


NORTHWEST HARNETT ELEMENTARY SCHOOL

736 ROLLINS ROAD,
FUQUAY-VARINA, NC 27526

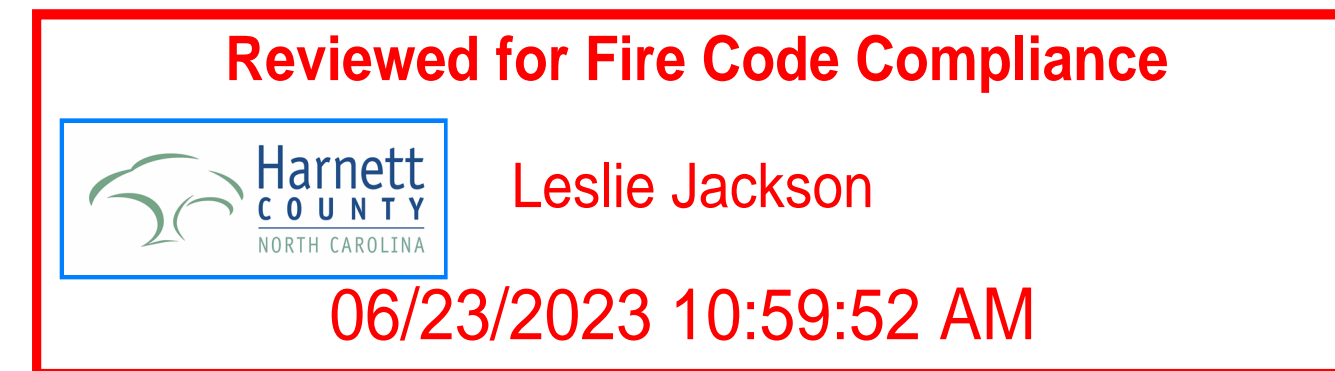

ERRC

PERMIT DRAWINGS

| LEGEND LIST | |
|-------------|---------------|
| SYMBOL | DESCRIPTION |
| ANT | ANTENNA |
| 2WAY | 2WAY SPLITTER |
| 4WAY | 4WAY SPLITTER |
| REP | REPEATER |
| RISER | RISER |

NORTH CAROLINA SOUND OF GOLDSBORO, LLC
5413 HWY 117N
PIKEVILLE, NC 27863
PHONE: 919-709-4040
WWW.NCSOUND.ORG



NORTH CAROLINA
SOUND

- * INTERCOM
- * VOICE & DATA
- * SECURITY
- * CCTV
- * MATV
- * AV

Home Office:
5413 Hwy 117N
Pikeville, NC 27863
919-709-4040 (Voice)
919-709-4044 (Fax)

AUTHORIZED DEALER
OF:

BOGEN
COMMUNICATIONS,
INC.

NAPCO
SECURITY
SYSTEMS

PANASONIC
SURVEILLANCE
SYSTEMS

NORTHWEST HARNETT ELEMENTARY SCHOOL
736 ROLLINS ROAD
FUQUAY-VARINA, NC 27526



Designed by: Adam Dutcher

DRAWN BY:



Rennie Brock

DATE: 5/22/2023

REVISIONS


| REV # | DATE | DESCRIPTION |
|-------|------|-------------|
| | | |
| | | |
| | | |

SYSTEM:
ERRC
PERMIT DRAWINGS

SHEET TITLE:
COVER

SHEET NO.


COVER

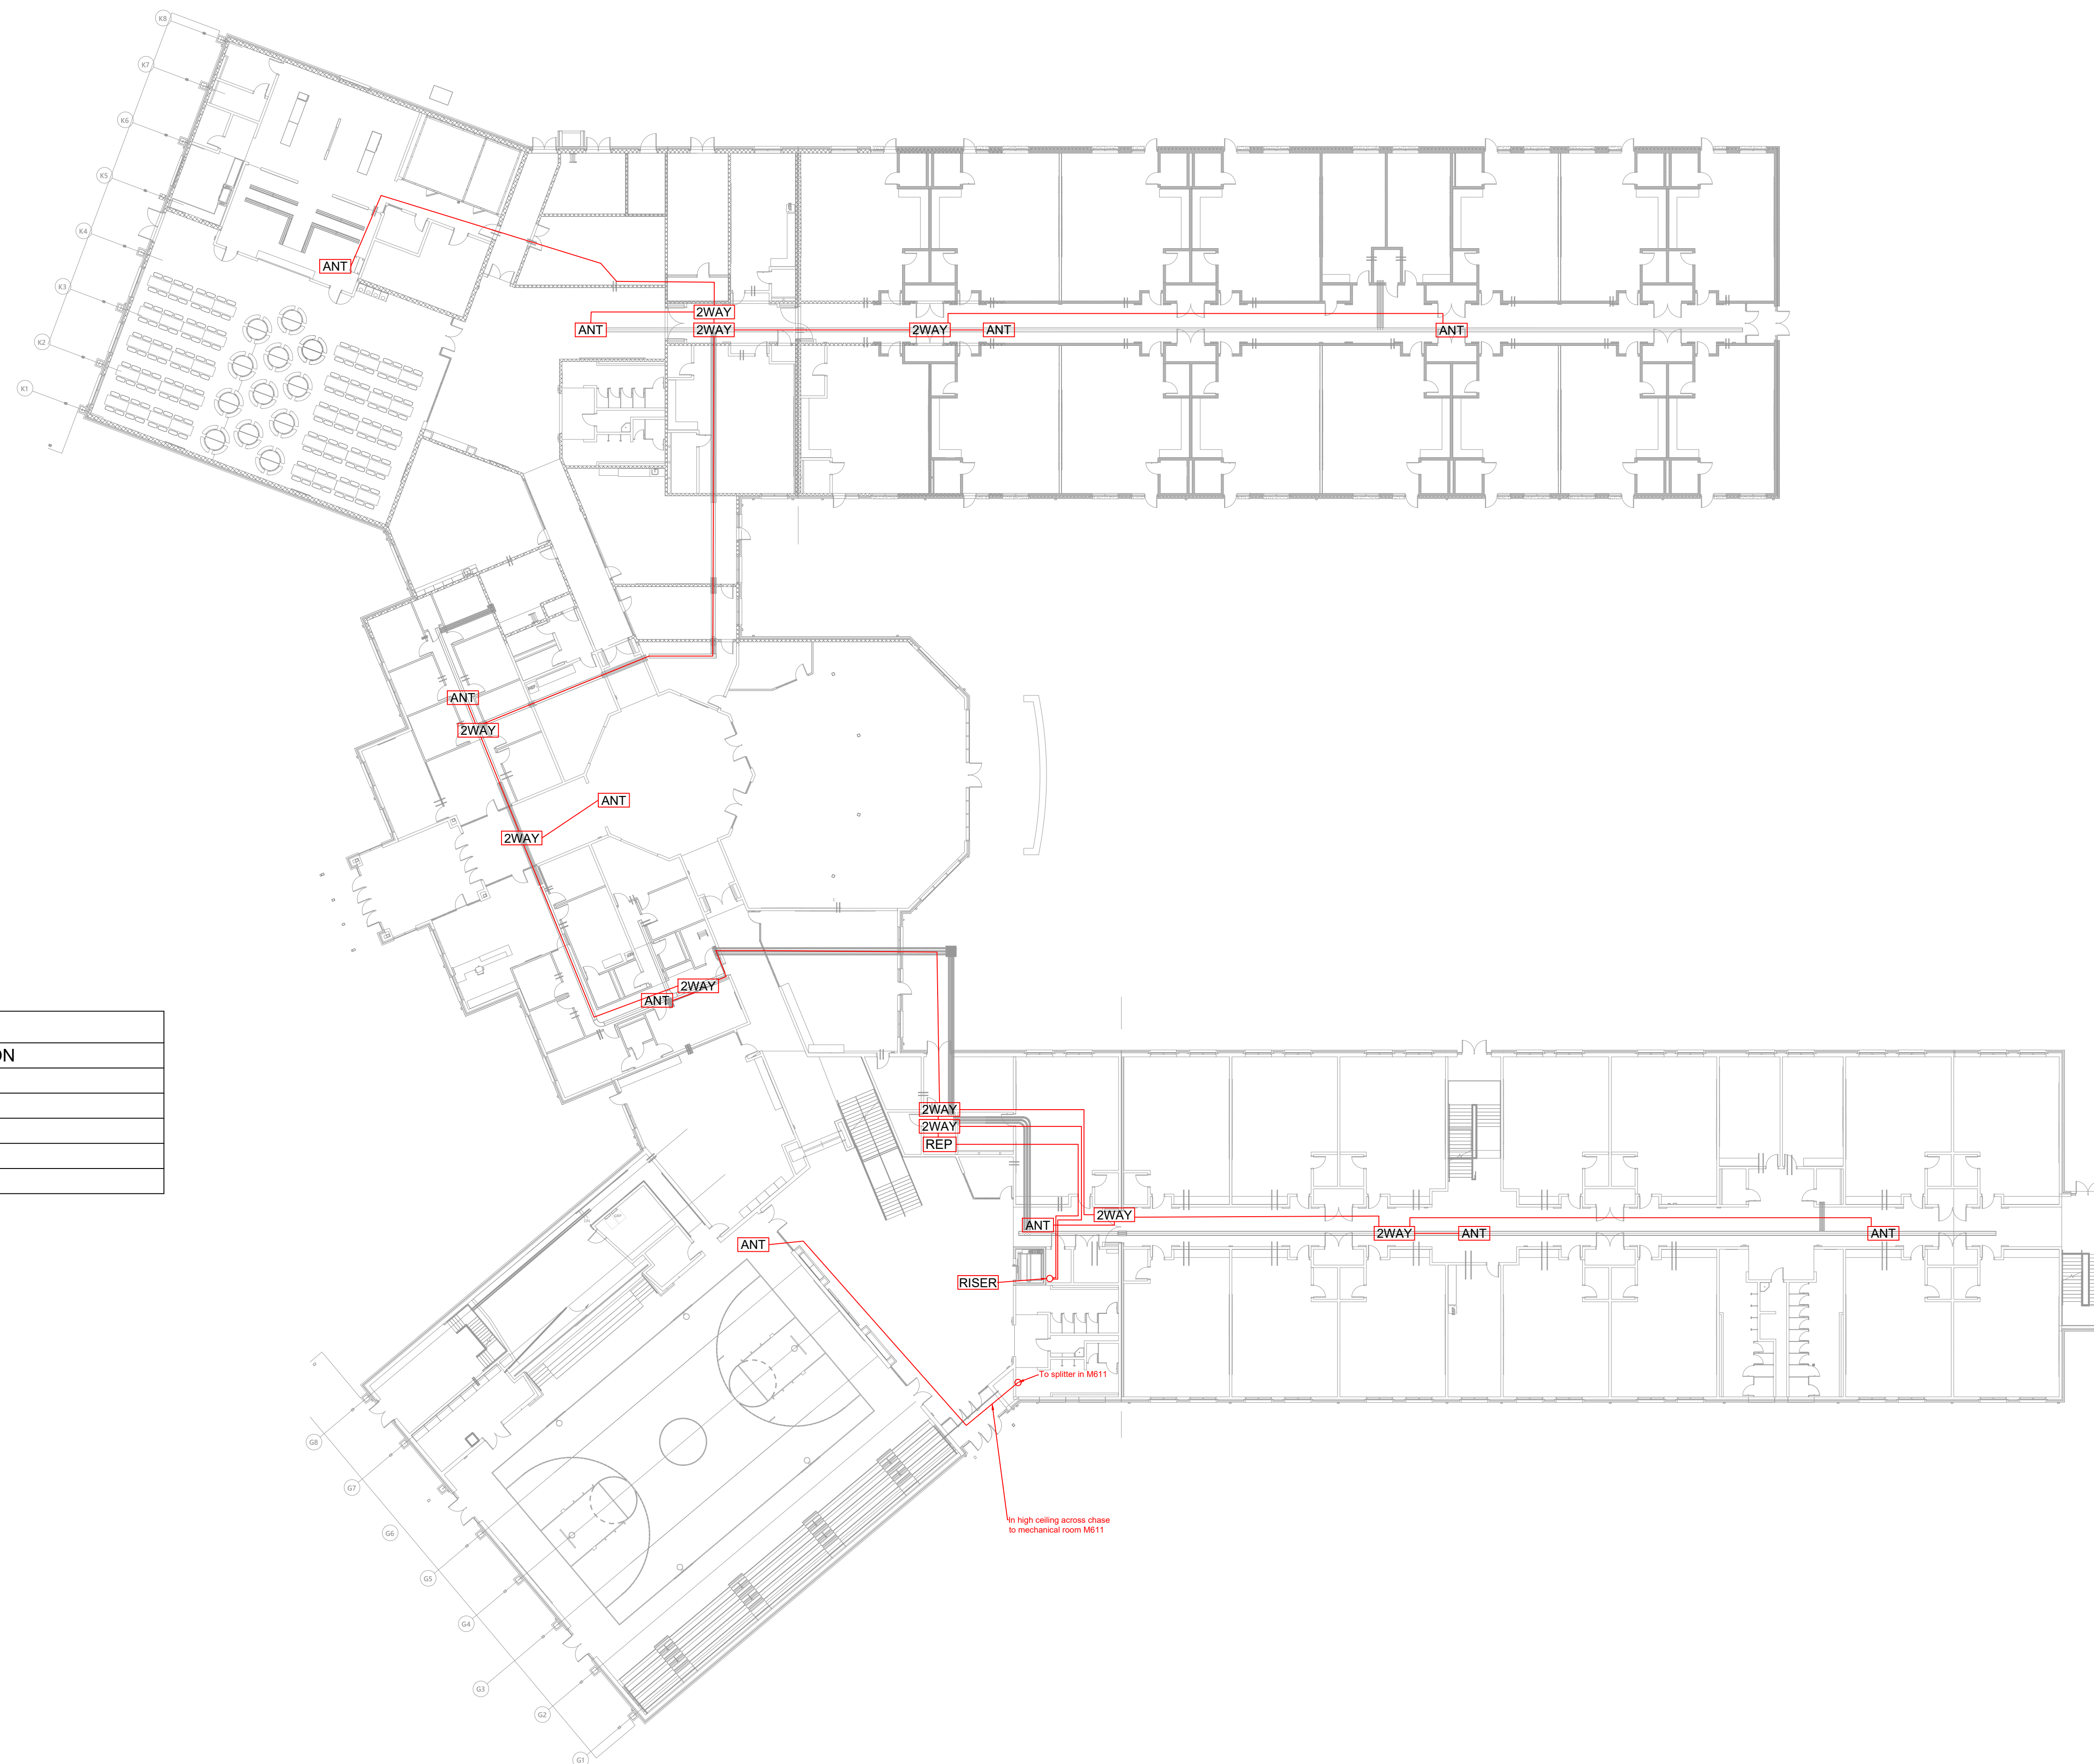

| LEGEND LIST | |
|-------------|---------------|
| SYMBOL | DESCRIPTION |
| ANT | ANTENNA |
| 2WAY | 2WAY SPLITTER |
| 4WAY | 4WAY SPLITTER |
| REP | REPEATER |
| RISER | RISER |

01 PERMIT DRAWINGS - 1ST FLOOR ANTENNA LAYOUT
ERRC01 SCALE: 1/32" = 1'-0"

02 1ST FLOOR KEY PLAN
ERRC01 SCALE: NTS



NORTH CAROLINA SOUND

- * INTERCOM
- * VOICE & DATA
- * SECURITY
- * CCTV
- * MATV
- * AV

Home Office:
5413 Hwy 177N
Pikeville, NC 27863
919-709-4040 (Voice)
910-709-4044 (Fax)


AUTHORIZED DEALER OF:

BOGEN COMMUNICATIONS, INC.

NAPCO SECURITY SYSTEMS

PANASONIC SURVEILLANCE SYSTEMS

NORTHWEST HARNETT ELEMENTARY SCHOOL
736 ROLLINS ROAD
FUQUAY-VARINA, NC 27526



Designed by: Adam Dutcher

DRAWN BY:



DATE: 5/22/2023

REVISIONS

| REV # | DATE | DESCRIPTION |
|-------|------|-------------|
| | | |
| | | |

SYSTEM:
ERRC PERMIT DRAWINGS

SHEET TITLE:
1ST FLOOR ANTENNA LAYOUT

SHEET NO.
ERRC01


| REVISIONS | | |
|-----------|------|-------------|
| REV # | DATE | DESCRIPTION |
| | | |
| | | |

SYSTEM:
ERRC
PERMIT DRAWINGS



SHEET TITLE:
2ND FLOOR ANTENNA LAYOUT


SHEET NO.
ERRC02

| LEGEND LIST | |
|-------------|---------------|
| SYMBOL | DESCRIPTION |
| ANT | ANTENNA |
| 2WAY | 2WAY SPLITTER |
| 4WAY | 4WAY SPLITTER |
| REP | REPEATER |
| RISER | RISER |

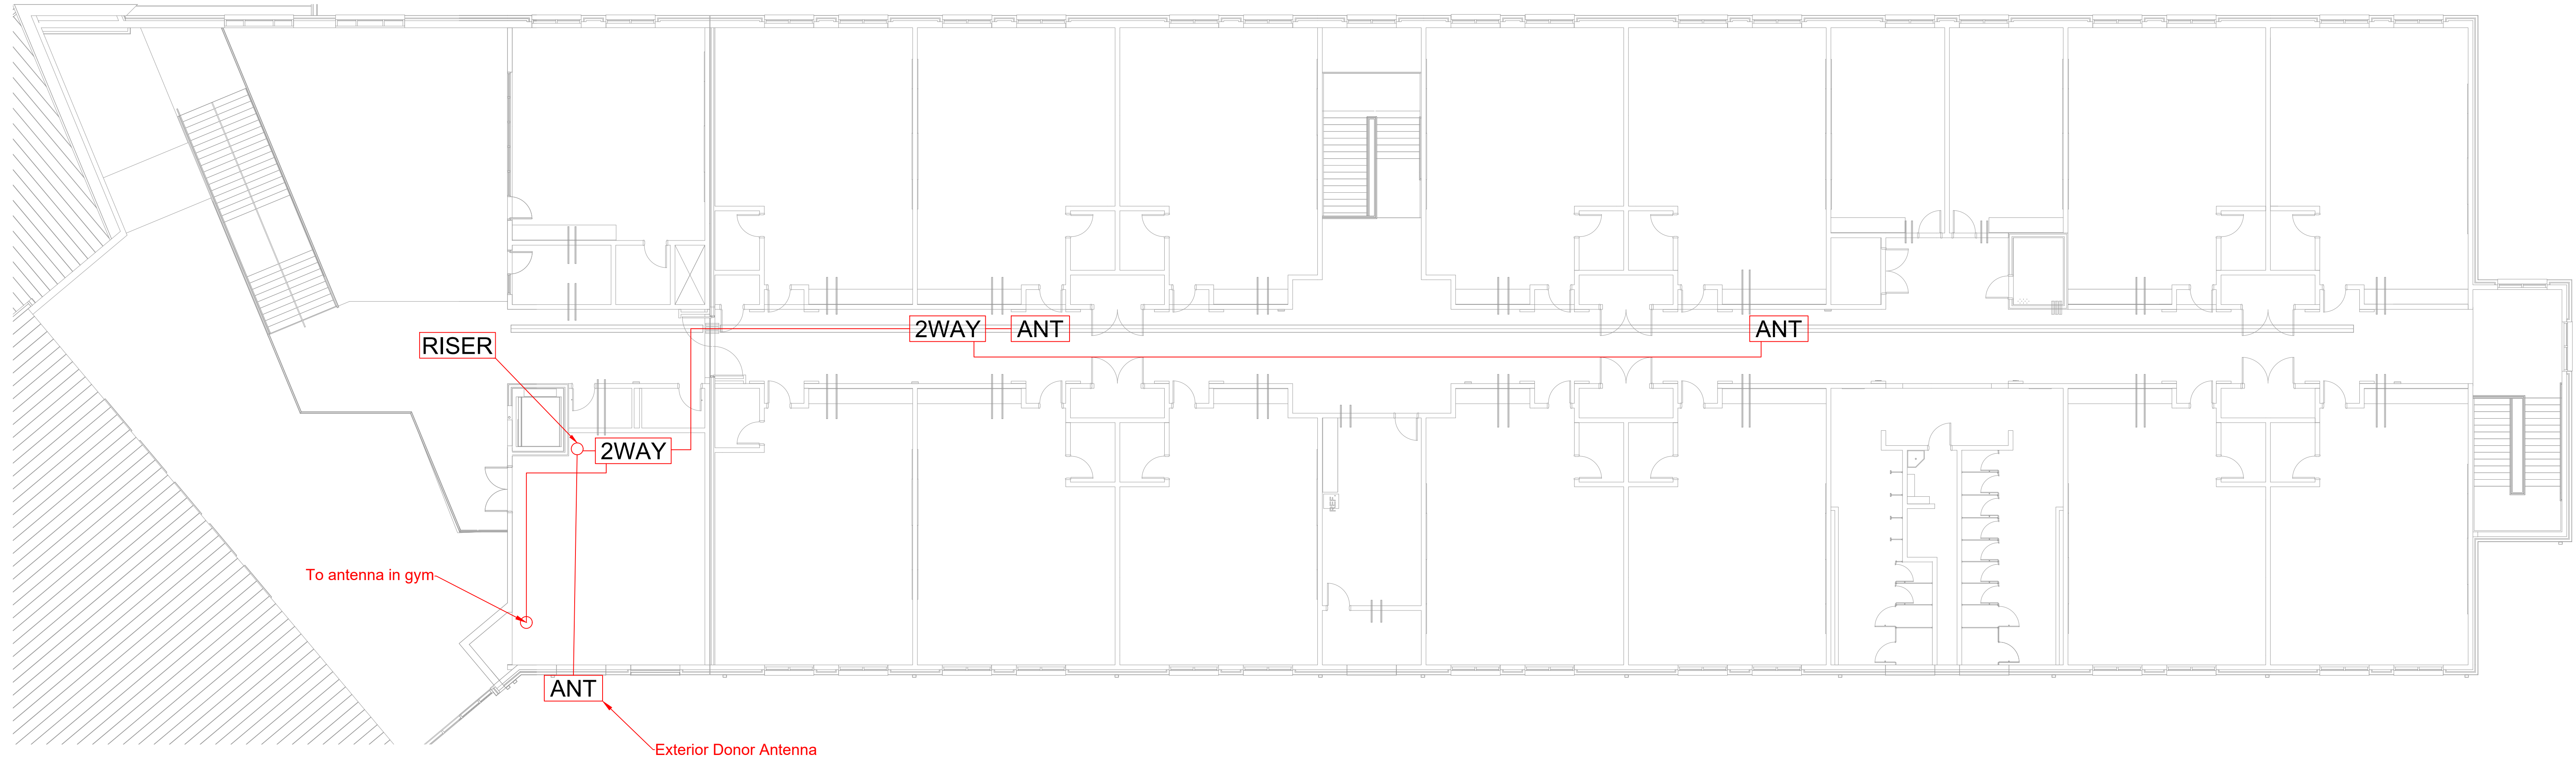


01 PERMIT DRAWINGS - 2ND FLOOR ANTENNA LAYOUT
ERRC02 SCALE: 3/32" = 1'-0"

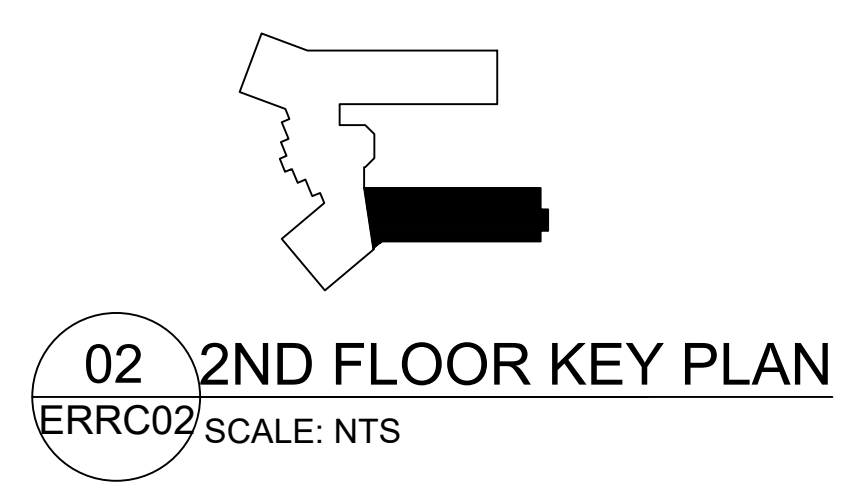

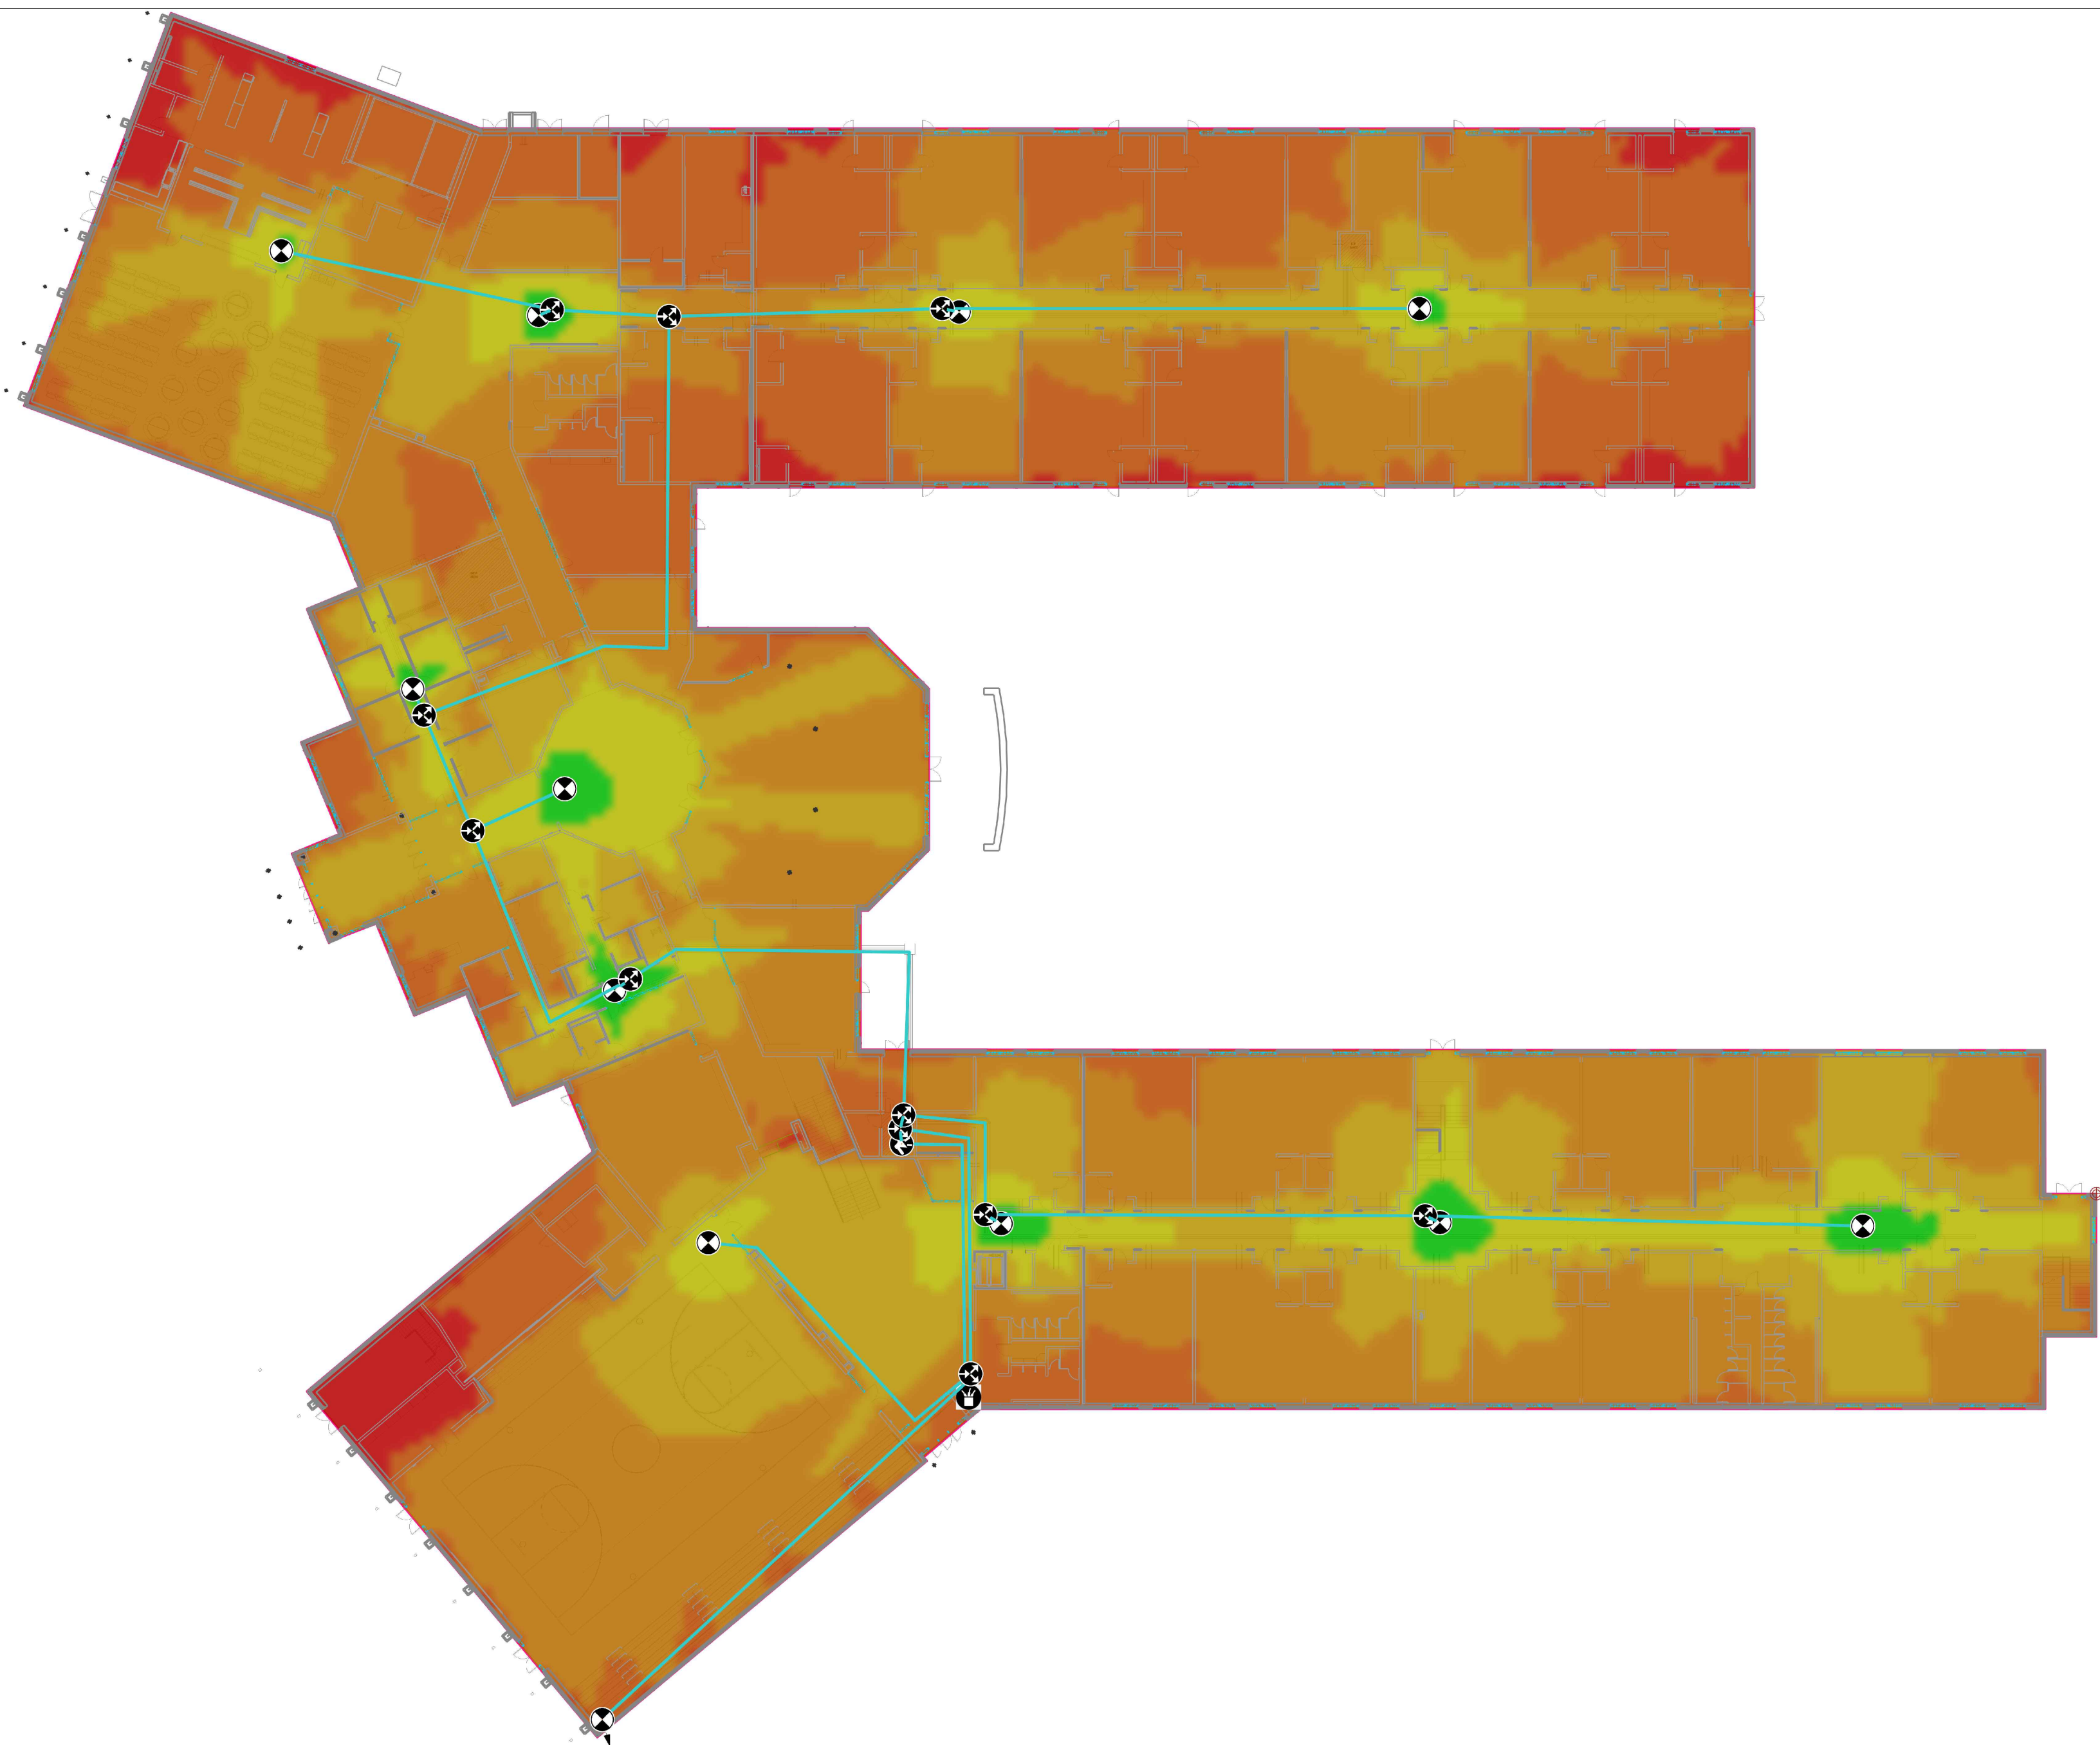

01 PERMIT DRAWINGS - 1ST FLOOR PLAN
ERRC03 SCALE: 1/32" = 1'-0"

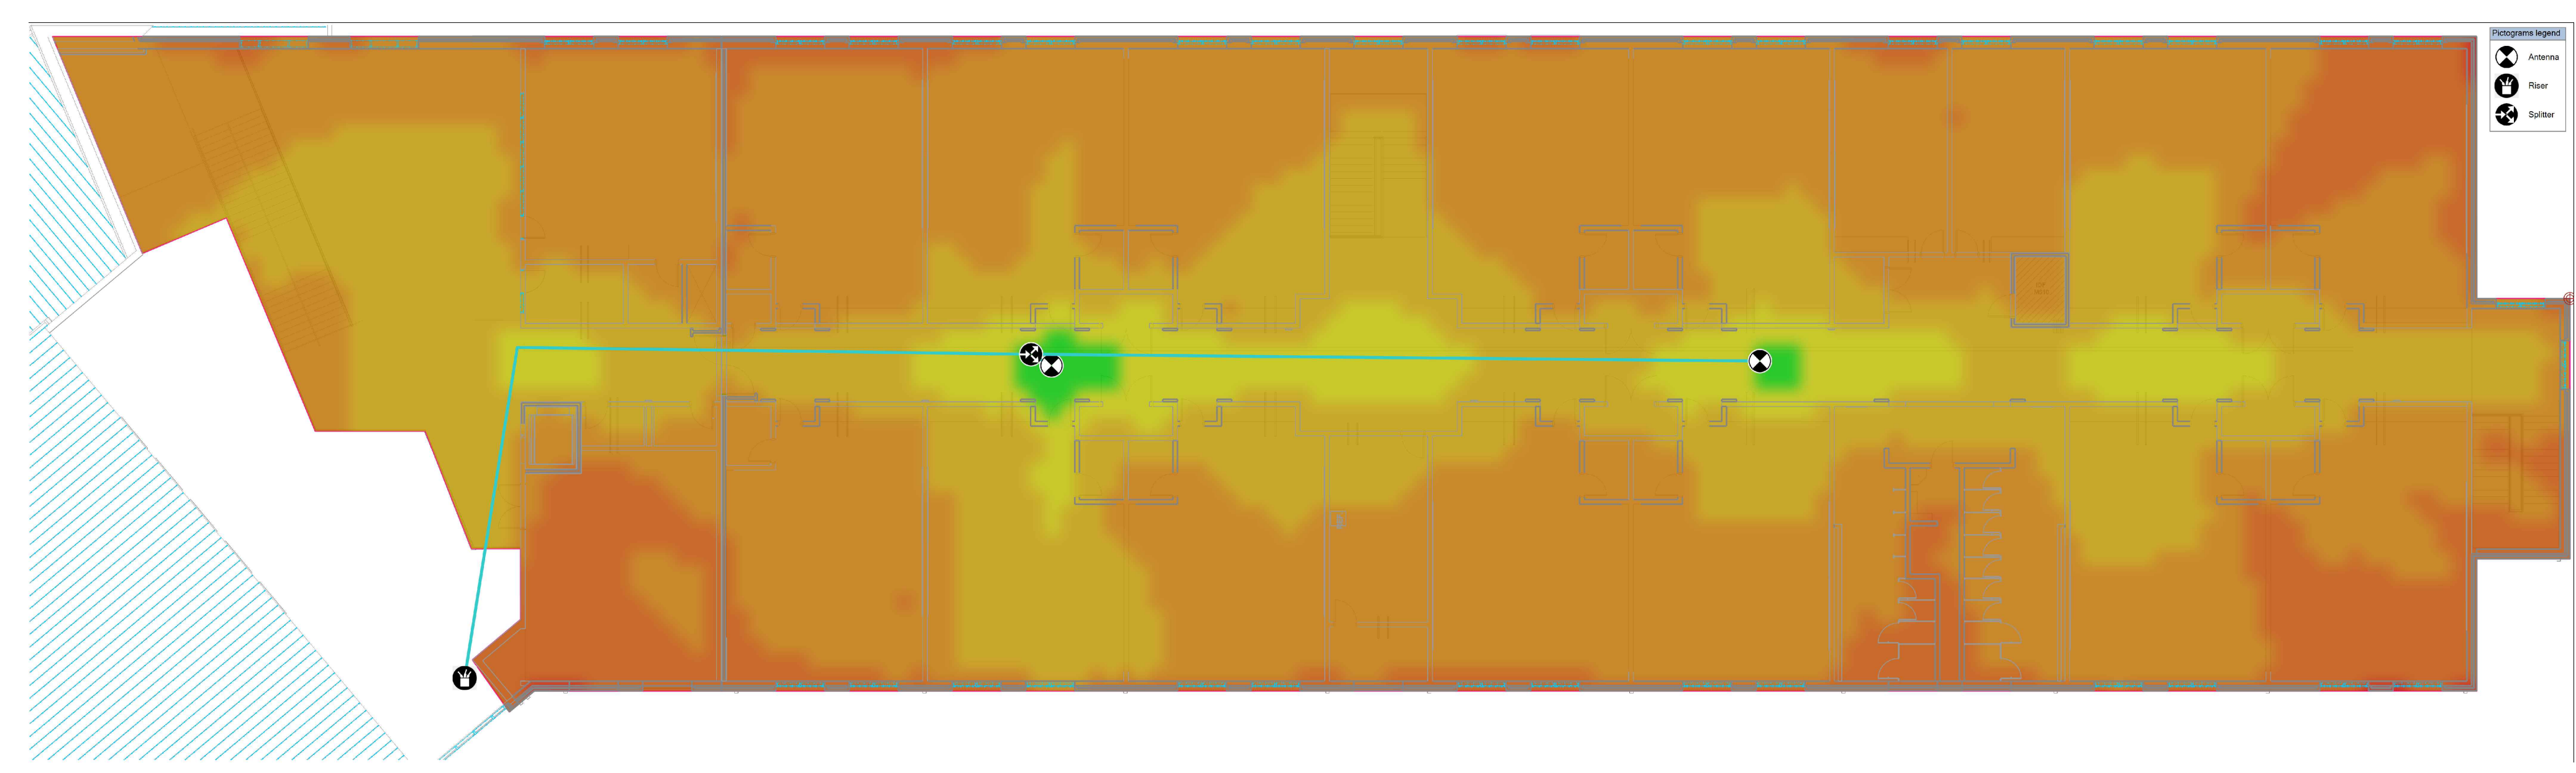

02 PERMIT DRAWINGS - 2ND FLOOR PLAN
ERRC03 SCALE: 1/32" = 1'-0"

Antenna
 Riser
 Splitter

PLAN NORTH




NORTH CAROLINA SOUND
 * INTERCOM
 * VOICE & DATA
 * SECURITY
 * CCTV
 * MATV
 * AV

Home Office:
 5413 Hwy 117N
 Pineville, NC 27863
 919-709-4040 (Voice)
 910-709-4044 (Fax)

AUTHORIZED DEALER
 OF:
 BOGEN COMMUNICATIONS, INC.
 NAPCO SECURITY SYSTEMS
 PANASONIC SURVEILLANCE SYSTEMS

NORTHWEST HARNETT ELEMENTARY SCHOOL
 736 ROLLINS ROAD
 FUQUAY-VARINA, NC 27526

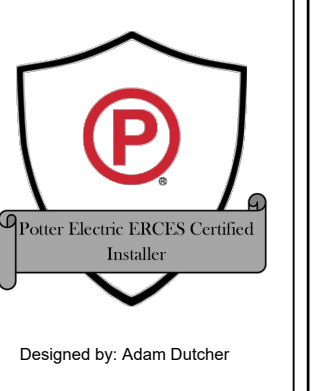

DRAWN BY:

 Rennis Brook
 DATE: 5/22/2023

| REVISIONS | | |
|-----------|------|-------------|
| REV # | DATE | DESCRIPTION |
| | | |
| | | |

SYSTEM:
 ERRC PERMIT DRAWINGS
 SHEET TITLE:
 FLOOR PLANS

SHEET NO.
ERRC03



SUBMITTAL FOR:

Northwest Harnett Elementary School

Harnett County Public Schools

736 Rollins Road,

Fuquay-Varina, NC 27526

BDA System

Product Data

Submitted By:

North Carolina Sound of Goldsboro, LLC

To:

Moonlite Electric and Construction Inc

05/23/23

5413 Hwy 117N Pikeville, NC 27863
919-709-4040 Phone 919-709-4044 Fax

Northwest Harnett ES
BDA System

| Quantity | Manufacturer | Part Number | Description |
|----------|--------------|-------------------------|--|
| 1 | NewMar | AP-8000B | BDA ANNUNCIATOR PANEL |
| 1 | NewMar | PE-12V-120-100AH-UL2524 | 12V-120-100AH-UL2524 BDA POWER SUPPLY |
| 1 | TowerIQ | Guardian4 | 80dB Public Safety Band BDA Signal Booster |
| 2000 | TowerIQ | 3996054 | 1/2 INCH CONDUCTOR AIR DIELECTRIC CABLE |
| 1 | Trilogy | PCT012-2 | Power Plenum Strip tool for ½" cable |
| 3 | TowerIQ | TQ-WS-2 | Wide Band 2 Way Splitter |
| 3 | TowerIQ | TQ-C-6 | -6dB Coupler |
| 6 | TowerIQ | TQ-C-10 | -10dB Coupler |
| 2 | TowerIQ | TQ-ATNR-10 | 10 dB RF Attenuator |
| 3 | TowerIQ | TQ-ATNR-20 | 20 dB RF Attenuator |
| 54 | Trilogy | NMP01250 | TRILOGY N MALE CONNECTOR |
| 1 | TowerIQ | TQ-LP | Lightning Protector |
| 13 | TowerIQ | TQ-530W | MULTI BAND DOME ANTENNA |
| 1 | TowerIQ | TQ-230W | Wide Band Yagi Dir 50 ohm, 10 to 11dBi, (inc mounting kit) |
| 1 | TowerIQ | TQ-Mount-JBar | Steel 1 inch J-Bar mount for donor antenna (No Spec Sheet) |

Annunciator Panel



Annunciator Panel, model **AP-8000B**, is a micro-processor controlled fire alarm annunciator panel for use with In-building 2-Way Emergency Radio Communication Enhancement System (ERCES) required by the National Fire Protection Agency (NFPA 1221). It monitors the alarms of the Bi-Directional Amplifier (BDA) and Battery Back-up Unit (BBU) and provides visual and audible alarms, as well as communicates these alarms to the fire control panel (FACP) via up to eight sets of Form-C alarm contacts. The first five alarms are wired for NFPA mandated alarms; AC Power Failure, Low Battery, Charger Failure, BDA Failure and Antenna Failure. Three additional alarm relays are available for site customization per UL Standard 2524.

Features

- Designed for easy set-up and installation in a NEMA 4 enclosure, powder coated steel
- Wide operating voltage range: 12, 24 and 48 volt systems
- Eight (8) Form-C alarm relay outputs with terminals for end of line resistors
- Alarm Input Wiring Supervision continuously monitors alarm input wiring for faults, either NO or NC contacts
- Master/Remote operation allows up to 15 additional AP-8000B's to be connected by daisy chain
- Up to 15 remotes can be powered via Cat 5 cable (POE)
- Built-in battery back-up (option)
- Front panel "test" alarm button
- Ultra bright light emitting diodes
- Alarm silence button (24 Hrs.) located inside enclosure
- Easily adapted to fit nearly any situation, 12, 24 and 48V DC battery back-ups
- Selectable Alarm Input: Can be activated by contact open (default) or contact closure upon alarm.
- End of Line resistors included

Specifications

Input: 9 - 60V DC

Input Current Draw: <100 mA

Max. Power Consumption: 4.5 watts

Operating Temperature: -4 to 122° F (-20 to 50° C)

Heat Dissipation: <12 watts (worst case)

Relay Switching Current: 2-Amp DC (resistive)

Enclosure: NEMA-4, UL listed, welded steel, quarter turn latch, bonding studs on door and enclosure, continuous stainless steel hinge with welded brackets for enclosure mounting, one each NPT-1/2 and NPT-3/4 liquid tight cord grips included.

Master/Remote Multiple Annunciators: Allows 1 master and up to 15 remotes to be wired in sequence via RS-485 connectivity

POE: Master can power up to 15 remotes via Cat. 5 cable

Options

Summary Alarm (Auto Dialer): Alarm relay #8 can be re-programmed via DIP switch to act as a summary alarm for alarm inputs #1 - 7 in order to activate an auto dialer or other device.

Loss of Annunciator Panel Power Alarm: Provides a normally closed alarm contact that opens upon loss of power to annunciator panel.

| Model | Dimensions (H x W x D) | Weight (Lbs.) |
|----------|------------------------|---------------|
| AP-8000B | 11.375" x 8" x 4.75" | 7.35 |



Huntington Beach, CA USA

Powering the Network

1220

www.poweringthenetwork.com ■ 800-854-3906

NFPA Compliant Battery Back-Up Power

ETL Listed to UL Standard 2524 & 924 Public Safety/BDA In-Building Coverage

An integral part of an in-building solution for emergency response radio coverage is the backup power system. NFPA codes relating to the autonomous operation and monitoring of the BDA power is quite stringent. These back up power enclosures were engineered to meet every aspect of NFPA 1221 and provide integrators configuration flexibility and rapid delivery directly to site, batteries included.

Features

- ETL listed to UL 2524 & 924
- NFPA compliant
 - All required monitoring alarms
- Batteries included
 - Choose capacity to match system requirements
- NEMA-4 enclosure
- Lightweight and prewired with waterproof feed-thru's for easy one-man install and on-site connections

Specifications

Input: 115/230 VAC (factory wired for 120V AC)

Outputs:

DC: 12, 24 and 48V, with 120, 240 and 480 Watt DC UPS

AC: 110V at 96 watts - see reverse for detailed specifications

Protections: Battery breaker, AC input breaker, NEMA enclosure, liquid tight cord grips

NFPA 1221 Compliant Alarms (Form C, Dry Contact)


- AC fail
- Battery discharged to 30% of capacity
- Charger fail

Batteries Included: maintenance free, valve regulated, sealed lead acid, 18, 55, and 100 AH capacity

Enclosure Size including Mounting Flanges (H x W x D):

A: 30" x 23" x 10.5"

B: 23.15" x 24" x 24"

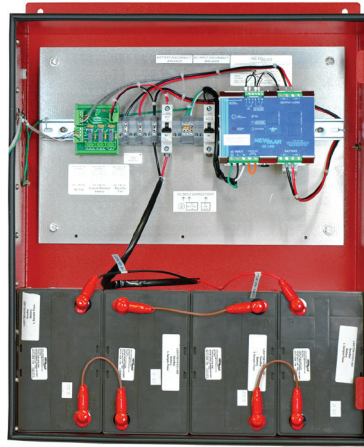

Enclosure A
12, 24, & 48V DC, 18 - 100AH



**ETL Listed to
UL Standards
2524 & 924**



Enclosure B
48V, 100AH



UL Standard 2524
UL Standard 924



Enclosure A: NEMA-4, UL listed (E465553), welded aluminum with IP 65 battery vent and locking door, IP-68 cable entries. Red powder coat wall mount.

Enclosure B: NEMA-4, welded aluminum with IP 65 vent, pad lockable door handle, IP-68 cable entries. Red powder coat wall mount.

| Model | Output Voltage | Max. BDA Load Amps | Batt. A/H Capacity* | System w/ Batt. Wt. (Lbs.) | Shipping Wt. (Lbs.) | Enclosure Size |
|--------------------------------|----------------|--------------------|---------------------|----------------------------|---------------------|----------------|
| PE-12V-120-18AH-UL2524 | 12V DC | 1.2A | 18 | 49 | 89 | A |
| PE-12V-120-55AH-UL2524 | 12V DC | 3.8A | 55 | 75 | 115 | A |
| PE-12V-120-100AH-UL2524 | 12V DC | 5A | 100 | 111 | 151 | A |
| PE-24V-240-18AH-UL2524 | 24V DC | 1.2A | 18 | 63 | 103 | A |
| PE-24V-240-55AH-UL2524 | 24V DC | 3.8A | 55 | 114 | 154 | A |
| PE-24V-240-100AH-UL2524 | 24V DC | 5A | 100 | 186 | 226 | A |
| PE-48V-480-18AH-UL2524 | 48V DC | 1.2A | 18 | 90 | 130 | A |
| PE-48V-480-55AH-UL2524 | 48V DC | 4A | 55 | 190 | 230 | A |
| PE-48V-480-100AH-UL2524 | 48V DC | 8.5A | 100 | 371 | 411 | B |
| PE-110V-165-100AH/24V-UL2524 | 110V AC | 1.4A | 100 | 191 | 231 | A |

*See reverse for battery specifications

UL: Models ETL Listed to UL Standards 2524 & 924



Powering the Network 0220


NFPA Compliant Battery Back-Up Power

Battery Specifications

| Model | Amp/Hour | Battery | Quantity | Max Continuous Load 12 Hour Rating | Max Continuous Load 24 Hour Rating | Electrolyte Content | |
|------------------------------|------------------|-------------|----------|------------------------------------|------------------------------------|---------------------|---------|
| | | | | | | Pounds | Gallons |
| 12V DC | | | | | | | |
| PE-12V-120-18AH-UL2524 | 18AH-UL2524 | ES17-12S | 1 | 1.2A/15.2W | .75A/9W | 1.9 | 0.3 |
| PE-12V-120-55AH-UL2524 | 55AH-UL2524 | XP12-210FR | 1 | 3.8A/48.2W | 2.33A/28W | 7.6 | 0.8 |
| PE-12V-120-100AH-UL2524 | 100AH-UL2524 | PYL12V100FS | 1 | 5A/63.5W | 4.6A/55W | 22.8 | 1.6 |
| 24V DC | | | | | | | |
| PE-24V-240-18AH-UL2524 | 18AH-UL2524 | ES17-12S | 2 | 1.2A/29.4W | .75A/18W | 3.9 | 0.6 |
| PE-24V-240-55AH-UL2524 | 55AH-UL2524 | XP12-210FR | 2 | 3.8A/93.1W | 2.33A/56W | 15.2 | 1.6 |
| PE-24V-240-100AH-UL2524 | 100AH-UL2524 | PYL12V100FS | 2 | 5A/122.5W | 4.6A/110W | 45.7 | 3.2 |
| 48V DC | | | | | | | |
| PE-48V-480-18AH-UL2524 | 18AH-UL2524 | ES17-12S | 4 | 1.2A/60W | .75A/36W | 7.7 | 1.3 |
| PE-48V-480-55AH-UL2524 | 55AH-UL2524 | XP12-210FR | 4 | 4A/200W | 2.33A/112W | 30.5 | 3.2 |
| PE-48V-480-100AH-UL2524 | 100AH-UL2524 | PYL12V100FS | 4 | 8.5A/392W | 4.6A/221W | 91.3 | 6.3 |
| 110V AC | | | | | | | |
| PE-110V-165-100AH/24V-UL2524 | 100AH/24V-UL2524 | PYL12V100FS | 4 | N/A | 96W | 91.3 | 6.3 |

Based on 100% duty cycle. Back-up time increase if intermittent duty cycle loads applied.
ETL Listed to UL Standards 2524 & 924

Typical Wiring Diagram

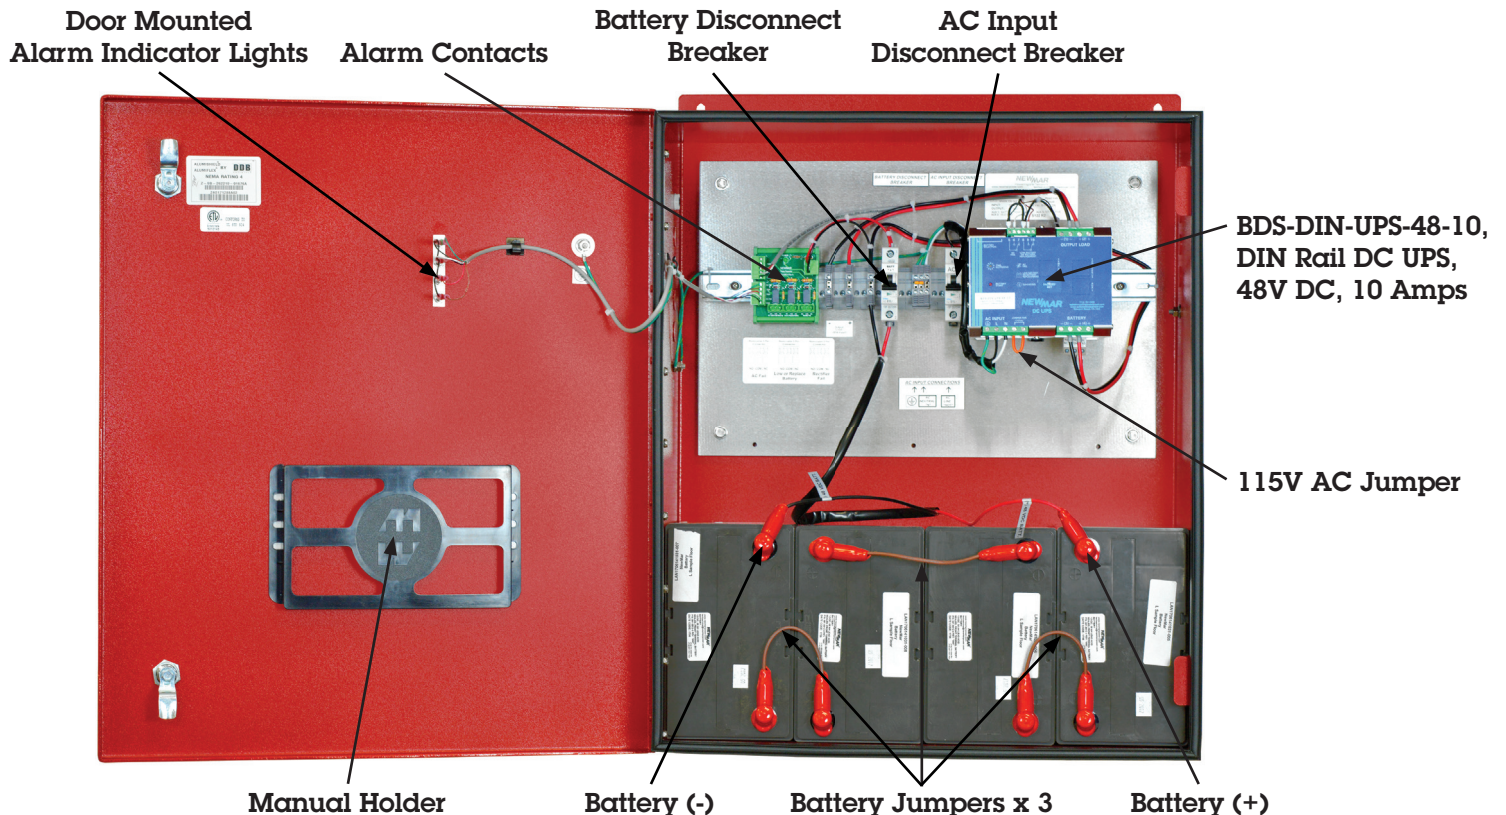

Huntington Beach, CA USA

Powering the Network

www.poweringthenetwork.com ■ 800-854-3906



TOWERIQ™
SIGNAL WHERE IT MATTERS

Guardian4 Public Safety BDA

Guardian4 Public Safety BDA



FEATURES

- Provides improved coverage for Public Safety 700 MHz (FirstNet) and 800 MHz
- 80 dB gain for Public Safety Bands
- Features built-in TowerIQ Sentry™ remote monitoring with ethernet port
- Integrated 7-pin alarm and UPS port for external battery backup
- NEMA-4 rated amplifier housing. No additional NEMA enclosure(s) needed
- Meets the code for NFPA 1221 and IFC 510
- Dry contact 7-pin alarm, UPS and Ethernet port for remote monitoring
- Energy-saving operation allows bands to remain dormant when not in use
- Automatic gain control (AGC)
- A/C 110V or D/C 12- 20V power option
- Independently adjustable frequency attenuation for uplink and downlink (Reduce gain in -1 dBm increments)
- Industry leading 3-year warranty available

TowerIQ's Guardian4 Public Safety Band signal booster amplifies FirstNet signals for crucial communications, delivering consistent signal for First Responders and other public safety officials relying on two-way radio communication inside large buildings.

The Guardian4 is a bi-directional amplifier with a maximum gain of 80 dB on the Public Safety frequency bands, supporting 700 MHz (FirstNet Ready) and 800 MHz.

In the majority of cases, newly constructed buildings with considerable size, or existing buildings that increase capacity by expanding the building footprint are required to have signal strength of -95 dBm or better in designated critical areas – elevators, stairwells, etc. – in order to receive a certificate of occupancy. Guardian4 meets the code for NFPA 1221 and IFC 510 and features a NEMA-4 rated amplifier housing, which eliminates the need for an additional NEMA enclosure.

Additionally, the Guardian4 comes equipped with dry contact 7-pin alarming capability, UPS and Ethernet port enabled remote monitoring. The BDA features sturdy metal construction and is covered by an industry leading 3-year warranty.




Electrical Specifications

| Model | Guardian4 |
|--------------------------------|-------------------------------|
| Uplink Frequency Range (MHz) | 788-805 / 806-816 |
| Downlink Frequency Range (MHz) | 758-775 / 851-861 |
| Maximum Gain: | 80 dB |
| Supported Standards: | Public Safety 700 and 800 MHz |
| Gain Adjustment: | 31 dB |
| Noise Figure: | ≤ 5 dBm |
| Impedance: | 50Ω |
| VSWR: | ≤ 2.0 |
| Power Input: | DC 12- 20V; AC 110V; 60 Hz |
| Maximum RF Output Power: | +27 dBm (DL), +26 dBm (UL) |
| P1dB: | 31.5 dBm |
| Propagation delay | 0.03 Microseconds |
| Operation Temperature: | -4°F to +131°F |
| Power Consumption | 35W |
| FCC ID: | 2AXVJGuard-2QR |
| Certifications | FCC Part 90 / UL: 60950-1 |

Technical Specifications

| | |
|---------------------|------------------------------|
| Dimensions | 25 x 19 x 9 in |
| DL Frequency Range | 758-775/ 851-861 MHz |
| Gain Adjustment | 31 dB |
| Max Gain | 80 dB |
| Max RF Output Power | +27 dBm (DL) +26 dBm (UL) |
| Noise Figure | ≤ 5 dB |
| P1dB | 31.5 dBm |
| Power Consumption | 35W |
| RF Connections | N Female |
| UL Frequency Range | 788-805/ 806-816 MHz |
| VSWR | ≤ 2.0 |
| Weight | 54 lbs |


Example Building Component Layout

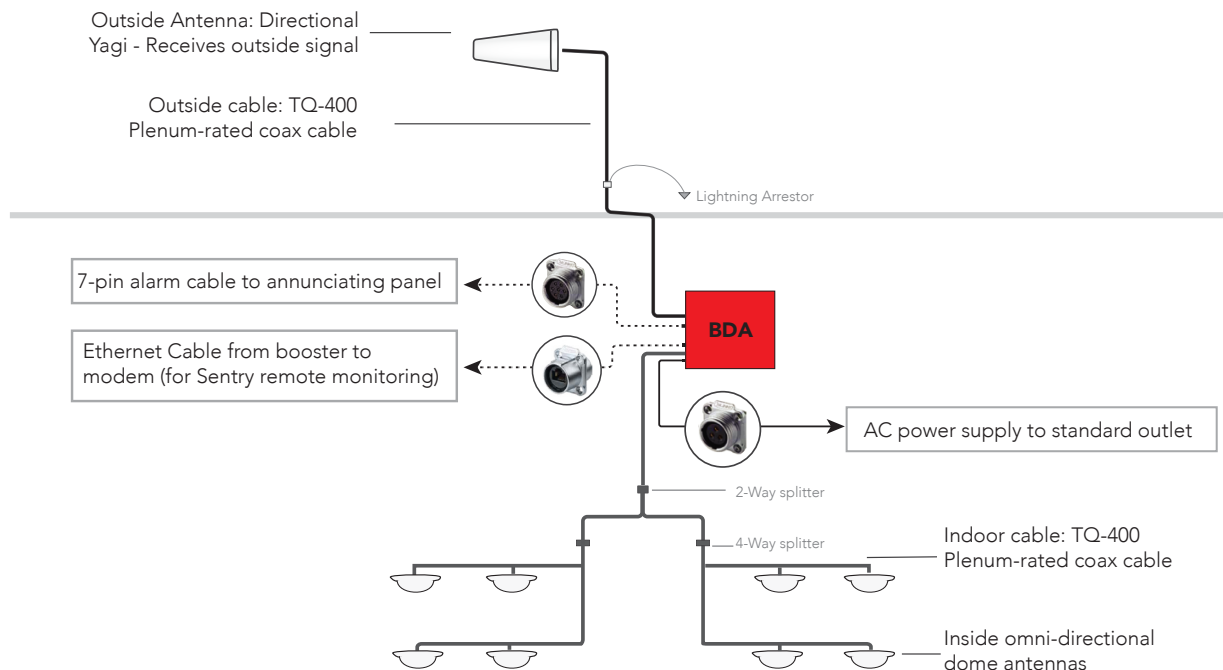



Guardian4 BDA Interface

| Interface | Type | Description |
|-----------|---------------|---|
| A1 | Grounding lug | Grounding lug |
| A2 | OUTSIDE | N Female for OUTSIDE cable and antenna |
| A3 | ALARM I/O | To Fire Department Control Box |
| A4 | ETHERNET | Cat5e Standard Ethernet Cable Device |
| A5 | POWER 110VAC | Connect to 110VAC or 110V of UPS output |
| A6 | INSIDE | N Female for INSIDE cable and antenna |
| A7 | USB | Used to initialize the network connection devices |
| A8 | Alarm LEDs | Indicate an alarm condition |
| A9 | DC 12-20V | Connect DC, voltage should be between 12-24V |

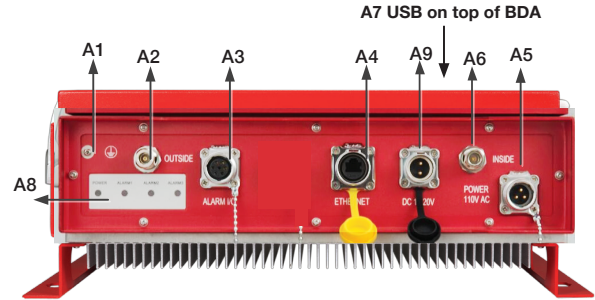

^a Outdoor Antenna Options

| | | | |
|---------|--|---------------------|--------------|
| TQ-230W | Directional Wide Band 50 Ω Yagi Antenna (698 - 2700 MHz) | N-Female connectors | 10 to 11 dBi |
|---------|--|---------------------|--------------|

^b Inside Antenna Options

| | | | |
|---------|---|---------------------|-------------|
| TQ-528W | Omni Wide Band Dome 50 Ω Antenna (698 - 2700 MHz) | N-Female connectors | 3 to 4 dBi |
| TQ-248W | Directional Wide Band Panel 50 Ω Antenna (698-2700 MHz) | N-Female connectors | 7 to 10 dBi |

^c Splitters and Couplers

| | |
|---------|--------------------------|
| TQ-WS-2 | Wide Band 2 Way Splitter |
| TQ-WS-4 | Wide Band 4 Way Splitter |

^d Plenum Cable

| | | |
|------------|--|---------------------|
| TQ-PL-1000 | 1000 ft, Ultra Low-Loss Coax Plenum Fire-Rated, Orange | Pool, no connectors |
|------------|--|---------------------|

UL-rated for plenum ceilings (UL E473791)

Additional Required Components:

Note: Some component options are listed in table below. Not all accessories are listed.

- One External antenna ^a (directional Yagi)
- Multiple Inside antennas ^b (omnidirectional domes and/or directional panels)
- Cable splitter for inside antennas ^c
- Sufficient TQ-400 ultra-low loss interior/exterior cable, 50 ohm ^d
- Lightning protector
- Grounded surge suppressor for DC power supply

Ordering Information

| Model | Description | Stock No. |
|-----------|---|-----------|
| Guardian4 | 80dB PublicSafety Band BDA Signal Booster | 3996001 |

Included Components:

- Guardian4 bi-directional amplifier with NEMA-4 rated housing and mounting kit
- Alarm cable and connector
- Ethernet connector
- AC power cable
- DC power cable and connector

WARNING

THIS IS NOT A CONSUMER DEVICE. IT IS DESIGNED FOR INSTALLATION BY FCC LICENSEES AND QUALIFIED INSTALLERS. USERS MUST HAVE AN FCC LICENSE OR THE EXPRESS CONSENT OF AN FCC LICENSEE TO OPERATE THIS DEVICE. USERS MUST REGISTER CLASS B SIGNAL BOOSTERS (AS DEFINED BY 47 CFR 90.219) ONLINE AT: WWW.FCC.GOV/SIGNAL-BOOSTERS/REGISTRATION.

UNAUTHORIZED USE MAY RESULT IN SIGNIFICANT FORFEITURE PENALTIES, INCLUDING PENALTIES IN EXCESS OF \$100,000 FOR EACH CONTINUING VIOLATION.

Part 90 Signal Boosters. THIS IS A 90.219 CLASS B DEVICE.



50 Ohm Plenum Cable 1/2"

FEATURES

- AirCell® Non Pressurized Air Dielectric Design for Superior RF Performance and Ease of Installation
- Plenum Rated Jacketed CMP
- Conforms to NFPA-262, UL-444, Canadian CSA 222



2011/65/EU

Technical Specifications

| | |
|--------------------------|---|
| Physical Dimensions | <ul style="list-style-type: none"> • Center Diameter, in (mm) 0.188 (4.78) • Diameter Over Outer Conductor, in (mm) 0.550 (13.97) • Maximum Diameter Over Jacket, in (mm) 0.63 (16.00) |
| Cable Materials | <ul style="list-style-type: none"> • Center Conductor Copper-Clad Aluminum • Outer Conductor Corrugated Aluminum |
| Jacket Color | Off White |
| Maximum Frequency | 10 GHz |
| Peak Power Rating | 35 KW |
| DC Resistance | <ul style="list-style-type: none"> • Center 0.46 (1.51) Ohms/1,000 ft (1,000m) • Outer 0.51 (1.67) Ohms/1,000 ft (1,000 m) |
| DC Breakdown | 2 kV |
| Capacitance | 22 (72.12) mH/ft |
| Inductance | 0.057 (0.187) mH/ft (m) |
| Jacket Spark | 8 kV RMS |
| VSWR min | 1.25 (19.0) (dB) |
| VSWR typical | 1.13 (24.3) 700-960/1700-2200 MHz (dB) |
| Impedance | 50 ± 2 Ohms |
| Velocity of Propagation | 94% |
| Minimum Bend Radius | <ul style="list-style-type: none"> • Single 2 (50.8) in (mm) • Multiple 5 (127) in (mm) |
| Cable Weight | 0.13 (0.20) lb/ft (kg/m) |
| Bending Moment | 1 (1.4 ft lb (N m) |
| Tensile Strength | 250 (114) lb (kg) |
| Flat Plate Crush | 78(1.39) lb/in (kg/mm) |
| Number of Bends | 15 minimum |
| Recommended Temperatures | <ul style="list-style-type: none"> • Install Temp. '+5° to 194°F (-15° to 90°) • Storage Temp. '+5° to 194°F (-15° to 90°) • Operating Temp. '+5° to 194°F (-15° to 90°) |

The TowerIQ 50 Ohm 1/2" Plenum rated air dielectric cable is the superior choice for Public Safety in-building DAS systems. It conforms to NFPA, UL and CSA standards for Public Safety cabling to ensure our cable meets the highest level of quality and reliability in the industry. With low VSWR and DC Resistance the TowerIQ Plenum rated 1/2" cable is an ideal solution for your Public Safety DAS installation.

Standard Conditions

For Attenuation: VSWR 1.0, Ambient Temperature 20°C (68°F)

For Average Power: VSWR 1.0, Ambient Temperature 40°C (104°F), Inner Conductor Temperature 100°C (212°F), No Solar Loading

TL 9000 H-V - All Cables designed and manufactured under this quality management system

Ordering Information


| Model | Description | Stock No. |
|---------------------|---|-----------|
| 50 Ohm Plenum Cable | 1/2", Corrugated (6 GHz), Jacketed CMP, Conforms to NFPA-262, UL-444, Canadian CSA 22.2/FT6 | 3996054 |

Cable Prep Tool Specification

PCT012-2 AirCell® All-In-One Cable Prep Tool

For use with AirCell® 1/2" Plenum, In-Conduit, and Conduit Cables, 50 Ohm

| Description | PCT012-2 |
|----------------------------------|-------------------------------------|
| General Specifications | |
| Product Line | Coaxial Cable Tools |
| Product Type | Drill Mounted Cable Prep Tool |
| Cable Type | Plenum, In-Conduit, & Conduit Cable |
| Cable Family | AP6, APC, AC, ACC, & AP |
| Cable Size | 1/2" |
| Accessories | |
| Spare Parts/Replacement Blades | PCT012-2RB/3PK |
| Mechanical Specifications | |
| Material | Aluminum |
| Packaging Information | |
| Package Quantity | 1 Tool Per Box |

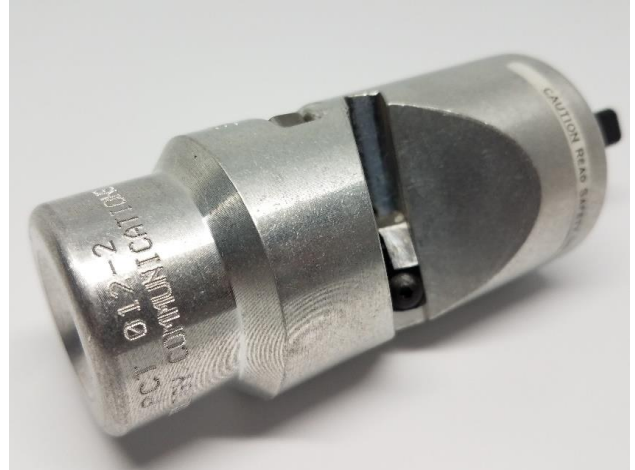

©2018 Trilogy Communications, Inc. All rights reserved. All trademarks identified by ® are registered trademarks of Trilogy Communications. All Specifications are subject to change without notice. See www.trilogyrf.com or call 800-TRILOGY for the most current information. Revised 12/12/18


Notice: Trilogy disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance or removal practices



Guardian TQ-WS Wide Band Splitter

FEATURES

- Wide Band 698-2700Mhz
- 2, 3 or 4 way Splitters
- Meets international standards
- Stainless steel

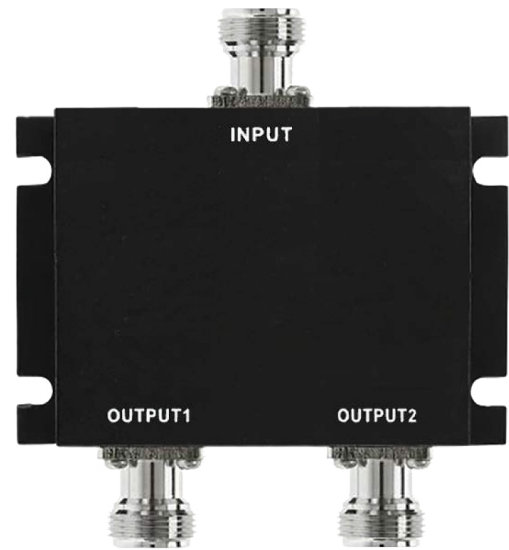

These bi-directional splitters allow from 2 to 4 inside antennas to be used with a single amplifier. Each inside antenna connection has ≤ 0.4 dB signal loss. The full band splitters cover PCS, Cellular, AWS and LTE band systems from 698 MHz to 2700 MHz.

These splitters transmit and receive signal and distribute equal amounts of signal sent to two to four interior antennas for similarly sized areas.

Technical Specifications

| Item | 2-Way Splitter | 3-Way Splitter | 4-Way Splitter |
|----------------------------|----------------|----------------|----------------|
| Model # | TQ-WS-2 | TQ-WS-3 | TQ-WS-4 |
| Frequency Range | 698-2700Mhz | | |
| Insertion Loss | ≤ 0.4 dB | ≤ 0.5 dB | ≤ 0.6 dB |
| VSWR | $\leq 1.5:1$ | | |
| Isolation | ≥ 22 dB | | |
| Maximum Power | 20W | | |
| Dimension (with connector) | 3.5 x 3.9 inch | 4.3 x 4.8 inch | 4.3 x 4.8 inch |
| Weight | 8.4 oz | 12.5 oz | 13.0 oz |

Ordering Information

| Model | Description | Stock No. |
|------------|--|-----------|
| TQ-WS-2 | TQ-WS-2 Wide Band 2 Way Splitter | 3996025 |
| TQ-WS-3 | TQ-WS-3 Wide Band 3 Way Splitter | 3996026 |
| TQ-WS-4 | TQ-WS-4 Wide Band 4 Way Splitter | 3996027 |
| TQ-WS-2-5G | SPL TQ-WS-2-5G Ultra-WideBand 2-Way Splitter | 3996119 |
| TQ-WS-3-5G | SPL TQ-WS-3-5G Ultra-WideBand 3-Way Splitter | 3996120 |
| TQ-WS-4-5G | SPL TQ-WS-4-5G Ultra-WideBand 4-Way Splitter | 3996121 |



Guardian TQ-C Coupler



FEATURES

- Allows for multiple broadcast antennas
- Ensures adequate signal
- -6 and -10 dB options
- 5G Ultra-Wideband options available

A coupler, also known as a tap, is used when placing multiple broadcast antennas in a long line when installing a cell phone signal booster system. This component unevenly distributes the signal coming into and out of the coupler. This allows less signal loss out of one port ensuring that the next broadcast antenna down the line receives adequate signal. The coupler comes in -6 dB and -10 dB options.

Technical Specifications

| Model # | TQ-C-6 | TQ-C-10 |
|-----------------------|---------------------------------------|-------------|
| Type | -6 dB | -10 dB |
| Insertion loss | 1.7 dB | 0.8 dB |
| Coupling port loss | 6 ± 0.6 dB | 10 ± 0.8 dB |
| Directivity | ≥20 dB | |
| Frequency range | 698 - 2500 MHz | |
| VSWR | ≤1.25 | |
| Power Capacity | 200W | |
| Impedance | 50 Ω | |
| Connector Type | N-Female | |
| Dimension | 120 × 40 × 17 mm (Without Connectors) | |
| Weight | 2.26 oz (64 g) | |
| Operating Temperature | -30° to +65° C | |
| Color | Black | |

Ordering Information

| Model | Description | Stock No. |
|------------|--|-----------|
| TQ-C-6 | TQ -C-6 -6dB Coupler | 3996028 |
| TQ-C-10 | TQ-C-10 -10dB Coupler | 3996029 |
| TQ-C-6-5G | TQ-C-6-5G Ultra-Wideband - 6 dB Coupler | 3996122 |
| TQ-C-10-5G | TQ-C-10-5G Ultra-Wideband -10 dB Coupler | 3996123 |



Guardian TQ-ATNR Attenuators



FEATURES

- High quality, low-loss connector
- Weather resistant
- Commercial grade

Connect attenuators in between the booster and the outside antenna cable to automatically lower the signal strength by 5, 10 or 20 dB.

Reduce the signal level coming from or going to cell towers with the addition of one or more attenuators.

Technical Specifications

| Model # | TQ-ATNR-5 | TQ-ATNR-10 | TQ-ATNR-20 |
|-----------------------|--------------------------------|------------|------------|
| Attenuation | 5 dB | 10 dB | 20 dB |
| Attenuation Accuracy | ± 0.6 dB | ± 0.8 dB | ± 0.8 dB |
| VSWR | ≤1.2 | | |
| Power Consumption | 10 W | | |
| Impedance | 50 Ω | | |
| Connector Type | N-Female, N-Male | | |
| Dimension | Φ 20 x 58 mm | | |
| Weight | 2.26 oz (64 g) | | |
| Operating Temperature | -67°F to 257°F (-55 to +125°C) | | |

Ordering Information

| Model | Description | Stock No. |
|------------|--------------------------------|-----------|
| TQ-ATNR-5 | TQ-ATNR-5 5 dB RF Attenuator | 3996031 |
| TQ-ATNR-10 | TQ-ATNR-10 10 dB RF Attenuator | 3996032 |
| TQ-ATNR-20 | TQ-ATNR-20 20 dB RF Attenuator | 3996033 |

NMP01250 AirCell® 50 Ohm Connectors

For use with AirCell® 1/2" 50 Ohm Plenum, Conduit and In-Conduit Cables

| Description | NMP01250 |
|---|--------------------------------|
| General Specifications | |
| Interface | N Male |
| Body Style | Straight |
| Electrical Specifications | |
| Impedance, Ohms | 50 |
| Operating Frequency Band | 0.3 MHz to 6 GHz |
| Dielectric Withstand Voltage | 2 kV DC |
| 3rd Order IMD | -140 dBc minimum, -150 typical |
| 3rd Order IMD, Test Method | 2 x 20 Watt carriers |
| Average Power | 0.6 kW |
| Peak Power, maximum | 10 kW |
| Insertion Loss, typical | 0.05 |
| Shielding Effectiveness | -130 dB |
| Return Loss (VSWR) | |
| DC to 1 GHz | 30 dB (1.06) |
| 1 GHz to 2 GHz | 31 dB (1.06) |
| 2 GHz to 3 GHz | 32 dB (1.06) |
| 3 GHz to 4 GHz | 25 dB (1.12) |
| 4 GHz to 5 GHz | 20 dB (1.22) |
| 5 GHz to 6 GHz | 15 dB (1.43) |
| Mechanical Specifications | |
| Outer Contact Plating | Silver |
| Inner Contact Plating | Silver |
| Interface Durability | 500 cycles |
| Interface Durability Test Method | IEC 16916 |
| Minimum Connector Pull-off Force | 200 lbs |
| Environmental Specifications | |
| Operating Temperature, °F (°C) | -40° to 158° (-40° to 70°) |
| Storage Temperature, °F (°C) | -40° to 158° (-40° to 70°) |
| Installation Temperature, °F (°C) | 23° to 122° (-5° to 50°) |
| Immersion Test Method | IEC60529:2001 IP68 |
| Corrosion Test Method | MIL-STD-1344A |
| Thermal Shock Test Method | MIL-STD-202F |
| Vibration Test Method | MIL-STD-202F |
| Regulatory Compliance/Certifications | |
| RoHS 2011/65/EU Compliant | |
| TL 9000 H-V - All Cables designed and manufactured under this quality management system | |



©2016 Trilogly Communications, Inc. All rights reserved. All trademarks identified by ® are registered trademarks of Trilogly Communications. All Specifications are subject to change without notice. See www.triloglycoax.com or call 800-TRILOGY for the most current information. Revised 09/15/16

Notice: Trilogly disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance or removal practices



Guardian TQ-LP Lightning Surge Protector



Technical Specifications

| | | |
|-------------------------------|--|----|
| Impedance | 50 | |
| Insulation Resistance | ≥5000 | |
| Contact resistance (MΩ) | Inner conductor (MΩ) | ≤1 |
| | Outer conductor (MΩ) | ≤1 |
| Pressure AC (Vmin) | 2500V 1min 2500V 1min - No breakdown and no arcing phenomenon | |
| Frequency Range (MHz) | DC-3000 | |
| Peak Power (w) | 200 | |
| Initial discharge voltage (V) | 230 | |
| Peak discharge current (KA) | 10/20 | |
| Insertion Loss (dB) | ≤0.50 | |
| V.S.W.R. | ≤1.20 | |
| Weight (g) | 110 | |

The TQ-LP coaxial lightning arrestors act as a signal filter and are designed to pass desired frequencies while suppressing lightning surges. Lightning strike electrical surges are diverted through the protector's short-circuit to the ground. TQ-LP features N-Female connectors on both ends.

Installation


To ground the surge protector, use 10 or 12-gauge copper wire and attach it to the ground connector screw.

Tighten the screw so the wire is firmly embedded under the screw. Clip the other end of the wire and strip back the jacket to expose the raw wire.

Attach the wire to a grounding point or rod sunk into the ground 8 feet deep. Be sure to check local grounding code requirements as they vary by location.

Material Information

| Part | Material | Electroplating |
|-----------------|----------------|----------------|
| Hull | Brass rods | Ni |
| Plughole | Brass rods | Au |
| Contact pin | Brass rods | Au |
| Inner conductor | Brass rods | Au |
| Sealing element | Silicon rubber | N/A |
| Dielectric | PTFE | N/A |
| SC | Stainless | N/A |

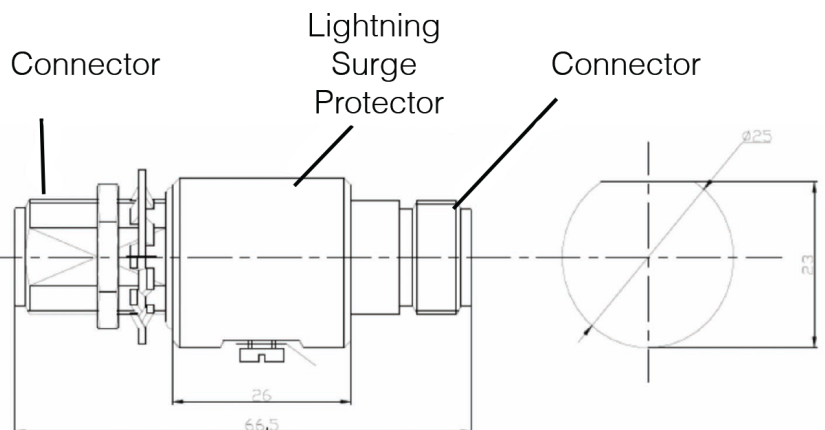

Ordering Information

| Model | Description | Stock No. |
|-------|---------------------|-----------|
| TQ-LP | Lightning Protector | 3996042 |



TOWERIQTM
SIGNAL WHERE IT MATTERS

TQ-530W Multi Band Dome Antenna

Guardian TQ-530W Multi Band Dome Antenna

FEATURES

- Wide Frequency Band (698 – 2700 MHz)
- 2G/3G/4G/LTE Coverage
- Low VSWR & High Gain
- Easy Installation in projects
- Corrosion Resistance, Anti-aging
- Widely used for In-building DAS

Technical Specifications

| Model No. | TQ-530W Multi Band Dome Antenna | |
|-------------------------------------|---------------------------------|-----------|
| Frequency(MHz) | 698-960 | 1710-2700 |
| Polarization | Vertical | Vertical |
| Gain (dBi) | 2.5 | 5 |
| Horizontal beam width(°) | 360° | 360° |
| Vertical beam width(°) | 80° | 45° |
| VSWR | ≤1.8 | ≤1.7 |
| 3rd PIM(dBc) | ≤-153dBc@2*43dBm | |
| Average Power(W) | 50 | |
| Impedance (ohm) | 50 | |
| Connector & Cable Color | N-Female & White | |
| Light Protection | DC-Ground | |
| Working Temp(deg) | -40~+55 | |
| Radome Material and Color | UV-Protected ABS, White | |
| Rated Wind Velocity (m/s) | 36.9 | |
| Wind Loading area (M ²) | ≤0.2 | |
| Dimensions(mm) | Ø203*43 | |




The TQ-530W multi band dome antenna is an omni-directional interior antenna. The range of antenna is dependent on three factors: 1) physical obstructions, 2) power generated by booster/ amplifier, and 3) reception from outside signal received and distributed by outside antenna.


In addition to the antenna itself, parts include equipment for mounting on the ceiling.

Installation

1. Drill a 18 mm diameter hole in the ceiling. The size should be large enough to allow the antenna's plastic cable base to pass through.
2. Place antenna cable through hole.
3. From crawl space, screw the fixing nut onto antenna and fasten around the threaded plastic cable base.
4. Connect female antenna connector with coax cable that leads to your booster port marked INSIDE.

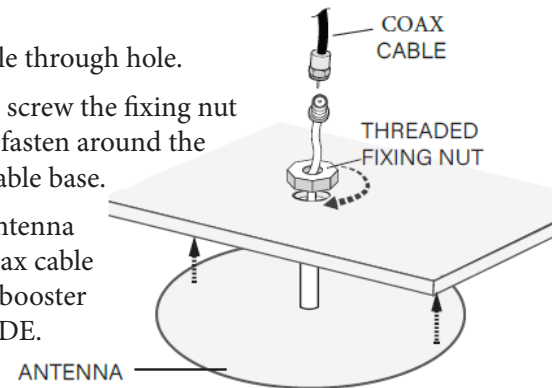

Antenna Pattern

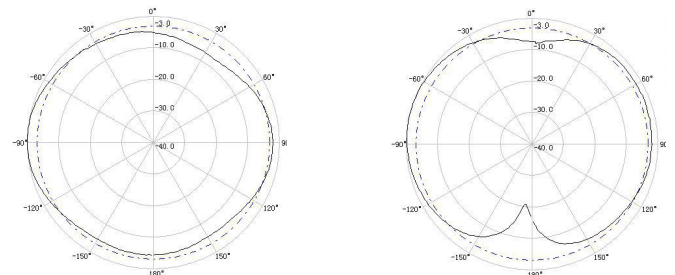

Ordering Information

| Model | Description | Stock No. |
|---------|---|-----------|
| TQ-530W | TQ-530W is a wide band omni-directional interior 50 Ohm antenna | 3996128 |



Guardian TQ-230W Wide Band Outdoor Yagi Antenna

FEATURES

- Wide Band (698 – 2700 MHz)
- 2G/3G/4G and WLAN systems
- Directional antenna – designed to be pointed directly at the cellular tower
- 8 dBi Gain
- Designed for outdoor use only


Technical Specifications

| | |
|-------------------|-----------------------------------|
| Frequency | 698-806 / 806-960 / 1710-2700 MHz |
| Input Impedance | 50 ohm |
| Antenna Gain | 8 dBi |
| VSWR | ≤1.8 |
| Polarization Type | Vertical |
| Radiation | Directional |
| Maximum Power | 50 Watt |
| Connector Type | N-Female |
| Diameter | Φ40~50 |
| Dimension | 17.3" x 8" x 1.45" |
| Color | White |
| Weight | 2 lb 4 oz |
| Beamwidth | E50 H75 / E50 H75 / E40 H60 |



The TQ-230W is an outdoor yagi antenna that can be aimed in the direction of the closest cellular tower and pick up signals up to 30 miles away. The wide band yagi antenna is designed to cover 2G/3G/4G/and WLAN systems for Cellular, PCS, AWS and LTE frequencies.

When installing, any metallic rods must be at least 3 feet from the antenna. Mount the entire assembly to a 1 to 2 inch diameter pole (not included). In addition to the antenna, mounting equipment is included for mounting to either a flat horizontal surface or wall. For best results, the white fiber-glass portion of the antenna should be mounted above the roof line and unobstructed in the direction of the tower.

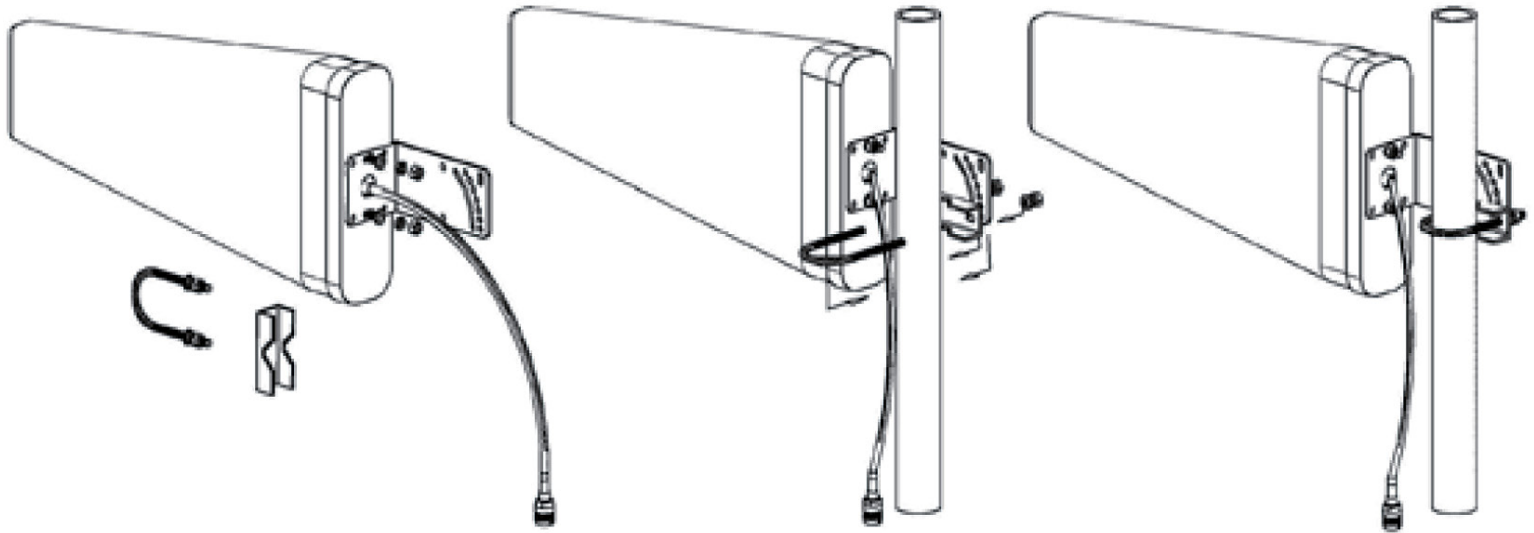

Installation

1. Install U-Bolt on pole
2. Slide pipe clamp over U-Bolt with the flat side facing away from the pipe.
3. Slide antenna bracket onto U-Bolt in desired location.
4. Install flat washer, split washer and nut, hand tighten

Note: Antenna may be installed on a variety of pipe angles. Ensure that the antenna is pointing in the direction of the closest cellular tower, and is vertical with the drip hole at the bottom.

Ordering Information

| Model | Description | Stock No. |
|---------|---|-----------|
| TQ-230W | TQ-230W Wide Band Yagi Dir 50 ohm, 10 to 11dBi (inc mounting kit) | 3996048 |



Emergency Responder Radio System Coverage Report Test Results

| | |
|-----------------------|---|
| Date Prepared: | May 5, 2023 |
| Test File: | NWH A100_20230504_130608 |
| Test Location: | Northwest Harnett Elementary School 736 Rollins Road Fuquay-Varina NC 27526 |
| Technician: | Chris Jordan |
| FCC#: | 987654321 |

Building: Northwest Harnett Elementary School
Result: Fail

Test Report Summary

| Channel/ Ch Group | Freq (MHz) | Technology | Band | Result | Area Points passed (%) | Critical Points passed (%) |
|-------------------------------------|--|------------|---------------|--------|---------------------------|-------------------------------|
| Northwest Harnett: 4, 3, 2, 1 | 774.55625 773.81250 853.37500 852.61250 | P25 | Fuquay-Varina | Fail | 25/112 (22%) | 2/5 (40%) |

Test Details

| | | | |
|--|-----|---------------------------------------|------------------|
| Number of Zones Tested: | 6 | Result Calculation: | By area per Zone |
| Number of Areas Tested: | 112 | Area Pass Criteria: | 95% |
| Number of Critical Points Tested: | 5 | Critical Points Pass Criteria: | 99% |
| | | Apply Adjacent Area Rule: | No |

Equipment Configuration

| Vendor | Application | Device | Calibration Expires | Antenna info |
|--------|------------------------------|---|------------------------|--------------|
| PCTEL | SeeHawk Touch rel 3.2.0.2 | SeeGull IBflex Device rel 3.9.5.0 SN: 082103071 | 3-29-2025 | |

Threshold Settings

| Measurement | DL Area Point | UL Area Point | DL Critical Point | UL Critical Point | Use for grading |
|------------------|---------------|---------------|-------------------|-------------------|-----------------|
| P25 Power (RSSI) | -95.0 dBm | -95.0 dBm | -95.0 dBm | -95.0 dBm | Yes |
| P25 S/N (SINR) | 20.0 dB | 20.0 dB | 22.0 dB | 22.0 dB | No |
| P25 FBER | 2.0 % | 2.0 % | 1.5 % | 1.5 % | No |
| DAQ | 3.0 | | | | Yes |

Floors Result

| Floor Plan | Northwest Harnett |
|--------------------|-------------------|
| NWH Area 100 | Fail |
| NWH A200 | Fail |
| NWH A300 | Fail |
| NWH A400 | Fail |
| NWH A500 | Fail |
| NWH A600 2nd floor | Fail |

Floor: NWH Area 100
Group: Northwest Harnett Channels: 4, 3, 2, 1
Result: Fail

| Freq (MHz) | Tech | Band | Ant Gain | Cable Loss | Ph. | Type | Mod | NAC | Area Points passed (%) | Critical Points passed (%) |
|------------|------|---------------|----------|------------|-----|------|-----|-----|------------------------|----------------------------|
| 774.55625 | P25 | Fuquay-Varina | 0.00 | 0.00 | - | CC | | | 4/18 (22%) | 0/0 (0%) |
| 773.81250 | | | | | CC | | | | | |
| 853.37500 | | | | 1 | CC | C4FM | 1F2 | | | |
| 852.61250 | | | | | CC | | | | | |



| Grid | # of Areas | Area Size (sq. ft) | Area Width (ft) | Area Height (ft) | Ignore Area Color | Comments |
|------|------------|--------------------|-----------------|------------------|-------------------|----------|
| 1 | 20 | 726.26 | 27.56 | 26.35 | Black | |



Floor: NWH Area 100
Group: Northwest Harnett Channels: 4, 3, 2, 1

Reference Point Report

| Reference Point | Power (dBm) | DL S/N (dB) | DL FBER (%) | Selected | Comment |
|-----------------|-------------|-------------|-------------|----------|---------|
| 1 | -80.85 | 26.53 | 2.25 | | |
| 2 | -81.07 | 24.95 | 1.10 | | |
| 3 | -78.23 | 25.62 | 0.72 | | |

Area Report

| Grid | Area | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | Result | DL Loss (dB) | Comment |
|------|------|----------------|-------------|-------------|--------|--------------|---------|
| 1 | 1 | -97.62 | 11.25 | 4.50 | Fail | | |
| 1 | 2 | -116.00 | 7.43 | 16.66 | Fail | | |
| 1 | 3 | -94.62 | 19.22 | 9.05 | Pass | | |
| 1 | 4 | -107.71 | 0.00 | 31.25 | Fail | | |
| 1 | 5 | -94.73 | 13.62 | 6.75 | Pass | | |
| 1 | 6 | -90.43 | 6.80 | | Pass | | |
| 1 | 7 | -99.28 | | | Fail | | |
| 1 | 8 | -101.31 | 5.85 | | Fail | | |
| 1 | 9 | -108.68 | | | Fail | | |
| 1 | 10 | -107.34 | 4.32 | | Fail | | |
| 1 | 11 | -105.89 | 7.49 | 15.10 | Fail | | |
| 1 | 12 | -94.73 | 15.81 | 6.18 | Pass | | |
| 1 | 13 | -101.78 | 4.51 | | Fail | | |
| 1 | 14 | -117.60 | | | Fail | | |
| 1 | 15 | -114.33 | 3.41 | 27.08 | Fail | | |
| 1 | 16 | NT | NT | NT | NT | | |
| 1 | 17 | NT | NT | NT | NT | | |
| 1 | 18 | -109.13 | | | Fail | | |
| 1 | 19 | -108.16 | | | Fail | | |
| 1 | 20 | -102.40 | 9.21 | 9.00 | Fail | | |

Floor: NWH A200
Group: Northwest Harnett Channels: 4, 3, 2, 1
Result: Fail

| Freq (MHz) | Tech | Band | Ant Gain | Cable Loss | Ph. | Type | Mod | NAC | Area Points passed (%) | Critical Points passed (%) |
|------------|------|---------------|----------|------------|-----|------|------|-----|------------------------|----------------------------|
| 774.55625 | P25 | Fuquay-Varina | 0.00 | 0.00 | - | CC | | | 3/19 (15%) | 0/1 (0%) |
| 773.81250 | | | | | 1 | CC | C4FM | 1F2 | | |
| 853.37500 | | | | | | CC | | | | |
| 852.61250 | | | | | | CC | | | | |



| Grid | # of Areas | Area Size (sq. ft) | Area Width (ft) | Area Height (ft) | Ignore Area Color | Comments |
|------|------------|--------------------|-----------------|------------------|-------------------|----------|
| 1 | 20 | 995.83 | 31.02 | 32.11 | Black | |

Floor: NWH A200
Group: Northwest Harnett Channels: 4, 3, 2, 1

Reference Point Report

| Reference Point | Power (dBm) | DL S/N (dB) | DL FBER (%) | Selected | Comment |
|-----------------|-------------|-------------|-------------|----------|---------|
| 1 | -88.93 | 19.28 | 4.20 | | |
| 2 | -80.22 | 20.00 | 0.54 | | |

Critical Point Report


| Critical Point | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | DL DAQ | UL Power (dBm) | UL S/N (dB) | UL FBER (%) | UL DAQ | Result | DL Loss (dB) | Comment |
|----------------|----------------|-------------|-------------|--------|----------------|-------------|-------------|--------|-------------|--------------|---------|
| 1 | -114.53 | 4.24 | | | | | | | Fail | | |

Area Report

| Grid | Area | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | Result | DL Loss (dB) | Comment |
|------|------|----------------|-------------|-------------|-------------|--------------|---------|
| 1 | 1 | -96.64 | 8.86 | 17.11 | Fail | | |
| 1 | 2 | -116.00 | | | Fail | | |
| 1 | 3 | -110.57 | | | Fail | | |
| 1 | 4 | -105.18 | | | Fail | | |
| 1 | 5 | -100.83 | 9.17 | 12.10 | Fail | | |
| 1 | 6 | -100.27 | 7.68 | 25.00 | Fail | | |
| 1 | 7 | -99.50 | 7.52 | | Fail | | |
| 1 | 8 | -106.73 | 12.08 | 6.76 | Fail | | |
| 1 | 9 | -97.46 | 17.15 | 1.80 | Fail | | |
| 1 | 10 | -87.96 | 22.00 | 0.00 | Pass | | |
| 1 | 11 | -81.71 | 16.82 | 3.00 | Pass | | |
| 1 | 12 | -91.48 | 7.71 | 17.11 | Pass | | |
| 1 | 13 | -107.30 | 5.74 | | Fail | | |
| 1 | 14 | -105.46 | 5.46 | | Fail | | |
| 1 | 15 | -101.77 | | | Fail | | |
| 1 | 16 | NT | NT | NT | NT | | |
| 1 | 17 | -115.50 | | | Fail | | |
| 1 | 18 | -110.56 | 7.05 | | Fail | | |
| 1 | 19 | -100.59 | 6.30 | | Fail | | |
| 1 | 20 | -111.19 | | | Fail | | |

Floor: NWH A300
Group: Northwest Harnett Channels: 4, 3, 2, 1
Result: Fail

| Freq (MHz) | Tech | Band | Ant Gain | Cable Loss | Ph. | Type | Mod | NAC | Area Points passed (%) | Critical Points passed (%) |
|------------|------|---------------|----------|------------|-----|------|------|-----|------------------------|----------------------------|
| 774.55625 | P25 | Fuquay-Varina | 0.00 | 0.00 | - | CC | | | 9/15 (60%) | 0/0 (0%) |
| 773.81250 | | | | | | | | | | |
| 853.37500 | | | | | 1 | CC | C4FM | 1F2 | | |
| 852.61250 | | | | | | CC | | | | |

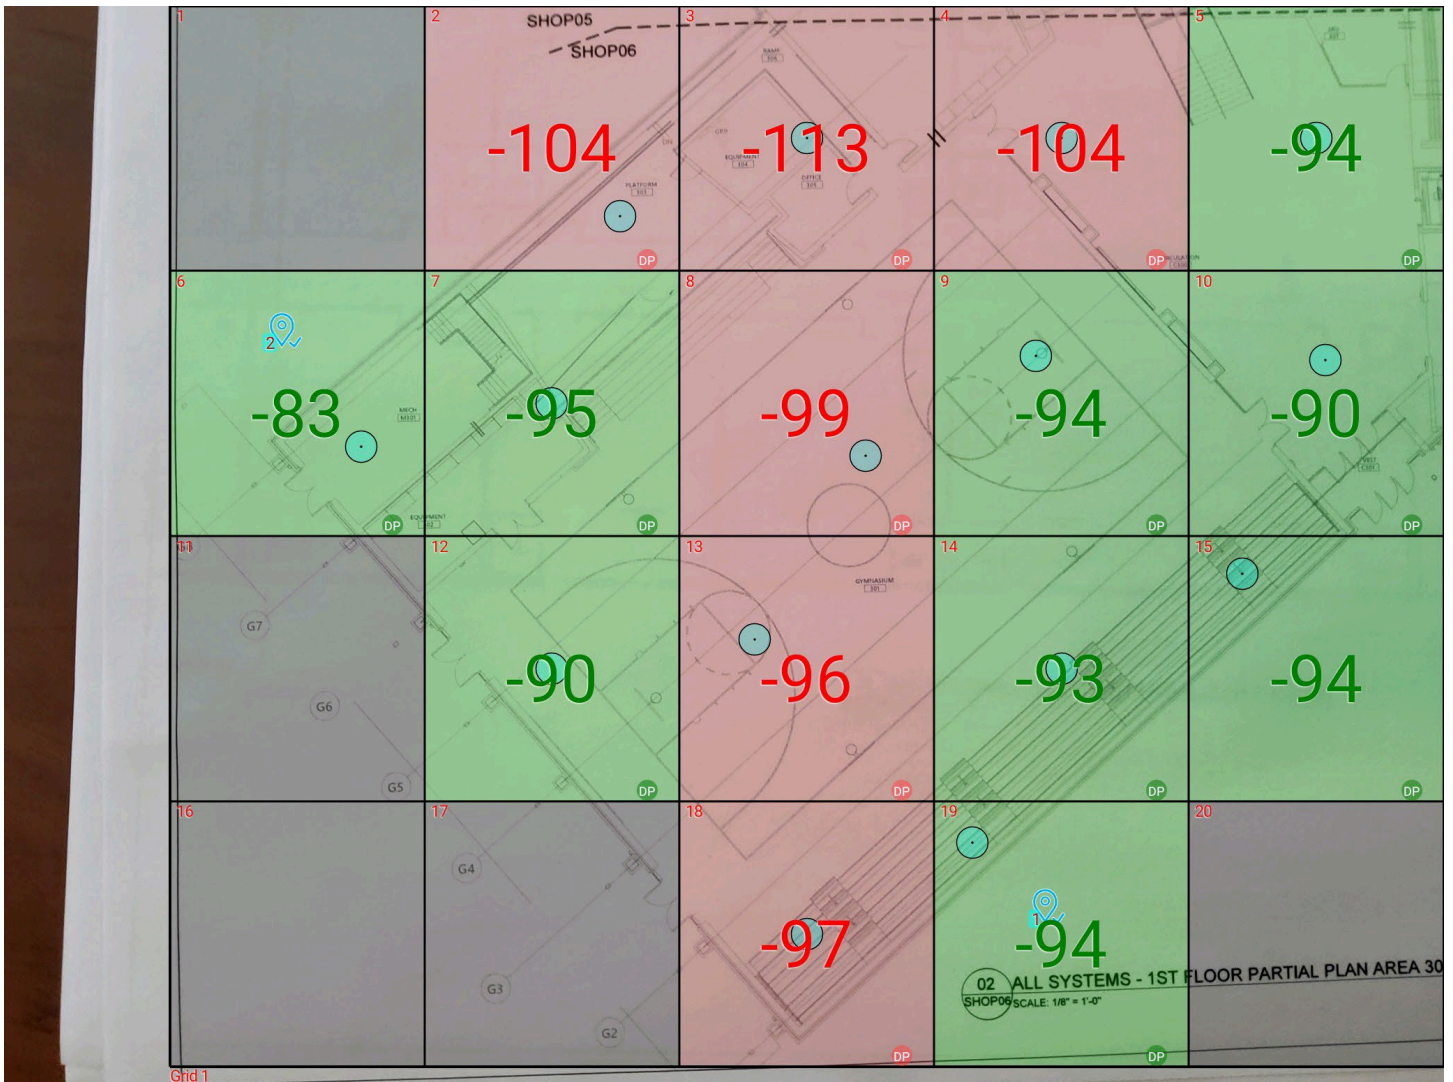

| Grid | # of Areas | Area Size (sq. ft) | Area Width (ft) | Area Height (ft) | Ignore Area Color | Comments |
|------|------------|--------------------|-----------------|------------------|-------------------|----------|
| 1 | 20 | 3286.60 | 85.70 | 38.35 | Black | |



Floor: NWH A300
Group: Northwest Harnett Channels: 4, 3, 2, 1

Reference Point Report


| Reference Point | Power (dBm) | DL S/N (dB) | DL FBER (%) | Selected | Comment |
|-----------------|-------------|-------------|-------------|----------|---------|
| 1 | -80.85 | 17.26 | 0.45 | | |
| 2 | -81.10 | 25.56 | 1.17 | | |

Area Report

| Grid | Area | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | Result | DL Loss (dB) | Comment |
|------|------|----------------|-------------|-------------|--------|--------------|---------|
| 1 | 1 | NT | NT | NT | NT | | |
| 1 | 2 | -103.51 | 7.47 | | Fail | | |
| 1 | 3 | -112.01 | 6.32 | | Fail | | |
| 1 | 4 | -103.37 | 13.11 | 4.50 | Fail | | |
| 1 | 5 | -93.86 | 6.62 | | Pass | | |
| 1 | 6 | -82.06 | 19.48 | 4.05 | Pass | | |
| 1 | 7 | -94.29 | 6.31 | | Pass | | |
| 1 | 8 | -98.47 | 6.81 | 27.08 | Fail | | |
| 1 | 9 | -93.47 | 8.41 | | Pass | | |
| 1 | 10 | -89.65 | 5.38 | | Pass | | |
| 1 | 11 | NT | NT | NT | NT | | |
| 1 | 12 | -89.65 | 18.33 | 4.05 | Pass | | |
| 1 | 13 | -95.62 | 12.54 | 8.55 | Fail | | |
| 1 | 14 | -92.24 | 8.00 | 18.75 | Pass | | |
| 1 | 15 | -93.83 | 8.37 | 7.20 | Pass | | |
| 1 | 16 | NT | NT | NT | NT | | |
| 1 | 17 | NT | NT | NT | NT | | |
| 1 | 18 | -96.89 | 18.10 | 2.16 | Fail | | |
| 1 | 19 | -93.49 | 10.47 | 8.55 | Pass | | |
| 1 | 20 | NT | NT | NT | NT | | |

Floor: NWH A400
Group: Northwest Harnett Channels: 4, 3, 2, 1
Result: Fail

| Freq (MHz) | Tech | Band | Ant Gain | Cable Loss | Ph. | Type | Mod | NAC | Area Points passed (%) | Critical Points passed (%) |
|------------|------|---------------|----------|------------|-----|------|------|-----|------------------------|----------------------------|
| 774.55625 | P25 | Fuquay-Varina | 0.00 | 0.00 | - | CC | | | 1/20 (5%) | 0/0 (0%) |
| 773.81250 | | | | | | CC | | | | |
| 853.37500 | | | | | 1 | CC | C4FM | 1F2 | | |
| 852.61250 | | | | | | CC | | | | |

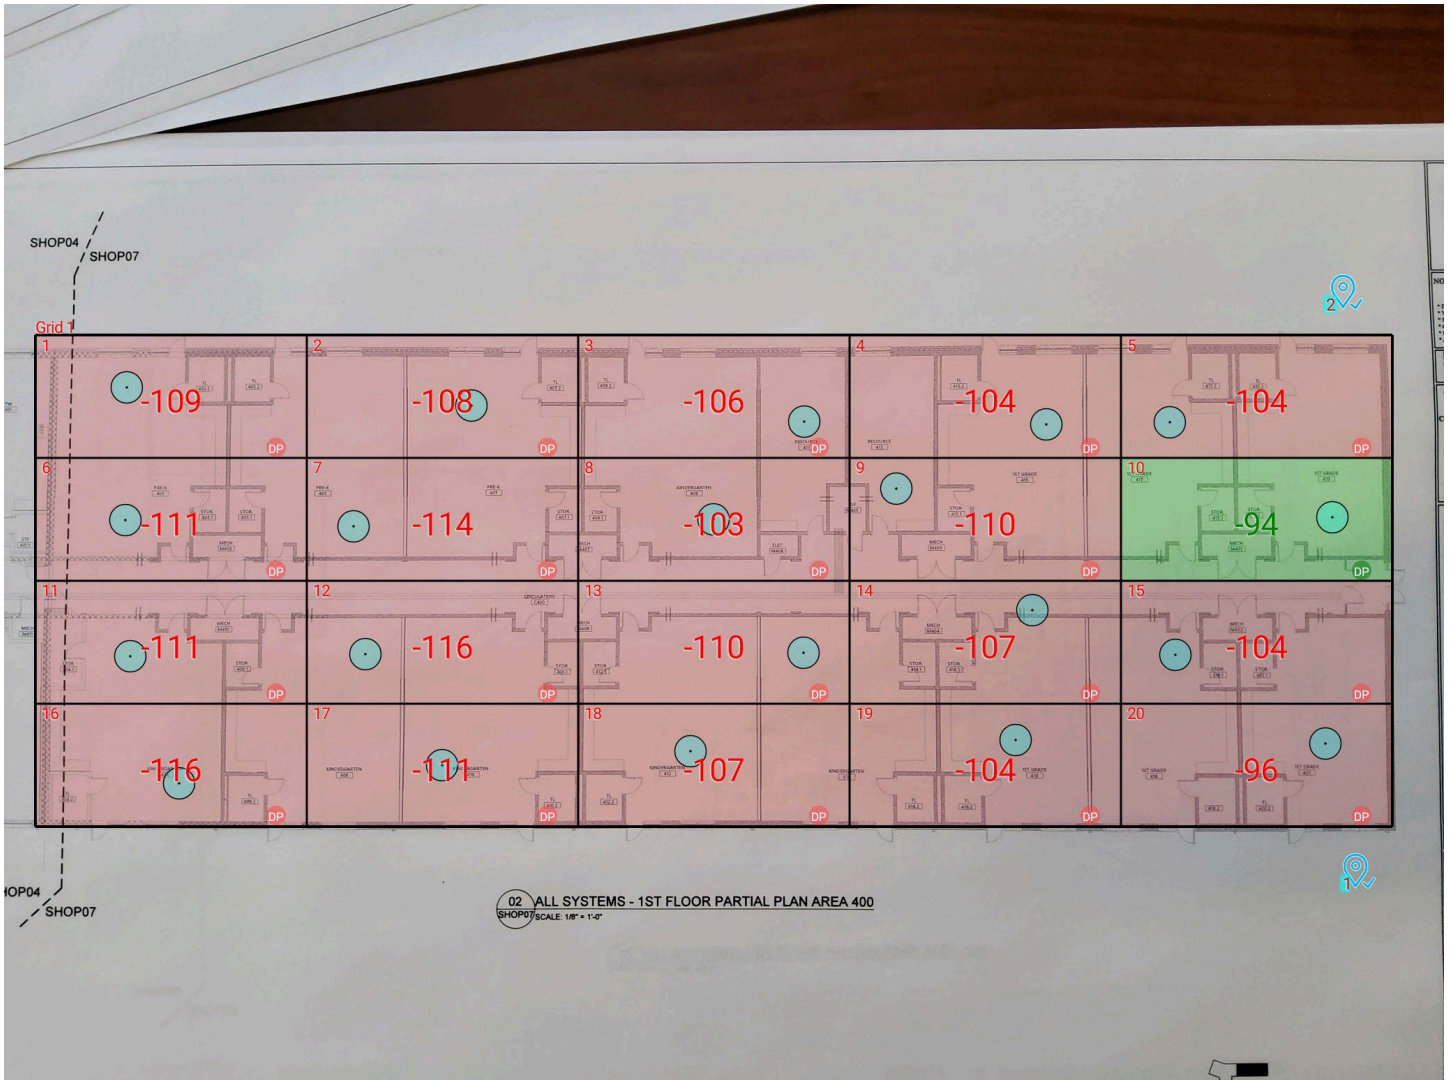

| Grid | # of Areas | Area Size (sq. ft) | Area Width (ft) | Area Height (ft) | Ignore Area Color | Comments |
|------|------------|--------------------|-----------------|------------------|-------------------|----------|
| 1 | 20 | 814.77 | 42.46 | 19.19 | Black | |



Floor: NWH A400
Group: Northwest Harnett Channels: 4, 3, 2, 1

Reference Point Report

| Reference Point | Power (dBm) | DL S/N (dB) | DL FBER (%) | Selected | Comment |
|-----------------|-------------|-------------|-------------|----------|---------|
| 1 | -92.52 | 31.29 | 1.20 | | |
| 2 | -80.75 | 26.00 | 1.08 | | |

Area Report

| Grid | Area | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | Result | DL Loss (dB) | Comment |
|------|------|----------------|-------------|-------------|--------|--------------|---------|
| 1 | 1 | -108.21 | 8.58 | 12.61 | Fail | | |
| 1 | 2 | -107.85 | 12.88 | 4.95 | Fail | | |
| 1 | 3 | -105.75 | | | Fail | | |
| 1 | 4 | -103.45 | 6.69 | | Fail | | |
| 1 | 5 | -103.97 | 18.34 | 0.00 | Fail | | |
| 1 | 6 | -110.29 | 8.42 | 12.61 | Fail | | |
| 1 | 7 | -113.97 | 5.82 | | Fail | | |
| 1 | 8 | -102.83 | 11.93 | 0.00 | Fail | | |
| 1 | 9 | -109.85 | 7.16 | 18.91 | Fail | | |
| 1 | 10 | -93.69 | 16.53 | 2.48 | Pass | | |
| 1 | 11 | -110.36 | | | Fail | | |
| 1 | 12 | -116.00 | | | Fail | | |
| 1 | 13 | -109.12 | 6.10 | | Fail | | |
| 1 | 14 | -106.20 | 5.03 | | Fail | | |
| 1 | 15 | -103.71 | 22.15 | 1.50 | Fail | | |
| 1 | 16 | -116.00 | | | Fail | | |
| 1 | 17 | -110.81 | 6.98 | | Fail | | |
| 1 | 18 | -106.80 | 8.35 | 16.21 | Fail | | |
| 1 | 19 | -103.37 | 10.89 | 5.85 | Fail | | |
| 1 | 20 | -95.94 | 16.41 | 4.14 | Fail | | |

Floor: NWH A500
Group: Northwest Harnett Channels: 4, 3, 2, 1
Result: Fail

| Freq (MHz) | Tech | Band | Ant Gain | Cable Loss | Ph. | Type | Mod | NAC | Area Points passed (%) | Critical Points passed (%) |
|------------|------|---------------|----------|------------|-----|------|-----|-----|------------------------|----------------------------|
| 774.55625 | P25 | Fuquay-Varina | 0.00 | 0.00 | - | CC | | | 5/20 (25%) | 1/2 (50%) |
| 773.81250 | | | | | CC | | | | | |
| 853.37500 | | | | 1 | CC | C4FM | 1F2 | | | |
| 852.61250 | | | | | CC | | | | | |



| Grid | # of Areas | Area Size (sq. ft) | Area Width (ft) | Area Height (ft) | Ignore Area Color | Comments |
|------|------------|--------------------|-----------------|------------------|-------------------|----------|
| 1 | 20 | 1136.33 | 54.16 | 20.98 | Black | |

Floor: NWH A500
Group: Northwest Harnett Channels: 4, 3, 2, 1

Reference Point Report

| Reference Point | Power (dBm) | DL S/N (dB) | DL FBER (%) | Selected | Comment |
|-----------------|-------------|-------------|-------------|----------|---------|
| 1 | -76.20 | 24.68 | 1.44 | | |
| 2 | -77.20 | 16.70 | 1.16 | | |
| 3 | -83.35 | 23.66 | 1.35 | | |

Critical Point Report


| Critical Point | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | DL DAQ | UL Power (dBm) | UL S/N (dB) | UL FBER (%) | UL DAQ | Result | DL Loss (dB) | Comment |
|----------------|----------------|-------------|-------------|--------|----------------|-------------|-------------|--------|--------|--------------|---------|
| 1 | -91.94 | 7.48 | 13.12 | | | | | | Pass | | |
| 2 | -107.28 | 10.71 | 6.30 | | | | | | Fail | | |

Area Report

| Grid | Area | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | Result | DL Loss (dB) | Comment |
|------|------|----------------|-------------|-------------|--------|--------------|---------|
| 1 | 1 | -115.43 | | | Fail | | |
| 1 | 2 | -101.73 | 14.11 | 4.05 | Fail | | |
| 1 | 3 | -108.79 | 6.52 | 17.11 | Fail | | |
| 1 | 4 | -112.83 | 7.69 | | Fail | | |
| 1 | 5 | -88.32 | 14.01 | 6.30 | Pass | | |
| 1 | 6 | -114.39 | 5.34 | | Fail | | |
| 1 | 7 | -113.77 | | | Fail | | |
| 1 | 8 | -114.57 | 6.02 | | Fail | | |
| 1 | 9 | -109.71 | 8.13 | | Fail | | |
| 1 | 10 | -94.66 | 14.23 | 1.13 | Pass | | |
| 1 | 11 | -116.00 | | | Fail | | |
| 1 | 12 | -106.53 | | | Fail | | |
| 1 | 13 | -115.28 | 8.28 | 9.40 | Fail | | |
| 1 | 14 | -111.40 | | | Fail | | |
| 1 | 15 | -91.36 | 6.07 | | Pass | | |
| 1 | 16 | -104.04 | 5.83 | | Fail | | |
| 1 | 17 | -99.44 | 6.91 | | Fail | | |
| 1 | 18 | -98.93 | | | Fail | | |
| 1 | 19 | -93.40 | 13.51 | 4.50 | Pass | | |
| 1 | 20 | -94.32 | 0.00 | 27.08 | Pass | | |

Floor: NWH A600 2nd floor
Group: Northwest Harnett Channels: 4, 3, 2, 1
Result: Fail

| Freq (MHz) | Tech | Band | Ant Gain | Cable Loss | Ph. | Type | Mod | NAC | Area Points passed (%) | Critical Points passed (%) |
|------------|------|---------------|----------|------------|-----|------|------|-----|------------------------|----------------------------|
| 774.55625 | P25 | Fuquay-Varina | 0.00 | 0.00 | - | CC | | | 3/20 (15%) | 1/2 (50%) |
| 773.81250 | | | | | | CC | | | | |
| 853.37500 | | | | | 1 | CC | C4FM | 1F2 | | |
| 852.61250 | | | | | | CC | | | | |

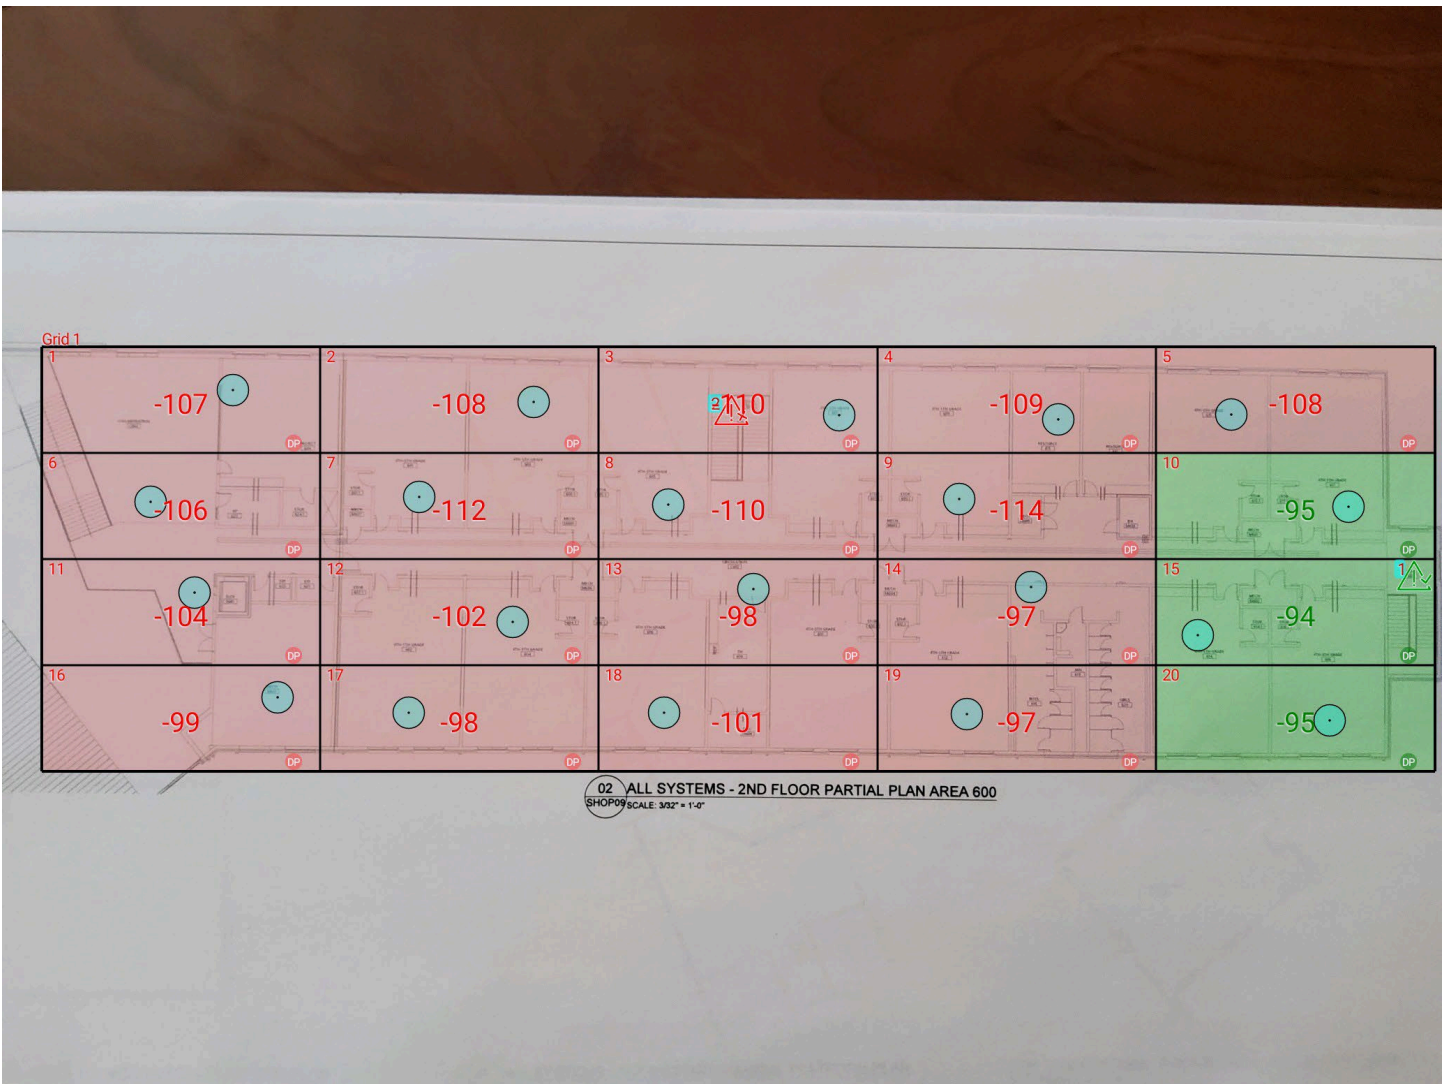

| Grid | # of Areas | Area Size (sq. ft) | Area Width (ft) | Area Height (ft) | Ignore Area Color | Comments |
|------|------------|--------------------|-----------------|------------------|-------------------|----------|
| 1 | 20 | 1438.16 | 61.51 | 23.38 | Black | |

Floor: NWH A600 2nd floor
Group: Northwest Harnett Channels: 4, 3, 2, 1

Critical Point Report

| Critical Point | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | DL DAQ | UL Power (dBm) | UL S/N (dB) | UL FBER (%) | UL DAQ | Result | DL Loss (dB) | Comment |
|----------------|----------------|-------------|-------------|--------|----------------|-------------|-------------|--------|--------|--------------|---------|
| 1 | -88.59 | 12.73 | 4.05 | | | | | | Pass | | |
| 2 | -108.63 | 7.19 | 20.83 | | | | | | Fail | | |

Area Report

| Grid | Area | DL Power (dBm) | DL S/N (dB) | DL FBER (%) | Result | DL Loss (dB) | Comment |
|------|------|----------------|-------------|-------------|--------|--------------|---------|
| 1 | 1 | -106.80 | 15.75 | 6.30 | Fail | | |
| 1 | 2 | -107.33 | 6.69 | | Fail | | |
| 1 | 3 | -109.80 | 6.81 | | Fail | | |
| 1 | 4 | -108.77 | 6.99 | | Fail | | |
| 1 | 5 | -107.46 | 6.28 | | Fail | | |
| 1 | 6 | -105.46 | 15.59 | 0.00 | Fail | | |
| 1 | 7 | -111.23 | 7.15 | 18.01 | Fail | | |
| 1 | 8 | -109.97 | 6.87 | 29.16 | Fail | | |
| 1 | 9 | -113.40 | 5.47 | | Fail | | |
| 1 | 10 | -94.19 | 6.08 | | Pass | | |
| 1 | 11 | -103.57 | 7.40 | | Fail | | |
| 1 | 12 | -101.40 | 13.08 | 1.80 | Fail | | |
| 1 | 13 | -97.77 | | | Fail | | |
| 1 | 14 | -96.63 | 7.52 | | Fail | | |
| 1 | 15 | -93.60 | 8.05 | 13.51 | Pass | | |
| 1 | 16 | -98.27 | 8.45 | 6.30 | Fail | | |
| 1 | 17 | -97.27 | | | Fail | | |
| 1 | 18 | -100.79 | 5.17 | | Fail | | |
| 1 | 19 | -96.19 | | | Fail | | |
| 1 | 20 | -94.88 | 4.10 | 17.97 | Pass | | |



Additional Info

In accordance with NCFC 510, NCS has performed an initial radio signal strength survey of the site located at 736 Rollins Road, Fuquay-Varina, NC 27526. This was in reference to the Emergency Responder Radio Coverage System or Enhancement System. The structure is 95% complete. The readings we obtained at the site are noted above. NCFC 510 requires a maximum dB loss of -95dBm for down-link and up-link in all new construction. Given the survey above the current buildings signal levels do NOT meet those require by code.

A BDA SYSTEM REQUIRED

Sincerely,

Chris Jordan, RCDD