


A New Fire Alarm System for:  
**RELIANT REAL ESTATE**  
#NC07  
14396 NC-210 S. HIGHWAY  
SPRING LAKE, NC. 28390

THE ATTACHED EQUIPMENT DATA  
SUBMITTAL HAS BEEN REVIEWED  
AND APPROVED BY THE ENGINEER  
OF RECORD FOR THIS PROJECT.



System/Installation Narrative:

This new, Dedicated FACU with Sprinkler Monitoring and Elevator Function System will be installed in a space in an existing structure, occupancy type is a 'B,S-1'. The building is Sprinklered. The U.L. listed system will meet the requirements of, Spring Lake NC.

- The Fire Alarm System will consist of:
  - Manual Pull Station
  - Smoke Detectors
  - Heat Detectors
  - Waterflow
  - Tamper
  - Weather Proof Horn/Strobe
- The Fire Alarm System, **indicating (NAC) circuits, shall be Class 'B' wired and the initiating (SLC) circuit shall be Class 'B' wired. All wiring will be supervised. All cabling shall be FPLP (Plenum) rated.**
- Fire Alarm contractor to coordinate all sizes, locations, etc. All 120vac dedicated power circuits and all associated conduit and boxes for this power shall be provided by the Electrical Contractor.
- The 120vac circuit for the Fire Alarm Panel shall be dedicated. The circuit must be identified at the control panel as well as the electrical panel. The disconnect means must be labeled, painted red and mechanically locked to prevent accidental disconnect.
- The fire alarm system will be monitored by a U.L. Listed Central Station for Remote System Type monitoring. U.L. Certificate enclosed.
- Off Premise notification shall be accomplished by Cellular, Sole Path or IP Primary with Cellular back-up communication methods. All NFPA 72, 2019 Edition, Criteria has been met.
- Manual Pull Station, Smoke Detectors, Heat Detectors and Waterflow will activate an Alarm condition.

2/28/2025

- A fire alarm document storage cabinet shall be installed.
- All Strobe appliances will be synchronized and installed using **NFPA72** for room and hallway/corridor spacing for ceiling and/or wall mounted appliances.
- The Fire Alarm System shall have battery back-up and be capable of meeting/exceeding the 24hr standby period followed by 5 minutes of alarm at maximum system load. The Fire Alarm Control Panel will have two 12vdc, 12amp batteries.
- Copies of Fire Marshal approved, stamped, signed drawings along with a complete user's manual will be left with the Site Manager for their reference and all future annual inspections. Customer designated personnel will be provided training on proper use of the Fire Alarm System by the installation contractor.
- A complete zone list/device address chart will be provided. An **NFPA** Record of Completion will be submitted. As-Built (Record) drawings will be generated upon completion of a successful final inspection and copies will be provided to the customer and kept on file with Everon.



LIFE SAFETY &amp; INCIDENT MANAGEMENT

# Intelligent Fire Alarm Systems

iO64, iO1000

FDNY  
COA 62277165-1657:  
0244

## Overview

EDWARDS brand intelligent life safety systems offer the power of high-end intelligent processing in configurations that deliver uncomplicated solutions for small-to-mid-sized applications. With intelligent detection, electronic addressing, automatic device mapping, optional Ethernet® connectivity, and a full line of easily-configured option cards and modules, these flexible systems offer versatility that benefits building owners and contractors alike.

The iO64 provides one Class A or Class B intelligent device loop that supports up to 64 device addresses, and two Class B Notification Appliance Circuits (NACs). Optional Class A device wiring is available with the use of a module.

The iO1000 provides one Class A or Class B intelligent device loop that supports up to 250 device addresses. Loop controller modules may be added in combination to expand total system capacity in 250-point increments to up to 1,000 device addresses. The iO1000 panel includes four NACs that may be wired for either Class A or Class B operation.

The RZ16-2 module adds even more capacity to iO installations by adding up to 16 conventional device circuits and two additional notification appliance circuits. This makes them an ideal retrofit solution that can accommodate new intelligent detectors, as well as existing conventional devices.

iO Series supports a wide range of high-end features, including:

- Supports 10-Year Carbon Monoxide detectors
- R-Series remote annunciators
- SIGA-REL Releasing Modules
- Fully integrated CO detection using Signature Series detectors with or without audible signaling

## Features

- Auto-programming reduces installation time
- Supports Signature Series intelligent modules and detectors
- Combines the Signature intelligent releasing module with Signature multisensor detectors for reliable fire suppression
- Electronic addressing with automatic device mapping
- Optional Ethernet port (SA-ETH) for central station monitoring service, programming, diagnostics and a variety of system reports.
- Two programmable switches with LEDs and custom labeling
- Supports Genesis horn silence over two wires, and UL 1971-compliant strobe synchronization
- Optional multi-protocol Field Server Bridge for interface to third-party Building Management Systems.
- Ground fault detection by module
- Supports up to eight serial annunciators, (LCD, LED-only, and graphic interface)
- Can use existing wiring for most retrofit applications
- Upload/download remotely or locally
- Optional USB module for local printing or programming using the configuration utility on a technician's laptop.
- Two-level maintenance alert reporting
- Pre-alarm and alarm verification by point
- Adjustable detector sensitivity
- 4 x 20 character backlit LCD display
- Optional earthquake hardening: seismic Importance Factor 1.5
- Standalone operation
- Alarm ON command manually activates alarm condition
- Form C contacts for alarm and trouble, Form A for supervisory

# Application

The EDWARDS iO Series life safety systems are powerful intelligent solutions for small to mid-sized buildings. Advanced intelligent technology delivers the benefits of flexible system installation, while clean and easy-to-operate user interfaces make panel operation and system maintenance quick and intuitive.

## The smart choice

Signature Series electronic addressing eliminates the tedium of setting dip switches, and automatic device mapping ensures that each device resides on the system at its correct location. Meanwhile, innovative programming allows the designer to customize the system to precisely suit the needs of the building owner.

## Reliability you can count on

The inherent fault-tolerant characteristics of Analog/Addressable Technology boost the reliability of EDWARDS brand fire alarm systems. When combined with iO Series smoke and heat detectors, these systems deliver a level of dependability not previously available for small-to-mid-sized applications. All EDWARDS systems are built to exacting reliability benchmarks.

## Clear-cut remote annunciation

Remote annunciation is a strong suit of the iO Series fire alarm systems. Up to eight annunciators can be installed on a single system. Compatible annunciators include a range of LED and LCD models that provide zone or point annunciation, as well as common control capabilities. iO control panels also support graphic annunciation with optional RA Graphic Annunciator interface modules. Each interface provides common control and 32 LEDs.

## Flexibility built right in

Two fully-programmable front panel switch/LED combinations provide an added measure of flexibility. Their slide-in labels take the mystery out of custom applications, and present a clean, finished appearance.

# Programming and remote diagnostics

The EDWARDS iO Series life safety systems are simple to set up, yet offer advanced programming features that put these small building panels into a class of their own. The auto programming feature quickly gets the panel operational using factory default settings. Basic zone and point settings can be programmed through the front panel interface, so the system is up and running in no time.

For more advanced system configuration and correlation groups programming, iO Series systems interface to a PC running compatible iO-CU software. This option offers full system configuration in the familiar Windows® operating environment. Connection is made to a laptop through the panel's optional RS-232 communications port, which can also be used to connect a system printer.

Among the many innovative features of iO Series control panels is the optional network card. This module provides a standard 10/100 Base T Ethernet® network connection that permits access to the control panel from any remote location with the correct communications protocols. The connection can be used to download to the panel from the iO-CU, or upload and view system reports using the iO-CU.

Available system reports include: Correlation groups, Device details, Device maintenance, History, Internal status, System configuration, System status, Walk test, Dialer, and CO runtime.

## Perfect for retrofits

The EDWARDS iO Series control panels are particularly well-suited to retrofit applications. All connections are made over standard wiring – no shielded cable required. This means that in most situations existing wiring can be used to upgrade a legacy control panel to iO technology without the expense or disruption of rewiring the entire building. iO control panels also support the ingenious RZI16-2 Zone Module, which adds up to 16 conventional circuits and two NACs. This combination easily accommodates new intelligent detection alongside existing conventional circuits, making it a superior solution in the retrofit market.

## Scalable IP and Cellular Communications

Optional SA-ETH module supports IP connection to a central station's Sur-Gard receiver, meeting one of the methods of communication allowed by NFPA 72 as of the 2013 Edition. Several popular third-party IP/Cellular communicators have been tested with the iO control panels and are compatibility-listed to UL864. The IP/Cellular communicators meet NFPA72 2013 edition requirements for sole or secondary transmission paths. Using IP/Cellular communicators can reduce the cost of ownership by eliminating POTS lines. Please see the iO control panel compatibility documentation part number 3102353-EN for a full list of compatible communicators.


## Signals with a difference

iO system NACs are configurable to fully support the advanced signaling technology of the EDWARDS Genesis and Enhanced Integrity notification appliances. These devices offer precision synchronization of strobes to UL 1971 standards. For Genesis devices, enabling this feature allows horns to be silenced while strobes on the same two-wire circuit continue to flash until the panel is reset.

## A complete line of accessories

iO Series life safety systems are supported by a complete line of analog/addressable detectors, modules and related equipment. Consult the Ordering Information section for details.

# Dimensions

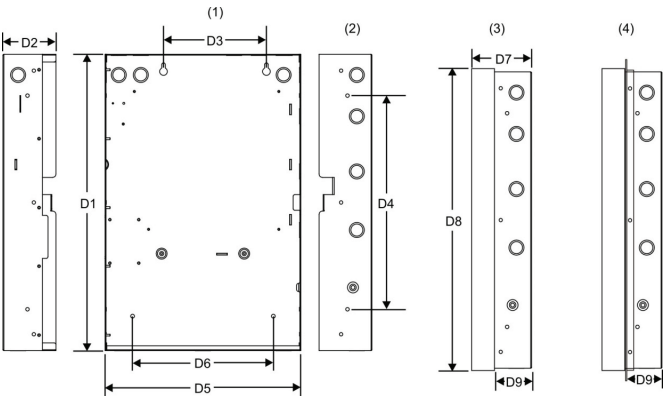

Panel dimensions, in (cm)									
Model	D1*	D2	D3	D4	D5*	D6	D7	D8	D9
iO1000	28.0 (71.1)	3.85 (9.8)	9.0 (22.8)	22.0 (55.8)	15.75 (40.0)	10.25 (26.0)	4.4 (11.1)	28.2 (71.6)	2.7 (6.8)
iO64	21.5 (54.6)	3.85 (9.8)	7.5 (19.0)	15.5 (39.4)	14.25 (36.2)	10.25 (26.0)	4.5 (11.4)	21.7 (55.1)	2.7 (6.8)


\* Add 1-1/2 in. (3.81 cm) to D1 and D5 dimensions for trim kit. The trim kit provides 0.75 inches (1.9 cm) of trim to the top, bottom, and sides of the backbox.



# System Layout


## iO1000

Any combination of two single- or dual Signature loop modules

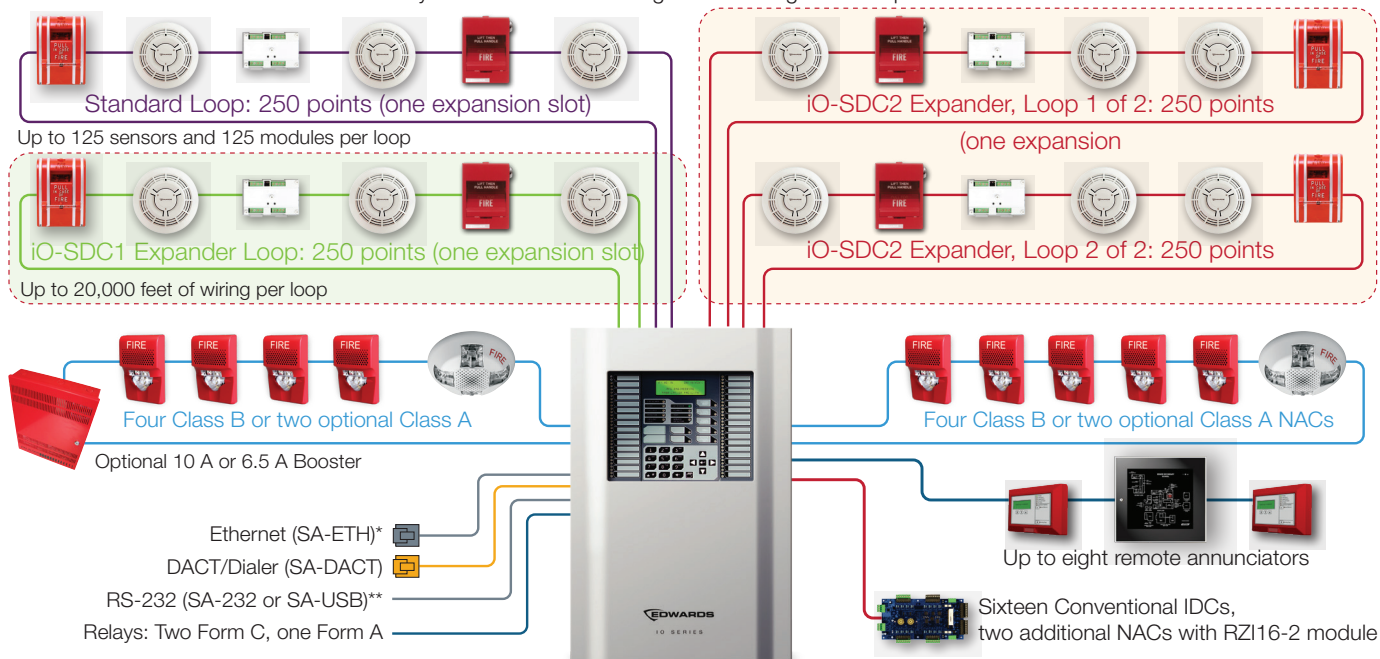


Each iO1000 panel has room for up to two Signature loop controller modules in any combination of single or dual 250-device loops. iO1000 loops support 125 detectors and 125 modules.

## iO64

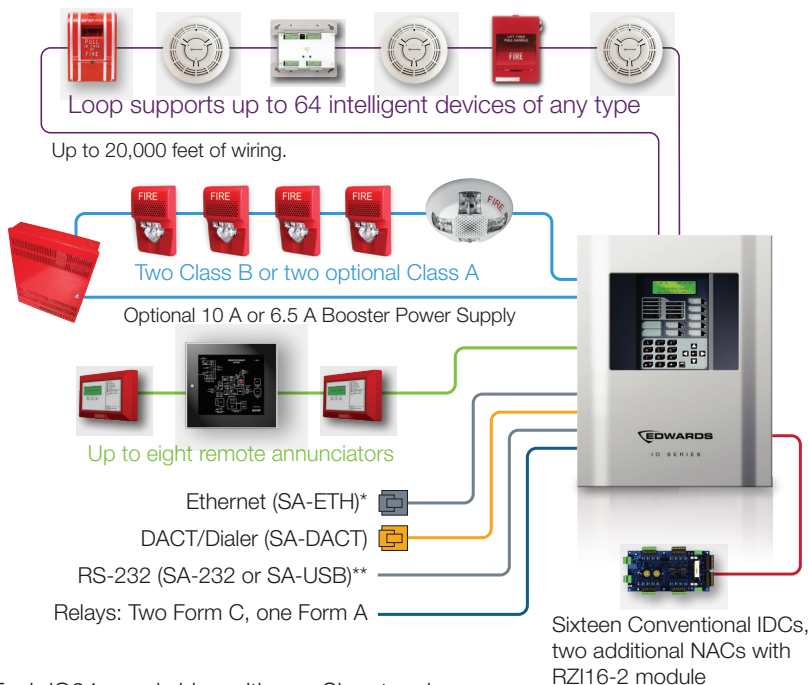

Each iO64 panel ships with one Signature loop controller that supports 64 devices of any type. This panel's device capacity cannot be expanded.

## Panel Layout

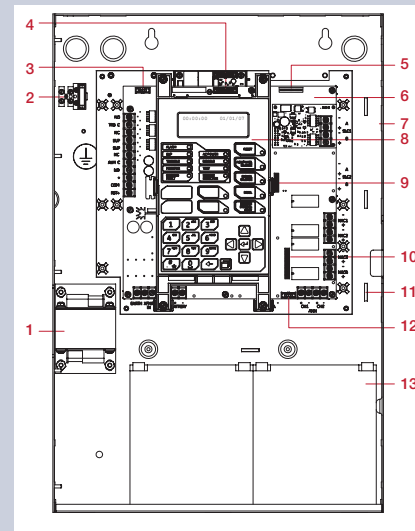

- Transformer
- Main AC wiring block & fuse holder
- RS-232 card connector (J3)
- Dialer card connection (J8)
- Ethernet card connector (J1)
- Main circuit board
- Panel backbox enclosure
- Operator interface
- SLC card connector (J7)
- Class A card connector (J2)
- Tie wrap mounts
- LED expander connector (J6)
- Standby batteries

\*SA-ETH supports: (1) remote connectivity for diagnostics & programming, (2) Central station monitoring to Sur-Gard IP Receivers.


\*\*RS-232 supports: (1) Printer, (2) Programming Interface, (3) Use of Field Server Bridge (SA-FSB) for third-party Building Management Systems interface.

Wiring & Configuration

Signature device loop

The system provides one Signature device loop circuit with a total capacity of 125 detectors and 125 module addresses. The loop circuit is supervised for opens, shorts, and grounds.


Circuit specifications	iO1000	iO64
Device loops	One Class B or A loop, supporting 125 detectors and 125 modules. Expandable to four loops.	One Class B or A loop, supporting 64 devices of any kind.
Communication line voltage	Maximum 20 V peak-to-peak	
Circuit current	0.5 A max	
Circuit impedance	66Ω total, 0.5 μF, max	
Isolators	64 maximum	
Signal Synchronization	Supported on a system-wide basis (all device loops) when using a SIGA-CC1S or SIGA-MCC1S module and Genesis or Enhanced Integrity notification appliances.	

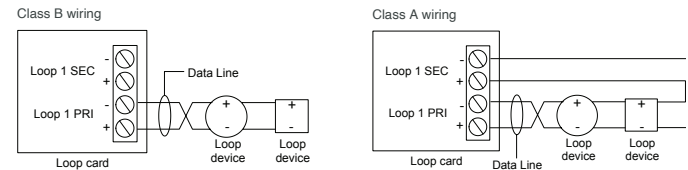

Notification appliance circuits (TB2)

iO1000 control panels come equipped with four notification appliance circuits. iO64 control panels come with two NACs. Each circuit can be individually configured for continuous, temporal, synchronized, and coded output.

Specifications	iO1000	iO64
Circuit Type	4 Class B or 2 Class A	2 Class B or 2 Class A with SA-CLA module
Voltage	24 VFWR	
Current	6.0 A total, 2.5 A max. per circuit at 120/230 VAC 60 Hz. 5.0 A total, 2.5 A max. per circuit at 230 VAC 50 Hz.	3.75 A total, 2.5 A max. per circuit at 120/230 VAC 60 Hz. 3.0 A total, 2.5 A max. per circuit at 230 VAC 50 Hz.
Impedance	26 Ω total, 0.35 μF max	
EOLR	15 K Ω, ½ W	
Synchronization	Supported system-wide	

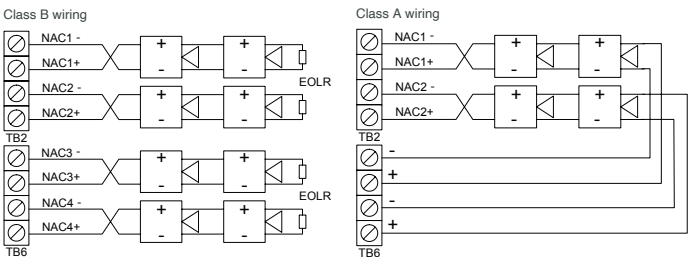


Marking indicates output signal polarity when the circuit is active. Polarity reverses when the circuit is not active. Wire notification appliances accordingly. Notification appliance polarity shown in active state.

Auxiliary & smoke power outputs (TB3)

The control panel provides two auxiliary power outputs that can be used for powering ancillary equipment such as remote annunciators and two wire smoke detectors. Aux 2 can be software-selected to operate continuously. The circuit is supervised for shorts and grounds.

Circuit specifications	
Circuit voltage range	21.9 to 28.3 V
Resettable circuit (Aux power 2)	24 VDC nominal at 500 mA
Continuous circuit (Aux power 1)	24 VDC nominal at 500 mA. Use this circuit for powering two-wire smoke detectors.

Note: Any current above 0.5 amp connected to both Aux 1 and 2 will reduce the total available NAC power by that amount.

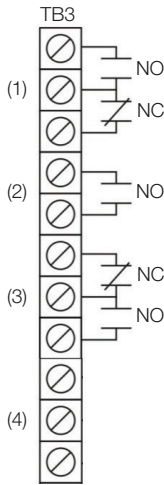

- (1) Trouble
- (2) Supervisory
- (3) Alarm
- (4) Smoke/Aux

Alarm, trouble, and supervisory relay (TB3)

The trouble relay is normally-open, held closed, and opens on any trouble event or when the panel is de-energized. The supervisory relay is normally-open, and closes on any supervisory event. The alarm relay changes over on any alarm event.

Relay specifications

	Alarm	Trouble	Supervisory
Type	Form C		Form A
Voltage	24 VDC at 1 A resistive		24 VDC at 1 A resistive

Relay circuits can only be connected to power-limited sources.


Annunciator loop (TB4)

The control panel provides a connection for up to eight serially driven and supervised remote annunciators.


Circuit specifications

Device loops	Class B (Style Y) or Class A (Style Z)
Circuit voltage	2.55 V
Circuit current	30 mA max
Circuit impedance	Up to 8 annunciators or 4000 feet

Class B



Class A



## Option Cards

EDWARDS brand iO Series panels are supported by a complete line of modules and related equipment that enhance performance and extend system capabilities. Option cards plug directly into the control panel main circuit board or are connected to it with a ribbon cable. After installation, terminals remain accessible. The cabinet provides ample room for wire routing, keeping wiring neat at all times.

### Single and Dual Loop Controller Cards

The iO-SDC1 is a single loop controller card that can be used with the iO64 as a replacement for the standard 64-point loop, or with the iO1000 as a 250-point expansion module.

The iO-SDC2 is a 500-point dual loop controller card for the iO1000 that provides two SLC circuits, each with 125 detector addresses and 125 module addresses.

Specifications	iO-SDC1	iO-SDC2
Device Addresses	iO1000: one loop, 250 device addresses iO64: 64 addresses	iO1000: two loops, 500 device addresses
Wiring	Class B or Class A	
Operating Voltage	24 VDC	
Operating Current (fully loaded loop)	Standby: 55 mA Alarm: 80 mA	Standby: 45 mA Alarm: 70 mA
Note: These ratings do not include the use of two-wire smoke modules.		
Communication Line Voltage	Max. 20.6 V peak-to-peak	
Terminal Rating	12 to 18 AWG (0.75 to 2.5 mm <sup>2</sup> )	
Circuit Current	0.5 A max.	
Max total loop resistance	66 $\Omega$	
Max total loop capacitance	0.5 $\mu$ F	
Isolators	64 isolators maximum per loop (total both isolator bases and modules)	
Ground Fault Impedance	0 to 5 k $\Omega$	
Operating Environment	32 to 120°F (0 to 49°C) 0 to 93% noncondensing at 90°F (32°C)	

### SA-ETH Ethernet Interface Card/IP Communicator


The SA-ETH card provides a standard 10/100 Base T Ethernet network connection for connecting to an intranet, a local network, or the Internet. The card supports IP connectivity for monitoring services by a supervising station to meet NFPA 72 Chapter 26. The Ethernet card uses the FIBRO protocol to communicate with Sur-Gard System receivers (see below). The card can be used to download configuration programming from the iO-CU to the panel.



The Ethernet card is installed on the plastic assembly and connects to the main circuit board via a ribbon cable.

SA-ETH specifications	
Ethernet	10/100 Base-T
Operating environment	
Temperature	32 to 120°F (0 to 49°C)
Humidity	0 to 93% RH, noncondensing at 90°F (32°C)
Compatible Sur-Gard Receivers	SG-System I, II, III, IV and V

### RZI16-2 Remote Zone Interface Module



The RZI16-2 Addressable Remote Zone Interface Module is an addressable device that provides connections for sixteen Class B Initiating Device Circuits and two Class B Supervised Output Circuits. The inputs and outputs can be configured individually for several device types.

It requires 18 consecutive addresses on the Signaling Line Circuit (SLC). Addresses are assigned electronically. There are no address switches to set.


The RZI16-2 incorporates two 8-segment DIP switches that are used to select the Alarm or Supervisory default device type for each of the 16 IDC circuits. The module also includes one 4-segment DIP switch used to select the default Relay or NAC output device type. Device types other than the default are accomplished through programming.

#### RZI16-2 Specifications

Voltage	
24V/Aux nominal:	24 VDC
Supervisory current:	250 mA at 24 VDC nominal
Alarm Current	1000 mA
24V/Aux minimum:	18.4 VDC
24V/Aux maximum:	26.4 VDC
NAC1, NAC2 nominal:	24 VDC
Current	
Standby current for 4.7 k EOL (U.S.)	4.8 mA/ circuit
Standby current for 3.9 k EOL (Canada)	5.7 mA/ circuit
Alarm current at nominal voltage	31.1 mA/ circuit
Relay outputs	
Quantity	2
Type Rating (pilot duty)	Programmable 24 VDC at 2.5 A
Input circuit wiring resistance	25 $\Omega$ per wire
Initiating device circuits	
Quantity	16
EOL resistor	4.7 k $\Omega$ (U.S.); 3.9 k $\Omega$ Canada
Zone voltage	22.78 V for 4.7 k $\Omega$ (U.S.) 22.08 V for 3.9 k $\Omega$ (Canada)
Alarm current	31.1 mA/ channel at nominal voltage
Alarm impedance range	< 680 $\Omega$
Trouble impedance range	> 5.55 k $\Omega$
Supervised output circuits	
EOL resistor	15 k $\Omega$
Quantity	2
Short circuit detection	< 2.6 k $\Omega$
Open circuit detection	> 61.9 k $\Omega$
Contact ratings	24 VDC at 2.5 A (5 A for two NACs)
Compatible cabinets	MFC-A, iO1000, APS

SA-DACT Dialer

The SA-DACT provides communications between the control panel and the central station over a telephone line system. It transmits system status changes (events) to a compatible digital alarm communicator receiver over the public, switched telephone network. The dialer is capable of single, dual, or split reporting of events to two different account and telephone numbers. The modem feature of the SA-DACT can also be used for uploading and downloading panel configuration, history, and current status to a PC running the iO-CU.



The dialer phone lines connect to connectors on the dialer's main circuit board. Phone line 1 connects to connector J4 and phone line 2 connects to connector J1.

The SA-DACT queues messages and transmits them based on priority (alarm, supervisory, trouble, and monitor). Activations are transmitted before restorations.

The SA-DACT is installed on the plastic assembly and connects to the main circuit board via a ribbon cable.

SA-DACT specifications	
Phone line type	One or two loop-start lines on a public, switched network
Phone line connector	RJ-31/38X (C31/38X)
Communication formats	Contact ID (SIA DC-05)
Operating environment	
Temperature	32 to 120°F (0 to 49°C)
Humidity	0 to 93% RH, noncondensing at 90°F (32°C)

Compatible DACRs		
Receiver	Models	Formats
Ademco	685	Contact ID
FBI	CP220	Contact ID
Osborne-Hoffman	OH 2000	Contact ID
Bosch	D6600	Contact ID
Silent Knight	9800	Contact ID
Sur-Gard	SG-MLR1, MLR2	Contact ID

The SA-USB Interface Card

The SA-USB Interface Card provides a USB connection to a supported printer or a connection to a PC. The card can be used for connecting a printer to the control panel to print system events. The card can also be used for uploading and downloading panel configuration, history, and current status to a PC running the configuration utility (CU).

SA-USB specifications	
Operating voltage	24VDC
Current Standby/Alarm	13 mA, max 20mA
Universal Serial Bus (USB) ports	1 USB Type A –host port J3 (printer connection) 1 USB Type B – device port J4 (CU connection)
Supported Printer	PT-1S
Printer communication speed	9600 baud
Operating environment	
Temperature	32 to 120°F (0 to 49°C)
Humidity	0 to 93% RH, noncondensing

SA-232 RS-232 interface

The SA-232 card provides an RS-232 interface with iO panels. It can be used for connecting a printer to the control panel to print system events. The card also can be used for connecting a computer to download a configuration program from the iO-CU to the control panel.



The RS-232 card is installed on the plastic assembly and connects to the main circuit board via a ribbon cable.

SA-232 specifications	
Operating voltage	Standard EIA-232
Terminal rating	12 to18 AWG (0.75 to 2.5 sq mm)
Operating environment	
Temperature	32 to 120°F (0 to 49°C)
Humidity	0 to 93% RH, noncondensing at 90°F (32°C)


SA-CLA Class A Module (iO64 only)

The SA-CLA card provides Class A capability for NAC wiring. Its terminal block provides the wiring connection for NAC return wiring. The card is required for annunciator Class A wiring even though this wiring does not return to the SA-CLA card. The SA-CLA is compatible with iO64 control panels only. iO1000 panels are Class A Ready. The SA-CLA is installed directly to the control panel circuit board using its plastic standoffs and plug connection.

SA-CLA specifications	
Operating voltage	24 VFWR
Operating current	3.75 A FWR total at 120/230 VAC 60 Hz 3.0 A FWR total at 230 VAC 50 Hz 2.5 A max per circuit
Circuit impedance	26 ohms, 0.35uF
Terminal rating	12 to18 AWG (0.75 to 2.5 sq mm)
Operating environment	
Temperature	32 to 120°F (0 to 49°C)
Humidity	0 to 93% RH, noncondensing at 90°F (32°C)

D16L-iO LED Display Expander (iO1000 only)

The D16L-iO LED Display Expanders provide LED annunciation for up to 16 zones. It provides two LEDs for each zone. Two D16L-iO LED display expanders can be installed in each iO1000 panel.

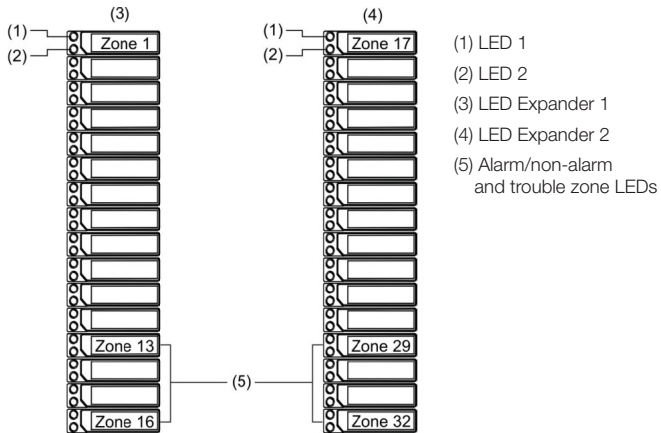



## Specifications

	iO64	iO1000
Device loops	1 loop Class B or Class A (Styles 4, 6, 7) supporting up to 64 device addresses (any combination of detectors and modules) Maximum T-taps: 63 (each device can be on its own branch)	1 loop, expandable to 4, Class A or B (Styles 4, 6, 7), each loop supporting up to 250 device addresses (125 detectors and 125 modules max.). Addresses 1 to 125 are for detectors and addresses 126 to 250 are for modules Maximum T-taps/loop: 124
Notification appliance circuits	2 Class B (Style Y), Class A (Style Z) optional 3.75 A FWR total at 120/230 VAC 60 Hz 3.0 A FWR total at 230 VAC 50 Hz 2.5 A FWR each max. per circuit	4 Class B (Style Y) or 2 Class A (Style Z) 6.0 A FWR total at 120/230 VAC 60 Hz 5.0 A FWR total at 230 VAC 50 Hz 2.5 A FWR each max. per circuit
Primary power	120 VAC, 60 Hz, 1.3 A max. 230 VAC, 50-60 Hz, 0.62 A max.	120 VAC, 60 Hz, 2.0 A max. 230 VAC, 50-60 Hz, 0.97 A max.
Base panel current standby	155 mA	172 mA
Base panel current alarm	204 mA	267 mA
Input zones	16 max.	32 max.
Remote annunciator	8 drops max., RS-485 Class B, Class A is optional Data line length: 4,000 ft. (1,219 m)	8 drops max., RS-485 Class A or B Data line length: 4,000 ft. (1,219 m)
Operating voltage	24 VDC panel	
Auxiliary power output circuit	Aux power 1: 500 mA, 24 VDC (1 A possible if you reduce total available NAC power by 500 mA) Aux power 2: 500 mA, 24 VDC Output: 28.3 to 21.9 VDC, special application <i>Note: For a list of compatible devices, see the iO64 and iO1000 Series Compatibility List (P/N 3102353-EN)</i>	
Loop circuit	Maximum loop resistance: 66 $\Omega$ Maximum loop capacitance: 0.5 $\mu$ F Communication line voltage: Maximum 20.6 V peak-to-peak Operating current (fully loaded loop) Stand by: 55 mA/45 mA Alarm: 125 mA/115 mA (not including two-wire smoke modules) Circuit current: 0.5 A max. Style 4, 6, and 7 wiring Max. resistance between isolators: Limited only by overall wire run lengths 64 isolators maximum per loop (total both isolator bases and modules)	
Batteries	Type: Sealed lead acid Voltage: 24 VDC Charging current: 2.47 A max. Amp hour capacity: 26 Ah Standby operation: 24 hour or 60 hour Placement: Up to two 10 Ah batteries will fit in the iO64 control panel cabinet and two 18 Ah batteries will fit in the iO1000 control panel cabinet. If larger batteries are required, use an EDWARDS battery cabinet.	
SA-DACT dialer	Phone line type: One or two loop-start lines on a public, switched network Phone line connector: RJ-31/38X (C31/38X) Communication formats: Contact ID (SIA DC-05) Operating current Standby/Alarm: 41 mA Max.: 100 mA FCC registration number: GESAL01BSADACT Industry Canada Registration number: 3944A-SADACT Ringer equivalence number: 0.1B	
Ground fault impedance	0 to 5 k $\Omega$	
Alarm contact	Form C N.O. 24 VDC at 1 A (resistive load)	
Trouble contact	Form C 24 VDC at 1 A (resistive load)	
Supervisory contact	Form A N.O. 24 VDC at 1 A (resistive load)	
Environmental	Temperature: 0 to 49°C (32 to 120°F) Relative humidity: 0 to 93% noncondensing	
Terminal rating	All terminals rated for 12 to 18 AWG (0.75 to 2.5 mm <sup>2</sup> )	



LIFE SAFETY & INCIDENT MANAGEMENT

#### Contact us

Phone: 800-655-4497 (Option 4)  
Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)  
Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

©2023 Carrier  
All Rights Reserved.

## Ordering Information

Part	Description
<b>iO1000 Fire Alarm Systems</b>	
IO1000G	Four loop system with one 250-point loop installed. 110v, gray door.
IO1000G-2	Four loop system with one 250-point loop installed. 230v, gray door.
IO1000G-2-PG	Four loop system with one 250-point loop installed. 230v, gray door, Portuguese.
IO1000G-2-SP	Four loop system with one 250-point loop installed. 230v, gray door, Spanish.
IO1000G-CA	Four loop system, one 250-point loop installed. 110v, gray door, LED strips, Canada.
IO1000G-F	Four loop system, one 250-point loop. 110v, gray door, LED strips, French Canada.
IO1000G-PG	Four loop system with one 250-point loop installed. 110v, gray door, Portuguese.
IO1000G-SP	Four loop system with one 250-point loop installed. 110v, gray door, Spanish.
IO1000R	Four loop system with one 250-point loop installed. 110v, red door.
IO1000R-2	Four loop system with one 250-point loop installed. 230v, red door.
SA-TRIM2	iO1000 Flush mount trim, black.

<b>iO64 Fire Alarm Systems</b>	
IO64G	One loop system with one 64-point loop installed. 110v, gray door.
IO64G-2	One loop system with one 64-point loop installed. 230v, gray door.
IO64G-2-PG	One loop system with one 64-point loop installed. 230v, gray door, Portuguese.
IO64G-2-SP	One loop system with one 64-point loop installed. 230v, gray door, Spanish.
IO64GL	One loop system, one 64-point loop installed. 110v, gray door, English Canada.
IO64GL-F	One loop system, one 64-point loop installed. 110v, gray door, French Canada.
IO64G-PG	One loop system with one 64-point loop installed. 110v, gray door, Portuguese.
IO64G-SP	One loop system with one 64-point loop installed. 110v, gray door, Spanish.
IO64R	One loop system with one 64-point loop installed. 110v, red door.
IO64R-2	One loop system with one 64-point loop installed. 230v, red door.
SA-TRIM1	iO64 Flush mount trim, black

<b>Option Cards</b>	
iO-SDC1	Expansion module, one 250-device loop.
iO-SDC2	Expansion module, two 250-device loops, 500 devices total. For iO1000 only.
RZI16-2	Remote Zone Interface Module. 16 Class B IDCs, 2 Class B Output. Includes bracket.
SA-DACT	Dual Line Dialer/Modem, supports Contact ID, mounts in cabinet on base plate.
SA-232	RS-232 Serial Port for connection to printers & computers, mounts in cabinet.
SA-ETH	Ethernet Port, IP Communicator, mounts in cabinet on base plate.
SA-CLA	Class A adapter module. Provides Class A capacity on NACs. Mounts in cabinet on main board. iO64 systems only.
SA-FSB	Field Server Bridge for connection to 3rd Party Building Management Systems. Supports BACnet and Modbus protocols. Mounts in the MFCA cabinet using the FSB-BRKT2 mounting plate. See separate SA-FSB datasheet E85010-0156 for additional information.
SA-USB	RS-232 Serial port for connection to printers & computers, mounts in cabinet.
D16L-iO-2	LED Annunciator module, 16 X 2-LED zones (4 programmable for sup). Mounts in cabinet to right of LCD display for zones 17-32. For iO1000 only.
D16L-iO-1	LED Annunciator module, 16 X 2-LED zones (4 programmable for sup). Mounts in cabinet to left of LCD display for zones 1-16. For iO1000 only.
D8RY-iO-2	Canada only: LED Annunciator module, two LEDs per zone, 16 zones (4 alarm only, 8 supervisory only, 4 alarm or supervisory). Mounts in cabinet. For iO1000 only.
D8RY-iO-1	Canada only: LED Annunciator module, two LEDs per zone, 16 zones (4 alarm only, 8 supervisory only, 4 alarm or supervisory). Mounts in cabinet. For iO1000 only.

<b>Accessories</b>	
CTM	City Tie Module. 2-gang. Connection to a local energy fire alarm box.
MFC-A	Multifunction Fire Cabinet, 8" x 14" x 3.5" - red.
SIGA-REL	Releasing Module
PT-1S	System Printer
BC-1	Battery Cabinet. 14.0" x 18.25" x 7.25". Holds two 12V24A batteries.
BC-1R	Battery Cabinet - Red. 14.0" x 18.25" x 7.25". Holds two 12V24A batteries.
BC-1EQ	Seismic hardening Kit for iO series panels. Includes battery hardening for BC-1 enclosure and components to harden panel internal components.

<b>Programming Tools</b>	
iO-CU	IO Series configuration and diagnostics utility.
260097	RS232 cable, 4 conductor, DB9 PC interface





LIFE SAFETY & INCIDENT MANAGEMENT

# EST4 Remote Annunciators

## 4-xxANN Series

4-2ANN and 4-4ANN shown with optional equipment.



NYC FIRE DEPT. COA #  
2022-TMCOAP-008086-RENL



EN54

### Overview

EST4 Remote Annunciators provide front panel system status and control functions located conveniently anywhere on the EST4 network. Annunciators can be as simple as a couple of LED indicator strips, or complex enough to support up to two LCD displays, an audio telephone interface and hundreds of control points and indicators — all in a single enclosure.

Up to 576 tactile switches and 576 LED indicators may be mounted in a single EST4 annunciator cabinet. Control Display Modules (CDMs), comprise a column of programmable buttons accompanied by one or two LED indicator positions per button. Indicator-only modules hold up to 24 indicators. Switch and indicator module LEDs can be set to any of five colors, providing an additional level of feedback.

All remote annunciators feature color-matched cabinets and distinctive metallic bronze (Pantone Coated PMS# P 171-16 C, Pantone RGB# 81 75 67, and RAL Classic/RAL Design# 7022) doors for a readily-identifiable and consistent look throughout the facility.

Thanks to EST4's ingenious communications protocol, network data — as well as telephone and audio data — is carried on a single fiber optic cable or twisted wire pair. This multi-use capacity has an enormous cost-savings potential compared with conventional audio transmission, reducing not only installation costs, but also simplifying ongoing system maintenance.

Slide-in LED and switch labeling makes it easy to incorporate right into the annunciator design such information aids as descriptive text, color-coding, icons, and local languages. For custom floorplans or facility maps, EST4 offers LED driver boards perfectly suited to operate in most graphic annunciators.

### Standard Features

- **Connection Over High-Speed Life Safety Network**  
Annunciator network and audio data carried on a single fiber or twisted pair.
- **Optional Color LCD Display**  
Touchscreen capability supplements control buttons for quick, intuitive access to key system status and control functions.
- **Wide Range of Annunciator Configurations**  
From a two-slot model holding a single LCD display to 24-slot cabinets for complex annunciation.
- **Supports Two LCD Displays**  
Providing users with a simplified sequence of operations.
- **Convenient Programming**  
Built-in support for radio groups of up to 24 switches in size.
- **Slide-in Switch and Indicator Labels**  
A simple, effective means to customize annunciator appearance and messaging.
- **Programmable LED Flash Rates and Colors**  
Easy to see, quick to understand.
- **Clean and robust door designs**
- **Support for all Common Networking Media**  
Annunciators connect over any combination of twisted pair wire, Multi-mode fiber, Single Mode fiber and even CAT5 cable.

## Application

Use EST4 remote annunciators where a compact system status display is needed. Annunciator configuration can range from a couple of LED indicator strips, to complex arrangements supporting in a single enclosure up to two LCD displays, paging microphone, firefighter telephone and hundreds of control points and indicators.

EST4 annunciators support a range of options that make them ideal for Mass Notification, Life Safety and other emergency communications purposes. They can be used as Central Control Stations (CCS), Autonomous Control Units (ACU), Local Operating Console (LOC) and combination units from which initiated Mass Notification functions can be controlled.

Cabinets may be surface or semi-flush mounted for installation expediency and aesthetic appeal.

Annunciators connect over the high-speed EST4 network, which supports copper or fiber-optic communications in any combination. Network data and audio data share the same cabling. This results in more efficient deployment with fewer cables needed and fewer connections to be made.

The 2-wide, 4-wide, and 6-wide, 4-xANNMT series, annunciator wallboxes come standard with surface mounting trims and semi-flush mounting trims.


The 8-space, 16-space and 24-space 4-xxANNMT series wallboxes are designed for surface mount applications. Their depth is kept to a minimum to allow the least amount of room penetration. When semi-flush mounting is required, order the standard 3-CAB5B, 7B, or 14B wallbox.

## Engineering Specification


The Life Safety system shall incorporate annunciation of Alarm, Supervisory, Trouble and Monitor operations. Annunciation must be through the use of both LED display strips complete with a means to custom label each LED as to its function. LED color shall be selectable at configuration time. Where applicable control switches must be provided. Switches with LEDs must provide positive feedback to the operator of remote equipment status. A color touchscreen LCD display with basic common control LEDs and switches shall be provided. Optionally a second color touchscreen display may be added to support audio and telephone operations. The Common Control Switches and LEDs provided as minimum will be: Reset switch and LED, Alarm Silence switch and LED, Panel Silence switch and LED, Drill switch and LED. It must be possible to add additional common controls as required through the use of modular display/control units. The LCD must provide the emergency user, hands-free viewing of the first highest priority event. System events must automatically be placed in queues. It shall be possible to view specific event types separately. The total number of active events by type must be displayed. It must be possible to customize the designations of all user interface LEDs and switches for local language requirements. It must be possible to route system event messages to specific annunciator locations. It must be possible for the annunciator to contain a paging microphone and firefighter telephone.

## Installation and Mounting

**4-2ANNMT, 4-4ANNMT, and 4-6ANNMT**  
included side trim installation for surface mount applications

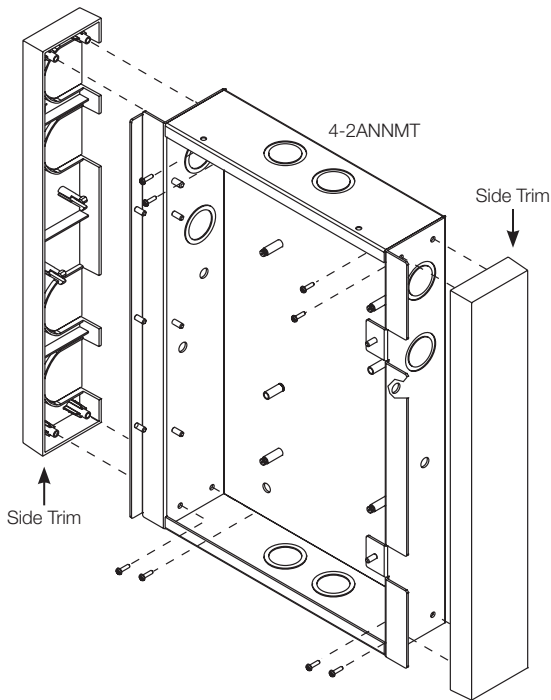



**4-2ANNMT, 4-4ANNMT, and 4-6ANNMT**  
included trim installation for semi-flush mount applications

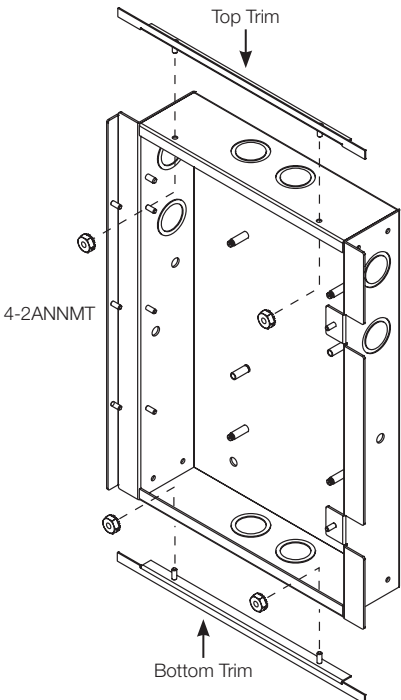



See Specifications Table for 4-8ANNMT, 4-16ANNMT, 4-24ANNMT mounting options.

## Dimensions, wallboxes



### 4-2ANNMT Wallbox Assembly, Surface and Semi-Flush Mounting (both trims are included)

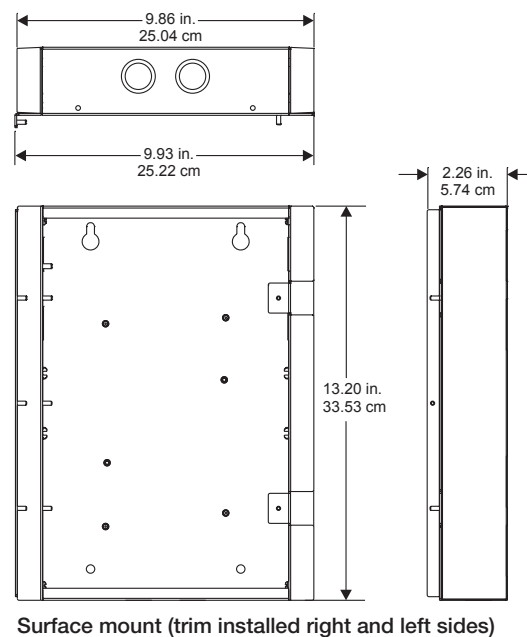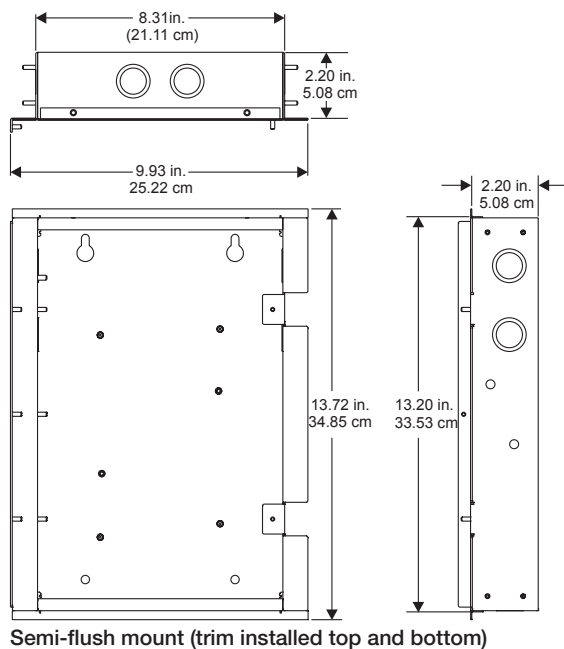

### 4-4ANNMT Wallbox Assembly, Surface and Semi-Flush Mounting (both trims are included)

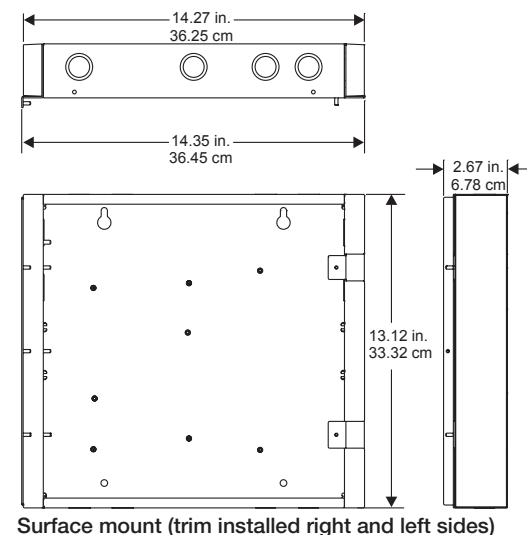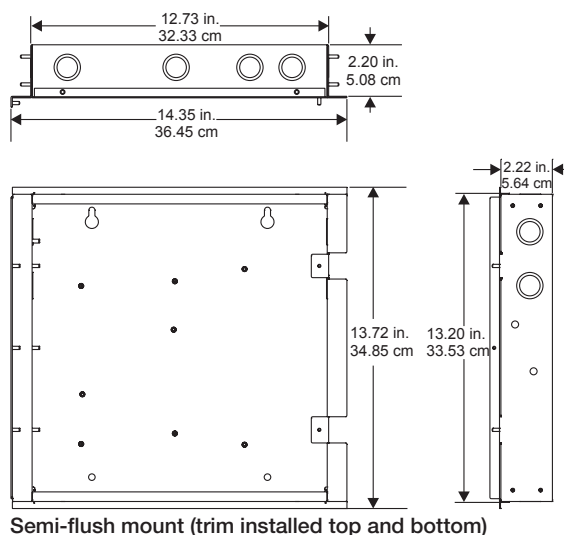


### 4-6ANNMT Wallbox Assembly, Surface and Semi-Flush Mounting (both trims are included)

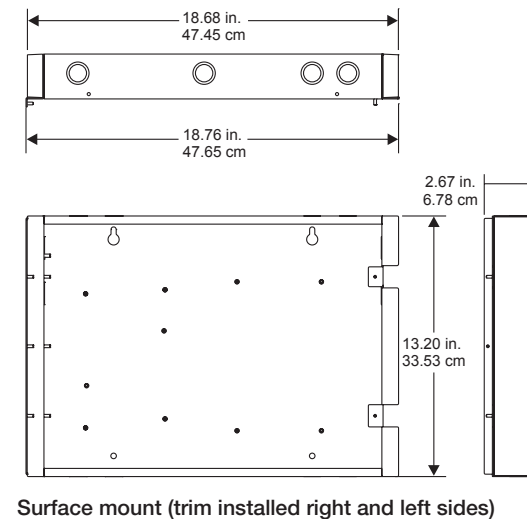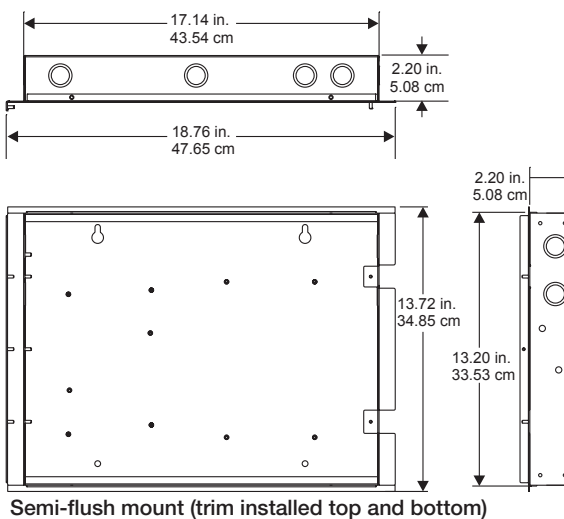


# Dimensions, wallboxes


**4-8ANNMT Wallbox  
Assembly, Surface Mount**  
*For semi-flush mounting,  
use a 3-CAB5B wallbox.*

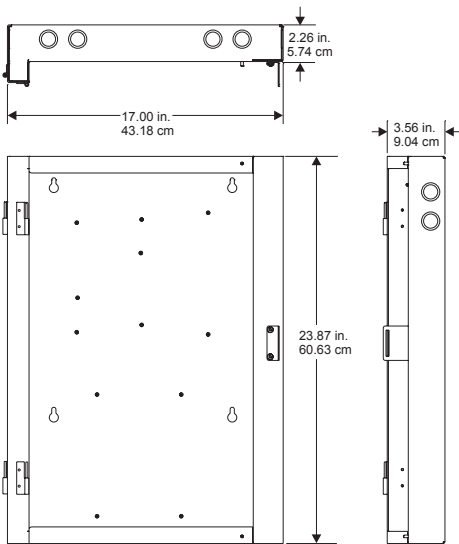

**4-24ANNMT Wallbox  
Assembly, Surface Mount**  
*For semi-flush mounting,  
use a 3-CAB14B wallbox.*

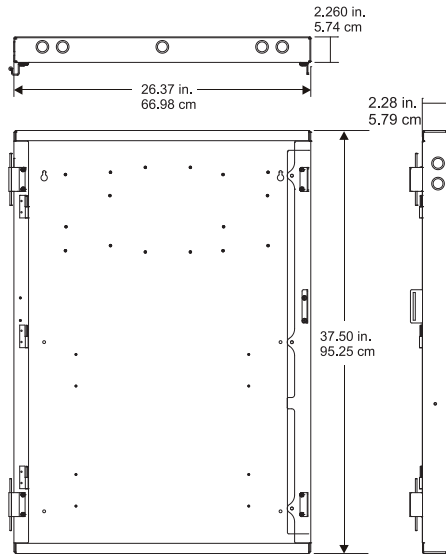


**4-16ANNMT Wallbox  
Assembly, Surface Mount**  
*For semi-flush mounting,  
use a 3-CAB7B wallbox.*

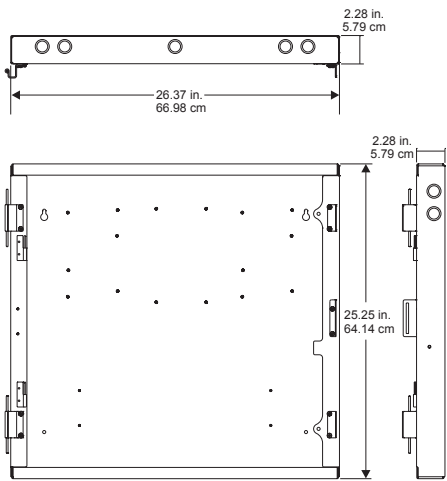


# Dimensions, door assemblies

**4-2ANN Series Door Assembly**

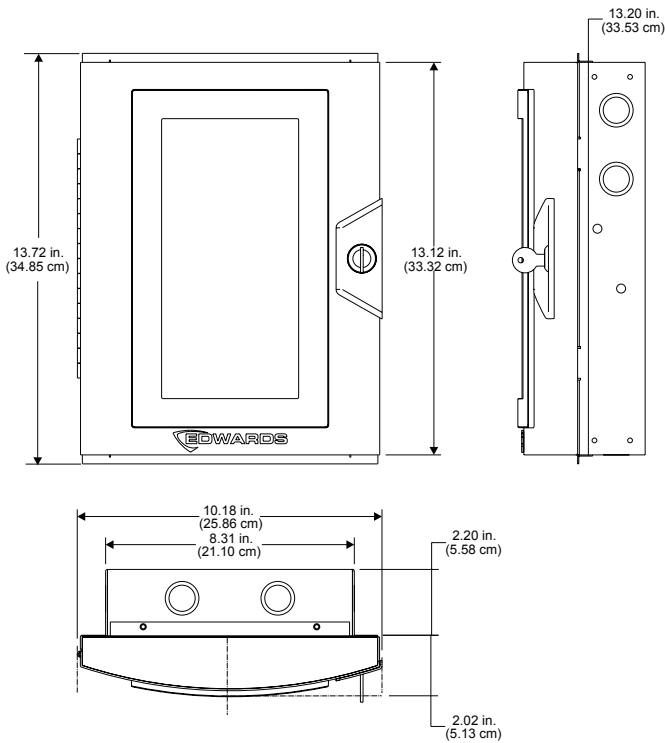


**4-4ANN Series Door Assembly**

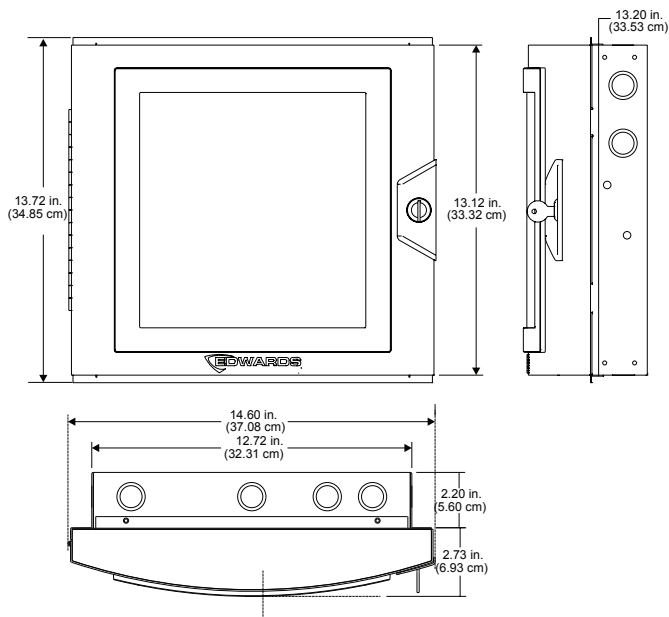


## Dimensions, door assemblies continued


### 4-6ANN Series Door Assembly

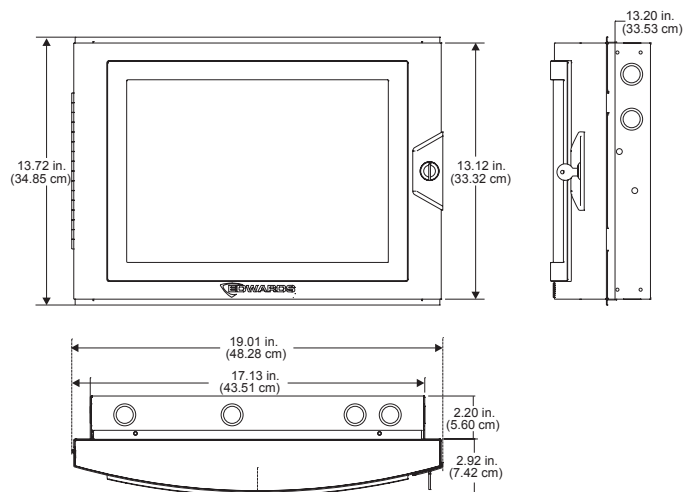


### 4-CAB8D Series Door Assembly

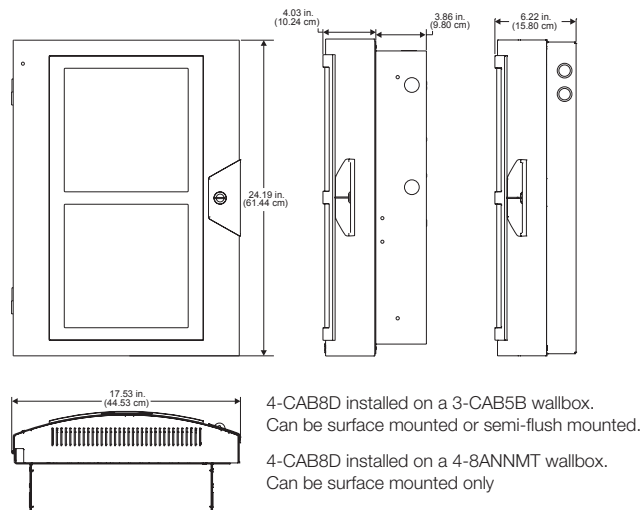


### 4-CAB16D Series Door Assembly

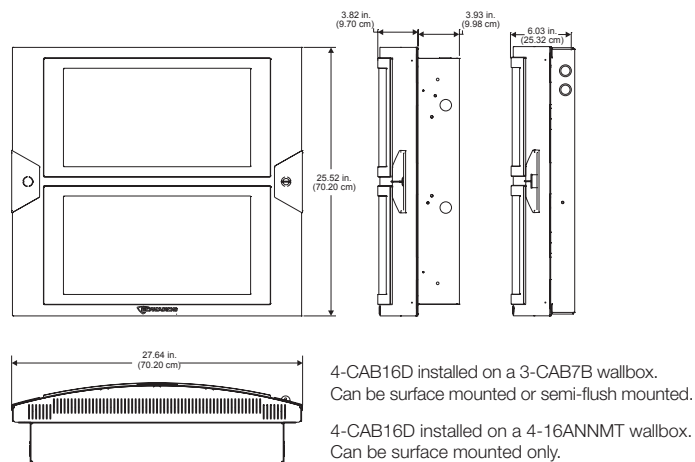

### 4-CAB24D Series Door Assembly

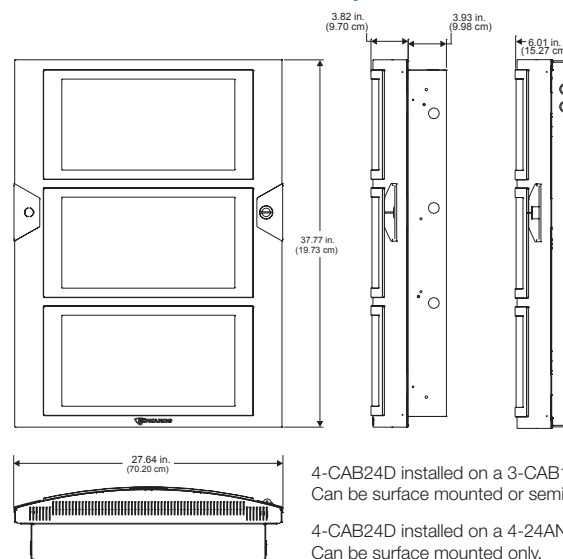

## Wiring

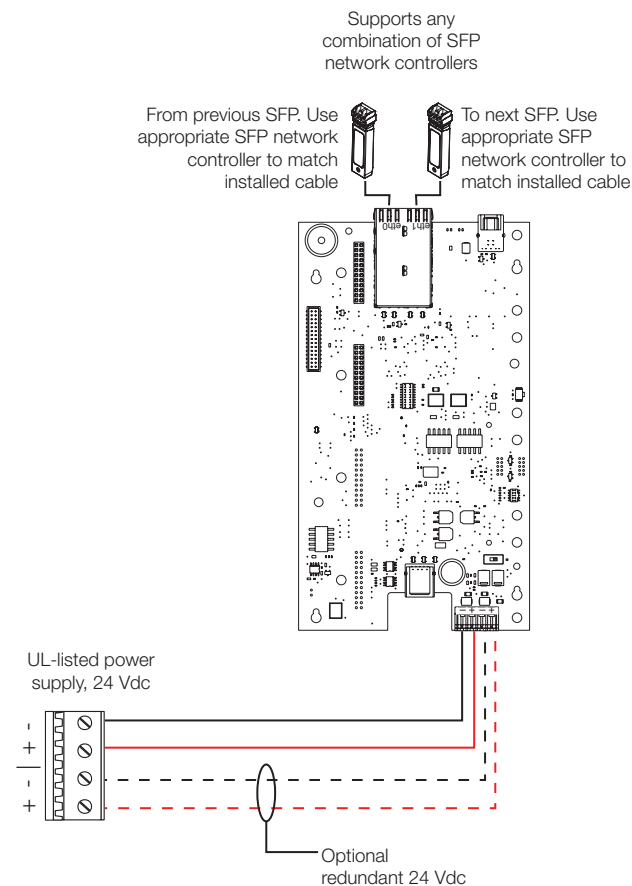

## SFP Network Controllers

Model #	Description	Network Interconnection Media Supported
4-NET-CAT	100 Mbps SFP Network Controller	Cable type - Cat 5e or better Connector type - RJ-45 Distance 328 ft. (100 m) max
4-NET-MM	Multi-mode fiber-optic SFP Network Controller	SFP network media interface, multi-mode fiber-optic, supports 50/125 $\mu$ (OM3/OM4) fiber pair up to 1.24 mi. (2 km), 62.5/125 $\mu$ (OM1) fiber pair up to 0.62 mi. (1 km), or a 100/140 $\mu$ fiber pair up to 150 m. Order one 4-NET-MM for "in" wiring and one for "out" wiring for connections from previous node and to next node as required. Each 4-NET-MM supports one multi-mode fiber pair between network cards.
4-NET-SM	Single-mode fiber-optic SFP Network Controller	Single mode 9/125 $\mu$ (G.652) fiber pair up to 6.2 miles (10 km). Order one 4-NET-SM for "in" wiring from the previous node and a second 4-NET-SM for "out" network wiring to the next node. Each 4-NET-SM supports one single-mode fiber pair between network cards
4-NET-SMH	Single-mode fiber-optic SFP Network Controller High output	Single-mode fiber-optic, high-power output, with a 9/125 $\mu$ (G.652) fiber pair up to 24.8 mi (40km). Order one 4-NET-SMH for "in" wiring from the previous node and a second 4-NET-SMH for "out" network wiring to the next node. Each 4-NET-SMH supports one single-mode fiber pair between network cards.

4-NET-SMU	Single-mode fiber-optic SFP Network Controller Bi-Directional	Bi-directional, single-mode fiber-optic with a 9/125 $\mu$ (G.652) fiber up to 6.2 miles (10 km). The 4-NET-SMU must be paired with a 4-NET-SMD over one single-mode fiber between network cards.
4-NET-SMD	Single-mode fiber-optic SFP Network Controller Bi-Directional	Bi-directional, single-mode fiber-optic with a 9/125 $\mu$ (G.652) fiber up to 6.2 miles (10 km). The 4-NET-SMD must be paired with a 4-NET-SMU over one single-mode fiber between network cards.
4-NET-TP	2 Mbps Twisted Pair SFP Network Controller	Twisted pair. Following specifications are between any two panels. <ul style="list-style-type: none"> <li>16 to 22 AWG (1.3 to 0.33 mm<sup>2</sup>)</li> <li>Six twists per foot minimum</li> <li>Circuit Capacitance 0.09 <math>\mu</math>F max.</li> <li>5,000 ft. (1,524 m) between any two panels</li> <li>Circuit resistance 90 <math>\Omega</math> max.</li> </ul>
4-NET-TP-HC	0.3 Mbps Twisted Pair SFP Network Controller	Twisted pair or Shielded twisted pair. Following specifications are between any two panels. <ul style="list-style-type: none"> <li>16 to 24 AWG (1.3 to 0.20 mm<sup>2</sup>)</li> <li>Six twists per foot minimum</li> <li>5,000 ft. (1,524 m) between any two nodes with unshielded twisted pair</li> <li>Circuit capacitance 0.3 <math>\mu</math>F max.</li> <li>3280 ft. (1,000 m) between any two nodes shielded twisted pair</li> <li>Circuit resistance 90 <math>\Omega</math> max.</li> <li>For UL/ULC applications only</li> </ul>

Refer to Data Sheet E85014-0008 for additional details on SFP network controllers.

## Technical Specifications

### Annunciator Assemblies

Each annunciator space holds a control-display module. LCD displays, 4-MIC and 4-FT take two spaces.

	4-2ANN	4-4ANN	4-6ANN	4-8ANN	4-16ANN	4-24ANN
Number of Spaces	Two	Four	Six	Eight	Sixteen	Twenty-four
Wallbox, Surface Mounting	4-2ANNMT	4-4ANNMT	4-6ANNMT	4-8ANNMT	4-16ANNMT	4-24ANNMT
Wallbox, Semi-flush Mounting				3-CAB5B	3-CAB7B	3-CAB14B
Agency Approvals:	UL, ULC, FM, CSFM, CE, EN54 and NYC Fire Dept.			UL, ULC, FM, CSFM and NYC Fire Dept.	UL, ULC, FM, CSFM, CE, EN54 and NYC Fire Dept.	
Door Color	Metallic Bronze (Pantone Coated PMS# P 171-16 C, Pantone RGB# 81 75 67, and RAL Classic/RAL Design# 7022)					
Wallbox Color	Black					

### 4-ANNCPU Central Processor

Comes standard with annunciator assemblies.

Voltage	16 to 32 Vdc
Current draw Standby Alarm/Active	205 mA at 16 VDC; 145 mA at 24 VDC; 125 mA at 32 VDC; 205 mA at 16 VDC; 145 mA at 24 VDC; 125 mA at 32 VDC
USB support	One USB 3.0, Type A – female port One USB 3.0, Type B – female port
SFP support	Supports all 4-NET series SFPs. Refer to EST4 Network Controllers Catalog sheet 85014-0008 for details.
Wire Size	TB1 backup power connection 12 to 18 AWG (2.5 to 1.0 mm <sup>2</sup> )
Operating Temperature	32 to 120°F (0 to 49°C)
Operating relative Humidity	0 to 93% noncondensing
Option modules	4-ANNAUDTEL: Annunciator Audio/Telephone interface module. Adds audio and telephone processing capabilities to the 4-ANNCPU, required for the use of the 4-MIC and/or 4-FT with the 4-ANNCPU.



## Ordering Information, annunciators and accessories

Model # (SKU)	Description	Shipping Weight
4-2ANN	LCD Annunciator - Comes with 4-LCDANN color touchscreen display, 4-ANNCPU, metallic bronze outer door and black inner door. Order wallbox assembly model 4-2ANNMT and required network Controllers 4-NET-XX separately (see Notes 1 and 4).	10.3lb (4.67kg)
4-4ANN	Metallic bronze Annunciator supports 4 slots (1 row of 4). Comes with 4-ANNCPU, metallic bronze outer door and black inner door. Order wall Mounting assembly 4-4ANNMT, required network controllers 4-NET-XX series (See Notes 1 and 4), any user interfaces and filler plates separately.	11.5lb (5.22kg)
4-6ANN	Metallic bronze Annunciator, 6 slots (1 row of 6). Comes with 4-ANNCPU, metallic bronze outer door and black inner door. Order wall Mounting assembly 4-6ANNMT, required network Controllers 4-NET-XX series (see Notes 1 and 4), any user interfaces and required filler plates separately.	12.5lb (5.67kg)
4-8ANN	Metallic bronze Annunciator, 8 slots (2 rows of 4). Comes with 4-ANNCPU, metallic bronze outer and black inner doors. Order wall Mounting assembly 4-8ANNMT (surface mounting), or 3-CAB5B (Semi-flush mounting) required network Controllers 4-NET-XX series (see Notes 1 and 4), End User interfaces and required filler plates separately. Not approved for EN54 applications.	24.5lb (11.11kg)
4-16ANN	Metallic bronze Annunciator, 16 slots (2 rows of 8). Comes with 4-ANNCPU, metallic bronze outer and black inner doors. Order wall Mounting assembly 4-16ANNMT (Surface mount) or 3-CAB7B (semi-flush mount), required network Controllers 4-NET-XX series (see Notes 1 and 4), end user interfaces and required filler plates separately.	37.9lb (17.19kg)
4-24ANN	Metallic bronze Annunciator, 24 slots (3 rows of 8). Comes with 4-ANNCPU, metallic bronze outer and black inner doors. Order wall mounting assembly 4-24ANNMT, required network Controllers 4-NET-XX series (see Notes 1 and 4) and End User interfaces and required filler plates separately.	52.9lb (24.02kg)

### Accessories and Related Equipment

4-LCDANN	Color LCD display, includes silicon rubber common control buttons, mounts in remote annunciators, communicates to 4-ANNCPU. Comes with interconnect cable. LCD ordered separately for mounting in 4-4ANN or 4-6ANN. 4-2ANN comes with one 4-LCDANN.	1.9lb (0.85kg)
4-LCDLE	Color LCD display, includes silicon rubber common control buttons, mounts in remote annunciators sizes 4-8ANN, 4-16ANN or 4-24ANN, communicates to 4-ANNCPU. Comes with interconnect cable	1.9lb (0.85kg)
4-LCDAUD TELANN	LCD display for control of paging and firefighter telephone. Comes with one 4-LCDAUDTEL and mounting and cabling hardware for mounting in 4-16ANNMT or 4-24ANNMT enclosures where separate LCD display of Audio and Telephone is required. Is not supported in other annunciator sizes. Order annunciator application specific equipment separately.	1.8lb (0.81kg)
4-ANNCPU	Annunciator Central Processor Unit (CPU), provides mounting for up to two network controllers (see Notes 1 and 4), one USB device port, one USB host port and one 4-ANNAUDTEL module.	1.0lb (0.45kg)
4-24L	Control Display Module with 24 indicators. See Notes 2 and 4.	0.6lb (0.27kg)
4-24L12S	Control Display Module with 24 indicators and 12 switches. See Notes 2 and 4.	0.7lb (0.29kg)
4-24L18S	Control Display Module with - 24 indicators and 18 switches See Notes 2 and 4.	0.7lb (0.29kg)
4-24L24S	Control Display Module with - 24 indicators and 24 switches. See Notes 2 and 4.	0.7lb (0.29kg)
4-FIL	Fills one indicator/switch space on inner doors when no Switch or LED strips are installed.	0.1lb (0.04kg)
4-MIC	Audio paging microphone. Requires 4-ANNAUDTEL support card be installed on the 4-ANNCPU card. Can be mounted in 4-4ANN through 4-24ANN annunciators. See Note 4.	1.2lb (0.54kg)
4-FT	Master Fire Fighters telephone. Requires a 4-ANNAUDTEL support card be installed on the 4-ANNCPU card. Can be mounted in 4-4ANN through 4-24ANN annunciators.	1.4lb (0.64kg)
4-ANN AUDTEL	Annunciator Audio/Telephone interface module. Adds audio and telephone processing capabilities to the 4-ANNCPU, required for the use of the 4-MIC and/or 4-FT with the 4-ANNCPU.	0.3lb (0.14kg)
4-CPUGRPH	Graphic Annunciator Central Processor Module. See Notes 3 and 4.	1.5lb (0.68kg)
3-EVDVR	LED/SWITCH Driver Module Assembly for ENVOY graphics. See Note 3.	0.4lb (0.18kg)
3-EVDVRA	LED/SWITCH Driver Module Assembly for Third-party Graphics. See Note 3.	0.7lb (0.32kg)
3-EVPWR	Power Supply Assembly space for one 4-CPUGRPH for ENVOY Graphics. See Note 3.	0.2lb (0.09kg)
3-EVPWRA	Power Supply Assembly c/w 19-inch rail mounting chassis assembly space for one 4-CPUGRPH for Third-party Graphics. See Note 3.	2.9lb (1.34kg)
3-EVDVRX	Plastic mounting extrusion 19" mounting - for up to 3 3-EVDVRAs. See Note 3.	0.9lb (0.41kg)

Note 1: Refer to Catalog Sheet part number E85014-0008 for a complete list and description of available Network Controllers.

Note 2: Refer to Catalog Sheet part number E85014-0006 for a complete description of Control Display Modules.

Note 3: SKU not FM approved.

Note 4: Add suffix "-E" for EN54 compliant versions.

## Ordering Information, wallboxes and replacement parts

Model # (SKU)	Description	Shipping Weight
<b>Wallboxes</b>		
4-2ANNMT	Mounting assembly for 4-2ANN, two wide annunciator. Supports surface or semi-flush mounting. Comes with black wallbox, surface mounting plastic fillers and semi-flush trim.	6.4lb (2.9kg)
4-4ANNMT	Mounting assembly for 4-4ANN, four wide annunciator. Supports surface or semi-flush mounting. Comes with black wallbox, surface mounting plastic fillers and semi-flush trim.	9.0lb (4.08kg)
4-6ANNMT	Mounting assembly for 4-6ANN, six wide annunciator. Supports surface or semi-flush mounting. Comes with wallbox, surface mounting plastic fillers and semi-flush trim.	10.3lb (4.67kg)
4-8ANNMT	Mounting assembly for 4-8ANN, four wide x two row high annunciator. Supports surface mounting. Not approved for EN54 applications.	19.0lb (8.62kg)
3-CAB5B	Wallbox – Black Semi-flush wallbox, ideal for use when semi-flush mounting 4-8ANN annunciators. Not approved for EN54 applications.	20.0lb (9.07kg)
4-16ANNMT	Surface Mount Wall box assembly for eight wide by two high annunciators (16 spaces)	27.0lb (12.25kg)
3-CAB7B	Wallbox – Black Semi-flush wallbox, ideal for use when semi-flush mounting 4-16ANN annunciators. Add suffix "-E" for EN54 compliant versions.	29.5lb (13.38kg)
4-24ANNMT	Surface mount wallbox assembly for eight wide by three high annunciator (24 spaces).	37.0lb (16.78kg)
3-CAB14B	Wallbox – Black Semi-flush wallbox, ideal for use when semi-flush mounting 4-24ANN annunciators.	40.8lb (18.5kg)
<b>Service Replacement Parts</b>		
4-2ANND	Service replacement metallic bronze Annunciator Door for 4-2ANN annunciators includes the inner and outer doors.	7.7lb (3.5kg)
4-2ANND-E	Service replacement metallic bronze Annunciator Door for 4-2ANN annunciators includes the inner and outer doors. For EN54 market only.	
4-4ANND	Service replacement metallic bronze Annunciator Door for 4-4ANN annunciators includes the inner and outer doors.	10lb (4.5kg)
4-4ANND-E	Service replacement metallic bronze Annunciator Door for 4-2ANN annunciators includes the inner and outer doors. For EN54 market only.	
4-6ANND	Service replacement metallic bronze Annunciator Door for 4-6ANN annunciators, includes the inner and outer door.	11lb (5kg)
4-6ANND-E	Service replacement metallic bronze Annunciator Door for 4-2ANN annunciators includes the inner and outer doors. For EN54 market only.	
4-CAB8D	Service replacement metallic bronze door for 3-CAB5B or 4-8ANNMT - four spaces wide by two high (8 spaces) Includes inner (black) door and outer metallic bronze door. Not approved for EN54 applications.	23lb (10.4kg)
4-CAB8DR	Red door for 3-CAB5B - four spaces wide by two high (8 spaces). Includes inner (black) door and outer red door. May be used to provide a red door for 4-8ANN annunciators. Not approved for EN54 applications.	23lb (10.4kg)
4-CAB16D	Service replacement metallic bronze door for 3-CAB7B eight spaces wide by two high (16 spaces). Includes inner (black) door and outer metallic bronze door. Not approved for EN54 applications.	36lb (16.3kg)
4-CAB16DR	Red door for 3-CAB7B - eight spaces wide by two high (16 spaces). Includes inner (black) door and outer red door. May be used to provide a red door for 4-16ANN annunciators.	36lb (16.3kg)
4-CAB16DR-E	Red door for 3-CAB7B - eight spaces wide by two high (16 spaces). Includes inner (black) door and outer red door. May be used to provide a red door for 4-16ANN annunciators. For EN54 market only.	
4-CAB24D	Service replacement metallic bronze door for 3-CAB14B eight spaces wide by three high (24 spaces). Includes inner (black) door and outer metallic bronze door. Not approved for EN54 applications.	51lb (23.1kg)
4-CAB24DR	Red door for 3-CAB14B - eight spaces wide by three high (24 spaces). Includes inner (black) door and outer red door. May be used to provide a red door for 4-24ANN annunciators.	51lb (23.1kg)
4-CAB24DR-E	Red door for 3-CAB14B - eight spaces wide by three high (24 spaces). Includes inner (black) door and outer red door. May be used to provide a red door for 4-24ANN annunciators. For EN54 market only.	
4-2ANNFA	Service replacement part - plastic frame assembly with mounting screws for 4-2ANN annunciators. Not approved for EN54 application.	1.5lb (0.68kg)
4-4ANNFA	Service replacement part - plastic frame assembly with mounting screws for 4-4ANN annunciators.	2lb (0.91kg)
4-6ANNFA	Service replacement part - plastic frame assembly with mounting screws for 4-6ANN annunciators.	2lb (0.91kg)
4-4X2ANNFA	Service replacement part – plastic frame assembly with mounting screws for 4-8ANN annunciators and 4-CAB5D door assemblies.	3lb (1.36kg)
4-8ANNFA	Service replacement part - plastic frame assembly with mounting screws for 4-CAB16D and 4-CAB21D(L) door assemblies.	3lb (1.36kg)

*Note 1: Unless otherwise specified, all SKUs may be used in EN54/UL/ULC applications*



LIFE SAFETY & INCIDENT MANAGEMENT

**Contact us**

Phone: 800-655-4497 (Option 4)

Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)

Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

© 2024 Carrier  
All rights reserved.

---



# SA-DACT Dialer Installation Sheet

## Operation

The SA-DACT transmits system status changes (events) to compatible digital alarm communicator receivers over the public switched telephone network. The SA-DACT queues messages and transmits them based on priority (alarm, supervisory, trouble, disable, test, monitor, and system). The dialer is capable of single, dual, or split reporting of events to two different account and telephone numbers. The modem feature of the SA-DACT can also be used for uploading and downloading panel configuration, history, and current status to a PC running the configuration utility. The modem feature uses line 1 only.

**Note:** The SA-DACT is compatible with Contact ID (CID) only.

## Installation

The DACT is installed on the plastic assembly and connects to the main circuit board via a ribbon cable.

### To install the DACT:

1. Power down the panel and disconnect the batteries.
2. Locate the dialer card slot on the plastic assembly behind the main circuit board and connector J8 on the main circuit board (at the top-center of the main board).
3. Slide the DACT into the slot on the plastic assembly as shown in the diagram.
4. Attach the DACT to the plastic assembly using two #6 plastite screws as shown in the diagram.
5. Connect the ribbon cable (P/N 7140188) from the DACT to connector J8 on the main circuit board.
6. Connect the phone lines. See "Wiring."
7. Power up the panel and connect the batteries.

Figure 1: Slide the DACT into its slot


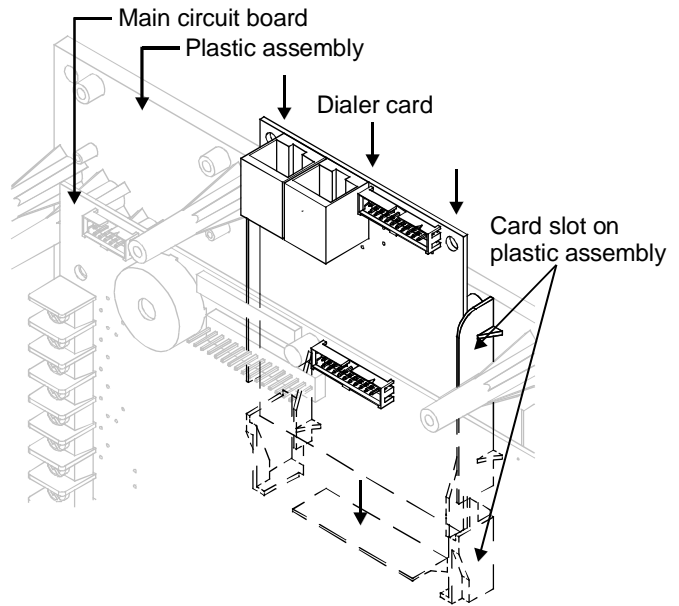


Figure 2: Screw the DACT in place and connect the ribbon cable

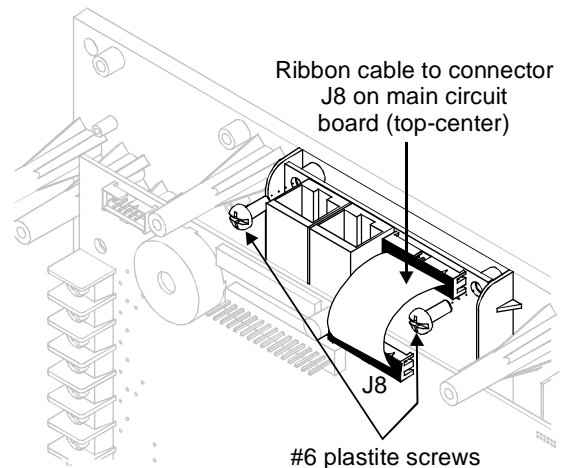

## Wiring

The dialer phone lines connect to connectors on the dialer's main circuit board. Phone line 1 connects to connector J1 and phone line 2 connects to connector J4.


The card typically connects to an RJ-31X block using an 8-position, 4-conductor modular cord. Wire the RJ-31X block as shown below.

**Note:** Install a listed secondary telephone protector between the telco network and the SA-DACT card. The SA-DACT card must be the next piece of equipment that connects to the telephone company (TELCO) telephone lines.

Refer to the *Cellular Capture Module Configuration Application Guide* (P/N 3102371-EN) for specific settings and wiring that must be used to meet UL and ULC Agency requirements for FACU communication with cellular capture modules.

The optional Panel Presence Failure Condition (PPFC) offered in the cellular capture modules is *not* supported when the module is connected to line 2 of the SA-DACT. The cellular capture module must be connected to line 1 if the PPFC function is selected.

**Figure 3: SA-DACT wiring**

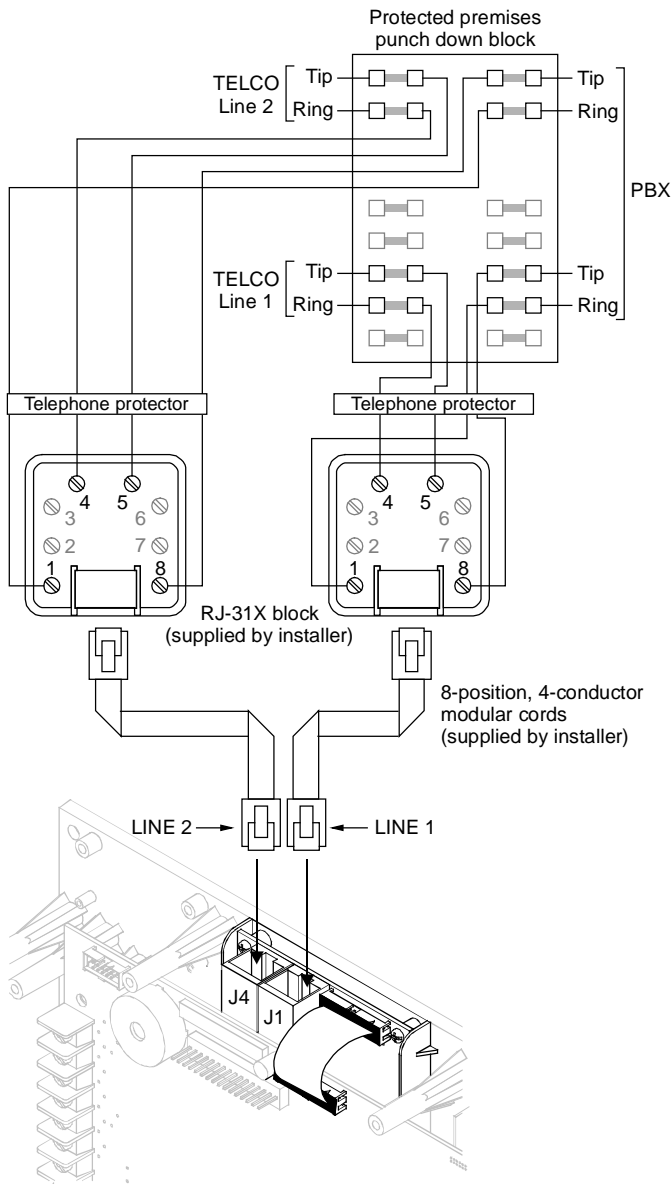

## Testing

A dialer test is a test of the telephone line for each dialer account. When a dialer is tested, a normal or abnormal test message (depending on the state of the system) is sent to the selected account. If the dialer is set up for dual line operation, a test message is sent to both lines regardless of the success of the transmission for either account.

**Note:** Before conducting a test, configure the dialer's accounts for proper operation.

### To conduct a dialer test:

1. Press the control panel's Menu button.
2. Choose Test.
3. Choose Dialer.
4. Select the account that you want to test.
5. Press Enter.

**Note:** The test message is sent to the CMS account that you selected. For verification of the CMS account receiving the test message, you must be in contact with the CMS account during the test. Nothing is displayed on the LCD display.

6. Press Cancel to return to the previous menu.

– or –

Press the Menu button to exit menu mode.

## Specifications

Phone line type	One or two loop-start lines on a public, switched network
Phone line connector	RJ-31/38X (C31/38X)
Communication formats	Contact ID (SIA DC-05)
Operating voltage	24 VDC
Operating current	Standby/Alarm: 41 mA Max.: 100 mA
FCC registration number	GESAL01BSADACT
Industry Canada Registration number	3944A-SADACT
Ringer equivalence number	0.1B
Operating environment	
Temperature	32 to 120°F (0 to 49°C)
Humidity	0 to 93% RH, noncondensing at 90°F (32°C)

## Compatibility

Refer to the panel compatibility list for compatible receivers and cellular capture modules.

## FCC information

### Cautions

- To ensure proper operation, this dialer must be installed according to the enclosed installation instructions. To verify that the dialer is operating properly and can successfully report an alarm, it must be tested immediately after installation, and periodically thereafter, according to the enclosed test instructions.
- In order for the dialer to be able to seize the phone line to report an alarm or other event when other customer equipment (telephone, answering system, computer modem, etc.) connected to the same line is in use, the dialer must be connected to a properly installed RJ-31X jack. The RJ-31X jack must be connected in series with, and ahead of, all other equipment attached to the same phone line. Series installation of an RJ-31X jack is depicted in the wiring diagram. If you have any questions concerning these instructions, you should consult your telephone company or a qualified installer.

## Testing

When programming emergency numbers or making test calls to emergency numbers, remain on the line and briefly explain to the dispatcher the reason for the call. Perform programming and testing activities in the off-peak hours, such as early morning or late evenings.

## Compliance

- **For equipment approved before July 23, 2001:** This dialer complies with Part 68 of the FCC rules. A label attached to the dialer contains, among other information, the FCC registration number and ringer equivalence number (REN) for this equipment. If requested, this information must be provided to the telephone company.  
  
**For equipment approved after July 23, 2001:** This dialer complies with Part 68 of the FCC rules and the requirements adopted by the Administrative Council for Terminal Attachments (ACTA). A label attached to the dialer contains, among other information, a product identifier in the format US:AAAEQ##TXXXX. If requested, this information must be provided to the telephone company.
- The plug and jack used to connect the dialer to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by ACTA. The dialer must be connected to a compliant RJ-31X or RJ-38X jack using a compliant cord. If a modular telephone cord is supplied with the dialer, it is designed to meet these requirements. See installation instructions for details.
- A ringer equivalence number (REN) is used to determine how many devices you can connect to a telephone line. If the total REN value for all devices connected on a telephone line exceeds that allowed by the telephone company, the devices may not ring on an incoming call. In most (but not all) areas the total REN value should not exceed 5.0. To be certain of the total REN value allowed on a telephone line, contact the local telephone company.

For products approved after July 23, 2001, the REN is part of the product identifier in the format US:AAAEQ##TXXXX. The digits ## represent the REN without a decimal point. Example: 03 is an REN of 0.3. For earlier products the REN is listed separately.

- If the dialer is harming the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. If advance notice isn't practical, the telephone company will notify you as soon as possible. You will also be advised of your right to file a complaint with the FCC, if you believe it is necessary.
- The telephone company may make changes to its facilities, equipment, operations, or procedures that could affect the operation of the dialer. If this happens, the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.
- If you are experiencing problems with the dialer, contact EST Technical Support for repair or warranty information. If the dialer is harming the telephone network, the telephone company may request that you disconnect the dialer until the problem is resolved.
- The dialer contains no user serviceable parts. In case of defects, return the dialer for repair.
- You may *not* connect the dialer to a public coin phone or a party line service provided by the telephone company.

## Industry Canada information

**Note:** The Industry Canada label identifies certified equipment. This certification means that the equipment meets certain telecommunications network protective, operational, and safety requirements. Industry Canada does not guarantee the equipment will operate to the user's satisfaction.

Before installing this equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be made by an authorized Canadian maintenance facility designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user disconnect the equipment.

---

**Caution:** Users should not attempt to make connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.

---

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines, and internal metallic water pipe system, if present, are connected together. This precaution may be particularly important in rural areas.

**Note:** The Load Number (LN) assigned to each terminal device denotes the percentage of the total load to be connected to a telephone loop which is used by the device, to prevent overloading. The termination on a loop may consist of any combination of devices subject only to the requirements that the sum of the Load Numbers of all the devices does not exceed 100.

## Contact information

For contact information, see [www.edwardsfiresafety.com](http://www.edwardsfiresafety.com).





## INTRODUCTION

The **SLE-MAX2-FIRE** *Sole/Dual-Path Alarm Communicator* is specifically designed to interface with FACP (Fire Alarm Control Panels) and comply with UL 864 10<sup>th</sup> edition. The **SLE-MAX2-FIRE** operates on both the Verizon and AT&T cellular networks and utilizes CAT-M1 technology. This device supports both Sole Path, cellular only; Traditional Dual Path, cellular and IP; and Super Dual™, Supervised Dual Carrier and Dual Path communication methods. Super Dual™, exclusive to NAPCO, is a UL 864 10<sup>th</sup> edition Certified fire communication service that allows the communicator to utilize two cellular carriers to provide dual path reporting. This is accomplished through the supervision of each carrier at the required NFPA intervals, i.e., 6 Hour supervision for NFPA 2013 through 2022. For Dual Path cellular/IP reporting, the system can communicate via an on-board Ethernet jack or via Wi-Fi using the optional UL 864 Certified **SLE-WIFI-MODULE**. The communication mode (Sole Path or Dual Path) requires selection of the appropriate service plan at the point of communicator activation. The communicator is equipped with two form "C" dry relays, one for a trouble output and one for an auxiliary output. The unit is also equipped with four EOLR supervised inputs to report a Fire Alarm, a Fire Trouble, a Water Flow Alarm and a Supervisory Alarm, each triggered from the N/O and Common terminals of the associated FACP output relays. This communicator is for use as the primary means of communication with the central station and do not have backup mode capability. This communicator can also be utilized as a Sole Path Cell communicator. No POTS (Telco Line) connection is permitted. For Commercial Burglary installations, under the armed condition, any loss of communication must be treated as a Burglary Alarm at the central station.

For connection to the FACP DACT, the **SLE-MAX2-FIRE** provides two RJ-45 Telco connections to satisfy the FACP telephone requirements. The primary Telco connector can be supervised and can report a trouble signal to the central station upon any open or short on the primary Telco wires that prevents reporting. The secondary telephone line is supervised by the FACP; when a line fault is detected, a signal trouble is reported to the central station through the primary telephone line.

The **SLE-MAX2-FIRE** is compatible with most 12VDC or 24VDC alarm control panels (always adhere to the documentation provided by the control panel manufacturer). Mount to a single-, dual-, or three-gang electrical box and route the wires through the back knock-out(s), or as specified by local codes. See **WI2140** for programming information.

## Summary of Supported Reporting Plans

### Sole Path Service Plan (Cellular-only, Verizon & AT&T)

The system selects and locks onto the higher quality cellular carrier signal (primary) upon power up and will reevaluate

# StarLink™ SLE-MAX2-FIRE Sole/Dual-Path Alarm Communicator Submittal Data Sheet

## SLE-MAX2-FIRE

Commercial / Residential Fire / Burglary CAT-M1 alarm capture Communicator. SIM cards are included. Red plastic enclosure. Rated nominal 12/24VDC input.



every 7 days. If the secondary signal exhibits higher quality, the system will switch carriers. If the primary carrier fails, the system will immediately switch carriers.

## Traditional Dual Path Service (Cellular, Verizon & AT&T, and IP)

The system selects and locks onto the higher quality cellular carrier signal (primary) upon power up and will reevaluate every 7 days. If the secondary signal exhibits higher quality, the system will switch carriers. If the primary carrier fails, the system will immediately switch carriers. Also requires an IP connection to the subscriber's network via the on-board Ethernet jack. **Note:** The cable modem/router and switch (if any) at the premises requires standby power; therefore a UL 1481, UL 864 or ITE (*Information Technology Equipment*) Certified UPS must be used at the premises to power these devices for 24 hours (unless an engine-driven generator is provided on the premises, then only 4 hours of UPS backup are required).

## Super Dual™, Dual Path Service (Cellular-only, Verizon & AT&T)

The system utilizes both cellular carriers to provide a UL 864 Certified dual path service plan. An IP connection is not required. If either cellular carrier fails, the system will continue operating on the remaining carrier and will report the trouble to the central station and will locally annunciate the trouble.

The **SLE-MAX2-FIRE** communicators use proprietary data-capture technology that captures the alarm report from the control panel and transmits the alarm signals to the SLE Control Center (NAPCO NOC); the alarm signals are then forward-

## AGENCY LISTINGS



- ETL Listed: All Models Conform to UL Standards: UL 864, UL 2610, UL 985, UL 1023
- New York City Certificate of Approval 2023-TMCOAP-010503-CERT
- CSFM LISTING No.: 7300-0992:0503
- UL Certified to UL 864 10th Edition, UL 2610, UL 985 and UL 1023

ed to ANY central station. The communicator can transmit to any central station capable of receiving SIA Contact ID or 4/2 via DACR technology or the DSC Sur-Gard Model System II or Sur-Gard System V central station receivers, Bosch D6100IPV6 or Bosch D6600 Receiver (with ITS-D6686 Ethernet Adapter) via TCP/IP using standard line security.

The **SLE-MAX2** Series of Communicators are provided with two antennas to reduce the possibility of RF nulls and ensure reliable cellular service. Only one antenna is active at a time, and should the communicator have a loss of adequate signal strength, the communicator will connect to the tower via the other antenna. If neither antenna can connect to the tower within 200 seconds, a trouble output will be activated. If using an external antenna such as from the NAPCO StarLink SLE-ANTEXTXXX Series of Extended Antenna Kits, connect it to the left antenna connector.

### StarLink Fire Self-Supervision

NFPA 72 requires that any fire communicator trouble be locally annunciated by the fire panel within 200 seconds of the trouble. The troubles include loss of signal, NOC supervision check-in failure, etc. The StarLink MAX2 Fire communicator models include a "**Self-Supervising Fire Communicator**" feature that allows the communicator to annunciate a communication trouble without the need for wiring to an FACP zone input or any FACP reprogramming. This is accomplished by dropping the emulated phone line voltage to the FACP secondary phone line, causing the FACP to annunciate a communication trouble. To enable Self-Supervision, simply remove Jumper **JP2**. Note that when using Self-Supervision, some FACP's may require the Jumper **J7** shunt to be removed for the Primary Phone line to restore correctly. To also report a communicator trouble to the central station, enable the feature "**Tip/Ring Wiring Fault Report**" in the **Advanced** tab in the StarLink NOC.

### ADDITIONAL COMPONENTS

In addition to the **SLE-MAX2-FIRE** listed above, the following sub-assemblies are available:

**SLE-WIFI-MODULE** - Allows your NAPCO StarLink device to connect to the Internet by means of a wireless (Wi-Fi) link, eliminating a wired Ethernet cable connection. **Note:** 7AH battery required when using the **SLE-WIFI-MODULE**. For more information, see WI2191. Not Certified for Commercial or Residential Burglary.

**SLE-FIRE-VR** - Control Panel Voltage Drop Kit (see WI2580).

**SLE-DLCBL** - Download Cable, 6 feet.

**SLE-ANTEXT30** - Antenna kit\* with 30 feet of LMR 300 cable.

**SLE-ANTEXT50** - Antenna kit\* with 50 feet of LMR 300 cable.

**SLE-ANTEXT75** - Antenna kit\* with 75 feet of LMR 400 cable.

**SLE-ANTEXT100** - Antenna kit\* with 100 feet of LMR 400 cable.

**SLE-ANTEXT04** - Antenna kit \* with 4 feet of LMR 300 cable.

Ideal for installations that may require a few extras dBs of gain but running the external cable may not be practical.

### SPECIFICATIONS

#### Electrical Ratings for +12V / 24V (powered by the control panel)<sup>†</sup>

- Input Voltage: 10-24VDC regulated (power-limited output from Certified control panel Aux/Remote Fire Power).

**IMPORTANT:** Powering the communicator with DC voltage above 27.5VDC could cause damage; if the control panel output voltage is operating between 27.5 - 30.7VDC, the **SLE-FIRE-VR Control Panel Voltage Drop Kit** is available to maintain the communicator input voltage below 27.5VDC. **Absolute maximum input voltage with SLE-FIRE-VR installed is 30.7VDC and FWR (Full Wave Rectification voltage) is NOT supported.**

- Input Current:
  - 10VDC standby: 115mA
  - 12VDC standby: 101mA
  - 15VDC standby: 92mA
  - 24VDC standby: 85mA
- **Wi-Fi Module:** (Optional) Add 45mA to the above. (With peak RF transmission current of 325mA).

#### Electrical Ratings for the IN 1 Fire Input:

- Input Voltage: 9-25VDC.
- Maximum Input Current: Up to 2mA from FACP NAC circuit

#### Electrical Ratings for IN 2, IN 3, IN 4, and IN 5:

(Inputs **IN 2**, **IN 3**, **IN 4**, and **IN 5** are Class B)

- Maximum Loop Voltage: 25VDC input.
- Maximum Loop Current: 1.7mA
- End of Line Resistor (EOLR) Value: 10K

#### Electrical Ratings for PGM3 Output:

- Open Collector Output: Maximum Voltage 25VDC.
- Maximum PGM Sink Current: 50mA (up to 15VDC), 25mA (15.1VDC - 25VDC)

#### Physical (W x H x D)

- Plastic Housing: 8 x 5<sup>-29</sup>/<sub>64</sub> x 1½" (20.3 x 13.9 x 3.8cm)
- Mounting: Plastic housing includes three keyhole slots for triple gang boxes (see scale template on page 13);
- Antenna Length: 8.25" (21cm)

#### Environmental

- Operating Temperature: 0°C - 49°C (32°F - 120°F)
- Humidity: Maximum 93% Non-Condensing
- Indoor / dry location use only


<sup>†</sup>For Commercial Fire installations, a UL Certified Fire Alarm regulated power supply or FACP regulated auxiliary output is required.

\*All antenna kits include high quality/low loss LMR 300 or 400 Coax Type N male to SMA male terminated cable, all mounting hardware and StarLink SLE-ANTEXT-ISO Commercial Fire Ground Fault Isolation Plate to ensure that the external antenna will not cause ground fault system troubles. (Any suitable external cellular antenna is permitted by UL). Always follow the manufacturer's installation instructions. **Note:** Antennas are not Certified by UL.

LIFE SAFETY &amp; INCIDENT MANAGEMENT

# Input Modules

SIGA-CT1, SIGA-CT1HT,  
SIGA-CT2, SIGA-MCT2

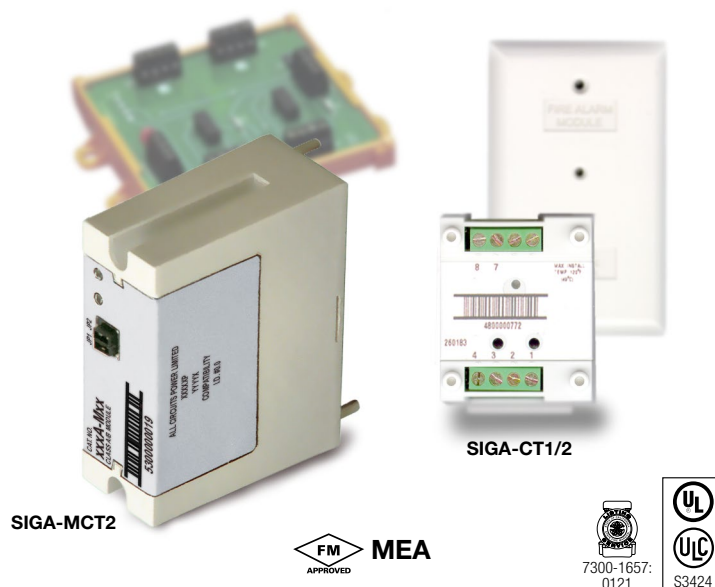

## Overview

The SIGA-CT1 Single Input Module, SIGA-CT1HT High Temperature Single Input Module and SIGA-CT2/SIGA-MCT2 Dual Input Modules are intelligent analog addressable devices used to connect one or two Class B normally-open Alarm, Supervisory, or Monitor type dry contact Initiating Device Circuits (IDC).

The actual function of these modules is determined by the “personality code” selected by the installer. This code is downloaded to the module from the Signature loop controller during system configuration.

The input modules gather analog information from the initiating devices connected to them and convert it into digital signals. The module’s on-board microprocessor analyzes the signal and decides whether or not to input an alarm.

**The SIGA-CT1, SIGA-CT1HT and SIGA-CT2** mount to standard North American 1-gang electrical boxes, making them ideal for locations where only one module is required. Separate I/O and data loop connections are made to each module.

The SIGA-CT1HT module operates at an expanded temperature range of 32 °F to 158 °F (0 °C to 70 °C) for those applications requiring more extreme environmental temperature variation.

**The SIGA-MCT2** is part of the UIO family of plug-in Signature Series modules. It functions identically to the SIGA-CT2, but takes advantage of the modular flexibility and easy installation that characterizes all UIO modules. Two- and six-module UIO motherboards are available. All wiring connections are made to terminal blocks on the motherboard. UIO assemblies may be mounted in EDWARDS enclosures.

## Standard Features

- **Multiple applications**  
Including Alarm, Alarm with delayed latching (retard) for waterflow applications, Supervisory, and Monitor. The installer selects one of four “personality codes” to be downloaded to the module through the loop controller.
- **SIGA-CT1HT rated for high temperature environments**  
Suitable for attic installation and monitoring high temperature heat detectors.
- **Plug-in (UIO) or standard 1-gang mount**  
UIO versions allow quick installation where multiple modules are required. The 1-gang mount version is ideal for remote locations that require a single module.
- **Automatic device mapping**  
Signature modules transmit information to the loop controller regarding their circuit locations with respect to other Signature devices on the wire loop.
- **Electronic addressing**  
Programmable addresses are downloaded from the loop controller, a PC, or the SIGA-PRO Signature Program/Service Tool. There are no switches or dials to set.
- **Ground fault detection by address**  
Detects ground faults right down to the device level.

## Signature Series Overview


The Signature Series intelligent analog-addressable system from EDWARDS Security is an entire family of multi-sensor detectors and mounting bases, multiple-function input and output modules, network and non-network control panels, and user-friendly maintenance and service tools. Analog information from equipment connected to Signature devices is gathered and converted into digital signals. An onboard microprocessor in each Signature device measures and analyzes the signal and decides whether or not to input an alarm. The microprocessor in each Signature device provides four additional benefits – Self-diagnostics and History Log, Automatic Device Mapping, and Fast, Stable Communication.

**Self-diagnostics and History Log** – Each Signature Series device constantly runs self-checks to provide important maintenance information. The results of the self-check are automatically updated and permanently stored in its non-volatile memory. This information is accessible for review any time at the control panel, PC, or using the SIGA-PRO Signature Program/Service Tool.


**Automatic Device Mapping** – The Signature Data Controller (SDC) learns where each device's serial number address is installed relative to other devices on the circuit. The SDC keeps a map of all Signature Series devices connected to it. The Signature Series Data Entry Program also uses the mapping feature. With interactive menus and graphic support, the wired circuits between each device can be examined. Layout or "as-built" drawing information showing branch wiring (T-taps), device types and their address are stored on disk for printing hard copy.

## Installation

**SIGA-CT1, SIGA-CT1HT and SIGA-CT2:** modules mount to North American 2½ inch (64 mm) deep 1-gang boxes and 1½ inch (38 mm) deep 4 inch square boxes with 1-gang covers and SIGA-MP mounting plates. The terminals are suited for #12 to #18 AWG (2.5 mm<sup>2</sup> to 0.75 mm<sup>2</sup>) wire size.

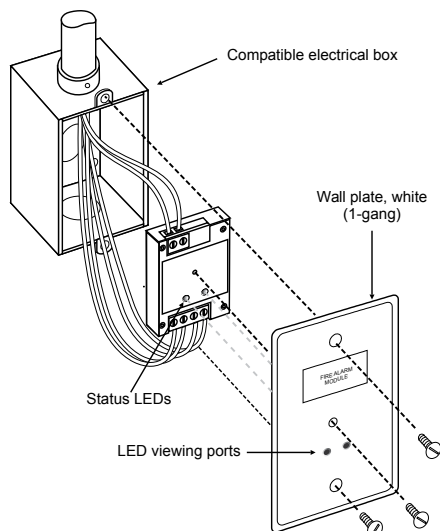

**SIGA-MCT2:** mount the UIO motherboard inside a suitable EDWARDS enclosure with screws and washers provided. Plug the SIGA-MCT2 into any available position on the motherboard and secure the module to the motherboard with the captive screws. Wiring connections are made to the terminals on the motherboard (see wiring diagram). UIO motherboard terminals are suited for #12 to #18 AWG (2.5 mm<sup>2</sup> to 0.75 mm<sup>2</sup>) wire size.



**Electronic Addressing** - The loop controller electronically addresses each module, saving valuable time during system commissioning. Setting complicated switches or dials is not required. Each module has its own unique serial number stored in its on-board memory. The loop controller identifies each device on the loop and assigns a "soft" address to each serial number. If desired, the modules can be addressed using the SIGA-PRO Signature Program/Service Tool.

EDWARDS recommends that this module be installed according to latest recognized edition of national and local fire alarm codes.

## Application

The duty performed by the SIGA-CT1 and SIGA-CT2/MCT2 is determined by their sub-type code or "Personality Code". The code is selected by the installer depending upon the desired application and is downloaded from the loop controller.

One personality code can be assigned to the SIGA-CT1. Two personality codes can be assigned to the SIGA-CT2/MCT2. Codes 1, 2, 3 and 4 can be mixed on SIGA-CT2/MCT2 modules only. For example, personality code 1 can be assigned to the first address (circuit A) and code 4 can be assigned to the second address (circuit B).

### NORMALLY-OPEN ALARM - LATCHING (Personality Code 1)

- Assign to one or both circuits. Configures either circuit A or B or both for Class B normally open dry contact initiating devices such as Pull Stations, Heat Detectors, etc. An ALARM signal is sent to the loop controller when the input contact is closed. The alarm condition is latched at the module.

### NORMALLY-OPEN ALARM - DELAYED LATCHING

**(Personality Code 2)** - Assign to one or both circuits. Configures either circuit A or B or both for Class B normally-open dry contact initiating devices such as Waterflow Alarm Switches. An ALARM signal is sent to the loop controller when the input contact is closed for approximately 16 seconds. The alarm condition is latched at the module.

### NORMALLY-OPEN ACTIVE - NON-LATCHING (Personality Code 3)

- Assign to one or both circuits. Configures either circuit A or B or both for Class B normally-open dry contact monitoring input such as Fans, Dampers, Doors, etc. An ACTIVE signal is sent to the loop controller when the input contact is closed. The active condition is not latched at the module.

### NORMALLY-OPEN ACTIVE - LATCHING (Personality Code 4)

- Assign to one or both circuits. Configures either circuit A or B or both for Class B normally open dry contact monitoring input such as from Supervisory and Tamper Switches. An ACTIVE signal is sent to the loop controller when the input contact is closed. The active condition is latched at the module.





## Typical Wiring

Modules will accept #18 AWG (0.75mm<sup>2</sup>), #16 (1.0mm<sup>2</sup>), and #14AWG (1.50mm<sup>2</sup>), and #12 AWG (2.50mm<sup>2</sup>) wire sizes.

Note: Sizes #16 AWG (1.0mm<sup>2</sup>) and #18 AWG (0.75mm<sup>2</sup>) are preferred for ease of installation. See Signature Loop Controller catalog sheet for detailed wiring requirement specifications.

### Initiating (Slave) Device Circuit Wire Specifications

Maximum Allowable Wire Resistance	50 ohms (25 ohms per wire) per Circuit	
Maximum Allowable Wire Capacitance	0.1µF per Circuit	
For Design Reference:	<b>Wire Size</b>	<b>Maximum Distance to EOLR</b>
	#18 AWG (0.75 mm <sup>2</sup> )	4,000 ft (1,219 m)
	#16 AWG (1.00 mm <sup>2</sup> )	
	#14 AWG (1.50 mm <sup>2</sup> )	
	#12 AWG (1.50 mm <sup>2</sup> )	

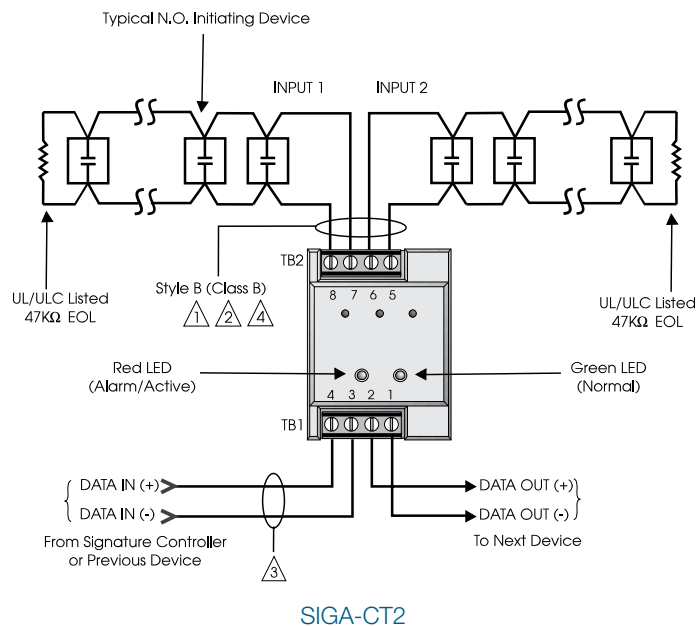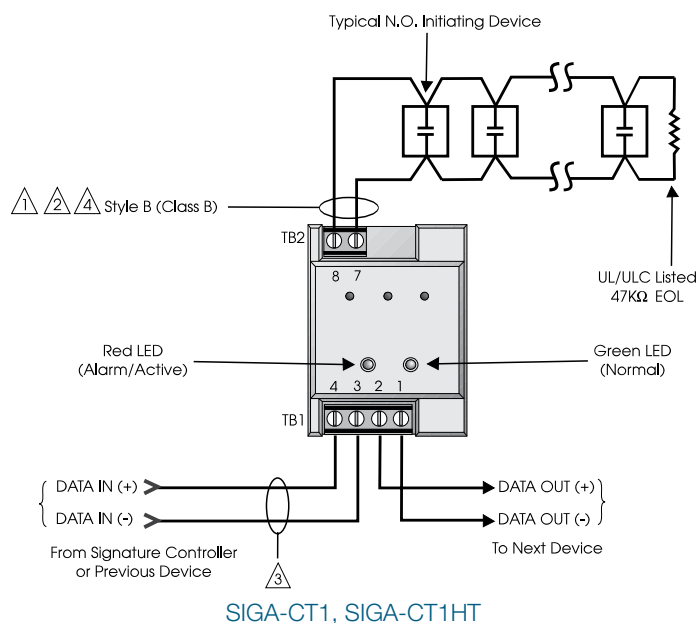

### NOTES


- 1 Maximum 25 Ohm resistance per wire.
- 2 Maximum #12 AWG (2.5 mm<sup>2</sup>) wire; Minimum #18 AWG (0.75 mm<sup>2</sup>).
- 3 Refer to Signature controller installation sheet for wiring specifications.
- 4 Maximum 10 Vdc @ 350 µA
- 5 The SIGA-UIO6R and the SIGA-UIO2R do not come with TB14.
- 6 All wiring is supervised and power-limited.
- 7 These modules will not support 2-wire smoke detectors.

## Warnings & Cautions

This module will not operate without electrical power. As fires frequently cause power interruption, we suggest you discuss further safeguards with your local fire protection specialist.

## Compatibility

These modules are part of EDWARDS's Signature Series intelligent processing and control platform. They are compatible with EST3, EST3X and iO Series control panels.

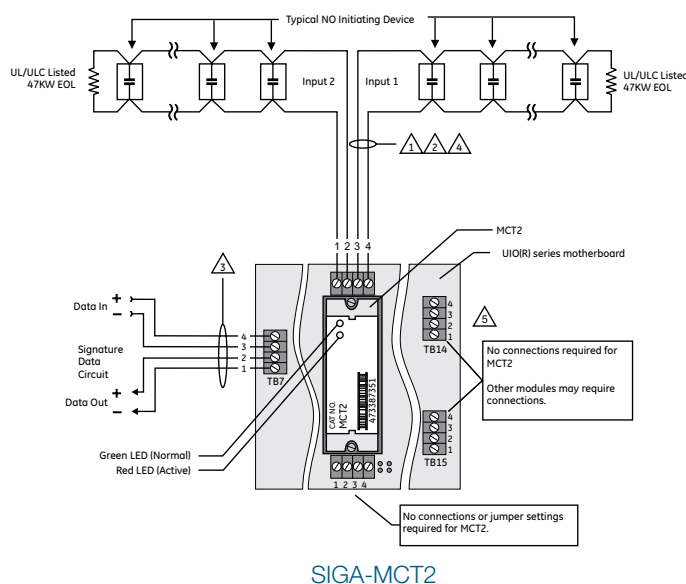



LIFE SAFETY & INCIDENT MANAGEMENT

**Contact us**

Phone: 800-655-4497 (Option 4)  
Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)  
Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

© 2020 Carrier  
All rights reserved.

## Specifications

Catalog Number	SIGA-CT1HT	SIGA-CT1	SIGA-CT2	SIGA-MCT2
Description	Single Input Module		Dual Input Module	
Type Code	48 (factory set) Four sub-types (personality codes) are available		49 (factory set) Four sub-types (personality codes) are available	
Address Requirements	Uses One Module Address		Uses Two Module Addresses	
Operating Current	Standby = 250µA; Activated = 400µA		Standby = 396µA; Activated = 680µA	
Operating Voltage	15.2 to 19.95 Vdc (19 Vdc nominal)			
Construction	High Impact Engineering Polymer			
Mounting	North American 2½ inch (64 mm) deep one-gang boxes and 1½ inch (38 mm) deep 4 inch square boxes with one-gang covers and SIGA-MP mounting plates			UIO2R/6R/6 Motherboard
Operating Environment	32°F to 158°F (0°C to 70°C)	32°F to 120°F (0°C to 49°C)		
Storage Environment	-4°F to 140°F (-20°C to 60°C); Humidity: 0 to 93% RH			
LED Operation	On-board Green LED - Flashes when polled; On-board Red LED - Flashes when in alarm/active.			
Compatibility	Use with Signature Loop Controller			
Agency Listings	UL, ULC, MEA, CSFM			

## Ordering Information


Catalog Number	Description	Ship Wt. lbs (kg)
SIGA-CT1	Single Input Module — UL/ULC Listed	0.4 (0.15)
SIGA-CT1HT	Single Input Module High Temperature Operation UL/ULC Listed	0.4 (0.15)
SIGA-CT2	Dual Input Module — UL/ULC Listed	0.4 (0.15)
SIGA-MCT2	Dual Input Plug-in (UIO) Module — UL, ULC Listed	0.1 (0.05)

Related Equipment		
27193-11	Surface Mount Box - Red, 1-gang	1.0 (0.6)
27193-16	Surface Mount Box - White, 1-gang	1.0 (0.6)
SIGA-UIO2R	Universal Input-Output Module Board w/Riser Inputs — Two Module Positions	0.32 (0.15)
SIGA-UIO6R	Universal Input-Output Module Board w/Riser Inputs — Six Module Positions	0.62 (0.28)
SIGA-UIO6	Universal Input-Output Module Board — Six Module Positions	0.56 (0.25)
MFC-A	Multifunction Fire Cabinet — Red, supports Signature Module Mounting Plates	7.0 (3.1)
SIGA-MB4	Transponder Mounting Bracket (allows for mounting two 1-gang modules in a 2-gang box)	0.4 (0.15)
SIGA-MP1	Signature Module Mounting Plate, 1 footprint	1.5 (0.70)
SIGA-MP2	Signature Module Mounting Plate, 1/2 footprint	0.5 (0.23)
SIGA-MP2L	Signature Module Mounting Plate, 1/2 extended footprint	1.02 (0.46)



# Control Relay Modules

SIGA-CR, SIGA-MCR, SIGA-CRR, SIGA-MCRR

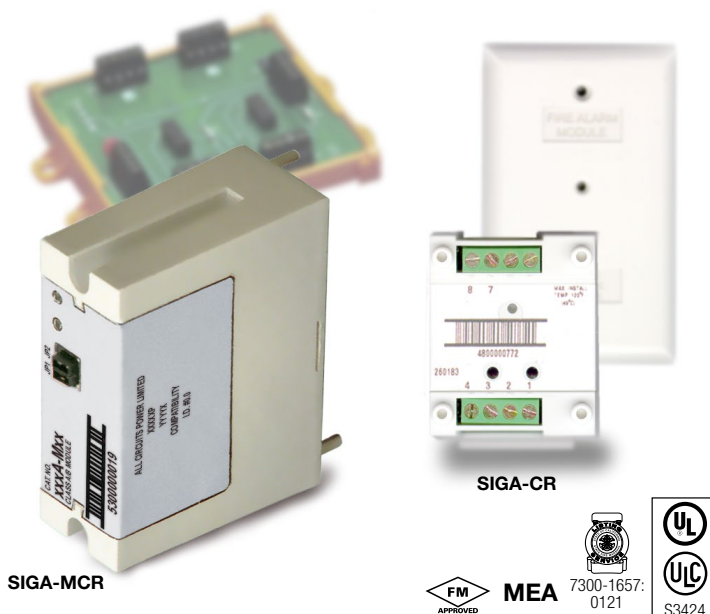

## Overview

The Control Relay Module and the Polarity Reversal Relay Module are part of the Signature Series system. They are intelligent analog addressable devices available in either plug-in (UIO) versions, or standard 1-gang mount versions.

**The SIGA-CR/MCR** Control Relay Module provides a Form “C” dry relay contact to control external appliances such as door closers, fans, dampers etc. This device does not provide supervision of the state of the relay contact. Instead, the on-board microprocessor ensures that the relay is in the proper ON/OFF state. Upon command from the loop controller, the SIGA-CR/MCR relay activates the normally open or normally-closed contact.

**The SIGA-CRR/MCRR** Polarity Reversal Relay Module provides a Form “C” dry relay contact to power and activate a series of SIGA-AB4G Audible Sounder Bases. Upon command from the Signature loop controller, the SIGA-CRR reverses the polarity of its 24 Vdc output, thus activating all Sounder Bases on the data loop.

**Standard-mount versions (SIGA-CR and SIGA-CRR)** are installed to standard North American 1-gang electrical boxes, making them ideal for locations where only one module is required. Separate I/O and data loop connections are made to each module.


**Plug-in UIO versions (SIGA-MCR and SIGA-MCRR)** are part of the UIO family of plug-in Signature Series modules. They function identically to the standard mount versions, but take advantage of the modular flexibility and easy installation that characterizes all UIO modules. Two- and six-module UIO motherboards are available. All wiring connections are made to terminal blocks on the motherboard. UIO assemblies may be mounted in EDWARDS enclosures.

## Standard Features


- Provides one no/nc contact (SIGA-CR/MCR)**  
 Form “C” dry relay contact can be used to control external appliances such as door closers, fans, dampers etc.
- Allows group operation of sounder bases**  
 The SIGA-CRR/MCRR reverses the polarity of its 24 Vdc output, thus activating all Sounder Bases on the data loop.
- Plug-in (UIO) or standard 1-gang mount**  
 UIO versions allow quick installation where multiple modules are required. The 1-gang mount version is ideal for remote locations that require a single module.
- Automatic device mapping**  
 Signature modules transmit information to the loop controller regarding their circuit locations with respect to other Signature devices on the wire loop.
- Electronic addressing**  
 Programmable addresses are downloaded from the loop controller, a PC, or the SIGA-PRO Signature Program/Service Tool; there are no switches or dials to set.
- Intelligent device with microprocessor**  
 All decisions are made at the module to allow lower communication speed with substantially improved control panel response time and less sensitivity to line noise and loop wiring properties; twisted or shielded wire is not required.

## Installation

**SIGA-CR and SIGA-CRR:** modules mount to North American 2½ inch (64 mm) deep 1-gang boxes and 1½ inch (38 mm) deep 4 inch square boxes with 1-gang covers and SIGA-MP mounting plates. The terminals are suited for #12 to #18 AWG (2.5 mm<sup>2</sup> to 0.75 mm<sup>2</sup>) wire size.

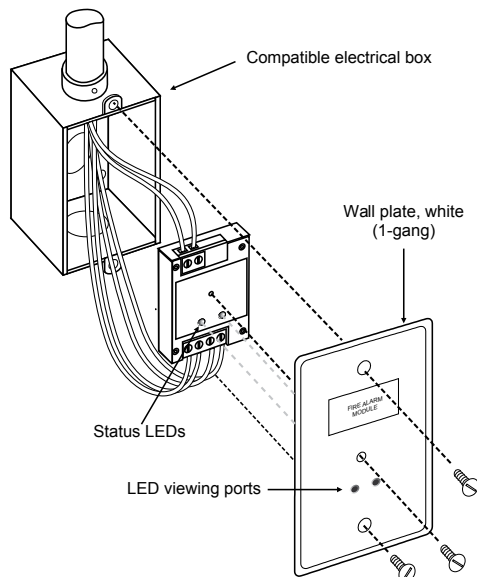

**SIGA-MCR and SIGA-MCRR:** mount the UIO motherboard inside a suitable EDWARDS enclosure with screws and washers provided. Plug the module into any available position on the motherboard and secure the module to the motherboard with the captive screws. Wiring connections are made to the terminals on the motherboard (see wiring diagram). UIO motherboard terminals are suited for #12 to #18 AWG (2.5 mm<sup>2</sup> to 0.75 mm<sup>2</sup>) wire size.



**Electronic Addressing** - The loop controller electronically addresses each module, saving valuable time during system commissioning. Setting complicated switches or dials is not required. Each module has its own unique serial number stored in its on-board memory. The loop controller identifies each device on the loop and assigns a “soft” address to each serial number. If desired, the modules can be addressed using the SIGA-PRO Signature Program/Service Tool.

EDWARDS recommends that this module be installed according to latest recognized edition of national and local fire alarm codes.

## Application

The operation of Signature Series control relays is determined by their sub-type code or “Personality Code.”

### Personality Code 8: CONTROL RELAY (SIGA-CR/MCR)

**- Dry Contact Output.** This setting configures the module to provide one Form “C” DRY RELAY CONTACT to control Door Closers, Fans, Dampers, etc. Contact rating is 2.0 amp @ 24 Vdc; 0.5 amp @ 120 Vac (or 0.25A @ 220 Vac for non-UL applications). Personality Code 8 is assigned at the factory. No user configuration is required.

### Personality Code 8: POLARITY REVERSAL RELAY MODULE (SIGA-CRR/MCRR)

This setting configures the module to reverse the polarity of its 24 Vdc output. Contact rating is 2.0 amp @ 24 Vdc (pilot duty). Personality Code 8 is assigned at the factory. No user configuration is required.

## Compatibility

These modules are part of EDWARDS’s Signature Series intelligent processing and control platform. They are compatible with EST3, EST3X and iO Series control panels.

## Warnings & Cautions


This module will not operate without electrical power. As fires frequently cause power interruption, we suggest you discuss further safeguards with your local fire protection specialist.

## Testing & Maintenance

The module’s automatic self-diagnosis identifies when it is defective and causes a trouble message. The user-friendly maintenance program shows the current state of each module and other pertinent messages. Single modules may be turned off (deactivated) temporarily, from the control panel. Availability of maintenance features is dependent on the fire alarm system used. Scheduled maintenance (Regular or Selected) for proper system operation should be planned to meet the requirements of the Authority Having Jurisdiction (AHJ). Refer to current NFPA 72 and ULC CAN/ULC 536 standards.

Note: Sizes #16 AWG (1.0mm<sup>2</sup>) and #18 AWG (0.75mm<sup>2</sup>) are preferred for ease of installation. See Signature Loop Controller catalog sheet for detailed wiring requirement specifications.


- 1 Refer to Signature Loop Controller Installation Sheet for wiring specifications.
- 2 NFPA 72 requires that the SIGA-CR/SIGA-MCR be installed in the same room as the device it is controlling. This requirement may not apply in all markets. Check with your local AHJ for details.
- 3 The SIGA-UIO6R and the SIGA-UIO2R do not come with TB14.
- 4 The SIGA-UIO6 does not come with TB8 through TB13.
- 5 Supervised and power-limited.
- 6 If the source is nonpower-limited, maintain a space of 1/4 inch from power-limited wiring or use FPL, FPLP, FPLR, or an equivalent in accordance with the National Electrical Code.
- 7 Maximum #12 AWG (2.5mm<sup>2</sup>) wire.  
Min. #18 (0.75mm<sup>2</sup>).

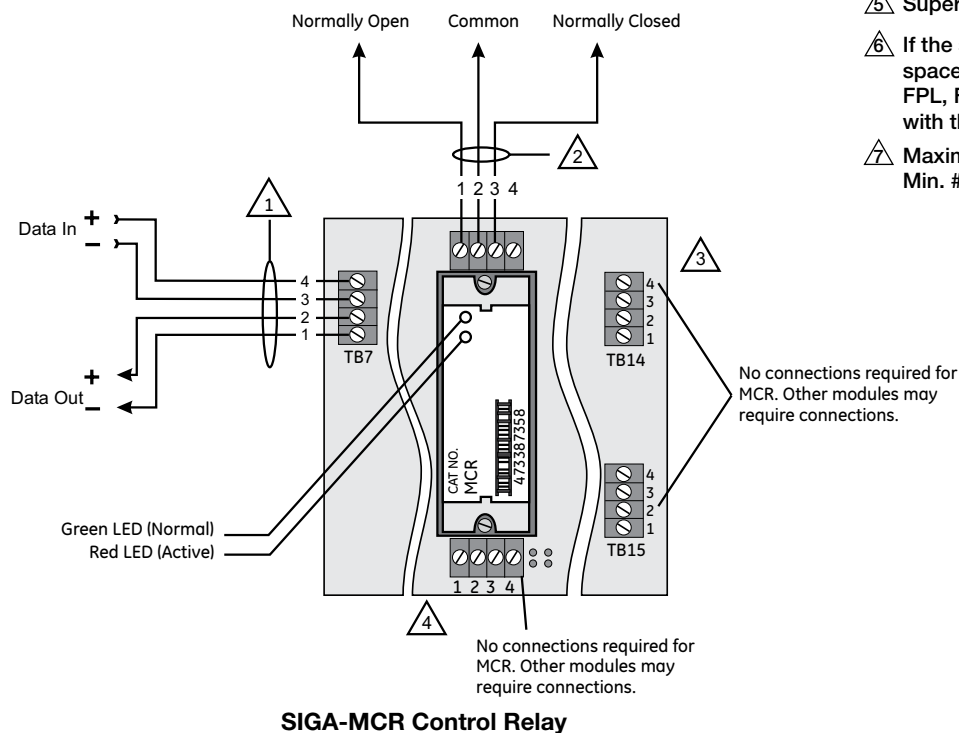

## Typical Wiring

Modules will accept #18 AWG (0.75mm<sup>2</sup>), #16 (1.0mm<sup>2</sup>), #14 AWG (1.50mm<sup>2</sup>) and #12 AWG (2.50mm<sup>2</sup>) wire sizes.

Note: Sizes #16 AWG (1.0mm<sup>2</sup>) and #18 AWG (0.75mm<sup>2</sup>) are preferred for ease of installation. See Signature Loop Controller catalog sheet for detailed wiring requirement specifications.

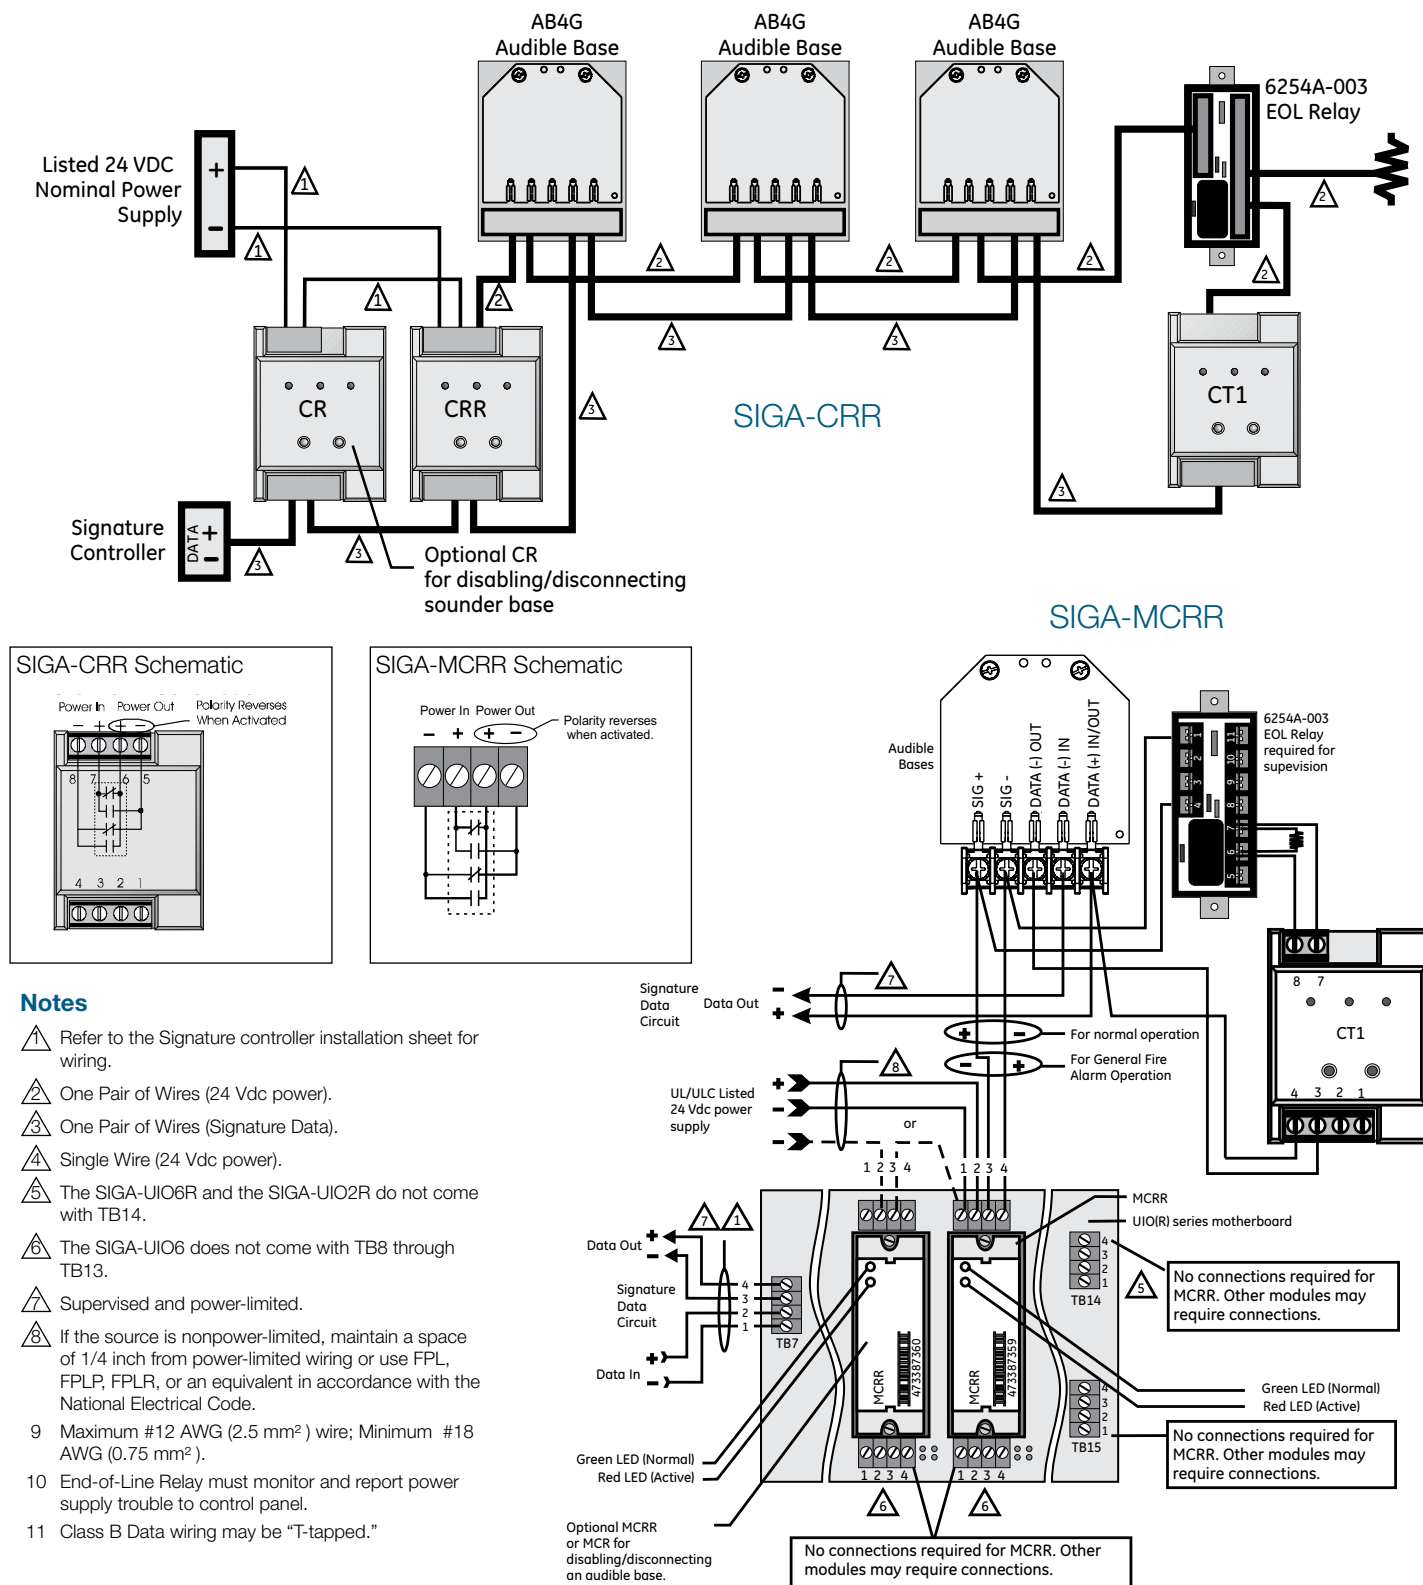

## Specifications

Catalog Number	SIGA-CR	SIGA-MCR	SIGA-CRR	SIGA-MCRR
Description	Control Relay		Polarity Reversal Relay	
Type Code	Personality Code 8 (Factory Set)		Personality Code 8 (Factory Set)	
Address Requirements	Uses 1 Module Address			
Operating Current	Standby = 75 µA Activated = 75 µA			
Operating Voltage	15.2 to 19.95 Vdc (19 Vdc nominal)			
Relay Type and Rating	Form C, 2 Amps @ 24 Vdc (pilot duty), 0.5 Amps @ 120 Vac and 0.25 Amps @ 220 Vac (220 Vac is non-UL) Not rated for capacitive loads.			
Mounting	North American 2½ inch (64 mm) deep 1-gang boxes and 1½ inch (38 mm) deep 4 inch square boxes with 1-gang covers and SIGA-MP mounting plates	Plugs into UIO2R, UIO6R or UIO6 Motherboards	North American 2½ inch (64 mm) deep 1-gang boxes and 1½ inch (38 mm) deep 4 inch square boxes with 1-gang covers and SIGA-MP mounting plates	Plugs into UIO2R, UIO6R or UIO6 Motherboards
Construction & Finish	High Impact Engineering Polymer			
Storage and Operating Environment	Operating Temperature: 32°F to 120°F (0°C to 49°C) Storage Temperature: -4°F to 140°F (-20°C to 60°C) Humidity: 0 to 93% RH			
LED Operation	On-board Green LED - Flashes when polled On-board Red LED - Flashes when in alarm/active			
Compatibility	Use With: Signature Loop Controller			
Agency Listings	UL, ULC, CSFM, MEA			

## Ordering Information

Catalog Number	Description	Ship Weight - lbs (kg)
SIGA-CR	Control Relay Module (Standard Mount)	0.4 (0.15)
SIGA-MCR	Control Relay Module (UIO Mount)	0.18 (0.08)
SIGA-CRR	Polarity Reversal Relay Module (Standard Mount)	0.4 (0.15)
SIGA-MCRR	Polarity Reversal Relay Module (UIO Mount)	0.18 (0.08)

### Related Equipment

27193-11	Surface Mount Box - Red, 1-gang	1 (0.6)
27193-16	Surface Mount Box - White, 1-gang	1 (0.6)
SIGA-UIO2R	Universal Input-Output Module Board w/Riser Inputs - Two Module Positions	0.32 (0.15)
SIGA-UIO6R	Universal Input-Output Module Board w/Riser Inputs - Six Module Positions	0.62 (0.28)
SIGA-UIO6	Universal Input-Output Module Board - Six Module Positions	0.56 (0.25)
SIGA-AB4G	Audible (Sunder) Detector Base	0.3 (0.15)

### Accessories

MFC-A	Multifunction Fire Cabinet - Red, supports Signature Module Mounting Plates	7.0 (3.1)
SIGA-MB4	Transponder Mounting Bracket (allows for mounting two 1-gang modules in a 2-gang box)	0.4 (0.15)
SIGA-MP1	Signature Module Mounting Plate, 1 footprint	1.5 (0.70)
SIGA-MP2	Signature Module Mounting Plate, 1/2 footprint	0.5 (0.23)
SIGA-MP2L	Signature Module Mounting Plate, 1/2 extended footprint	1.02 (0.46)



LIFE SAFETY & INCIDENT MANAGEMENT

**Contact us**

Phone: 800-655-4497 (Option 4)

Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)

Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

© 2020 Carrier  
All rights reserved.

---

## Signature Series Overview

The Signature Series intelligent analog-addressable system from EDWARDS is an entire family of multi-sensor detectors and mounting bases, multiple-function input and output modules, network and non-network control panels, and user-friendly maintenance and service tools. Analog information from equipment connected to Signature devices is gathered and converted into digital signals. An onboard microprocessor in each Signature device measures and analyzes the signal and decides whether or not to input an alarm. The microprocessor in each Signature device provides four additional benefits – Self-diagnostics and History Log, Automatic Device Mapping, and Fast, Stable Communication.

**Self-diagnostics and History Log** – Each Signature Series device constantly runs self-checks to provide important maintenance information. The results of the self-check are automatically updated and permanently stored in its non-volatile memory. This information is accessible for review any time at the control panel, PC, or using the SIGA-PRO Signature Program/Service Tool. The information stored in device memory includes:

- Device serial number, address, and type
- Time and date of last alarm
- Most recent trouble code logged by the detector — 32 possible trouble codes may be used to diagnose faults.

**Automatic Device Mapping** –The Signature Data Controller (SDC) learns where each device's serial number address is installed relative to other devices on the circuit. The SDC keeps a map of all Signature Series devices connected to it. The Signature Series Data Entry Program also uses the mapping feature. With interactive menus and graphic support, the wired circuits between each device can be examined. Layout or “as-built” drawing information showing branch wiring (T-taps), device types and their address are stored on disk for printing hard copy. This takes the mystery out of the installation. The preparation of as-built drawings is fast and efficient.

Device mapping allows the Signature Data Controller to discover:

- Unexpected additional device addresses
- Missing device addresses
- Changes to the wiring in the circuit.

Most Signature modules use a personality code selected by the installer to determine their actual function. Personality codes are downloaded from the SDC during system configuration and are indicated during device mapping.





LIFE SAFETY &amp; INCIDENT MANAGEMENT

# Manual Pull Stations

SIGA-270, SIGA-270P,  
SIGA-278



SIGA-278

SIGA-270 SERIES

Patented

MEA

7150-1657:  
0129

## Overview

The SIGA-270 and SIGA-278 series Manual Pull Stations are part of EDWARDS's Signature Series system. The SIGA-270 Fire Alarm Manual Pull Stations feature our very familiar teardrop shape. They are made from die-cast zinc and finished with red epoxy powder-coat paint complemented by aluminum colored stripes and markings. With positive pull-lever operation, one pull on the station handle breaks the glass rod and turns in a positive alarm, ensuring protection plus fool-proof operation. Presignal models (SIGA-270P) are equipped with a general alarm (GA) keyswitch for applications where two stage operation is required. The up-front highly visible glass rod discourages tampering, but is not required for proper operation.

EDWARDS's double action single stage SIGA-278 station is a contemporary style manual station made from durable red colored lexan. To initiate an alarm, first lift the upper door marked "LIFT THEN PULL HANDLE", then pull the alarm handle.

## Standard Features

**Note:** Some features described here may not be supported by all control systems. Check your control panel's Installation and Operation Guide for details.

- **Traditional familiar appearance**  
SIGA-270 models feature our familiar teardrop design with simple positive pull action and sturdy die-cast metal body.
- **One stage (GA), two stage (pre-signal), and double action models**  
SIGA-270 models are available for one or two stage alarm systems. The single stage double action SIGA-278 features a rugged Lexan housing with keyed reset mechanism.

- **Break glass operation**  
An up-front visible glass rod on the SIGA-270 discourages tampering.
- **Intelligent device with integral microprocessor**  
All decisions are made at the station allowing lower communication speed while substantially improving control panel response time. Less sensitive to line noise and loop wiring properties; twisted or shielded wire is not required.
- **ADA Compliant**  
Meets ADA requirements for manual pull stations.
- **Electronic Addressing with Non-volatile memory**  
Permanently stores programmable address, serial number, type of device, and job number. Automatically updates historic information including hours of operation, last maintenance date, number of alarms and troubles, and time and date of last alarm.
- **Automatic device mapping**  
Each station transmits wiring information to the loop controller regarding its location with respect to other devices on the circuit.
- **Diagnostic LEDs**  
Status LEDs; flashing GREEN shows normal polling; flashing RED shows alarm state.
- **Designed for high ambient temperature operation**  
Install in ambient temperatures up to 120 °F (49 °C).

## Application

The operating characteristics of the fire alarm stations are determined by their sub-type code or "Personality Code". NORMALLY-OPEN ALARM - LATCHING (Personality Code 1) is assigned by the factory; no user configuration is required. The device is configured for Class B IDC operation. An ALARM signal is sent to the loop controller when the station's pull lever is operated. The alarm condition is latched at the station.

## Compatibility

Signature Series manual stations are compatible only with EDWARDS's Signature Loop Controller.

## Warnings & Cautions

This device will not operate without electrical power. As fires frequently cause power interruption, we suggest you discuss further safeguards with your local fire protection specialist.

## Testing & Maintenance

To test (or reset) the station simply open the station and operate the exposed switch. The SIGA-270 series are opened with a tool; the SIGA-278 requires the key which is supplied with that station.

The station's automatic self-diagnosis identifies when it is defective and causes a trouble message. The user-friendly maintenance program shows the current state of each Signature series device and other pertinent messages. Single devices may be deactivated temporarily, from the control panel. Availability of maintenance features is dependent on the fire alarm system used.

Scheduled maintenance (Regular or Selected) for proper system operation should be planned to meet the requirements of the Authority Having Jurisdiction (AHJ). Refer to current NFPA 72 and ULC CAN/ULC 536 standards.

## Typical Wiring

The fire alarm station's terminal block accepts #18 AWG (0.75mm<sup>2</sup>) to #12 AWG (2.5mm<sup>2</sup>) wire sizes. See Signature Loop Controller catalog sheet for detailed wiring requirement specifications.

### Wiring Notes

1. Refer to Signature Loop Controller manual for maximum wire distance.
2. All wiring is power limited and supervised.

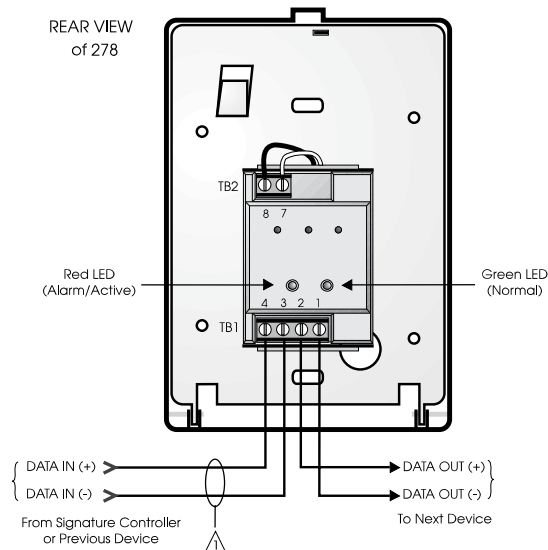


Figure 4. Single Stage Systems

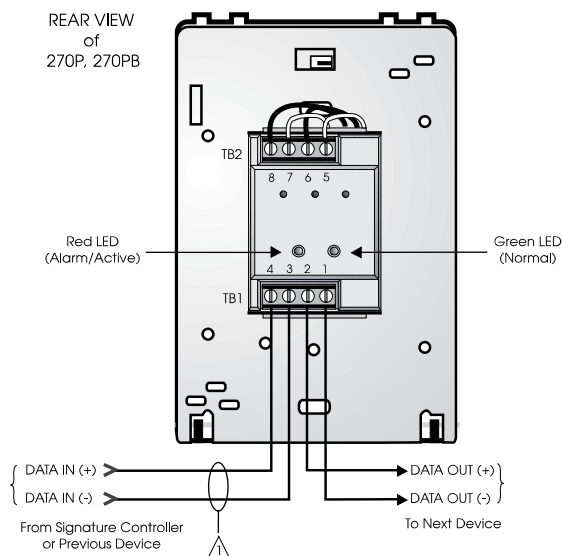


Figure 5. Two Stage Systems

## Installation

**Single-stage** Signature Series fire alarm manual pull stations mount to North American 2½ inch (64 mm) deep 1-gang boxes.

**Two stage** presignal (270P) models require 1½ inch (38 mm) deep 4-inch square boxes with 1-gang, ½-inch raised covers. Openings must be angular. *Rounded openings are not acceptable.* Recommended box: Steel City Model 52-C-13; in Canada, use Iberville Model CI-52-C-49-1/2.

**All models** include terminals are suited for #12 to #18 AWG (2.5 mm<sup>2</sup> to 0.75 mm<sup>2</sup>) wire size. EDWARDS recommends that these fire alarm stations be installed according to latest recognized edition of national and local fire alarm codes.

**Electronic Addressing:** The loop controller electronically addresses each manual station, saving valuable time during system commissioning. Setting complicated switches or dials is not required. Each station has its own unique serial number stored in its on-board memory. The loop controller identifies each device on the loop and assigns a “soft” address to each serial number. If desired, the stations can be addressed using the SIGA-PRO Signature Program/Service Tool.

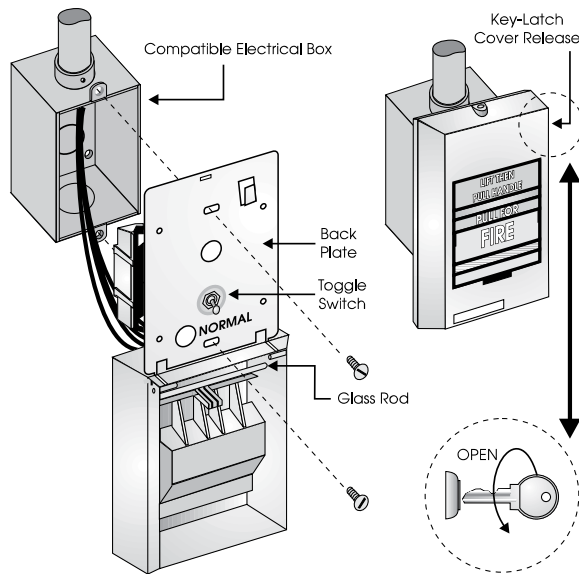


Figure 1. SIGA-278 installation

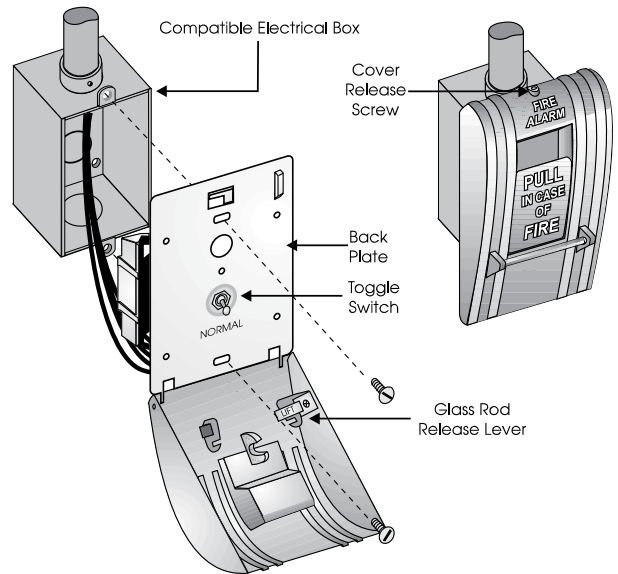


Figure 2. SIGA-270, SIGC-270F, SIGC-270B installation

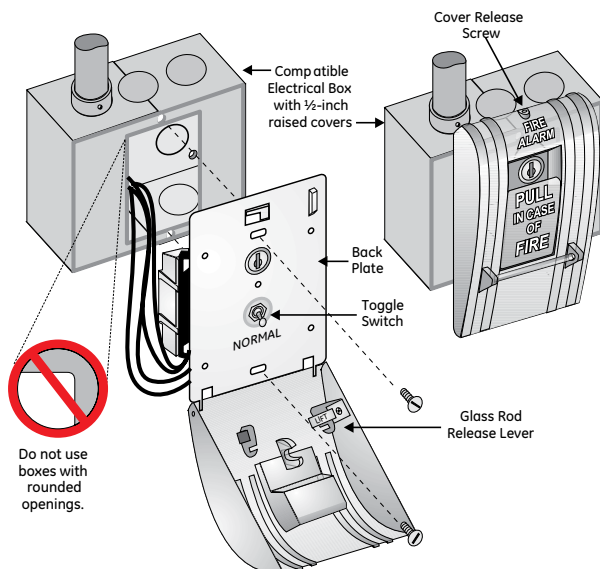


Figure 3. SIGA-270P, SIGC-270PB installation



LIFE SAFETY & INCIDENT MANAGEMENT

**Contact us**

Phone: 800-655-4497 (Option 4)  
Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)  
Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

© 2020 Carrier  
All rights reserved.

## Specifications

Catalog Number	SIGA-270, SIGC-270F, SIGC-270B	SIGA-270P, SIGC-270PB	SIGA-278
Description	Single Action - One Stage	Single Action - Two Stage (Presignal)	Double Action - One Stage
Addressing Requirements	Uses 1 Module Address	Uses 2 Module Addresses	Uses 1 Module Address
Operating Current	Standby = 250µA Activated = 400µA	Standby = 396µA Activated = 680µA	Standby = 250µA Activated = 400µA
Construction & Finish	Diecast Zinc - Red Epoxy with aluminum markings		Lexan - Red with white markings
Type Code	Factory Set		
Operating Voltage	15.2 to 19.95 Vdc (19 Vdc nominal)		
Storage and Operating Environment	Operating Temperature: 32°F to 120°F (0°C to 49°C) Storage Temperature: -4°F to 140°F (-20°C to 60°C) Humidity: 0 to 93% RH		
LED Operation	On-board Green LED - Flashes when polled On-board Red LED - Flashes when in alarm		
Compatibility	Use With: Signature Loop Controller		
Agency Listings	UL, ULC (note 1), MEA, CSFM, FM		

**Note:** SIGC-270F, SIGC-270B and SIGC-270PB are ULC listed only. Suffix "F" indicates French markings. Suffix "B" indicates English/French bilingual markings.

## Ordering Information

Catalog Number	Description	Ship Wt. lbs (kg)
SIGA-270	One Stage Fire Alarm Station, English Markings - UL/ULC Listed	1 (0.5)
SIGC-270F	One Stage Fire Alarm Station, French Markings - ULC Listed	
SIGC-270B	One Stage Fire Alarm Station, French/English Markings - ULC Listed	
SIGA-270P	Two Stage (Presignal) Fire Alarm Station, English Markings - UL/ULC Listed	
SIGC-270PB	Two Stage (Presignal) Fire Alarm Station, French/English Markings - ULC Listed	
SIGA-278	Double Action (One Stage) Fire Alarm Station, English Markings - UL/ULC Listed	

### Accessories

32997	GA Key w/Tag - for pre-signal station (CANADA ONLY)	0.1 (.05)
276-K2	GA Key - for pre-signal station (USA ONLY)	
276-K1	Station Reset Key, Supplied with all Key Reset Stations	
27165	12 Glass Rods - for SIGA-270 series (CANADA ONLY)	
270-GLR	20 Glass Rods - for SIGA-270 series (USA ONLY)	
276-GLR	20 Glass Rods - for SIGA-278 series	1 (0.6)
276B-RSB	Surface Mount Box, Red - for SIGA pull stations	



LIFE SAFETY &amp; INCIDENT MANAGEMENT

# Intelligent Smoke Detector

## SIGA-OSD



### Overview

The Signature Optica Series SIGA-OSD smoke detector brings advanced optical sensing technology to a practical design that increases efficiency, saves installation time, cuts costs, and extends life-safety and property-protection capabilities. Continuous self-diagnostics ensure reliability over the long haul, while environmental compensation helps reduce maintenance costs.

Like all Signature Optica Series detectors, the SIGA-OSD is an intelligent device that gathers analog information from multiple optical sensors, converting this data into digital signals. Utilizing dual optical wavelengths combined with multiple detection angles, the SIGA-OSD differentiates particles that are not representative of actual smoke. Particle data is input into digital filters which feed a series of ratios removing signal patterns that are typical of nuisance sources, thus reducing unwanted alarms. To make an alarm decision, the detector's on-board microprocessor measures and analyzes all optical sensor readings and compares this information to preprogrammed settings.

### Standard Features

- Multi-criteria optical smoke-sensing technology
- Wide 0.5 to 4.36 %/ft. (1.6 to 13.6 %/m) smoke obscuration
- Uses Existing Wiring
- Integrated nuisance rejection reducing unwanted alarms from general cooking particulates
- Listed to UL 268 7th edition
- Automatic Device Mapping
- Up To 250 Total Signature Addresses Per Loop
- Two Levels of Environmental Compensation
- Two Levels of Dirty Detector Warning
- Twenty Pre-Alarm Settings
- Five Sensitivity Settings
- Non-Volatile Memory
- Electronic Addressing
- Automatic Day/Night Sensitivity Adjustment
- Bicolor (Green/Red) Status LED
- Standard, Relay, Fault Isolator, and Audible Mounting Bases
- Sensor Markings Provide Easy Testing Identification

*Note: Some features described here may not be supported by all control systems. Check your control panel's Installation and Operation Guide for details.*



## Application


The SIGA-OSD detects particles from a wide range of combustion sources and will trigger an alarm when smoke density in the chamber reaches preprogrammed level. Thanks to its high-performance reflective-response technology, the smoke sensor responds quickly and reliably to a wide range of fire types, including both fast- and slow-burning fires fueled by combustibles typically found in modern multi-use buildings.

## Compatibility

The SIGA-OSD detector is compatible only with control panels using a Signature Loop controller.

## Installation

Signature Series detectors mount to North American 1-gang boxes, 3-1/2 inch or 4 inch octagon boxes, and to 4 inch square electrical boxes 1-1/2 inches (38 mm) deep. They mount to European BESA and 1-gang boxes with 60.3 mm fixing centers. See mounting base installation and wiring for more information.



## Sensing and reporting technology

The microprocessor in each detector provides additional benefits – Self-diagnostics and History Log, Automatic Device Mapping, and Fast, Stable Communication.

**Self-diagnostics and History Log** - Each Signature Series detector constantly runs self-checks to provide important maintenance information. The results of the self-check are automatically updated and permanently stored in the detector's non-volatile memory

**Automatic Device Mapping** - The loop controller learns where each device's serial number address is installed relative to other devices on the circuit. The mapping feature provides supervision of each device's installed location to prevent a detector from being reinstalled (after cleaning, etc.) in a different location from where it was originally.

**Fast Stable Communication** - On-board intelligence means less information needs to be sent between the detector and the loop controller. Other than regular supervisory polling response, the detector only needs to communicate with the loop controller when it has something new to report.


## Testing & Maintenance

Each detector automatically identifies when it is dirty or defective and causes a "dirty detector" message. The detector's sensitivity measurement can also be transmitted to the loop controller. A sensitivity report may be printed to satisfy NFPA sensitivity measurements, which must be conducted at the end of the first year and every two years thereafter.

The user-friendly maintenance program shows the current state of each detector and other pertinent messages. Single detectors may be turned off temporarily from the control panel. Availability of maintenance features is dependent on the fire alarm system used.

## Accessories

**Detector mounting bases** have wiring terminals that are accessible from the "room-side" after mounting the base to the electrical box. The bases mount to North American 1-gang boxes and to 3½ inch or 4 inch octagon boxes, 1½ inches (38 mm) deep. They also mount to European BESA and 1-gang boxes with 60.3 mm fixing centers. The SIGA-SB4, SIGA-RB4, and SIGA-IB4 mount to North American 4 inch sq. electrical boxes in addition to the above boxes. They include the SIGA-TS4 Trim Skirt, which is used to cover the "mounting ears" on the base. The SIGA-AB4G mounts to a 4 inch square box only.

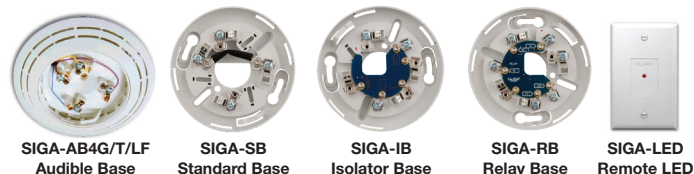

**Remote LED SIGA-LED** - The remote LED connects to the SIGA-SB or SIGA-SB4 Standard Base only. It features a North American size 1-gang plastic faceplate with a white finish and red alarm LED.

**SIGA-TS4 Trim Skirt** - Supplied with 4 inch bases, it can also be ordered separately to use with the other bases to help hide surface imperfections not covered by the smaller bases.

**Sounder Bases** - Signature Series sounder bases are designed for use where localized- or group-alarm signaling is required.

- **SIGA-AB4G** bases provide sounder capability to Signature Series to heat and smoke detectors. They are not intended for use with combination carbon monoxide detectors in Fire-plus-CO mode.
- **SIGA-AB4GT** bases provide sounder capability to Signature Series smoke and heat detectors, as well as carbon monoxide detectors when used with a SIGA-TCDR Temporal Pattern Generator.
- **SIGA-AB4G-LF** bases provide 520 Hz low frequency sounder capability to Signature Series smoke and heat detectors, as well as carbon monoxide detectors when used with a SIGA-TCDR Temporal Pattern Generator. The SIGA-AB4G-LF is suitable for applications requiring low frequency audible tones.




## Typical Wiring

The detector mounting bases accept #18 AWG (0.75mm<sup>2</sup>), #16 (1.0mm<sup>2</sup>), #14 AWG (1.5mm<sup>2</sup>), and #12 AWG (2.5mm<sup>2</sup>) wire sizes. Sizes #16 AWG (1.0mm<sup>2</sup>) and #18 AWG (0.75mm<sup>2</sup>) are preferred for ease of installation.

### Standard Detector Base, SIGA-SB, SIGA-SB4

This is the basic mounting base for the EDWARDS Signature Series detectors. The SIGA-LED Remote LED is supported by this base.

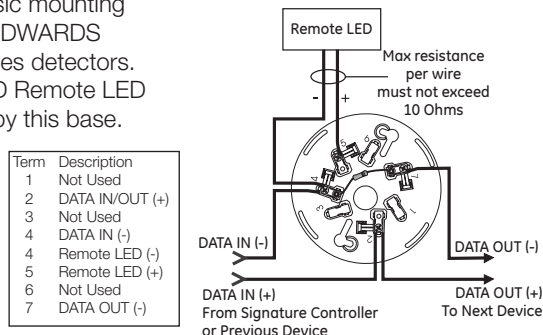


### Isolator Detector Base, SIGA-IB, SIGA-IB4

This base includes a built-in line fault isolator for use on Class A circuits. A detector must be installed for it to operate. The isolator base does not support the SIGA-LED Remote LED.

The isolator operates as follows:


- a short on the line causes all isolators to open within 23 msec.
- at 10 msec intervals, beginning on one side of the Class A circuit nearest the loop controller, the isolators close to provide the next isolator down the line with power.
- when the isolator next to the short closes, it reopens within 10 msec.

The process repeats beginning on the other side of the loop controller.

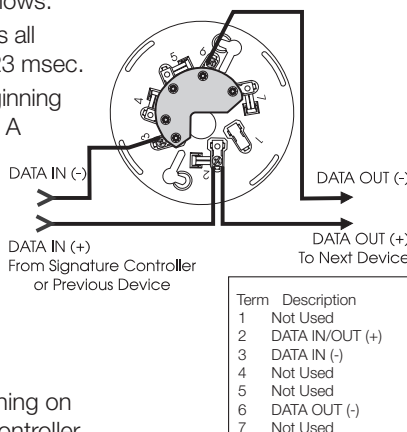


### Relay Detector Base, SIGA-RB, SIGA-RB4

This base includes a relay. Normally-Open or Normally-Closed operation is selected during installation. The dry contact is rated for 1 amp (pilot duty) @ 30 Vdc. The relay's position is supervised to avoid accidentally jarring it out of position. The SIGA-RB can be operated as a control relay if programmed to do so at the control panel. The relay base does not support the SIGA-LED Remote LED.

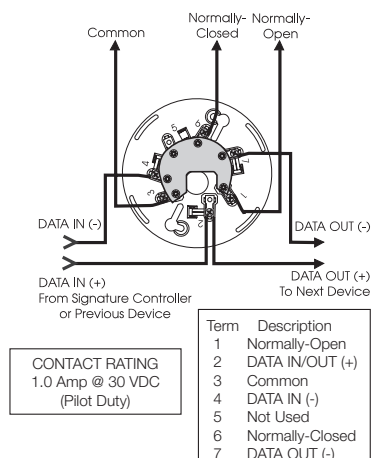

### Audible Sounder Bases, Fire Mode

AB4GT, AB4G, AB4G-LF sounder bases

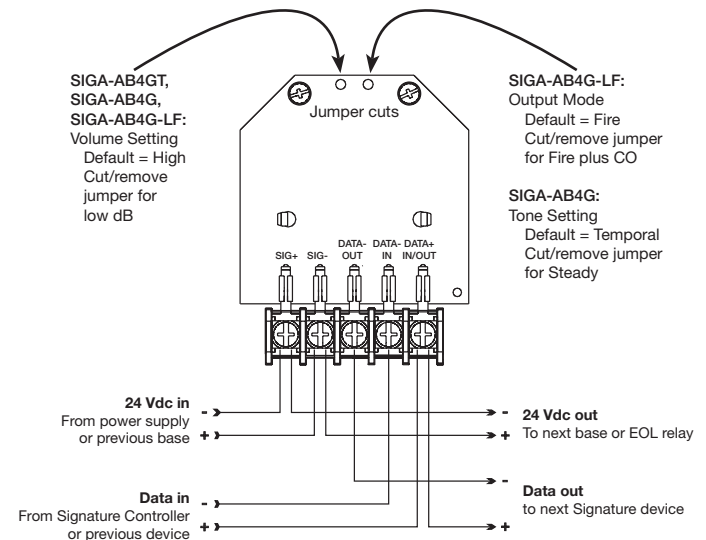

## Warnings & Cautions

- This detector does not operate without electrical power. As fires frequently cause power interruption, discuss further safeguards with the local fire protection specialist.
- This detector does not sense fires in areas where smoke cannot reach the detector. Smoke from fires in walls, roofs, or on the opposite side of closed doors may not reach the detector.
- In Canada, install according to CAN/ULC-S524 Standard for the Installation of Fire Alarm Systems, CSA C22.1 Canadian Electrical Code, and the local authority having jurisdiction.



LIFE SAFETY & INCIDENT MANAGEMENT


#### Contact us

Phone: 800-655-4497 (Option 4)  
Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)  
Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

© 2023 Carrier  
All rights reserved.

## Dimensions

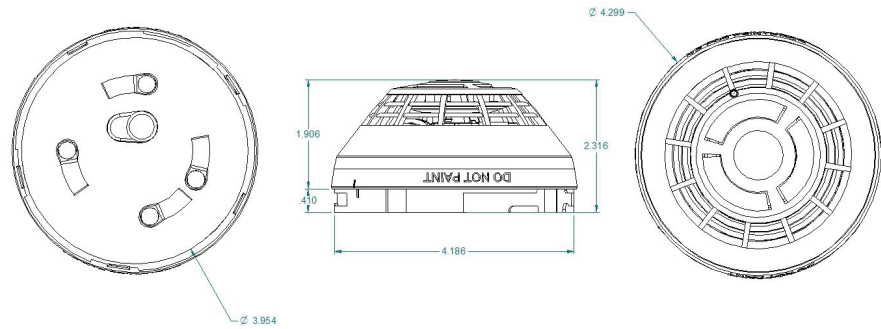

## Specifications

Operating voltage	15.20 to 19.95 VDC
Normal operating current	32 $\mu$ A
Alarm current	45 $\mu$ A
Smoke Sensitivity Range	UL/ULC: 0.5 to 4.36 %/ft. (1.6 to 13.6 %/m) obscuration
Vibration level	10 to 35 Hz, with an amplitude of 0.01 in.
Air velocity	0 to 4,000 ft./min (0 to 20 m/s)
Wall mounting	12 in. (305 mm) max. from ceiling
Compatible bases	See Ordering Information
Compatible detector testers	Testfire 1000, Testfire 2000
Operating environment	32 to 120°F (0 to 49°C), 0 to 93% RH, noncondensing
Construction	High Impact Engineering Polymer, White
Storage temperature	-4 to 140°F (-20 to 60°C)
Environmental compensation	Automatic
Agency Listings	CAN/ULC-S529, UL 268-7, UL 268A, CSFM

## Ordering Information

Catalog Number	Description	Ship Wt. lbs (kg)
SIGA-OSD	Intelligent Optical Smoke Detector	0.4 (0.16)
SIGA-OSD-NL	Intelligent Optical Smoke Detector, no visible logo	0.4 (0.16)

### Accessories

SIGA-SB	Detector Mounting Base - Standard	
SIGA-SB4	4-inch Detector Mounting Base c/w Trim Skirt	
SIGA-RB	Detector Mounting Base w/Relay	
SIGA-RB4	4-inch Detector Mounting Base w/Relay, c/w Trim Skirt	0.2 (.09)
SIGA-IB	Detector Mounting Base w/Fault Isolator	
SIGA-IB4	4-inch Detector Mounting Base w/ Fault Isolator, c/w Trim Skirt	
SIGA-LED	Remote Alarm LED (not for EN54 applications)	
SIGA-AB4G	Audible (Sounder) Base for Fire Detectors	0.3 (0.15)
SIGA-AB4G-LF	Low Frequency Audible (Sounder) Base for CO and/or Fire Detectors	0.3 (0.15)
SIGA-AB4GT	Audible (Sounder) Base for CO and/or Fire Detectors	0.3 (0.15)
SIGA-TS4	Trim Skirt (supplied with 4-inch bases)	0.1 (0.04)
SIGA-TS	Trim Skirt - (optional for non 4-inch bases)	0.1 (0.04)
SIGA-DMP	Detector Mounting Plate	3.0 (1.4)
SIGA-RTA	Detector Removal Tool	



LIFE SAFETY &amp; INCIDENT MANAGEMENT

# Intelligent Heat Detectors

SIGA-HRD, SIGA-HFD



## Overview

The Signature Series smoke detectors bring advanced sensing technology to a practical design that increases efficiency, saves installation time, cuts costs, and extends property protection capabilities. Continuous self-diagnostics ensure reliability over the long haul, while the latest thermister technology makes these detectors ideal wherever dependable heat detection is required.

**The SIGA-HRD** is an intelligent fixed-temperature/rate-of-rise fire detector. It monitors the temperature of the surrounding air and analyzes the data from the sensor to determine whether to initiate an alarm. The rate-of-rise heat function quickly detects a fast, flaming fire. The fixed-temperature heat function detects fire when the air temperature near the detector exceeds the alarm point.

**The SIGA-HFD** is an intelligent fixed-temperature heat detector that contains a fixed-temperature heat sensor rated at 135 °F (57.2 °C). It does not have a rate-of-rise function. The heat sensor monitors the temperature of the air in its surroundings and the detector analyzes the data to determine when the air temperature near the detector exceeds the device's alarm point.

## Standard Features

**Note:** Some features described here may not be supported by all control systems. Check your control panel's Installation and Operation Guide for details.

- Next-Generation Heat Sensing Technology
- 135°F (57°C) fixed-temperature alarm point (HRD and HFD)
- 15°F (8°C) per minute rate-of-rise alarm point (HRD)
- Uses existing wiring
- Automatic device mapping
- Sensor Markings Provide Easy Testing Identification
- Up To 250 Total Signature Devices Per Loop
- Non-volatile memory
- Electronic addressing
- Bicolor (green/red) status LED
- Standard, relay, fault isolator, and audible mounting bases
- 50-foot (15.2 meter) spacing

## Application


The SIGA-HRD combination fixed-temperature/rate-of-rise heat detector provides a 15 °F (9 °C) per minute rate-of-rise heat sensor for the detection of fast-developing fires, as well as a 135°F (57°C) fixed-temperature sensor for slow-building fires. The SIGA-HFD fixed-temperature detector provides a 135°F (57°C) fixed-temperature sensor for slow-building fires.

## Compatibility

Signature Series heat detectors are compatible only with the Signature Loop Controller.

## Installation

Signature Series detectors mount to North American 1-gang boxes, 3-1/2-inch or 4-inch octagon boxes, and to 4-inch-square electrical boxes 1-1/2 inches (38 mm) deep. They mount to European BESA and 1-gang boxes with 60.3 mm fixing centers. See mounting base installation and wiring for more information.



## Sensing and reporting technology

The microprocessor in each detector provides additional benefits - Self-diagnostics and History Log, Automatic Device Mapping, and Fast, Stable Communication.


**Self-diagnostics and History Log** - Each Signature Series detector constantly runs self-checks to provide important maintenance information. The results of the self-check are automatically updated and permanently stored in the detector's non-volatile memory.

**Automatic Device Mapping** - The loop controller learns where each device's serial number address is installed relative to other devices on the circuit. The mapping feature provides supervision of each device's installed location to prevent a detector from being reinstalled (after cleaning, etc.) in a different location from where it was originally.

**Fast, Stable Communication** - On-board intelligence means less information needs to be sent between the detector and the loop controller. Other than regular supervisory polling response, the detector only needs to communicate with the loop controller when it has something new to report.

## Accessories

**Detector mounting bases** have wiring terminals that are accessible from the "room-side" after mounting the base to the electrical box. The bases mount to North American 1-gang boxes and to 3½-inch or 4-inch octagon boxes, 1½ inches (38 mm) deep. They also mount to European BESA and 1-gang boxes with 60.3 mm fixing centers. The SIGA-SB4, SIGA-RB4, and SIGA-IB4 mount to North American 4-inch-square electrical boxes in addition to the above boxes. They include the SIGA-TS4 Trim Skirt, which is used to cover the "mounting ears" on the base. The SIGA-AB4G mounts to a 4-inch-square box only.

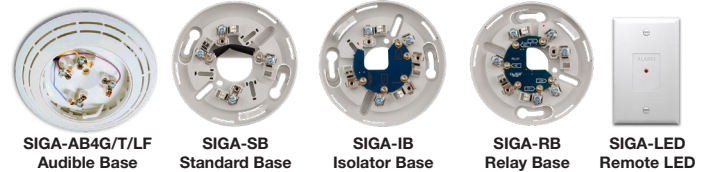

**Remote LED SIGA-LED** - The remote LED connects to the SIGA-SB or SIGA-SB4 Standard Base only. It features a North American size 1-gang plastic faceplate with a white finish and red alarm LED.

**SIGA-TS4 Trim Skirt** - Supplied with 4-inch bases, it can also be ordered separately to use with the other bases to help hide surface imperfections not covered by the smaller bases.

**Sounder Bases** - Signature Series sounder bases are designed for use where localized or group alarm signaling is required.

- **SIGA-AB4G** bases provide sounder capability to Signature Series heat and smoke detectors. They are not intended for use with combination carbon monoxide detectors in Fire-plus-CO mode.
- **SIGA-AB4GT** bases provide sounder capability to Signature Series smoke and heat detectors, as well as carbon monoxide detectors when used with a SIGA-TCDR Temporal Pattern Generator.
- **SIGA-AB4G-LF** bases provide 520 Hz low-frequency sounder capability to Signature Series smoke and heat detectors, as well as carbon monoxide detectors when used with a SIGA-TCDR Temporal Pattern Generator. The SIGA-AB4G-LF is suitable for applications requiring low-frequency audible tones.

## Warnings & Cautions


- This detector does not operate without electrical power. As fires frequently cause power interruption, discuss further safeguards with the local fire protection specialist.
- This detector does not sense fires in areas where heat cannot reach the detector. Heat from fires in walls, roofs, or on the opposite side of closed doors may not reach the detector.
- This heat detector by itself does not provide life safety protection. Use this detector with ionization and/or photoelectric smoke detectors.
- This detector does not detect oxygen levels, smoke, toxic gases, or flames. Use this device as part of a broad-based life safety program which includes a variety of information sources pertaining to heat and smoke levels, extinguishment systems, visual and audible devices, and other safety measures.
- Independent studies indicate that heat detectors should only be used when property protection alone is involved. Never rely on heat detectors as the sole means of fire protection.

## Typical Wiring

The detector mounting bases accept #18 AWG (0.75mm<sup>2</sup>), #16 AWG (1.0mm<sup>2</sup>), #14 AWG (1.5mm<sup>2</sup>), and #12 AWG (2.5mm<sup>2</sup>) wire sizes. Sizes #16 AWG (1.0mm<sup>2</sup>) and #18 AWG (0.75mm<sup>2</sup>) are preferred for ease of installation.

### Standard Detector Base, SIGA-SB, SIGA-SB4

This is the basic mounting base for the EDWARDS Signature Series detectors. The SIGA-LED Remote LED is supported by this base.

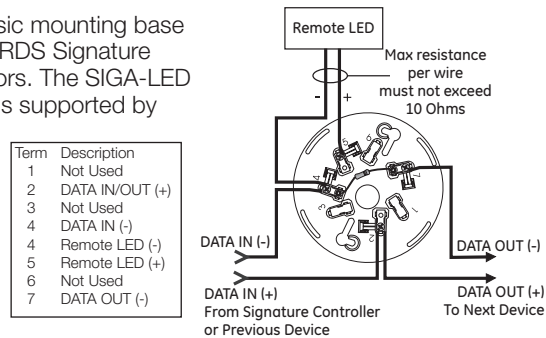


### Isolator Detector Base, SIGA-IB, SIGA-IB4

This base includes a built-in line fault isolator for use on Class A circuits. A detector must be installed for it to operate. The isolator base does not support the SIGA-LED Remote LED.

The isolator operates as follows:


- a short on the line causes all isolators to open within 23 msec
- at 10 msec intervals, beginning on one side of the Class A circuit nearest the loop controller, the isolators close to provide the next isolator down the line with power
- when the isolator next to the short closes, it reopens within 10 msec.

The process repeats beginning on the

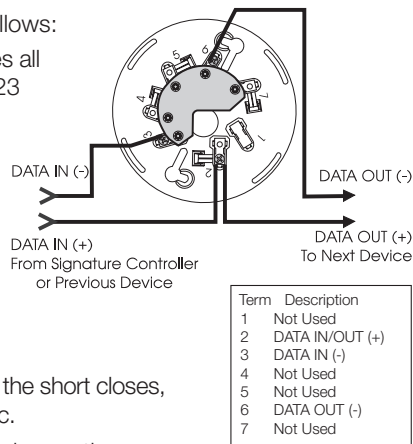


### Relay Detector Base, SIGA-RB, SIGA-RB4

This base includes a relay. Normally Open or Normally Closed operation is selected during installation. The dry contact is rated for 1 amp (pilot duty) @ 30 Vdc. The relay's position is supervised to avoid accidentally jarring it out of position. The SIGA-RB can be operated as a control relay if programmed to do so at the control panel. The relay base does not support the SIGA-LED Remote LED.

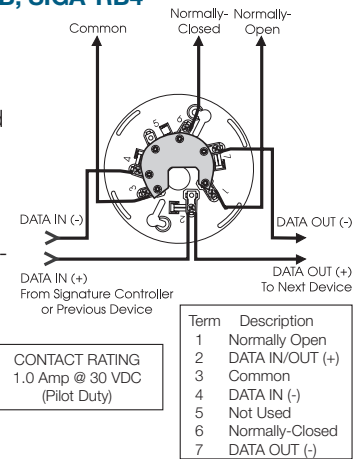

### Audible Sounder Bases, Fire Mode

AB4GT, AB4G, AB4G-LF sounder bases

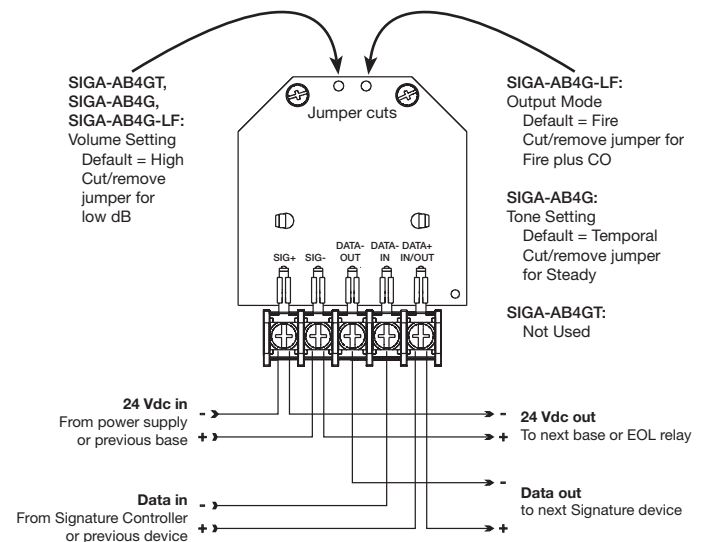





LIFE SAFETY & INCIDENT MANAGEMENT


#### Contact us

Phone: 800-655-4497 (Option 4)  
Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)  
Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

© 2023 Carrier  
All rights reserved.

## Dimensions

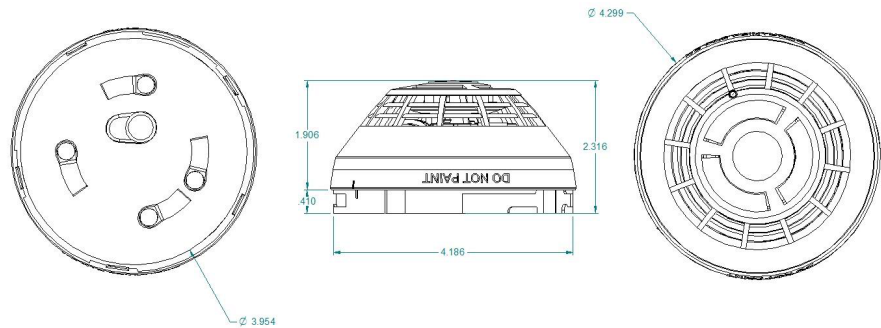

## Specifications

	FSIGA- HRD	SIGA-HFD
Operating voltage	15.20 to 19.95 VDC	
Normal operating current	51 $\mu$ A	
Alarm current	68 $\mu$ A	
Vibration level	10 to 35 Hz, with an amplitude of 0.01 in.	
Rate-of-rise rating	15°F/min (8°C/min)	NA
Fixed-temperature rating	135°F (57.2°C). Actual alarm point 129 to 141°F (53.9 to 60.6°C).	
Maximum spacing	50 ft. (15.2 m) centers	
Compatible bases	See Ordering Information	
Compatible detector testers	Testfire 1000, Testfire 2000	Testfire 2000
Operating environment	32 to 100°F (0 to 38°C), 0 to 93% RH, noncondensing	
Construction	High Impact Engineering Polymer, White	
Storage temperature	-4 to 140°F (-20 to 60°C)	
Agency Listings	CAN/ULC-S530, UL 521 FM	CAN/ULC-S530-M91, UL 521 CSFM

## Ordering Information

Catalog Number	Description	Ship Wt. lbs (kg)
SIGA-HRD	Intelligent fixed-temperature/Rate-of-rise heat detector	0.4 (0.16)
SIGA-HFD	Intelligent fixed-temperature heat detector	
SIGA-HRD-NL	Intelligent fixed-temperature/Rate-of-rise-heat detector, no visible logo	
SIGA-HFD-NL	Intelligent fixed-temperature heat detector, no visible logo	

Compatible Bases		
SIGA-SB	Detector Mounting Base - Standard	0.2 (.09)
SIGA-SB4	4-inch Detector Mounting Base c/w Trim Skirt	
SIGA-RB	Detector Mounting Base w/Relay	
SIGA-RB4	4-inch Detector Mounting Base w/Relay, c/w Trim Skirt	
SIGA-IB	Detector Mounting Base w/Fault Isolator	0.3 (0.15)
SIGA-IB4	4-inch Detector Mounting Base w/ Fault Isolator, c/w Trim Skirt	
SIGA-AB4G	Audible (Sunder) Base for Fire Detectors	
SIGA-AB4G-LF	Low Frequency Audible (Sunder) Base for CO and Fire Detectors	
SIGA-AB4GT	Audible (Sunder) Base for CO and Fire Detectors	0.1 (0.04)
SIGA-LED	Remote Alarm LED (not for EN54 applications)	
SIGA-TS4	Trim Skirt (supplied with 4-inch bases)	
SIGA-TS	Trim Skirt (optional for non 4-inch bases)	
SIGA-RTA	Detector Removal Tool	





BY SPACE AGE ELECTRONICS

## SRD ACE-11

### System Record Documents



Store important system documents in a secure location with a cabinet built specifically to meet the requirements of NFPA 72 7.7.2.4.

The number one goal at Space Age is to manufacture code compliant solutions, and the SRD is just that. NFPA 72 7.7.2.1 states, "With every new system, a documentation cabinet shall be installed at the system control unit or other approved location at the protected premises."

The SRD includes our innovative 8GB flash drive slide tab that allows the user to select a USB-C or Micro USB connector to access records electronically (See NFPA 72 7.5.6.7).



### FEATURES

- 18 gauge cold rolled steel construction with red powder coat and lettering
- Dimensions are 12" wide x 13" tall and 2 1/4" deep
- Stainless steel piano hinge
- Two key ring hooks to hold system keys
- Business card holder for key contacts
- Slide tab allows user to select USB-C or Micro USB connector to download from 8GB digital flash memory




### SPECIFICATIONS

The SRD System Record Documents Box shall be UL Listed, constructed of 18 gauge cold rolled steel. It shall have a powder coat finish. The cover shall be permanently screed with 1" high lettering "SYSTEM RECORD DOCUMENTS" with indelible ink. The access door shall be locked with a 3/4" barrel lock and there will be a 12" stainless steel piano hinge. The SRD will have a minimum of 8 gigabyte digital flash memory drive with a slide tab that allows user to select USB-C or Micro USB connector for uploading and downloading information. The enclosure will supply 4 mounting holes. Inside will accommodate standard 8 1/2" x 11" manuals and document records. A legend sheet will be attached to the door for system required documentation, key contacts and system information. The enclosure shall also provide 2 key ring holders with a location to mount standard business cards for key contact personnel.



## DIMENSIONS

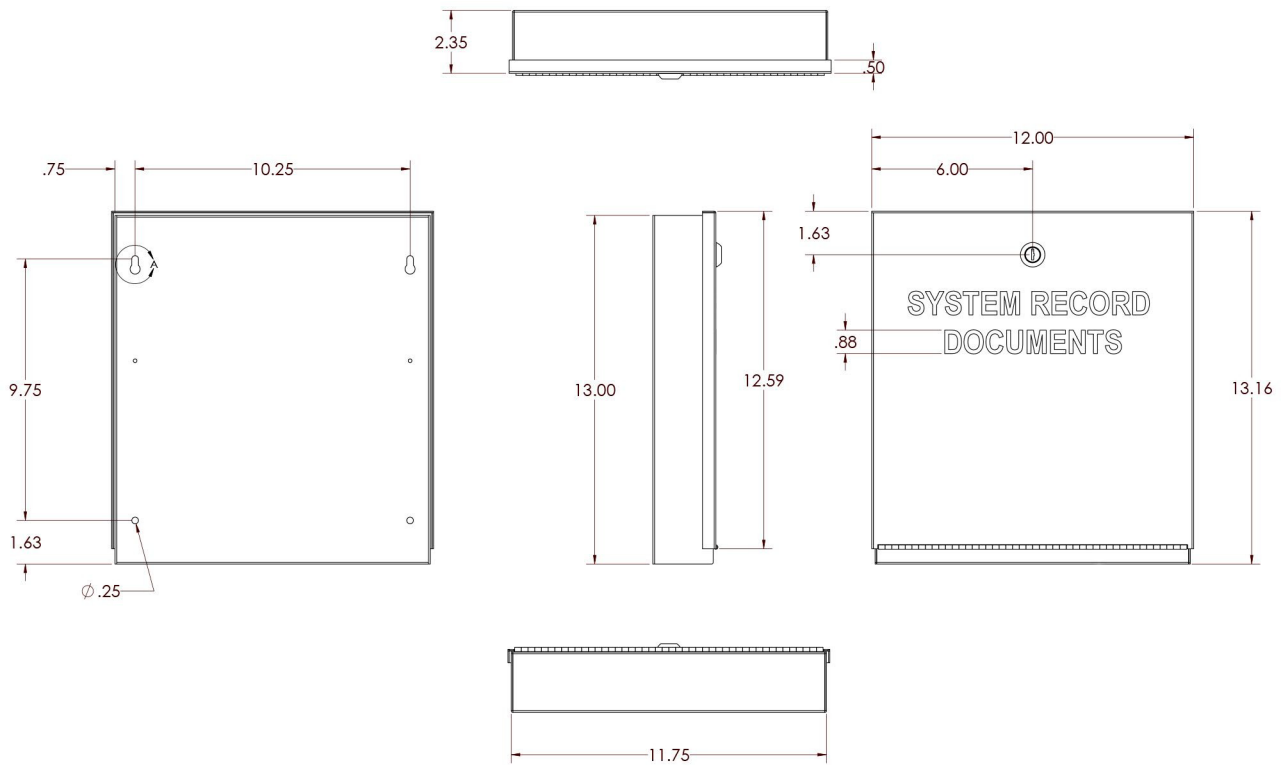

## ORDERING INFORMATION

**P/N# SSU00690**

System Record Documents Cabinet - **Red** - With Logo - Specify Key Lock Type On Order


**P/N# SSU01690**

System Record Documents Cabinet - **Black** - With Logo - Specify Key Lock Type On Order

**NO  
EXCUSES!**



# E120V-GT

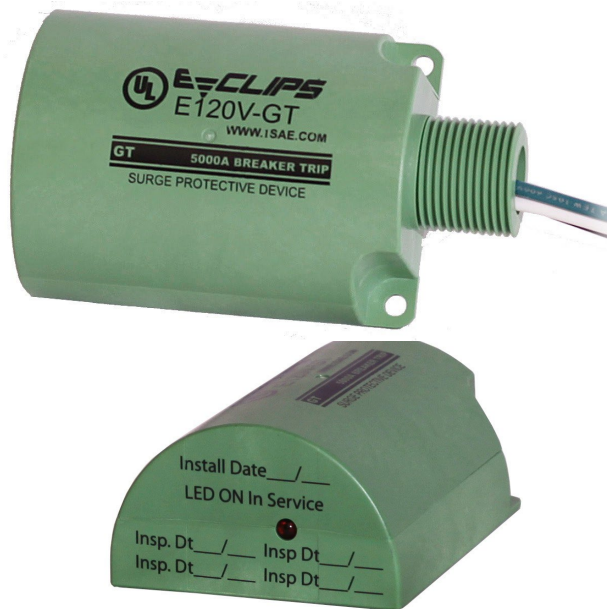

## Hybrid Surge Protection Device

Safety and performance is what Eclips is all about. While there are many varying criteria to be considered for surge protective devices (SPD), if the design engineer neglects the importance there can be serious implications for the client and equipment.

Every piece of electrical equipment is designed to operate at a specified nominal voltage. Typically equipment is designed to handle minor variations. However external sources such as lightning, motors, and short circuits cause wild and damaging variations.

Critical systems wired to your electrical service like Fire Alarm Control Panels (FACP), Mass Notification systems, amplifiers, motors, pumps (HVAC), power boosters and many more must require appropriate levels surge protection. The E120 series is an ideal choice for your 120V AC applications. because it has the robustness not only to absorb a spike, but to clamp long enough to trip the branch circuit breaker and still be functional for additional surges.

## Standard Features:

- Available in 120 VAC
- UL Listed 1449 3rd Edition Type 2 & 3  
2X to open circuit breaker @5000A
- Includes lockout & labels per  
NFPA 72 2013 10.6.5.2
- Surface or conduit mounting
- Diagnostic indicator light
- Self restoring
- 3 Wire device (18" length)

The number one cause of destruction, degradation and downtime of critical electrical equipment is from power surges and lightning strikes.

The E120V-GT device is an ideal solution to protect equipment. UL listed it maintains system integrity and protects against transients introduced into / onto electrical lines via poor atmospheric and utility conditions as well as internally generated inductive loads and transient TVSS. It reduces system downtime associated with power surges and lightning strikes. Prevents destruction and degradation of electrical components in the system. Fix your nuisance and non-billable service calls as a result of transients and poor power quality and show your customer you care about system integrity.



**ISO 9001  
REGISTERED  
COMPANY**



**RA**® - Uses UL Recognized Components



Space Age Electronics, Inc.  
www.ISAE.com  
**800.486.1723** Toll Free  
508.485.0966 Local  
508.485.4740 Fax

## Specifications:

All 120volt AC equipment will have Transient Voltage Surge Suppression (TVSS) protection manufactured by Space Age Electronics, Inc., part number E120V-GT ECLIPS Brand. The Unit shall be UL listed to standard 1449 rev 3. The unit will be labeled clearly with indelible ink. Mounting can be conduit mounted with a  $\frac{3}{4}$ " pipe threaded nipple to secure in panel, or surface panel mount with 2 external mounting holes. The unit shall have thermal fuses to protect against fire in short circuit conditions. The E120V will have 18" long, 14 gauge wires (3x) ground wire must be green. The enclosure will be a non dielectric material UL94 QMFZ2/8 grade material providing UV protection. The unit shall provide visual indication (LED) that unit is protecting and functioning.

### Specifications - Performance:

Short Circuit Current Rating (SCCR) :	5KA
Maximum Surge Current (8x20 $\mu$ s) :	25,000 Amps
Enclosure Material :	UL94 QMFZ2/8 (green)
Energy Dissipation Joules :	500 Joules
VPR=700(L – N) 700 (L – G) 600 (N – G)	
Capacitance:	< 2,000 pf
Clamping Response Time :	< 5 nanoseconds
Current :	Non-Load Bearing
Max Operating Voltage (MCOV):	140 volts AC, 50/60 Hz
Clamping Voltage :	230 Volts RMS
Design :	Thermally Fused Hybrid
Operation Indicators:	LED
Survivability :	UL rated X2 @5000 Amps to open Series external circuit breaker

### Specifications - Operating:

Service Voltage :	120 Single Phase
Circuits Protected :	L-N L-G N-G
Connection Type :	Hardwired
Installation Configuration :	Parallel


### Specifications - Physical:

Weight :	5.2oz
Dimensions :	2.75" x 1.55" x 4" long
Operation Temperature :	-40 to +85° C


### Specifications - Compliance:

UL Listed :	1449 Third Edition -VZCA
File Number :	E319370 Vol. 1 Sec. 1

### Mechanical Drawing:

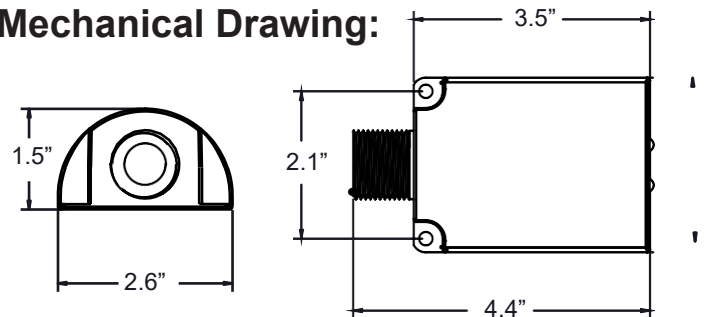

### Wiring Diagram:

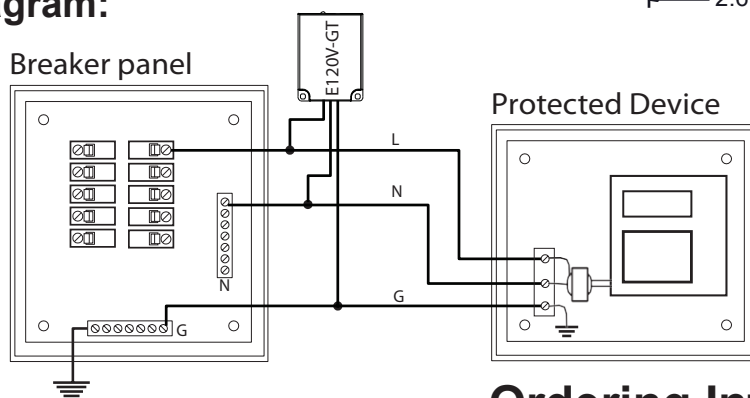

### Ordering Information:

Part #	Description
E120V-GT	120V Hybrid Surge Protective Device
ELOCK-FA	Circuit Lockout Kit



Space Age Electronics, Inc.  
www.ISAE.com  
800.486.1723 Toll Free  
508.485.0966 Local  
508.485.4740 Fax

No Excuses, Just Solutions!

This document is subject to change without notice, see doc # ED0479 for legal disclaimer

LT10629



Rev.5

2/2

## PAM SERIES MULTI-VOLTAGE RELAY MODULES

### SSU-PAM-1

Relay 10 Amp SPDT, 24Vac/dc or 120Vac

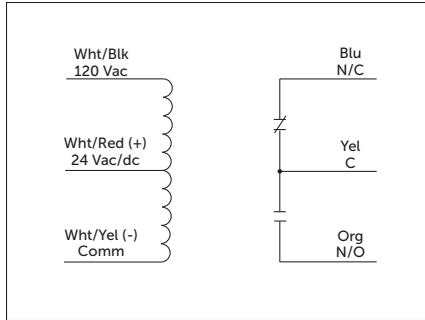

UUKL LISTED



### SPECIFICATIONS

**# Relays & Contact Type:** One (1) SPDT Continuous Duty Coil  
**Expected Relay Life:** 10 million cycles minimum mechanical  
**Operating Temperature:** -30 to 104° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Operate Time:** 8ms  
**Relay Status:** LED On = Activated  
**Dimensions:** 1.5"H x 1.2"W x 1.2"D  
**Origin:** Made of US and non-US parts  
**Wires:** 12", 600V Rated  
**Gold Flash:** No  
**Override Switch:** No  
**Polarized:** For use on supervised circuits

**Contact Ratings:**  
 10 Amp General Use @ 120 Vac  
 10 Amp Resistive @ 30 Vdc (N/O)  
 7 Amp Resistive @ 30 Vdc (N/C)  
 1/2 HP @ 120 Vac  
 C300 Pilot Duty



**Coil Current:**  
 20 mA @ 24 Vdc  
 50 mA @ 24 Vac, 50-60 Hz  
 30 mA @ 120 Vac, 50-60 Hz

**Coil Voltage Input:**  
 24 Vac/dc ; 120 Vac ; 50-60 Hz  
 Drop Out = 10 Vac / 10 Vdc  
 Pull In = 16 Vac / 18 Vdc

**Approvals:**  
 UL Listed, UL864, UUKL  
 C-UL Canada, CE, RoHS  
 California State Fire Marshal

### SSU-PAM-2

Relay 10 Amp SPDT, 9-40 Vdc

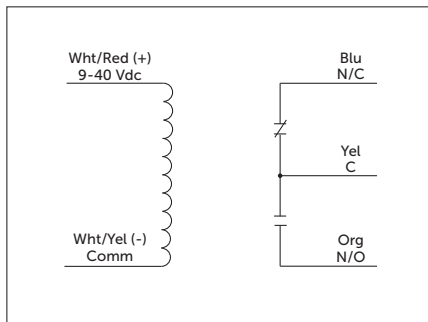

UUKL LISTED



### SPECIFICATIONS

**# Relays & Contact Type:** One (1) SPDT Continuous Duty Coil  
**Expected Relay Life:** 10 million cycles minimum mechanical  
**Operating Temperature:** -30 to 104° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Operate Time:** 20ms  
**Relay Status:** LED On = Activated  
**Dimensions:** 1.5"H x 1.2"W x 1.2"D  
**Origin:** Made of US and non-US parts  
**Wires:** 12", 600V Rated  
**Gold Flash:** No  
**Override Switch:** No  
**Polarized:** For use on supervised circuits

**Contact Ratings:**  
 10 Amp Resistive @ 120 Vac  
 10 Amp Resistive @ 28 Vdc  
 1/3 HP @ 120 Vac (N/O)  
 480 VA Pilot Duty @ 120 Vac

**Coil Current:**  
 20 mA @ 9-40 Vdc



**Coil Voltage Input:**  
 9-40 Vdc ; 50-60 Hz  
 Drop Out = 2 Vdc  
 Pull In = 9 Vdc

**Approvals:**  
 UL Listed, UL864, UUKL  
 C-UL Canada, CE, RoHS  
 California State Fire Marshal



## SSU-PAM-4

Relay 10 Amp SPDT, 9-40 Vdc

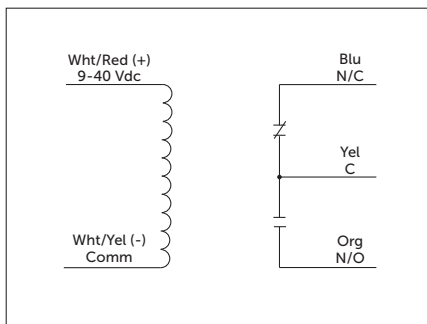

UUKL LISTED



### SPECIFICATIONS

**# Relays & Contact Type:** One (1) SPDT Continuous Duty Coil 10  
**Expected Relay Life:** million cycles minimum mechanical  
**Operating Temperature:** -30 to 104° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Operate Time:** 20ms  
**Relay Status:** LED On = Activated  
**Dimensions:** 1.5"H x 1.2"W x 1.2"D  
**Origin:** Made of US and non-US parts  
**Wires:** 12", 600V Rated  
**Gold Flash:** No  
**Override Switch:** No  
**Polarized:** For use on supervised circuits

**Contact Ratings:**  
 10 Amp Resistive @ 120 Vac  
 10 Amp Resistive @ 28 Vdc  
 1/3 HP @ 120 Vac (N/O)  
 480 VA Pilot Duty @ 120 Vac



**Coil Current:**  
 20 mA @ 9-40 Vdc

**Coil Voltage Input:**  
 9-40 Vdc ; 50-60 Hz  
 Drop Out = 2 Vdc  
 Pull In = 9 Vdc

**Approvals:**  
 UL Listed, UL864, UUKL  
 C-UL Canada, CE, RoHS  
 California State Fire Marshal

## SSU-PAM-EOLR

Relay 10 Amp SPST, 9-40 Vdc

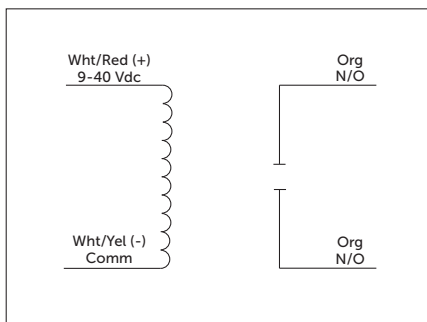

UUKL LISTED



### SPECIFICATIONS

**# Relays & Contact Type:** One (1) SPST Continuous Duty Coil  
**Expected Relay Life:** 10 million cycles minimum mechanical  
**Operating Temperature:** -30 to 104° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Operate Time:** 20ms  
**Relay Status:** LED On = Activated  
**Dimensions:** 1.5"H x 1.2"W x 1.2"D  
**Origin:** Made of US and non-US parts  
**Wires:** 12", 600V Rated  
**Gold Flash:** No  
**Override Switch:** No  
**Polarized:** For use on supervised circuits

**Contact Ratings:**  
 10 Amp Resistive @ 120 Vac  
 10 Amp Resistive @ 28 Vdc  
 1/3 HP @ 120 Vac (N/O)  
 480 VA Pilot Duty @ 120 Vac



**Coil Current:**  
 20 mA @ 9-40 Vdc

**Coil Voltage Input:**  
 9-40 Vdc ; 50-60 Hz  
 Drop Out = 2 Vdc  
 Pull In = 9 Vdc

**Approvals:**  
 UL Listed, UL864, UUKL  
 C-UL Canada, CE, RoHS  
 California State Fire Marshal



SSU-PAM-SD
Relay 10 Amp SPDT, 20-32 Vdc

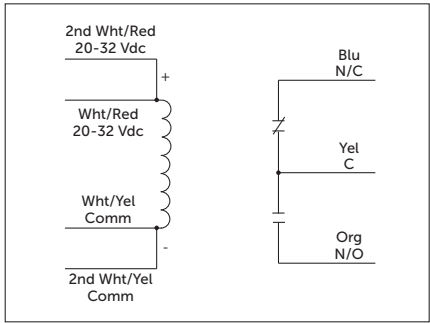

SPECIFICATIONS

Table with 3 columns: Relays & Contact Type, Contact Ratings, and Coil Voltage Input. It lists various specifications such as relay life, operating temperature, contact ratings, and approvals.

SSU-PAM SERIES SELECTION GUIDE

MODEL#	COIL VOLTAGE	COIL CURRENT	CONTACT CONFIGURATION	WIRE LEADS
SSU-PAM-1	24 Vac 24 Vdc 120 Vac	20mA @ 24 Vdc 50mA @ 24 Vac 30mA @ 120 Vac	SPDT	6 "Flying" Leads
SSU-PAM-2	9-40 Vdc	20mA	SPDT	5 "Flying" Leads
SSU-PAM-4	9-40 Vdc	20mA	SPDT	5 "Flying" Leads
SSU-PAM-EOLR	9-40 Vdc	20mA	SPST	4 "Flying" Leads
SSU-PAM-SD	20-32 Vdc	21mA	SPDT	7 "Flying" Leads



LIFE SAFETY &amp; INCIDENT MANAGEMENT

# Outdoor Rated Horns and Horn-Strobes

## Genesis WG4 Series



### Overview

Genesis WG4 Series horns and horn-strobe appliances are among the most versatile emergency appliances of their kind. Rated for indoor or outdoor use, they are suitable for a wide range of wet and harsh environments with a listed operating temperature range of as low as -40 °F to as high as 151 °F (-40 °C to 66 °C).

Field-configurable light and sound output settings add to their on-site flexibility, while optional FIRE markings make them ideal for fire alarm applications.

These appliances are suitable for indoor and outdoor applications, and are ideal for challenging conditions such as parking garages and process areas. They are available for mounting on the ceiling or the wall, and thanks to an ingenious optional full backplane sealing gasket, can be installed to recessed (in-the-pour/block) electrical boxes. WG4 notification appliances also mount to suitable surface boxes. Optional color-matched trim skirts provide a clean, finished appearance. All appliance wiring is accomplished room-side for easy installation.

WG4 Series appliances feature an efficient and powerful piezo sounder. The multi-candela strobes are available with clear lenses in two output categories – standard and high-output. They are precision-timed to meet UL 1971 synchronization standards, and field-configurable for one of four candela intensities. Candela settings are viewable even after installation through an innovative sealed viewport display.

### Standard Features

- Outdoor and indoor rated
- Low-profile design
- Wall or ceiling mount
- Room-side wiring accepts 18 to 12 AWG (0.75 to 2.5 mm<sup>2</sup>)
- Wide operating temperature range
- Field-selectable settings
- Fully-compatible with Genesis synchronization protocols
- Standard and high-output strobe intensities
- Horn only and horn-strobe options

## Application

### Horns

Genesis horn output reaches as high as 97 dBA in accordance with UL 464 (104 dBA in accordance with ULC-S525) and features a unique frequency tone that results in excellent sound penetration and an unmistakable warning of danger. Horns may be configured for either coded or non-coded notification circuits. They can also be set for low dB output with a jumper cut that reduces horn output by about 5 dB.

The suggested sound pressure level for each notification zone used with alarm notification appliances is at least 15 dB above the average ambient sound level, or 5 dB above the maximum sound level having a duration of at least 60 seconds, whichever is greater, measured 5 feet (1.5 m) above the floor. The average ambient sound level is A-weighted (fast response) sound pressure measured over a 24-hour period.

Doubling the distance from the notification appliance to the ear will theoretically result in a 6 dB reduction of the received sound pressure level. The actual effect depends on the acoustic properties of materials in the space. A 3 dBA difference represents a barely noticeable change in volume.

### Strobe Application


Genesis clear-lensed strobes are UL 1971-listed for use indoors as wall- or ceiling-mounted public-mode notification appliances for the hearing impaired, and UL 1638-listed for outdoor applications. Prevailing codes require strobes to be used where ambient noise conditions exceed specified levels, where occupants use hearing protection, and in areas of public accommodation.

Visible appliance synchronization is required to avoid causing issues with people who have Photosensitive Epilepsy (PSE). Notification appliance synchronization is also generally required when more than two strobe appliances are in the same field of view from any one location. All Genesis strobes meet UL synchronization requirements (within 10 milliseconds over a two-hour period) when used with a synchronization source.

**WARNING:** These devices will not operate without electrical power. As fires frequently cause power interruptions, we suggest you discuss further safeguards with your local fire protection specialist.

EDWARDS recommends that these devices always be installed in accordance with the latest recognized edition of national and local codes. Refer to the appropriate codes and standards for mounting height information.

## Installation and Mounting

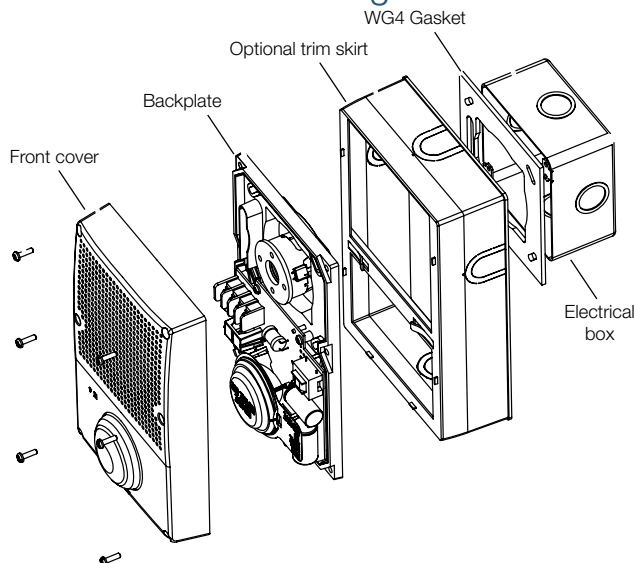


WG4 notification appliances are rated for outdoor use and are suitable for indoor or outdoor applications on walls or ceilings. For surface-mounting in outdoor or wet applications, appliances must be mounted to a 449 or 74347U electrical box. In dry conditions, they are compatible with standard 4-inch square by 1½-inch deep electrical boxes. When using the optional WG4WTS or WG4RTS trim skirt, a 449 or 4-inch square by 2-1/8" deep box must be used.

The Genesis WG4 horn and horn-strobe may be wall- or ceiling-mounted, and may be placed in one of four positions: strobe above, strobe below, and strobe to either side. The shallow depth of Genesis devices leaves room behind the appliance for extra wiring.

### Field Configuration

**Horn pattern:** Audible output for WG4 horns and horn-strobes is factory set to sound in a three-pulse temporal pattern. Units may be configured for use with coded systems by cutting a JP1 on the circuit board. This results in a steady output that can be turned on and off (coded) as the system applies and removes power to the notification circuit. A Genesis Signal Master is required when horn-strobe models are configured for coded systems.

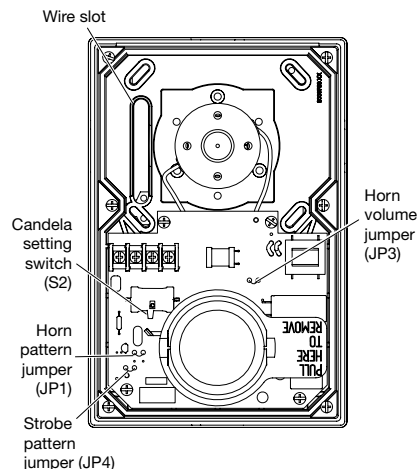


**Horn output:** Horns and horn-strobes are factory set for high dB output. Low dB output may be selected by cutting a jumper on the circuit board. This reduces the output by about 5 dB.

**Strobe pattern:** Genesis WG4 horn-strobes are factory set for use as UL 1971 compliant notification appliances for public mode operation. These notification appliances may be configured for temporal flash by cutting JP4 on the circuit board. This battery-saving feature is intended for private mode signaling only.

**Strobe output:** Genesis WG4 horn-strobes may be set for one of four output intensities. The output setting is changed by simply opening the device and sliding the switch to the desired setting. The device does not have to be removed to change the output setting. The setting remains visible after the cover is closed through a small window on the front of the device.

## Wiring

Field wiring is connected to WG4 notification appliances with terminals that accommodate #18 to #12 AWG (0.75 mm<sup>2</sup> to 2.5 mm<sup>2</sup>) wiring.

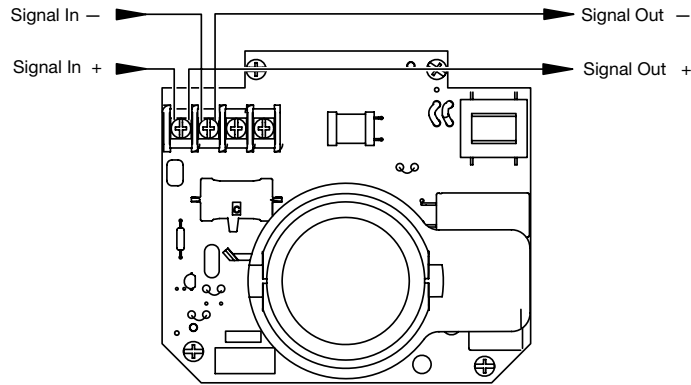

—/+ designations indicate the signal polarity required to activate the device.

## Specifications

### Horns and Horn-strobes

Operating voltage	24 VDC, 24 VFWR nominal
Dimensions (W × H × D)	5.6 × 8.5 × 1.4 in. (142 × 216 × 36 mm)
Horn tone	3.2 kHz
Wire size	12 to 18 AWG (0.75 to 2.50 mm <sup>2</sup> )
Compatible electrical box	
Outdoor	Model 449 or 74347U
Indoor	4 in. square by 1.5 in. deep box
Operating environment	
Temperature	-40 to 151°F (-40 to 66°C)
Relative humidity	0 to 95% noncondensing

## Compatible Synchronization Sources

### Horn-strobes

Auto-sync Output Modules	SIGA-CC1S, SIGA-CC2A, SIGA-MCC1S, SIGA-MCC2A
Genesis Signal Master	G1M-RM
Booster & Auxiliary Power Supplies	APS6A, APS10A, BPS6A, BPS10A
Control Panels with Genesis Synchronization built-in	FireShield Plus, iO Series, EST3X

## Sound Output

### Horns and Horn-strobes (dBA)

Volume Setting	16V		24V		33V	
	UL 464	ULC-S525	UL 464	ULC-S525	UL 464	ULC-S525
Continuous High	89.7	94.0	94.7	99.6	97.4	102.9
Continuous Low	85.4	92.8	89.5	97.2	92.5	98.6
Temporal High	84.2	96.5	90.5	100.5	93.5	104.2
Temporal Low	81.7	90.3	85.4	94.2	88.1	97.0


dBA = Decibels, A-weighted.

UL 464: Sound level output measured in a reverberant room at 10 ft. (3.05m).

CAN/ULC-S525: Sound level output measured in an anechoic room at 10ft (3.05m).

## Light Output

### Horizontal Plot

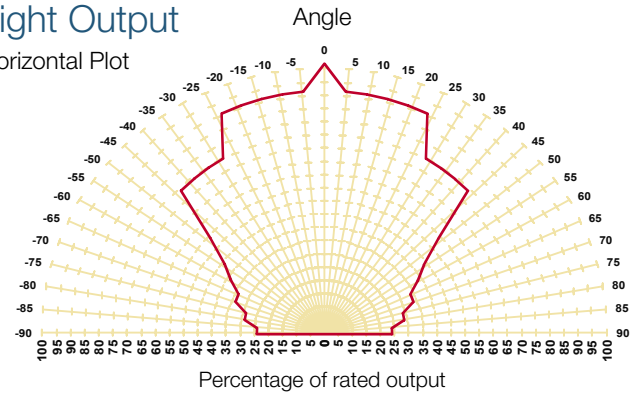

### Standard Candela Horn-strobes

Standard/rating		Strobe Switch Position			
		D	C	B	A
UL 1971	Indoor	15 cd	29 cd	70 cd	87 cd
UL 1638	Outdoor @ -35°C	6 cd	12 cd	28 cd	35 cd
CAN/ULC-S526	Outdoor @ -40°C	1 cd	3 cd	8 cd	10 cd

### High Candela Horn-strobes

Standard/rating		Strobe Switch Position			
		D	C	B	A
UL 1971	Indoor	102cd	123cd	147cd	161cd
UL 1638	Outdoor @ -35°C	41cd	50 cd	60 cd	65 cd
CAN/ULC-S526	Outdoor @ -40°C	11 cd	14 cd	17 cd	18 cd

## Operating Current

(UL specifies current ratings at 16 volts)

### Standard Candela Horn-strobes in RMS (mA), continuous

Input Voltage	Strobe Switch Position			
	D	C	B	A
16 VDC	127	168	297	351
16 VFWR	218	239	393	422
24 VDC	107	130	210	238
24 VFWR	190	222	325	356

### High Candela Horn-strobes in RMS (mA), continuous

Input Voltage	Strobe Switch Position			
	D	C	B	A
16 VDC	342	408	517	526
16 VFWR	447	502	614	679
24 VDC	240	271	327	365
24 VFWR	390	400	486	540

### Horn only models (mA)

Setting	16V RMS, continuous		24V, typical	
	High dB	Low dB	High dB	Low dB
VDC	69.1	41.2	49.0	32.3
VFWR	135	91.3	99.1	67.1



LIFE SAFETY & INCIDENT MANAGEMENT

#### Contact us

Phone: 800-655-4497 (Option 4)

Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)

Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)

8985 Town Center Pkwy  
Bradenton, FL 34202

© 2020 Carrier  
All rights reserved.

## Ordering Information



Model	Housing	Marking	Strobe Output	Ship Wt.
WG4RF-HVMC	Red	FIRE	Selectable standard candela output	1.5 lbs. (0.68 kg)
WG4WF-HVMC	White			
WG4RN-HVMC	Red	None		
WG4WN-HVMC	White			
WG4RF-HVMHC	Red	FIRE	Selectable high candela output	
WG4WF-HVMHC	White			
WG4RN-HVMHC	Red	None		
WG4WN-HVMHC	White			
WG4RF-H	Red	FIRE	Horn Only	
WG4WF-H	White			
WG4RN-H	Red	None		
WG4WN-H	White			

#### Accessories

WG4WTS	Surface Skirt for Genesis WG4 appliance family, white.
WG4RTS	Surface Skirt for Genesis WG4 appliance family, red.
WG4GSKT	Full Body Mounting Gasket for smooth surfaces, WG4 appliance family
74347U	Surface mount box, outdoor rated, red
449	Surface mount box, outdoor rated, gray






## PS-12120 12 Volt 12.0 AH

Rechargeable Sealed Lead Acid Battery



We've Got The Power.™

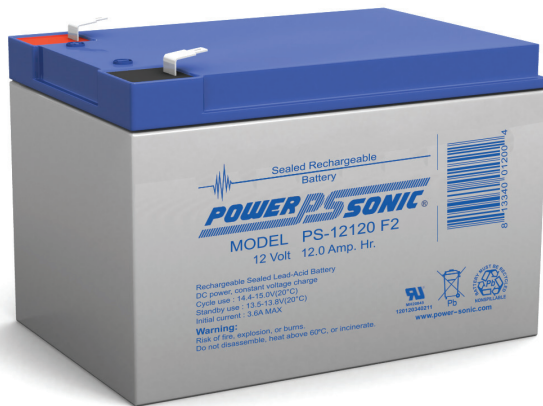


### Features



- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

### Terminals: (mm)


- F2 - Quick disconnect tabs, 0.250" x 0.032"  
- Mate with AMP. INC FASTON "250" series



- NB - Tin plated brass posts with nut & bolt fasteners



### Physical Dimensions: in (mm)

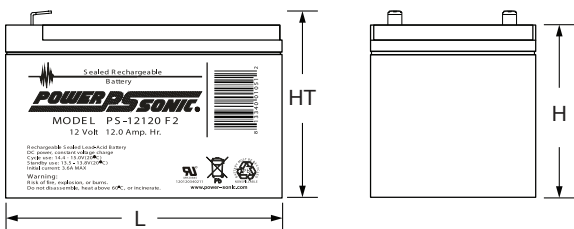

F2: L: 5.94 (151) W: 3.86 (98) H: 3.66 (93) HT: 3.86 (98)

NB: L: 5.94 (151) W: 3.86 (98) H: 3.66 (93) HT: 4.09 (104)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

### Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

#### Nominal Capacity

20-hr.	(600mA to 10.50 volts)	12.0 AH
10-hr.	(1.1A to 10.50 volts)	11.0 AH
5-hr.	(2.1A to 10.20 volts)	10.5 AH
1-hr.	(7.25A to 9.00 volts)	7.25 AH
15-min.	(21.5A to 9.00 volts)	5.38 AH

**Approximate Weight** ..... 7.92 lbs. (3.59 kg)

**Energy Density (20-hr. rate)** ..... 1.69 W-h/in<sup>3</sup> (103.41 W-h/l)

**Specific Energy (20-hr. rate)** ..... 18.18 W-h/lb (40.08 W-h/kg)

**Internal Resistance (approx.)** ..... 20 milliohms

**Max Discharge Current (7 Min.)** ..... 36.0 amperes

**Max Short-Duration Discharge Current (10 Sec.)** .. 120.0 amperes

#### Shelf Life (% of nominal capacity at 68°F (20°C))

1 Month	97%
3 Months	91%
6 Months	83%

#### Operating Temperature Range

Charge ..... -4°F (-20°C) to 122°F (50°C)


Discharge ..... -40°F (-40°C) to 140°F (60°C)

**Case** ..... ABS Plastic


**Power-Sonic Chargers** ..... PSC-122000A, 122000A-C



### Shelf Life & Storage

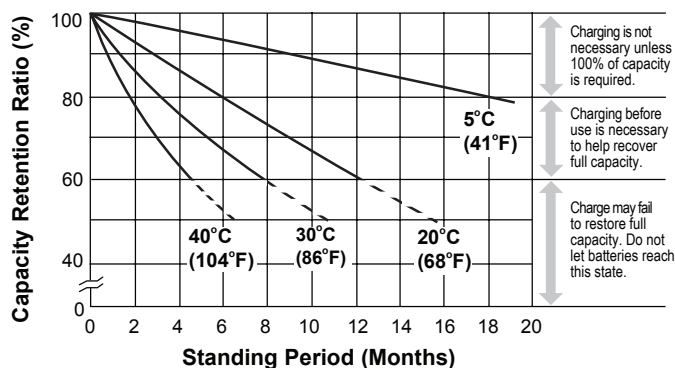

### Discharge Time vs. Discharge Current

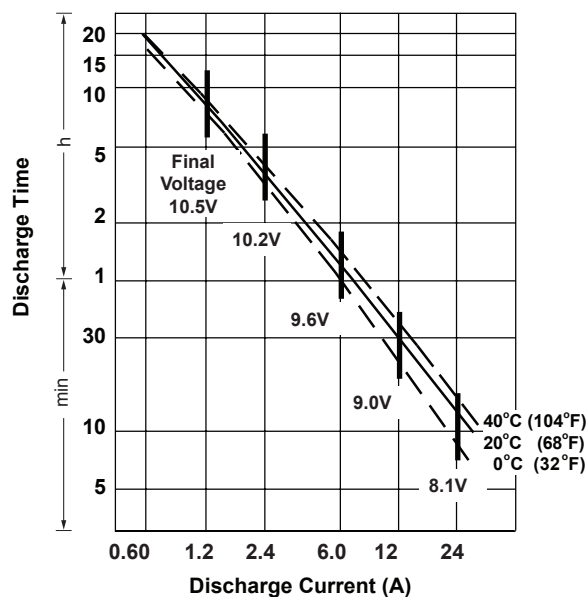

### Charging

Cycle Applications: Limit initial current to 3.6A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 120mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

### Chargers

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

### Contact Information

DOMESTIC SALES  
Tel: +1-619-661-2020  
Fax: +1-619-661-3650  
national-sales@power-sonic.com

CUSTOMER SERVICE  
Tel: +1-619-661-2030  
Fax: +1-619-661-3648  
customer-service@power-sonic.com

TECHNICAL SUPPORT  
Tel: +1-619-661-2020  
Fax: +1-619-661-3648  
support@power-sonic.com

INTERNATIONAL SALES  
Tel: +1-650-364-5001  
Fax: +1-650-366-3662  
international-sales@power-sonic.com

CORPORATE OFFICE • 7550 Panasonic Way • San Diego, CA 92154 • USA • Tel: +1-619-661-2020 • Fax: +1-619-661-3650

### Discharge Characteristics

