

**Submittal for:**  
**Fire Alarm System**

**Mt. Pisgah FWB Church  
Activities Center  
145 Prospect Church Road  
Erwin, NC 28339**

Albemarle Alarm & Electronics  
P.O. Box 1337  
Albemarle, NC 28002  
Tel: (704) 983-1300  
Darrel Furr  
NC License # SP.FA/LV.18041

**Mt. Pisgah FWB Church  
Erwin, NC**

**Fire Alarm System  
Equipment List**

Quantity	Model	Description
1	ES-50X	Fire Alarm Control Panel w/DACT
1	ANN-80	LCD Remote Annunciator
1	SLE-MAX2-FIRE	Fire Alarm Cellular Communicator
1	PSN-64	NAC Power Supply, 6 Amps
1	SD365	Photoelectric Smoke Sensor w/Base
5	BG-12LX	Manual Pull Station
8	MMF-300	Monitor Module
16	P2WLED	LED Horn Strobe, Wall Mount, White
3	SWLED	LED Strobe, Wall Mount, White
1	DTW-120HLOK	120VAC Panel Surge Protector
2	IM-1272F1	12V Sealed Lead Acid Battery, 7 Amp Hours
2	IM-12120	12V Sealed Lead Acid Battery, 12 Amp Hours

# ES-50X Series

## Intelligent Addressable Fire Alarm Control Panels



### Addressable Fire Alarm Control Panels

#### General

The **ES-50X**, **ES-50XC**, **ES-50XI**, and **ES-50XP** are the latest intelligent addressable fire alarm control panel (FACPs) from Fire•Lite Alarms and are direct replacement for the MS-9050UD. The ES-50X Series support up to 50 addressable devices in any combination of detectors or modules. With an extensive list of powerful features, the ES-50X Series programs just like Fire•Lite's other addressable panels, yet fits into applications previously served only by conventional panels.

The ES-50X and ES-50XC feature a pre-installed IPOTS-COM, a dual technology (POTS and IP) communicator. The POTS transmits system status (alarms, troubles, AC loss, etc.) to a Central Station via the public switched telephone network. The IP communicator's internet monitoring capability sends alarm signals over the Internet saving the monthly cost of two dedicated business telephone lines. Although not required, the secondary telephone line may be retained providing backup communication over the public switched telephone line. Optional cellular reporting is available using an HW-TG7F Series Communicators or the CLSS Pathway.

The ES-50XP features an integrated CLSS Pathway Pro Communicator, a dual-SIM (AT&T/ Verizon) 5G LTE-M Communicator with optional IP connection. The CLSS Pathway Pro transmits system status (alarms, troubles, AC loss, etc.) to the Central Station using LTE CAT-M1 networks, serving as a bridge between the fire system and the CLSS Cloud. The IP communicator's Internet monitoring capability sends alarm signals over the Internet, meeting requirements for backup communication. As an integrated communicator, the CLSS Pathway Pro, typically, can transmit data faster than dial capture methods.

Remote and local programming of the control panel is possible using the FS-Tools Upload/Download utility. Programming databases can be uploaded/downloaded via the panel's USB port (and USB cable) or via an ethernet connection using the IPOTS-COM communicator (*ES-50X and EX-50XC only*). The USB port also allows for the download or upload of the entire program, history file, walk-test data, current status and system voltages by means of a USB flash drive.

The power supply and all electronics are contained on a circuit board supported on a new quick install chassis and housed in a metal cabinet. Available accessories include local and remote upload/download software, remote annunciators, and reverse polarity/city box transmitter (4XTMF).

#### Features

- Listed to UL Standard 864, 10th edition
- Pre-installed IPOTS-COM Ethernet IP and POTS (Plain Old Telephone Service) Central Station Communicator (*ES-50X and EX-50XC only*)
- Optional Cellular Central Station Communicators over AlarmNet® (*ES-50X and EX-50XC only*)
- Integrated CLSS Pathway Pro Communicator; dual SIM AT&T/Verizon networks with LTE-CAT-M1 5G technology (*EX-50XP only*)
- Cloud monitoring using Honeywell's Connected Life Safety Services (CLSS) Cloud solutions software (*EX-50XP only*)
- Compatible with SWIFT® wireless devices
- Auto-programming (learn mode) reduces installation time. Reports two devices set to the same address
- Two independently programmable, built-in, Class A or Class B NAC circuits
- Selectable strobe synchronization for System Sensor, Wheelock, and Gentex devices
- Notification Appliance Circuit End of Line resistor matching



- Four programmable function keys for ease of maintenance
- Two programmable relays and one fixed trouble relay
- Built-in Programmer
- Integral 80-character LCD display with backlighting
- Real-time clock/calendar with automatic daylight savings control
- History file with 1,000 event capacity
- Addressable sounder base
- Multi-criteria detector (smoke, heat, CO) with programmable response
- Control module delay timer
- Automatic detector sensitivity testing (NFPA 72 compliant)
- Automatic device type-code verification
- Point trouble identification
- Waterflow selection per module point
- Alarm verification selection per detector point
- Maintenance alert warns when smoke detector dust accumulation is excessive
- One-person audible or silent walktest with walktest log & printout
- System alarm verification selection per detector point
- PAS (Positive Alarm Sequence) and Pre-signal per point (NFPA 72 compliant)
- Up to 16 ANN-BUS annunciators- 8 per each ANN-Bus
- Remote Acknowledge, Alarm Silence, Reset and Drill via addressable modules or remote annunciator
- Upload/Download of program and data via USB with optional FS-Tools Programming Utility

#### SLC (DCL) COMMUNICATION LOOP

- Supports LiteSpeed™ and CLIP protocols
- SLC (DCL) operates up to 10,000 ft. (3,000 m) in LiteSpeed mode with twisted, unshielded wire
- Single addressable SLC (DCL) loop which meets NFPA Class B and Class A requirements
- 50 addressable device capacity (any combination of addressable detectors and modules)
- Compatible with Fire•Lite's addressable devices (refer to the *SLC Wiring Manual*)

## NOTIFICATION APPLIANCE CIRCUITS (NACS)

- Two independently programmable output circuits. Circuits can be configured for Class A or Class B wiring.
  - Class B
  - Class A
- Silence Inhibit and Autosilence timer options
- Continuous, March Time, Temporal, or California code for main circuit board NACs with two-stage capability
- Selectable strobe synchronization per NAC
- 2.5 A special application, 250mA regulated, total power for NACs

**NOTE:** Maximum or total 24VDC system power shared between all NAC circuits and the ANN-BUS is 2.7 A

## PROGRAMMING AND SOFTWARE

- Autoprogramming (learn mode) reduces installation time
- Custom English labels (per point) may be manually entered or selected from an internal library file
- Two programmable Form-C relay outputs
- 50 software zones
- Continuous fire protection during online programming
- Program Check automatically catches common errors not linked to any zone or input point
- **OFFLINE PROGRAMMING:** Create the entire program in your office using FS-Tools, a Windows®-based software package, and upload/download system programming locally. Offline programming requires an ethernet connection. FS-Tools is available on [www.firelite.com](http://www.firelite.com).

## User interface

### LED INDICATORS

- |                           |   |
|---------------------------|---|
| • Fire Alarm (red)        | • CO Alarm (yellow)                         |
| • AC Power (green)        | • Supervisory (yellow)                      |
| • Trouble (yellow)        | • Ground fault (yellow)                     |
| • Battery fault (yellow)  | • Disabled (yellow)                         |
| • Maintenance (yellow)    | • Communication (yellow)                    |
| • Alarm Silenced (yellow) | • F1-F4 Programmable Function Keys (yellow) |

### KEYPAD

- |                                       |                           |
|---------------------------------------|---------------------------|
| • 16 key alpha-numeric pad            | • Acknowledge             |
| • Alarm Silence                       | • Drill (Manual Evacuate) |
| • Four (4) programmable function keys | • Reset (lamp test)       |

## Product Line Information

**ES-50X:** Addressable Fire Alarm Control Panel with one SLC loop. Includes main circuit board with display, pre-installed IPOTS-COM communicator, chassis with transformer, backbox with door, plastic bag containing screws, cables, key, etc.

**ES-50XC:** Addressable Fire Alarm Control Panel with one DCL loop. Includes main circuit board with display, pre-installed IPOTS-COM communicator, chassis with transformer, dress panel, backbox with door, plastic bag containing screws, cables, key, etc.

**ES-50XI:** Addressable Fire Alarm Control Panel with one SLC loop. Includes main circuit board with display, chassis with transformer, dress panel, backbox with door, plastic bag containing screws, cables, key, etc.

**ES-50XP:** Addressable Fire Alarm Control Panel with one SLC loop. Includes main circuit board with display, pre-installed CLSS Pathway Pro communicator, chassis with transformer, dress panel, backbox with door, plastic bag containing screws, cables, key, etc.

**FS-Tools:** Programming software for Windows®-based PC computer. Available for download at [www.firelite.com](http://www.firelite.com).

**IPOTS-COM:** Dual technology (POTS and IP) communicator. (replacement board) (*ES-50X and EX-50XC only*)

**HW-AV-LTE-M:** Optional CLSS Pathway

**HW-TG7FS-A/HW-TG7FS-V:** CLSS-Enabled 5G /LTE-M Commercial Fire Alarm Communicators for AT&T® and Verizon®

**HW-TG7FE-A/HW-TG7FE-V:** CLSS-Enabled 5G/LTE-M Dual Path Commercial Fire Alarm Communicators for AT&T and Verizon

**HW-TG7FP-A/HW-TG7FP-A:** CLSS-Enabled 5G/LTE-M Sole Path Commercial Fire Alarm Communicators for AT&T and Verizon

**DP-ES-R:** Optional dress panel.

**TR-CE:** Optional trim ring for semi-flush mounting.

**BB-2F:** Optional cabinet for one or two modules.

**BB-6F:** Optional cabinet for up to six modules mounted on CHS-6 chassis.

**BB-26:** Battery backbox, holds up to two 25 AH batteries & CHG-75.

**BB-55F:** Battery box, houses two 55 AH batteries

**CHS-6:** Chassis, mounts up to six multi-modules in a BB-6F cabinet.

**CHG-75:** Battery charger for lead-acid batteries with a rating of 25 to 75 AH.

**CHG-120F:** Remote battery charging system for lead-acid batteries with a rating of 55 to 120 AH. Requires additional BB-55F for mounting.

**NOTE:** CHG-120F or CHG-75 required for batteries larger than 18AH.

**BAT Series:** Batteries, see data sheet DF-52397.

**PRN Series:** UL listed compatible event printer.

## OPTIONAL MODULES

**4XTMF Reverse Polarity Transmitter Module:** Provides a supervised output for local energy municipal box transmitter, alarm and trouble. Includes a disable switch and disable trouble LED.0

## COMPATIBLE ANNUNCIATORS

**ANN-80:** Remote, red LCD annunciator mimics the information displayed on the FACP LCD display. Recommended wire type is un-shielded.

**ANN-100:** Remote LCD annunciator mimics the information displayed on the FACP LCD display. Recommended wire type is un-shielded. For use in FM applications only.

**ANN-I/O:** LED Driver Module provides connections to a user supplied graphic annunciator. (See DF-52430.)

**ANN-LED:** Annunciator Module provides three LEDs for each zone: Alarm, Trouble, and Supervisory. Ships with red enclosure. (See DF-60241.)

**ANN-RLED:** Provides alarm (red) indicators for up to 30 input zones or addressable points. (See DF-60241.)

**ANN-RLY:** Relay Module provides 10 programmable Form-C relays. Can be mounted inside the cabinet. (See DF-52431.)

**ANN-S/PG:** Serial/Parallel Printer Gateway module provides a connection for a serial or parallel printer. (See DF-52429.)

## ADDRESSABLE DEVICES

*All feature a polling LED and rotary switches for addressing.*

**SD365(A):** Addressable low-profile photoelectric smoke detector. LiteSpeed only.

**SD365(A)-IV:** Addressable low-profile photoelectric smoke detector. Ivory. LiteSpeed and CLIP mode.

**SD365T(A):** Addressable low-profile photoelectric smoke detector with thermal sensor. LiteSpeed only.

**SD365T(A)-IV:** Addressable low-profile photoelectric smoke detector with thermal sensor. Ivory. LiteSpeed and CLIP mode.

**SD365R(A):** Remote test capable addressable photoelectric smoke detector for use with DNR(W)(A) duct detector housing. LiteSpeed only.

**SD365R(A)-IV:** Remote test capable addressable photoelectric smoke detector for use with DNR(W)(A) duct detector housing. Ivory. LiteSpeed and CLIP mode.

**SD365CO:** Addressable, low-profile device that provides fire, heat, and carbon monoxide (CO) detection.

**SD365CO-IV:** Addressable, low-profile device that provides fire, heat, and carbon monoxide (CO) detection. Ivory. LiteSpeed and CLIP mode.

**H365(A):** Low-profile 135°F fixed thermal sensor. LiteSpeed only.

**H365(A)-IV:** Low-profile 135°F fixed thermal sensor. Ivory. LiteSpeed and CLIP mode.

**H365R(A):** Low-profile, intelligent, rate-of-rise thermal sensor. LiteSpeed only.

**H365R(A)-IV:** Low-profile, intelligent, rate-of-rise thermal sensor. Ivory. LiteSpeed and CLIP mode.

**H365HT(A):** Low-profile intelligent 190°F/88°C fixed thermal sensor. LiteSpeed only.

**H365HT(A)-IV:** Low-profile intelligent 190°F/88°C fixed thermal sensor. Ivory. LiteSpeed and CLIP mode.

**D365PL(A):** Low-flow non-relay duct-detector housing; includes SD365R(A).

#### *Legacy Devices*

**CP355(A)**Addressable, intelligent smoke detector that incorporates an ionization sensing chamber.

**SD355(A):** Addressable low-profile photoelectric smoke detector.

**SD355T(A):** Addressable low-profile photoelectric smoke detector with thermal sensor.

**SD355R(A):** Remote test capable addressable photoelectric smoke detector for use with DNR(W)(A) duct detector housing.

**SD355CO:** Addressable, low-profile device that provides fire, heat, and carbon monoxide (CO) detection.

**H355(A):** Fast-response, low-profile heat detector.

**H355R(A):** Fast-response, low-profile heat detector with rate-of-rise option.

**H355HT(A):** Fast-response, low-profile heat detector that activates at 190°F/88°C.

**AD355(A):** Low-profile, intelligent, “Adapt” multi-sensor detector (B350LP base included).

**B200S(A)(-WH)(-IV):** Programmable, addressable sounder base.

**B200SR(A)(-WH)(-IV):** Addressable sounder base.

**B200S-LF(-WH)(-IV):** Programmable, addressable sounder base, low-frequency.

**B200SR-LF(-WH)(-IV):** Addressable sounder base, low-frequency.

**BEAM355:** Intelligent beam smoke detector.

**BEAM355S:** Intelligent beam smoke detector with integral sensitivity test.

**D355PL(A):** InnovairFlex low-flow non-relay duct-detector housing; includes SD355R(A).

**DNR(A):** InnovairFlex™ low-flow non-relay duct-detector housing. (Order SD355R(A)/SD365R(A) separately.)

**DNRW:** InnovairFlex low-flow non-relay duct-detector housing, with NEMA-4 rating. Watertight. (Order SD355R(A)/SD365R(A) separately.)

#### *Addressable Modules*

**MMF-300(A):** Addressable Monitor Module for one zone of normally-open dry-contact initiating devices. Mounts in standard 4.0" (10.16 cm.) box. Includes plastic cover plate and end-of-line resistor. Module may be configured for either a Class B or Class A IDC.

**MDF-300(A):** Dual Monitor Module. Same as MMF-300(A) except it provides two Class B-only IDCs.

**MMF-301(A):** Miniature version of MMF-300(A). Excludes LED and Class A option. Connects with wire pigtails. May mount in device back-box.

**MMF-302(A):** Similar to MMF-300(A). Addressable Monitor Module for one zone of conventional two-wire detectors. Requires resettable 24 VDC power. Refer to the *Device Compatibility Document* for listed compatible devices and quantity limitation.

**CMF-300(A):** Addressable Control Module for one Class B or Class A zone of supervised polarized Notification Appliances. Mounts directly to a 4.0" (10.16 cm.) electrical box. NAC option requires external 24 VDC to power notification appliances.

**CRF-300(A):** Addressable relay module containing two isolated sets of Form-C contacts, which operate as a DPDT switch. Mounts directly to a 4.0" (10.16 cm.) box, surface mount using the SMB500.

**BG-12LX:** Addressable manual pull station with interface module mounted inside.

**I300(A):** This module isolates the SLC (DCL) loop from short circuit conditions (required for Class A or Class X operation).

**ISO-6(A):** Six-fault isolator module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**SMB500:** Used to mount all modules except MMF-301 and M301.

**MMF-300-10(A):** Ten-input monitor module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**MMF-302-6(A):** Six-zone interface module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**CMF-300-6(A):** Six-circuit supervised control module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**CRF-300-6(A):** Six-relay control module (Form-C relays). Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

#### *SWIFT Wireless Devices*

**W-GATE(A):** LiteSpeed Wireless Gateway

**W-SD355(A):** LiteSpeed intelligent, wireless photo detector.

**W-H355R(A):** LiteSpeed intelligent wireless rate of rise (135°) heat detector.

**W-SD355T(A):** intelligent wireless photo/heat detector.

**W-H355(A):** LiteSpeed intelligent wireless fixed-temperature (135°) heat detector.

**W-MMF(A):** LiteSpeed Intelligent wireless monitor module.

**W-CRF(A):** LiteSpeed Intelligent wireless relay module.

**W-BG12LX(A):** LiteSpeed Intelligent wireless pull station.

**WAV-RL, WAV-WL, WAV-CRL, WAV-CWL:** LiteSpeed Intelligent AV bases.

**W-USB:** Wireless USB radio/antenna dongle that plugs into the USB port of a PC running SWIFT Tools.

**SWIFT Tools:** Programming and diagnostic utility for the Wireless Gateway and devices. Available for download from [www.firelite.com](http://www.firelite.com).

**NOTE:** For more information on Compatible Addressable Devices for use with the ES-50X, see the following data sheets (document numbers): SD365 Series (DF-61010), H365 Series (DF-61011), AD355 (DF-52386), BG-12LX (DF-52013), CMF-300-6 (DF-52365), CRF-300-6 (DF-52374), CMF/CRF Series (DF-52130), CP355 (DF-52383), H355 Series (DF-52385), I300 (DF-52389), ISO-6 (DF-60485), MMF-300 Series/MDF-300 (DF-52121), MMF-300-10 (DF-52347), MMF-302-6 (DF-52356), SD355/SD355T (DF-52384), and SLC Wiring Manual (51309).

**NOTE:** Legacy 300 Series detection devices such as the CP300/CP350, SD300(T)/SD350(T) and older modules such as the M300, M301, M302, C304, and BG-10LX are not compatible with LiteSpeed polling. If the SLC (DCL) contains one of these devices, polling must be set for standard CLIP protocol. Please consult factory for further information on previous 300 Series devices.

#### **ADDRESSABLE DEVICE ACCESSORIES**

**End-of-Line Resistor Assembly (R-47K and R-3.9K):** The 47k ohm assembly supervises the MMF-300(A), MDF-300(A), MMF-301(A), and CMF-300(A) module circuits. The 3.9k ohm assembly supervises the MMF-302(A) module circuit. These resistors are included with each module.

**Power Supervision Relay:** Supervises the power to 4-wire smoke detectors and notification appliances.

#### **Wiring Requirements**

While shielded wire is not required, it is recommended that all SLC/DCL wiring be twisted-pair to minimize the effects of electrical interference. Refer to the panel manual for wiring details.



# SYSTEM SPECIFICATIONS

## System Capacity

- Intelligent Signaling Line Circuits (Digital Comm. Loops)..... 1
- Addressable device capacity ..... 50
- Programmable software zones..... 50
- Annunciators..... 16

## Electrical Specifications

**AC Power:** Operates in either 120 or 240 VAC, 50/60 Hz, 3.25 A, auto-sensing- no switch required. Wire size: minimum 14 AWG (2.00 mm<sup>2</sup>) with 600 V insulation. Non-power-limited, supervised.

**Battery:** Two 12 V 18 AH lead-acid batteries. Battery Charger Capacity: 7-18 AH (ES-50X cabinet holds maximum of two 18 AH batteries.)

**Communication Loop:** Supervised and power-limited.

**Notification Appliance Circuits:** Terminal Block provides connections for two NACs, Class B or Class A. Special Application power. Power-limited, supervised circuitry. Maximum signaling current per circuit: 2.5 amps special application, 250mA regulated. End-of-Line Resistor: 4.7k ohm, ½ watt (P/N 71252 UL listed) for Class B NAC; system capable of 1.9 kΩ - 22 kΩ ELR range. Refer to the *Fire•Lite Device Compatibility Document* for listed compatible devices.

**Two Programmable Relays and One Fixed Trouble Relay:** Contact rating: 2.0 A @ 30 VDC (resistive), 0.5 A @ 30 VAC (resistive). Form-C relays, non-power-limited, non-supervised.

## Cabinet Specifications

**Door:** 19.26" (48.92 cm.) high x 16.82" (42.73 cm.) wide x 0.72" (1.82 cm.) deep. **Backbox:** 19.00" (48.26 cm.) high x 16.65" (42.29 cm.) wide x 5.25" (13.34 cm.) deep. **Trim Ring (TR-CE):** 22.00" (55.88 cm.) high x 19.65" (49.91 cm.) wide.

## Shipping Specifications

**Weight:** 26.9 lbs. (12.20 kg.) **Dimensions:** 20.00" (50.80 cm.) high x 22.5" (57.15 cm.) wide x 8.5" (21.59 cm.) deep.

## Temperature and Humidity Ranges

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

## NFPA Standards

The ES-50X complies with the following NFPA 72 Fire Alarm Systems requirements:

- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **AUXILIARY** (Automatic, Manual and Waterflow) (requires 4XTMF).
- **REMOTE STATION** (Automatic, Manual and Waterflow) (Where a DACT is not accepted, the alarm, trouble and supervisory relays may be connected to UL 864 listed transmitters. For reverse polarity signaling of alarm and trouble, 4XTMF is required.)
- **PROPRIETARY** (Automatic, Manual and Waterflow).
- **CENTRAL STATION** (Automatic, Manual and Waterflow, and Sprinkler Supervised).
- **OT, PSDN** (Other Technologies, Packet-switched Data Network)
- **IBC 2012, IBC 2009, IBC 2006, IBC 2003, IBC 2000** (Seismic).
- **CBC 2007** (Seismic)

## Agency Listings and Approvals

The listings and approvals below apply to the basic ES-50X control panel. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult Fire•Lite for latest listing status.

### ES-50X, ES-50XC, ES-50XI

- **UL:** S624
- **FM approved**
- **CSFM:** 7165-0075:0500, 7165-0075:0511
- **FDNY:** COA #2021-TMCOAP-009618-AMD


### ES-50XP

- **ETL:** 5017286
- **CSFM:** 7165-0075:0511

**InnovairFlex™** and **LiteSpeed™** are trademarks and **AlarmNet®**, **Fire-Lite®**, **Alarms**, **SWIFT®**, and **System Sensor®** are registered trademarks of Honeywell International Inc. AT&T® is a registered trademark of the AT&T Properties, L.P. Verizon® is a registered trademark of Verizon Trademark Services LLC. Microsoft® and Windows® are registered trademarks of the Microsoft Corporation. ©2023 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
www.firelite.com



Country of Origin: USA



# ANN-80

## 80-Character LCD Serial Annunciator



### Annunciators

### General

The ANN-80 annunciator is a compact, backlit, 80-character LCD fire annunciator that mimics the Fire Alarm Control Panel (FACP) display. It provides system status indicators for AC Power, Alarm, Trouble, Supervisory, and Alarm Silenced conditions. The ANN-80 and the FACP communicate over a two-wire serial interface employing the ANN-BUS communication format. Connected devices are powered, via two additional wires, by either the host FACP or a remote UL-listed, filtered power supply. ANN-80 is red; for white, order ANN-80-W.

The ANN-80 displays English-language text of system point information including device type, zone, independent point alarm, trouble or supervisory status, as well as any custom alpha labels programmed into the control panel. It includes control switches for remote control of critical system functions. (A keyswitch prevents unauthorized operation of the control switches.)

Up to eight ANN-80s may be connected to the ANN-BUS of each FACP. No programming is required, which saves time during system commissioning.



### Features

- Listed to UL Standard 864, 9th Edition.
- Backlit 80-character LCD display (20 characters x 4 lines).
- Mimics all display information from the host panel.
- Control switches for System Acknowledge, Signal Silence, Drill, and Reset.
- Control switches can be independently enabled or disabled at the FACP.
- Keyswitch enables/disables control switches and mechanically locks annunciator enclosure
- Keyswitch can be enabled or disabled at the FACP.
- Enclosure supervised for tamper.
- System status LEDs for AC Power, Alarm, Trouble, Supervisory, and Alarm Silence.
- Local sounder can be enabled or disabled at the FACP.
- ANN-80 connects to the ANN-BUS terminal on the FACP and requires minimal panel programming.
- Displays device type identifiers, individual point alarm, trouble, supervisory, zone, and custom alpha labels.
- Time-and date display field.
- Surface mount directly to wall or to single, double, or 4" square electrical box.
- Semi-flush mount to single, double, or 4" square electrical box. Use ANN-SB80KIT for angled view mounting.
- Can be remotely located up to 6,000 feet (1,800 m) from the panel.
- Backlight turns off during AC loss to conserve battery power but will turn back on if an alarm condition occurs.
- May be powered by 24 VDC from the host FACP or by remote power supply (requires 24 VDC).
- Up to eight ANN-80s can be connected on the ANN-BUS.

### Controls and Indicators

- AC Power
- Alarm
- Trouble

- Supervisory
- Alarm Silenced

### Specifications

- **Operating voltage range:** 18 VDC to 28 VDC.
- **Current consumption @ 24 VDC nominal** (filtered and non-resettable): 40 mA maximum.
- **Ambient temperature:** 32°F to 120°F (0°C to 49°C).
- **Relative humidity:** 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F).
- 5.375" (13.65 cm.) high x 6.875" (17.46 cm.) wide x 1.375" (3.49 cm.) deep.
- For use indoors in a dry location.
- All connections are power-limited and supervised.

### Agency Listings and Approvals

The listings and approvals below apply to the ANN-80. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S2424
- **FM approved**
- **CSFM:** 7120-0075:211
- **MEA:** 442-06-E

### The ANN-BUS

#### POWERING THE DEVICES ON THE ANN-BUS FROM AUXILIARY POWER SUPPLY

The ANN-BUS can be powered by an auxiliary power supply when the maximum number of ANN-BUS devices exceeds the ANN-BUS power requirements. See the FACP manual for more information.

## ANN-BUS DEVICE ADDRESSING

Each ANN-BUS device requires a unique address (ID Number) in order to communicate with the FACP. A maximum of 8 devices can be connected to the FACP ANN-BUS communication circuit. See the FACP manual for more information.

## WIRE REQUIREMENTS: COMMUNICATIONS CIRCUIT

The ANN-80 connects to the FACP ANN-BUS communications circuit. To determine the type of wire and the maximum wiring distance that can be used with FACP ANN-BUS accessory modules, it is necessary to calculate the total worst case current draw for all modules on a single 4-conductor bus. The total worst case current draw is calculated by adding the individual worst case currents for each module.

**NOTE:** For total worst case current draw on a single ANN-BUS refer to appropriate FACP manual.

After calculating the total worst case current draw, the following table specifies the maximum distance the modules can be located from the FACP on a single wire run. The table ensures 6.0 volts of line drop maximum. In general, the wire length is limited by resistance, but for heavier wire gauges, capacitance is the limiting factor.

These cases are marked in the chart with an asterisk (\*). Maximum length can never be more than 6,000 feet (1,800 m), regardless of gauge used. See table below.


## WIRE REQUIREMENTS: POWER CIRCUIT

- 14 to 18 AWG (0.75 - 2.08 mm<sup>2</sup>) wire for 24 VDC power circuit is acceptable. Power wire distance limitation is set by 1.2 volt maximum line drop from source to end of circuit.
- All connections are power-limited and supervised.
- A maximum of eight ANN-80 modules may be connected to this circuit.

Communication Pair Wiring Distance: FACP to Last ANN-BUS Module				
Total Worst Case Current Draw (amps)	22 Gauge	18 Gauge	16 Gauge	14 Gauge
0.100	1,852 ft.	4,688 ft.	* 6,000 ft.	*6,000 ft.
0.200	926 ft.	2,344 ft.	3,731 ft.	5,906 ft.
0.300	617 ft.	1,563 ft.	2,488 ft.	3,937 ft.
0.400	463 ft.	1,172 ft.	1,866 ft.	2,953 ft.
0.500	370 ft.	938 ft.	1,493 ft.	2,362 ft.
0.600	309 ft.	781 ft.	1,244 ft.	1,969 ft.
0.700	265 ft.	670 ft.	1,066 ft.	1,687 ft.
0.800	231 ft.	586 ft.	933 ft.	1,476 ft.
0.900	206 ft.	521 ft.	829 ft.	1,312 ft.
1.000 (max.)	185 ft.	469 ft.	746 ft.	1,181 ft.

## WIRING CONFIGURATION

The following figure illustrates the wiring between the FACP and ANN-BUS devices.

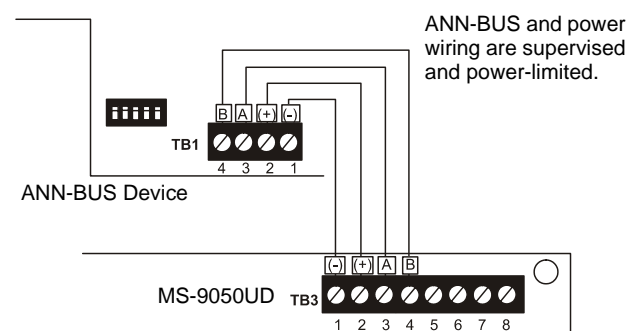

FACP Wiring to ANN-BUS Device

## ORDERING OPTIONS:

**ANN-80:** Red 80 character LCD Annunciator.

**ANN-80-W:** White, 80 character LCD Annunciator.

**ANN-SB80KIT-R:** Red surface mount backbox with angled wedge.

**ANN-SB80KIT-W:** White surface mount backbox with angled wedge.

FireLite® Alarms is a registered trademark of Honeywell International Inc. ©2009 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)



# StarLink<sup>®</sup> FIRE MAX 2



**DUAL SIM/DUAL PATH  
AT&T and VERIZON  
Cell &/or IP UNIVERSAL 5G  
COMMERCIAL FIRE LTE-M COMMUNICATORS**



- **Easiest installation, powered by panel, NO extra power supply, NO extra conduit.** (Excludes Metal Direct AC-Powered Model, shown below.)
- **Labor-Saving Supervision Features Save Time & Money** - Uniquely including 4 supervised, programmable EOLR zone inputs; 2 Form C Relay outputs (no extra supervision modules to buy or install); plus, 2 Telephone style jacks for easy FACU-connection. Self-supervised on 4 wires.
- **Easy-Repeat Account Templates** - Save your typical account setup and reuse for goof-proof communicator programming & fast deployment.
- **Free StarLink FACU-Saver App** - Smartphone Pro sales tool for calculating/demonstrating account's cellular cost-savings with dealer by number of lines & locations vs. copper POTs lines leased from phone co. **FREE download** on Apple Store or Google Play.
- **Pro Incentive Instant Rebate Program** - Dealers save on new and retrofit installations, replacing POTs, old radios, sunset networks and even new installations. (Nothing to mail in/fill out; Service credit automatically applied upon valid plan activation. See details online; scan QR code on back)
- **UL & NFPA 72 Fire Code-Compliant**, the StarLink Max2 Fire Series Wireless Commercial Fire Alarm Sole Path & Dual Path Communicators provide universal support for any brand 12V to 24V fire alarm control panel (FACU), reporting in Contact ID and 4/2. With broadest nationwide coverage footprint, Verizon or AT&T, using proven StarLink circuitry, they are also available in locking metal models.
- **Over-the-Air Upgradeable Firmware** for updates without a truck-roll.



## StarLink Fire MAX 2: SLE-MAX2-Series The Power of 2: Dual SIM, Dual Path by Napco

- **Dual SIM, Dual Path Universal** full data 5G LTE-M cellular &/or IP commercial fire alarm reporting from any panel brand, virtually anywhere nationwide
- **One Model to Stock:** Provides both Verizon® & AT&T® Cell Networks plus either sole or dual path cell/IP reporting (selectable by plan)
- **Auto-Network-Select by Site** - Upon power up, the signal-strength provided by each cell carrier is analyzed at the site, and the unit will lock-in the best carrier automatically, i.e., AT&T or Verizon. Thereafter, it's periodically reviewed and dynamically swapped when needed.
- **EZ Cell-Network ID- Red or Blue Indicators** - Inside the unit, the Carrier Indicators will light Blue for AT&T or Red for Verizon connection (also test button indicates signal strength on each for manual check)
- **See /Set SIM Status Remotely** - using a PC or smart device, the StarLink Network Operations Center (NOC), in Napco Headquarters, NY, can be accessed allowing you used to set parameters or view current status, Dual SIM status of accounts
- **Supports 12V-24V FACUs**, No Panel Reprogramming with those that communicate using Contact ID and 4/2 (such as on legacy panels), as primary or backup.
- **UL & NFPA Code-compliant**, replaces 2 POTs lines per FACU saves thousands of dollars per year over the leased landlines. (Show accounts savings -Free Sales Tool /Calculator App left)
- **Proven StarLink Reliability & Best 5G LTE-M Performance** - Works where others can't - Signal Boost™ Circuitry & unique dual-diversity twin antennas, maximizing signal acquisition and eliminating the multiphase-effect signal-clash/drop-outs single-antenna units are prone to.



**Universal Panel-Powered Commercial Fire FACU Communicator:  
Dual SIM for 2 Networks; Dual Path Cell or Cell/IP all in One Model**



**SLE-MAX2-CFBP**

**SLE-MAX2-CFB**

Dual SIM/Dual Path StarLink Fire MAX 2 also available in Metal enclosures with or without power supply



**One Dual SIM Dual Path Model is Both Verizon and AT&T and Sole or Dual Path with Cellular + Internet Option.** StarLink Fire provides full data reporting, in sole & dual path, as a primary or backup, to any central station of your choice, w/o requiring any special equipment on premises. The units are very easily activated, plans for dual or sole path & check-in periods are selected, and 24/7 account management is provided all through [www.napcocomnet.com](http://www.napcocomnet.com).

**Easy, Universal Installation at Every Application; standardly w/ Panel- Powered Technology™ or metal units with choice of power source.** StarLink Fire Communicators are easily connected to any 12V to 24V panel or Fire Alarm Control Panel (FACU) using easy Quick-Connect FACP modular jacks. For any application, StarLink Max Fire 2 Series comes in standard, ABS plastic Panel-Powered Technology™ (powered by the panel), models, or in metal housings w/ or w/o & choice of power options, i.e., direct-connect 120VAC or Plug-in transformer. **Quick Tip: Using StarLink Fire Max 2 with Power Supply models (suffix -PS) eliminates the need to do recalculations on the fire system being retrofitted as well.**

**StarLink Fire is End-to-End UL 864 Listed to protect signal reliability, speed & performance for critical life and safety alarm reports for maximum life safety & liability protection. UL-Listed from the UL 864 StarLink Fire Max 2 communicator, to Napco's NY UL 864 Network Operations Center (shown below in map), to any Central Station's UL Listed Receiver.** (It is also backed by Disaster Recovery NOC in PA for immediate, mirrored emergency switchover.)

**STARLINK: ALL SIGNALS,  
ALWAYS IN THE USA**





**SLE-MAX2 SERIES Fire Dual SIM/Dual Path Commercial Fire Alarm Cell Communicators**

- Dual SIM models auto-select optimal cell carrier - and Red or Blue LED Indicators inside signal Verizon or AT&T respectively, shown right.
- LED Status /Trouble Indicators 3 Radio Status LED Indicators (visible from outside standard model housing) - Green, Signal Strength; Amber- Busy/Activation; Red-Trouble. (Additional internal LEDs, not visible with cover closed, i.e., for troubleshooting and for AT&T or Verizon network selection, status). Power LED indicator viewable on outer metal enclosure models.
- Sole or Dual Path 5G LTE-M Cell Commercial Fire Alarm Communicator in One - Simply select Cell or Cell/IP Service Plan & check-in period: 5 minutes, 60 minutes, 6 hours or 24 hours.
- Signal Boost and Patented Switching Dual Diversity Antenna for maximum signal acquisition & null /signal-clash avoidance, receiving signals on both antennas (2 supplied, nothing extra to buy.)
- "Return Receipt" Fully-Supervised Communication Path between premise & central station, keeping channel open until *kiss-off* is received from Central Station receiver



## SPECIFICATIONS: (Apply to all models unless otherwise stated)

### SLE-MAX2-FIRE & SLE-MAX2-CFB:

#### Electrical Ratings for +12V / 24V (Models w/o Power Supply)

- Input Voltage: 10-24VDC regulated (power-limited output from UL Certified FACU/panel Aux/Remote Fire Power).
- Input Current: 24VDC standby: 85mA

### SLE-MAX2-CFBPS:

#### Electrical Ratings for 120VAC, 60Hz (Models with Power Supply)

- Input Voltage: 120VAC nominal
- Input Current: 200mA maximum
- Maximum Charging Current: 200mA

#### Electrical Ratings Fire Input 1:

- Input Voltage: 9-25VDC
- Max Input Current: Up to 2mA from FACU NAC circuit

#### Electrical Ratings for Inputs 2 to 5 (Class B):

- Maximum Loop Voltage: 25VDC
- Maximum Loop Current: 1.2mA (metal models); 1.7mA (plastic)
- End of Line Resistor (EOLR) Value: 10K

#### Electrical Ratings for PGM3 Output:

- Open Collector Output: Max Voltage 3V when active; 25V max. when not.
- PGM Max Sink Current: 50mA (up to 15VDC), 25mA (15.1VDC -25VDC)

#### Physical & Environmental

- Plastic Housing: 8 x 5½ x 1½" (WHD) + antennas (2ea, supplied) 8¼" H
- Metal Housing: 11½ x 9½ x 3½" (WHD) + antennas (2ea, supplied) 8¼" H
- Housings: 2 Keyholes for wall mount
- Operating Temp. 32 to 120°F, 93% Humidity Max.

#### COMPLIANCES:

NFPA 72 Eds: 2022, 2019, 2016, 2013, 2010; UL 2610, UL 985, UL1023, UL864 10th Ed., CSFM, NYC FD, LAFD Napco US Network Operations Center (NOC) UL 864 10th Ed., UL 1610, UL 1635

## ORDERING INFORMATION

Model	Description	Dual SIM/ Dual Path	Verizon ✓	AT&T	Sole Path Cell	Dual Path Cell/IP	Low Current Draw, Standby (@24V)	Current Draw, Peak (@24V)
SLE-MAX2-FIRE	Universal Fire Communicator, Dual SIM, Dual Path, Panel-Powered Technology, ABS Plastic Housing	✓	✓	✓	✓	✓	85mA	325mA
SLE-MAX2-CFB	Universal Fire Communicator, Dual SIM, Dual Path, Panel-Powered Technology	✓	✓	✓	✓	✓	85mA	325mA
SLE-MAX2-CFBPS	Universal Fire Communicator, Dual SIM, Dual Path, Direct AC Power 120VAC Metal Housing w/ Provision. For Plug-in TRF12 XFormer, 16VAC, 20VA (w/ provision for backup battery)	✓	✓	✓	✓	✓	200mA	200mA

#### OPTIONS/ACCESSORIES:

**SLE-WIFI-MODULE:** Optionally connects supported dual path models to Internet via WiFi, eliminating Ethernet cable connection. Requires 7AH battery. (see WI2191)

**SLE-ANTEXT30:** StarLink Omni-X Optional Extended Range Marine-Grade Complete Antenna Kit, w/ 30' of ultra low-noise LMR 300 cable, all hardware & ground fault isolator plate.

**SLE-ANTEXT50:** as above, 50' cable

**SLE-ANTEXT75:** as above, 75' cable

**SLE-ANTEXT100:** as above, 100' cable

**SLE-ANTEXT04:** as above, 4' cable

**SLE-FIRE-VR:** FACU Voltage Drop Kit, maintains safe input voltage < 27.5VDC

**TRF12:** Plug in AC Transformer, used w/ SLE-MAX2-CFBPS model, 16.5V / 20VA (use subject to local code).

**GEM-TAMPERKIT:** Tamper switches and screws to protect metal housing where required.

**SLE-ULPS-R:** Power Supply, for installations where FACU cannot provide Aux Power.

**SLE-FMBB:** Opt. Metal Cable Management Backbox for surface mounting plastic StarLink communicator models adjacent to FACUs on same plane. Radio easily snaps in on 4 stand-offs, no rewiring. Red metal enclosure w/ ¾" cable knockouts; 2 Connectors & 4" Conduit, supplied.

**Also See FireLink FACUs with built-in StarLink Communicators & LCD Touchpads on Door, addressable & conventional, cloud-programmable.**



verizon ✓ AT&T

Coming soon for Canada



[www.StarLinkFire.com](http://www.StarLinkFire.com)

## Addressable, Conventional Fire Alarm Systems & Leading Commercial Fire Cellular Communications

For Compliance, Always Consult with AHJ & Tech Docs by Model, i.e., SLE-MAX2-FIRE (Plastic) WI2609LF; SLE-MAX2-CFBPS, -CFB (Dual Path Metal) WI2642LF. StarLink & StarLinkMAX Fire are trademarks of NAPCO Security Technologies, Inc. Other marks remain intellectual property of their respective companies. Preliminary data & promotions subject to change without notice. © NAPCO 2024.1 A852



FOR MORE





Product includes a 5 year warranty

Dimensions: 16 1/8"W x 16 3/4"H x 3 1/2"D

Stock Number: 3006436 PSN-64 Red Enclosure  
3006437 PSN-106 Red Enclosure  
3006446 PSN-106 Black Enclosure

### Description

The PSN series of notification power supplies offers reliable notification power with unprecedented versatility. The power supplies offer either 6 or 10 amps of continuous power through 4 or 6 outputs respectively. Each output is rated at 3 amps and it may be used continuously without any derating.

The power supply operates on either 120 VAC or 220 VAC power input and has a regulated 24 VDC output. In addition, the panel can charge up to 55 AH batteries and leads the industry in housing up to 18 AH batteries. The cabinet is constructed out of 18 gauge cold rolled steel and has a durable red powder coat finish. In addition, a key lock is provided for securing the door. Ample electrical knockouts are provided on the sides and the top, allowing the installer options for running wires and maintaining the correct separations.

The power supply offers an industry leading Quadrasync function that allows for multiple strobe circuits of different brands to be synchronized to flash at the same time. The panel can have four different brands each connected to its own circuit and all of the strobes flash together.

Each output can independently be configured to provide one of four synchronizations or steady power. This provides unequivocal flexibility in new and retrofit installations. The panel can be configured to synchronize Potter/AMSECO®, Gentex®, Wheelock® and System

### UL, cUL, CSFM Listed

- PSN-64 has 6 amps regulated with 4 Outputs
- PSN-106 has 10 amps regulated with 6 Outputs
- Outputs Rated at 3 amps maximum each
- May be configured as up to three class "A" Style "Z" notification circuits
- 3 amp, 24 VDC programmable output power
- Supervised Battery Charger: 27.3 @ 1A (supports 7-55 AH batteries)
- Easy to install cabinet with leveling mounts and key lock
- Wiring knockouts provided on sides and top of cabinet
- Two Trouble Relays (5A at 30VDC)
  - General System Trouble (programmable for AC delay)
  - Low AC Trouble with optional delay settings

### Diagnostic LED's

Status LED's for Active NAC and NAC trouble conditions  
Status LED's for Earth Fault (Amber), AC (Green), Battery Fault (Amber)

- Trouble Memory feature captures troubles which have previously restored
- Synchronized notification appliance circuits
  - Potter/AMSECO®, Wheelock®, Gentex®, System Sensor®
- Configurable output circuits (DIP switch sets options for each circuit)
- 15 mA at 8-33 VDC input trigger
- Reference EOL allows 2K – 27K EOL value to be used
- Quadrasync provides panel wide synchronization of same or multiple brands
- PassThru mode allows the Outputs to match the Input Signal

### Electrical Specs:

- 120/240 VAC 50-60 Hz input
- 5.1 Amps @ 120 VAC or 2.5 Amps @ 240 VAC
- Battery Standby Current 75 mA
- Alarm Standby Current 75 mA (no external load)
- Terminals support 12 - 18 AWG wire.

Sensor® strobe devices. Each output can be configured the same sync protocol or set independently.

In addition, the panel has an input PassThru mode allows the outputs to follow the input signal and sync up the input flash. The panel will recognize the type of input being supplied and pass this through to the outputs with the same pattern. This input pass through can be selected on each output independently.


The power supply contains simple dipswitch programming and LED indications providing the installer indications of the operation and the ability to correct any faults. A Trouble Memory is provided to allow an installer to review past troubles and make the necessary repairs. Each output has an LED to pin point the exact circuit where a problem may have occurred. Relays are provided for monitoring the general system and AC failure.

Each output can be independently configured for various applications and installations. Each output can be independently configured for Class A or Class B operation, constant power, ANSI Temporal Code 3, Single, Multiple or Combo Inputs or Door Holder Power.

Potter Electric Signal Co., LLC • St. Louis, MO • Cust Service: 866-240-1870 • Tech Support: 866-956-1211 • Canada 888-882-1833 • [www.pottersignal.com](http://www.pottersignal.com)



**PSN-106 Wiring Diagram**

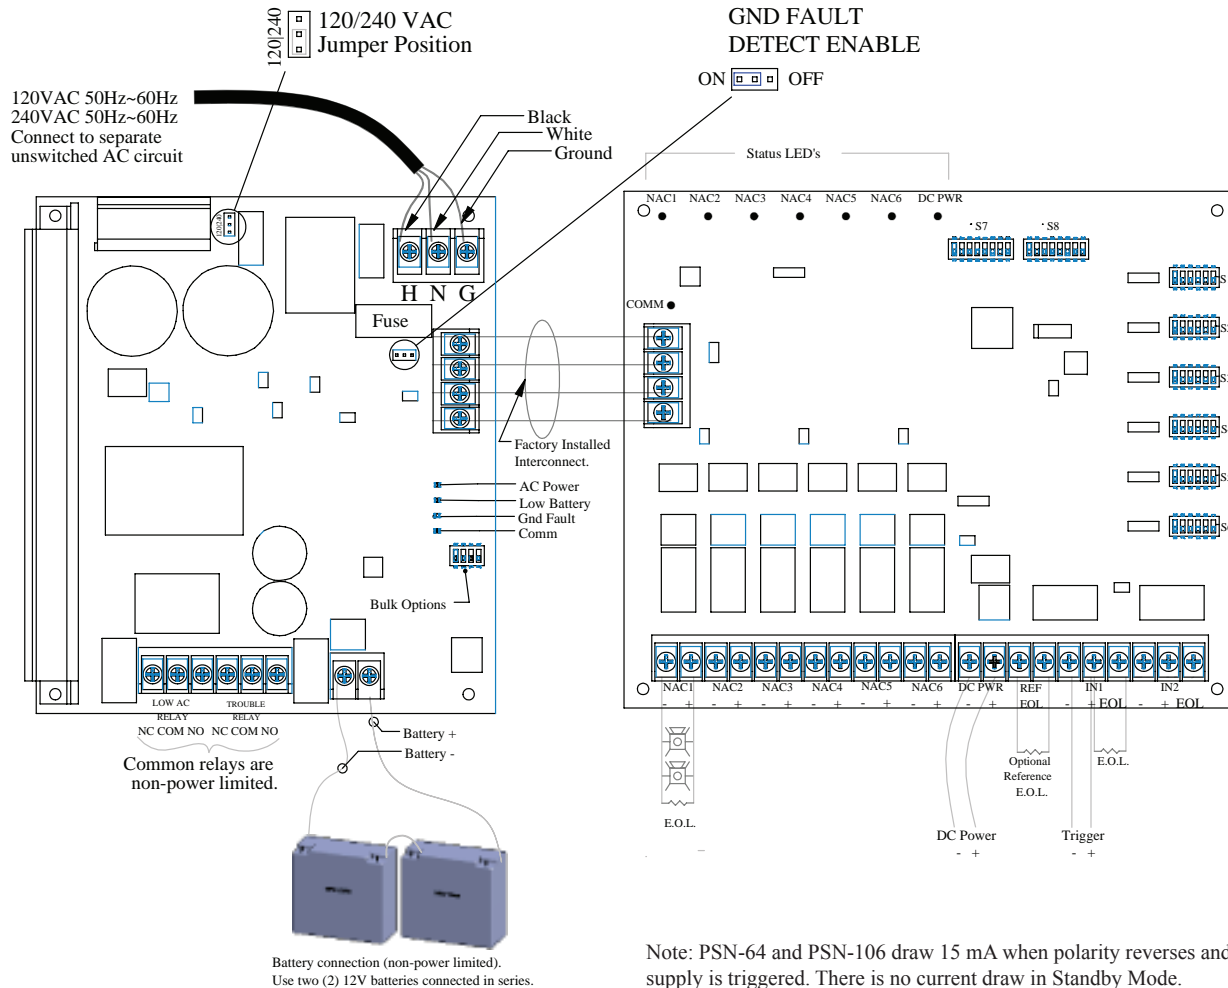

Note: PSN-64 and PSN-106 draw 15 mA when polarity reverses and the power supply is triggered. There is no current draw in Standby Mode.

**Engineering Specification**

The contractor shall supply and install the Potter PSN power supply. The power supply shall operate on either 120 or 240 VAC input. The panel shall be capable of continuous load power without any degradation to the main supply or the distribution board. The cabinet shall be capable of housing up to 18 AH batteries and the panel shall be capable of charging up to 55 AH batteries in an external cabinet.

The panel shall have dip switches for simplistic configuration of the system and LEDs to provide visual indication to the installer of the status of the system. The dip switches shall allow for AC power delay selection, Class A/B operation per output, Door Holder Power options, constant auxiliary power, trigger input type, ANSI Code 3 Temporal Code, Pass Thru (input tracking), Potter/AMSECO® sync, Gentex® Sync, System Sensor® Sync or Wheelock® sync. The LEDs shall provide indication of communication between the power supply and distribution circuit

assemblies. The LEDs shall have distinct flash patterns to provide further indication of the troubles present. The panel shall have selectable Trouble Memory to provide the installer an indication that a past trouble existed on a circuit for diagnostic purposes.

Each output of the power supply shall be capable of 3 amps of continuous power without degradation over time. The power supply shall provide for multiple circuits of strobe appliances. The power supply shall synchronize the flashes of any of the above listed strobe appliances on a per circuit basis. Up to four different strobe circuits may be connected and all of the strobes shall flash in unison as required by UL 864. In addition to this Quadrasync feature, the panel shall allow any of the four above mentioned sync patterns as an input and pass this signal through and synchronize the outputs to match the input flash pattern.

# SD365(A) Series

## Addressable Photoelectric Detectors



### Addressable Devices

### General

The Fire-Lite SD365(A), SD365T(A), and SD365R(A) Series addressable plug-in photoelectric smoke detectors are designed for both performance and aesthetics. A new modern, sleek, contemporary design and enhanced optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources in accordance with more stringent code standards.

Exclusively for use with Fire-Lite's addressable fire alarm control panels, the SD365(A) Series point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector location for emergency personnel to quickly locate a fire during its early stages, potentially saving precious rescue time while also reducing property damage. Two LEDs on each sensor light to provide a local, visible sensor indication.

The SD365(A) Series also offers 135°F (57°C) fixed temperature thermal sensing on the SD365T(A) and a remote test capable detector on the SD365R(A) for use with DNR(A)/DNRW duct smoke detector housings.

### Features

#### SLC LOOP

- Two-wire loop connection.
- Unit uses base for wiring.

#### ADDRESSING

- Addressable by device.
- Rotary, decimal addressing: *Please refer to the Fire-Lite panel manuals for device capacity.*

#### ARCHITECTURE

- New modern profile for improved aesthetics.
- Unique single-source design to respond quickly and dependably to a broad range of fires.
- Integral communications and built-in type identification.
- Built-in tamper-resistant feature.
- Removable cover and insect-resistant screen for simple field cleaning.

#### OPERATION

- Designed to meet UL 268 7th Edition.
- Factory preset at 1.5% nominal sensitivity for panel alarm threshold level.
- Visible LED "blinks" when the unit is addressed (communicating with the fire panel) and latches on in alarm.
- Low standby current.

#### MECHANICALS

- Sealed against back pressure.
- Mounts to: single-gang box, 3.5" (8.89 cm) or 4.0" (10.16 cm) octagonal box, or 4.0" (10.16 cm) square electrical box (*with or without a mud ring - not included*).

#### OPTIONS

- Remote LED output connection, RA100Z.



SD365

### Installation

SD365(A) series plug-in detectors use a detachable mounting base to simplify installation, service and maintenance.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see DF-60059.

**NOTE:** Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class B) wiring. SD365R(A) mounts in a D355PL(A) or DNR(A) /DNRW duct detector housing.

### Operation

Each SD365(A) Series detector uses one possible addresses on the Fire-lite Signaling Line Circuit (SLC). It responds to regular polls from the system and reports its type and status.

### Detector Sensitivity Test

Each detector can have its sensitivity tested (required per NFPA 72, Chapter 14 on *Inspection, Testing and Maintenance*) when installed/connected to an ES-50X or ES-200X addressable fire alarm control panel. The results of the sensitivity test can be printed off the for record keeping.

### Specification

**Voltage range:** 15 – 32 VDC (peak).

**Standby current:** 200 µA @ 24 VDC.

**Max current:** 4.5 mA @ 24 VDC (latched "ON").

**Air velocity:** 4,000 ft./min. (20 m/sec.) maximum.

**Sensitivity:** UL Applications: 0.5% to 4.0% per foot obscuration

**Size:** 2.0" (5.3 cm) high; base determines diameter.

– B300-6: 6.1" (15.6 cm) diameter.

– B501: 4" (10.2 cm) diameter.

For a complete list of detector bases see DN-60981.

**Shipping weight:** 3.4 oz. (95 g).



#### Operating temperature range:

- SD365(A): 0°C to 50°C (32°F to 122°F);
- SD365T(A): 0°C to 38°C (32°F to 100°F).
- SD365R(A): installed in a DNR(A)/DNRW -20°C to 70°C (-4°F to 158°F).

**Relative humidity:** 10%-93%, non-condensing.

## Listings

Listings and approvals below apply to the SD365 Series detectors. In some cases, certain detectors may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL/ULC Listed: S1059
- CSFM: 7272-0075-0502
- FM Approved

## Product Line Information

**NOTE:** Detectors must be mounted to one of the Intelligent Bases listed below.

**NOTE:** "IV" suffix indicates LiteSpeed® and CLIP device.

**NOTE:** "A" suffix indicates Canadian version.

**SD365(A):** White, Addressable photoelectric detector; B300-6 base included. LiteSpeed only.

**SD365(A)-IV:** Ivory, Addressable photoelectric detector; B300-6 base included.

**SD365T(A):** White, Same as SD365 but with thermal element; B300-6 base included. LiteSpeed only.

**SD365T(A)-IV:** Ivory, Same as SD365 but with thermal element; B300-6 base included.

**SD365R(A):** White, Remote test capable addressable photoelectric detector for use with DNR(A)/DNRW. LiteSpeed only.

**SD365R(A)-IV:** Ivory, Remote test capable addressable photoelectric detector; for use with DNR(A)/DNRW.

### INTELLIGENT BASES

**NOTE:** For details on intelligent bases, see DN-60981.

**B300-6:** White, 6" base, standard flanged low-profile mounting base. (CSFM: 7300-1653:0109 Pending)

**B300-6-IV:** Ivory, 6" base, standard flanged low-profile mounting base. (CSFM: 7300-1653:0109 Pending)

**B300A-6:** Same as B300-6, ULC listed.

**B300A-6-IV:** Ivory, 6" standard flanged low-profile mounting base, ULC listed.

**B300-6-BP:** Bulk pack of B300-6, package contains 10

**B501-WHITE:** White, 4" standard European flangeless mounting base. UL/ULC listed. (CSFM: 7300-1653:0109 Pending)

**B501-BL:** Black, 4" standard European flangeless mounting base. UL/ULC listed. (CSFM: 7300-1653:0109 Pending)

**B501-IV:** Ivory color, 4" standard European flangeless mounting base. UL/ULC listed. (CSFM: 7300-1653:0109 Pending)

**B501-WHITE-BP:** Bulk pack of B501-WHITE contains 10.

**B224RB-WH:** White, relay base. (CSFM: 7300-1653:0216 Pending)

**B224RB-IV:** Ivory, relay base. (CSFM: 7300-1653:0216 Pending)

**B224RBA-WH:** White, relay base, ULC listing.

**B224RBA-IV:** Ivory, relay base, ULC listing.

**B224BI-WH:** White, **isolator** detector base. (CSFM: 7300-1653:0216 Pending)

**B224BI-IV:** Ivory **isolator** detector base. (CSFM: 7300-1653:0216 Pending)

**B224BIA-WH:** White, **isolator** detector base, ULC listing.

**B224BIA-IV:** Ivory **isolator** detector base, ULC listing.

**B200S-WH:** White, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213 Pending)

**B200S-IV:** Ivory, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213 Pending)

**B200SA-WH:** Same as B200S-WH, ULC listing.

**B200SA-IV:** Same as B200S-IV, ULC listing.

**B200SCOA-WH:** White, Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications).

**B200SCOA-IV:** Ivory Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications, ULC listing).

**B200S-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238 Pending)

**B200S-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238 Pending)

**B200SR-WH:** White, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213 Pending)

**B200SR-IV:** Ivory, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213 Pending)

**B200SRA-WH:** Same as B200SR-WH with, ULC listing.

**B200SRA-IV:** Same as B200SR-IV in Ivory color, ULC listing.

**B200SR-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238 Pending)

**B200SR-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238 Pending)

### MOUNTING KITS AND ACCESSORIES

**TR300:** White, replacement flange for B210LP(A) base.

**TR300-IV:** Ivory, replacement flange for B210LP(A) base.

**RA100Z(A):** Remote LED annunciator. 3 – 32 VDC. Mounts to a U.S. single-gang electrical box. For use with B501(A) and B300-6(A).

**M02-04-00:** Test magnet.

**M02-09-00:** Test magnet with telescoping handle.

**CK300:** Color Kit (includes cover and trim ring), white, 10-pack.

**CK300-IV:** Color Kit (includes cover and trim ring), ivory, 10-pack.

**CK300-BL:** Color Kit (includes cover and trim ring), black, 10-pack.

---

**FireLite® Alarms** is a registered trademark of Honeywell International Inc.  
©2018 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)

# BG-12LX

## Addressable Manual Pull Station



### Addressable Devices

#### General

The Fire-Lite BG-12LX is a state-of-the-art, dual-action (i.e., requires two motions to activate the station) pull station that includes an addressable interface (mounted inside) for Fire-Lite's addressable fire alarm control panels (FACPs). Because the BG-12LX is addressable, the control panel can display the exact location of the activated manual station. This leads fire personnel quickly to the location of the alarm.

#### Features

- Maintenance personnel can open station for inspection and address setting without causing an alarm condition.
- Built-in bicolor LED, which is visible through the handle of the station, flashes in normal operation and latches steady red when in alarm.
- Handle latches in down position and the word "ACTIVATED" appears to clearly indicate the station has been operated.
- Captive screw terminals wire-ready for easy connection to SLC loop (accepts up to 12 AWG/3.25 mm<sup>2</sup> wire).
- Can be surface mounted (with SB-10 or SB-I/O) or semi-flush mounted. Semi-flush mount to a standard single-gang, double-gang, or 4" (10.16 cm) square electrical box.
- Smooth dual-action design.
- Meets ADAAG controls and operating mechanisms guidelines (Section 4.1.3[13]); meets ADA requirement for 5 lb. maximum activation force.
- Highly visible.
- Attractive shape and textured finish.
- Key reset.
- Includes Braille text on station handle.
- Optional trim ring (BG12TR).
- Meets UL 38, Standard for Manually Actuated Signaling Boxes.

#### Construction

Shell, door, and handle are molded of durable polycarbonate material with a textured finish.

#### Specifications

- **Shipping Weight:** 9.6 oz. (272.15 g)
- **Normal operating voltage:** 24 VDC.
- **Maximum SLC loop voltage:** 28.0 VDC.
- **Maximum SLC standby current:** 375  $\mu$ A.
- **Maximum SLC alarm current:** 5 mA.
- **Temperature Range:** 32°F to 120°F (0°C to 49°C)
- **Relative Humidity:** 10% to 93% (noncondensing)
- **For use indoors in a dry location**

#### Installation

The BG-12LX will mount semi-flush into a single-gang, double-gang, or standard 4" (10.16 cm) square electrical outlet box, or will surface mount to the model SB-10 or SB-I/O surface backbox. If the BG-12LX is being semi-flush mounted, then the optional trim ring (BG12TR) may be used. The BG12TR is



FL PullStation.jpg

usually needed for semi-flush mounting with 4" (10.16 cm) or double-gang boxes (not with single-gang boxes).

#### Operation

Pushing in, then pulling down on the handle causes it to latch in the down/activated position. Once latched, the word "ACTIVATED" (in bright yellow) appears at the top of the handle, while a portion of the handle protrudes from the bottom of the station. To reset the station, simply unlock the station with the key and pull the door open. This action resets the handle; closing the door automatically resets the switch.

Each manual station, on command from the control panel, sends data to the panel representing the state of the manual switch. Two rotary decimal switches allow address settings (1 – 159 with Breakaway Tab removed for MS-9600 Series, 1 – 99 and MS-9200UDLS, 1 – 50 for MS-9050UD).

#### Architectural/Engineering Specifications

Manual Fire Alarm Stations shall be non-coded, with a key-operated reset lock in order that they may be tested, and so designed that after actual Emergency Operation, they cannot be restored to normal except by use of a key. An operated station shall automatically condition itself so as to be visually detected as activated. Manual stations shall be constructed of red-colored polycarbonate material with clearly visible operating instructions provided on the cover. The word FIRE shall appear on the front of the stations in white letters, 1.00 inches (2.54 cm) or larger. Stations shall be suitable for surface mounting on matching backbox SB-10 or SB-I/O; or semi-flush mounting on a standard single-gang, double-gang, or 4" (10.16 cm) square electrical box, and shall be installed

within the limits defined by the Americans with Disabilities Act (ADA) or per national/local requirements. Manual Stations shall be Underwriters Laboratories listed.

Manual stations shall connect with two wires to one of the control panel SLC loops. The manual station shall, on command from the control panel, send data to the panel representing the state of the manual switch. Manual stations shall provide address setting by use of rotary decimal switches.

## Product Line Information

**BG-12LX:** Dual-action addressable pull station. Includes key locking feature. (Listed for Canadian and non-Canadian applications.)

**SB-10:** Surface backbox; metal.

**SB-I/O:** Surface backbox; plastic.

**BG12TR:** Optional trim ring.

**17003:** Keys, set of two.

## Agency Listings and Approvals

In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S711 (listed for Canadian and non-Canadian applications).
- **MEA:** 67-02-E.
- **CSFM:** 7150-0075:0184.
- **FM Approved.**

**Patented:** U.S. Patent No. D428,351; 6,380,846; 6,314,772; 6,632,108.

---

FireLite® Alarms® is a registered trademark of Honeywell International Inc.  
©2012 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)

# MMF-300(A) Series, MDF-300

## Addressable Monitor Modules



### Addressable Devices

#### General

Four different monitor modules are available for Fire•Lite's intelligent control panels to suit a variety of applications. Monitor modules are used to supervise a circuit of dry-contact input devices, such as conventional heat detectors and pull stations, or monitor and power a circuit of two-wire smoke detectors (MMF-302(A)).

**MMF-300(A)** is a standard-sized module (typically mounts to a 4" [10.16 cm] square box) that supervises either a Style D (Class A) or Style B (Class B) circuit of dry-contact input devices.

**MMF-301(A)** is a miniature monitor module a mere 1.3" (3.302 cm) H x 2.75" (6.985 cm) W x 0.65" (1.651 cm) D that supervises a Style B (Class B) circuit of dry-contact input devices. Its compact design allows the MMF-301(A) to be mounted in a single-gang box behind the device it monitors.

**MMF-302(A)** is a standard-sized module used to monitor and supervise compatible two-wire, 24 volt, smoke detectors on a Style D (Class A) or Style B (Class B) circuit.

**MDF-300(A)** is a standard-sized dual monitor module used to monitor and supervise two independent two-wire Style B (Class B) dry-contact initiating device circuits (IDCs) at two separate, consecutive addresses in intelligent, two-wire systems.

LiteSpeed™ is a communication protocol developed by Fire•Lite Engineering that greatly increases the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of other communication protocols.

#### MMF-300(A) Monitor Module

- Built-in type identification automatically identifies this device as a monitor module to the control panel.
- Powered directly by two-wire SLC loop. No additional power required.
- High noise (EMF/RFI) immunity.
- SEMS screws with clamping plates for ease of wiring.
- Direct-dial entry of address: 01 – 159 on MS-9600 series panels, 01 – 99 on other compatible systems.
- LED flashes during normal operation and latches on steady to indicate alarm.

The MMF-300(A) Monitor Module is intended for use in intelligent, two-wire systems, where the individual address of each module is selected using the built-in rotary switches. It provides either a two-wire or four-wire fault-tolerant Initiating Device Circuit (IDC) for normally-open-contact fire alarm and supervisory devices. The module has a panel-controlled LED indicator. The MMF-300(A) can be used to replace M300(A) modules in existing systems.

#### MMF-300(A) APPLICATIONS

Use to monitor a zone of four-wire smoke detectors, manual fire alarm pull stations, waterflow devices, or other normally-open dry-contact alarm activation devices. May also be used to monitor normally-open supervisory devices with special



MMF-300(A) (Type H)

supervisory indication at the control panel. Monitored circuit may be wired as an NFPA Style B (Class B) or Style D (Class A) Initiating Device Circuit. A 47K Ohm End-of-Line Resistor (provided) terminates the Style B circuit. No resistor is required for supervision of the Style D circuit.

#### MMF-300(A) OPERATION

Each MMF-300(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC). A flashing LED indicates that the module is in communication with the control panel. The LED latches steady on alarm (subject to current limitations on the loop).

#### MMF-300(A) SPECIFICATIONS

**Nominal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 5.0 mA (LED on).

**Average operating current:** 375  $\mu$ A (LED flashing), 1 communication every 5 seconds, 47k EOL.

**Maximum IDC wiring resistance:** 1500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**EOL resistance:** 47K Ohms.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.


**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

#### MMF-301(A) Mini Monitor Module

- Built-in type identification automatically identifies this device as a monitor module to the panel.
- Powered directly by two-wire SLC loop. No additional power required.
- High noise (EMF/RFI) immunity.



- Tinned, stripped leads for ease of wiring.
- Direct-dial entry of address: 01 – 159 on MS-9600 series panels, 01 – 99 on other compatible systems

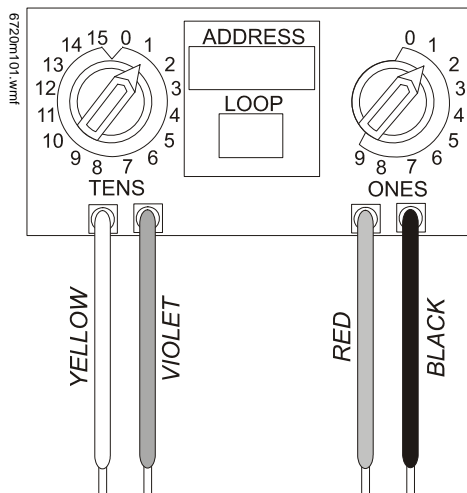

The MMF-301(A) Mini Monitor Module can be installed in a single-gang junction directly behind the monitored unit. Its small size and light weight allow it to be installed without rigid mounting. The MMF-301(A) is intended for use in intelligent, two-wire systems where the individual address of each module is selected using rotary switches. It provides a two-wire initiating device circuit for normally-open-contact fire alarm devices. The MMF-301(A) can be used to replace M301(A) modules in existing systems.

#### **MMF-301(A) APPLICATIONS**

Use to monitor a single device or a zone of four-wire smoke detectors, manual fire alarm pull stations, waterflow devices, or other normally-open dry-contact devices. May also be used to monitor normally-open supervisory devices with special supervisory indication at the control panel. Monitored circuit/device is wired as an NFPA Style B (Class B) Initiating Device Circuit. A 47K Ohm End-of-Line Resistor (provided) terminates the circuit.

#### **MMF-301(A) OPERATION**

Each MMF-301(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC).

#### **MMF-301(A) SPECIFICATIONS**

**Nominal operating voltage:** 15 to 32 VDC.

**Average operating current:** 350  $\mu$ A, 1 communication every 5 seconds, 47k EOL; 600  $\mu$ A Max. (Communicating, IDC Shorted).

**Maximum IDC wiring resistance:** 1500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**Maximum IDC Current:** 450  $\mu$ A.

**EOL resistance:** 47K Ohms.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 1.3" (3.302 cm) high x 2.75" (6.985 cm) wide x 0.65" (1.651 cm) deep.

**Wire length:** 6" (15.24 cm) minimum.

### **MMF-302(A) Interface Module**

- Supports compatible two-wire smoke detectors.

- Supervises IDC wiring and connection of external power source.
- High noise (EMF/RFI) immunity.
- SEMS screws with clamping plates for ease of wiring.
- Direct-dial entry entry of address: 01 – 159 on MS-9600 series panels, 01 – 99 on other compatible systems.
- LED flashes during normal operation.
- LED latches steady to indicate alarm on command from control panel.

The MMF-302(A) Interface Module is intended for use in intelligent, addressable systems, where the individual address of each module is selected using built-in rotary switches. This module allows intelligent panels to interface and monitor two-wire conventional smoke detectors. It transmits the status (normal, open, or alarm) of one full zone of conventional detectors back to the control panel. All two-wire detectors being monitored must be UL compatible with the module. The MMF-302(A) can be used to replace M302(A) modules in existing systems.

#### **MMF-302 (A) APPLICATIONS**

Use the MMF-302(A) to monitor a zone of two-wire smoke detectors. The monitored circuit may be wired as an NFPA Style B (Class B) or Style D (Class A) Initiating Device Circuit. A 3.9 K Ohm End-of-Line Resistor (provided) terminates the end of the Style B or D (class B or A) circuit (maximum IDC loop resistance is 25 Ohms). Install ELR across terminals 8 and 9 for Style D application.

#### **MMF-302(A) OPERATION**

Each MMF-302(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC). A flashing LED indicates that the module is in communication with the control panel. The LED latches steady on alarm (subject to current limitations on the loop).

#### **MMF-302(A) SPECIFICATIONS**

**Nominal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 5.1 mA (LED on).

**Maximum IDC wiring resistance:** 25 Ohms.

**Average operating current:** 270  $\mu$ A, 1 communication and 1 LED flash every 5 seconds, 3.9k eol.

**EOL resistance:** 3.9K Ohms.

**External supply voltage (between Terminals T10 and T11):**

- DC voltage: 24 volts power limited.
- Ripple voltage: 0.1 Vrms maximum.
- Current: 90 mA per module maximum.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

### **MDF-300(A) Dual Monitor Module**

The MDF-300(A) Dual Monitor Module is intended for use in intelligent, two-wire systems. It provides two independent two-wire initiating device circuits (IDCs) at two separate, consecutive addresses. It is capable of monitoring normally open contact fire alarm and supervisory devices. The module has a single panel-controlled LED.

**NOTE:** The MDF-300(A) provides two Style B (Class B) IDC circuits ONLY. Style D (Class A) IDC circuits are NOT supported in any application.

#### **MDF-300(A) SPECIFICATIONS**

**Normal operating voltage range:** 15 to 32 VDC.

**Maximum current draw:** 6.4 mA (LED on).

**Average operating current:** 750  $\mu$ A (LED flashing).

**Maximum IDC wiring resistance:** 1,500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**Maximum IDC Current:** 240  $\mu$ A

**EOL resistance:** 47K Ohms.

**Temperature range:** 32° to 120°F (0° to 49°C).

**Humidity range:** 10% to 93% (non-condensing).

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

#### **MDF-300(A) AUTOMATIC ADDRESSING**

The MDF-300(A) automatically assigns itself to two addressable points, starting with the original address. For example, if the MDF-300(A) is set to address "26", then it will automatically assign itself to addresses "26" and "27".

**NOTE:** "Ones" addresses on the MDF-300(A) are 0, 2, 4, 6, or 8 only. Terminals 6 and 7 use the first address, and terminals 8 and 9 use the second address.

---

#### **CAUTION:**

Avoid duplicating addresses on the system.

---

**MDF-300(A):** Monitor module, dual, two independent Class B circuits.

**SMB500:** Optional surface-mount backbox.

**NOTE:** See installation instructions and refer to the SLC Wiring Manual, PN 51309.

### **Architects'/Engineers' Specifications**

Specifications of these devices and all FireLite products are available from FireLite.

## **Installation**

MMF-300(A), MMF-302(A), and MDF-300(A) modules mount directly to a standard 4" (10.16 cm) square, 2.125" (5.398 cm) deep, electrical box. They may also be mounted to the SMB500 surface-mount box. Mounting hardware and installation instructions are provided with each module. All wiring must conform to applicable local codes, ordinances, and regulations. These modules are intended for power-limited wiring only.

The MMF-301(A) module is intended to be wired and mounted without rigid connections inside a standard electrical box. All wiring must conform to applicable local codes, ordinances, and regulations.

## **Agency Listings and Approvals**

In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S2424.
- **ULC:** S2424.
- **FM Approved.**
- **CSFM:** 7300-0075:0185.
- **MEA:** 72-01-E.

## **Product Line Information**

**NOTE:** "A" suffix indicates ULC-listed model.

**MMF-300(A):** Monitor module.

**MMF-301(A):** Monitor module, miniature.

**MMF-302(A):** Monitor module, two-wire detectors.

---

Fire-Lite® is a registered trademark and LiteSpeed™ and FireWatch™ are trademarks of Honeywell International Inc.  
©2015 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)




# L-Series and L-Series with LED Indoor Selectable Horns, Strobes and Horn Strobes

*System Sensor L-Series and L-Series with LED audible visible notification products are rich with features guaranteed to cut installation times and maximize profits with lower current draw and modern aesthetics.*

## Features

- LED technology provides lower current draw
- Digital Voltage Meter (DVM) diagnostic test points for Horn Strobes and Strobes
- Common aesthetics across the L-Series platform
- Standard and compact sizes
- Tamper-resistant construction
- Field-selectable candela settings on wall units: 15, 30, 75, 95, 110, 135, and 185
- Field-selectable candela settings on ceiling units: 15, 30, 75, 95, 115, 150, and 177
- Rotary switches for candela, tone and volume selections
- Mounting plate provides plug-in design for easier installation and shorting springs to check wiring continuity
- Electrically compatible with legacy SpectrAlert, SpectrAlert Advance and L-series devices
- Synchronization through use of UL approved power supplies that support System Sensor Sync protocol or System Sensor MDL3 Sync Module
- Horns, Strobes and Horn Strobes listed for wall or ceiling use

## Agency Listings



## The System Sensor L-Series and L-Series with LED

**platform** offers the most versatile and easy-to-use line of horns, strobes, and horn strobes in the industry with lower current draw and modern aesthetics. LED lighting technology offers significantly lower current draw compared to older Xenon bulbs across a full candela range. This improves design flexibility for notification appliance circuits (NACs) while also reducing power supply requirements allowing for simpler and lower cost installations.

Flexible design options meet virtually any application requirement: wall or ceiling mount, standard or compact sizes, red or white color choices, bezel kits for alternate markings and languages, and LED color lenses for distinctive visual signaling. In addition, installers can easily adapt devices using field selectable candela, tone and volume settings using rotary switches.

The L-Series and L-Series with LED line is developed to simplify installation. All devices feature plug-in designs with minimal intrusion into the back box, making installations fast and foolproof while virtually eliminating costly and time-consuming ground faults. The universal mounting plate includes an onboard shorting spring, so installers can test wiring continuity before the device is installed.

In addition, the System Sensor L-Series with LED notification appliances offer a new diagnostic test point feature that allows you to measure device voltage with a digital voltage meter (DVM) without removing the appliance from the wall or ceiling. The DVM test points are discreetly located on the face of the notification appliance which enable faster troubleshooting and end of line (EOL) voltage checks while greatly reducing the risk of misplacing or damaging appliances during troubleshooting.

## L-Series and L-Series with LED Specifications

Physical/Electrical Specifications	
Standard Operating Temperature	32°F to 120°F (0°C to 49°C)
Humidity Range	10 to 93% non-condensing
Strobe Flash Rate	1 flash per second
Nominal Voltage, LED Strobes and Horn Strobes	Regulated 24 VDC
Nominal Voltage, Horns	Regulated 12 VDC or regulated 24 DC/FWR
Operating Voltage Range, LED Strobes and Horn Strobes	16 to 33 V (24 V nominal)
Operating Voltage Range, Horns	8 to 17.5 V (12 V nominal) or 16 to 33 V (24 V nominal)
Input Terminal Wire Gauge	12 to 18 AWG

## UL/ULC Current Draw Data, Horn Tones, and Sound Output Data


UL/ULC Maximum Strobe Current Draw (mA)			
	Candela Rating	16–33 Volts	
		Wall	Ceiling
Candela Range	15	18	18
	30	22	22
	75	70	70
	95	75	75
	110	85	—
	115	—	90
	135	105	—
	150	—	110
	177	—	115
	185	120	—

UL/ULC Maximum Horn Current Draw (mA RMS)				
Sound Pattern	dB	8–17.5 Volts	16–33 Volts	
		DC	DC	FWR
Temporal	High	39	44	54
Temporal	Low	28	32	54
Non-Temporal	High	43	47	54
Non-Temporal	Low	29	32	54
3.1 KHz Temporal	High	39	41	54
3.1 KHz Temporal	Low	29	32	54
3.1 KHz Non-Temporal	High	42	43	54
3.1 KHz Non-Temporal	Low	28	29	54
Coded	High	43	47	54
3.1 KHz Coded	High	42	43	54


UL/ULC Maximum Horn Strobe Current Draw (mA) and Sound Output (dBA)													
Current Draw (mA RMS), Horn Strobe, Candela Range (15-185 cd)													Sound Output (dBA)
Switch Pos.	Sound Pattern	Volume Setting	16-33 Volts										16-33V
			15cd	30cd	75cd	95cd	110cd	115cd	135cd	150cd	177cd	185cd	DC
							WALL	CEILING	WALL	CEILING	CEILING	WALL	
1	Temporal 3	High	35	38	87	92	94	120	189	189	190	190	87
2	Temporal 3	Low	35	38	87	92	94	120	135	135	145	145	79
3	Non-Temporal	High	50	52	87	92	94	120	127	127	135	135	87
4	Non-Temporal	Low	35	38	87	92	94	120	125	125	130	130	79
5	3.1KHz Temporal 3	High	35	38	87	89	91	115	155	155	165	165	86
6	3.1KHz Temporal 3	Low	35	38	87	89	91	115	128	130	135	135	80
7	3.1KHz Non-Temporal	High	40	42	87	89	91	115	125	125	135	135	86
8	3.1KHz Non-Temporal	Low	35	38	87	89	91	115	120	120	130	130	80



# L-Series with LED Dimensions: Wall-Mounted Equipment

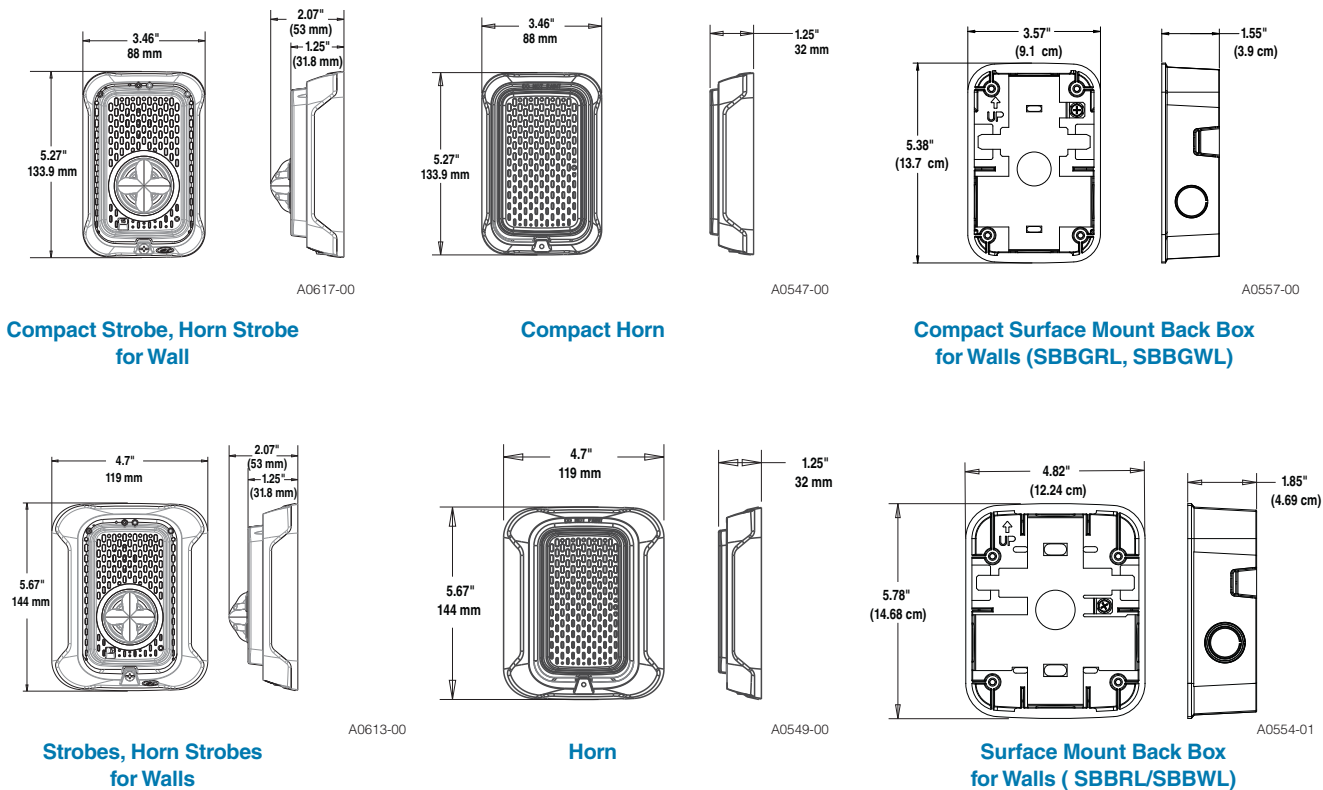

# L-Series with LED Dimensions: Ceiling-Mounted Equipment

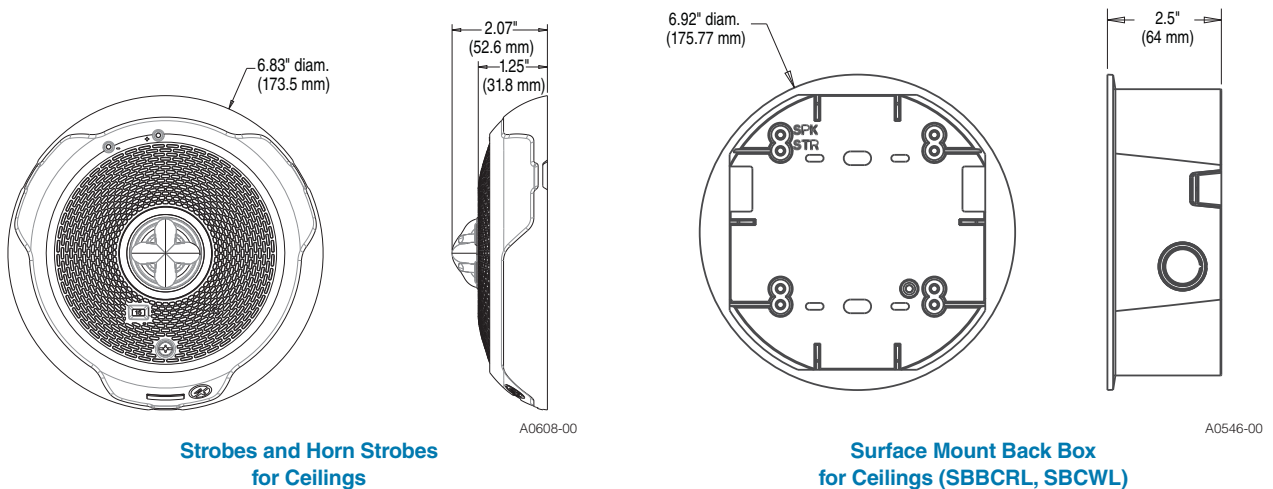

## L-Series with LED: Ordering Information

Model	Description
<b>L-Series with LED Horn Strobes</b>	
P2RLED	2-Wire, Horn Strobe, Wall, Red
P2RLED-B	2-Wire, Horn Strobe, Wall, Red, Bilingual
<b>P2WLED</b>	2-Wire, Horn Strobe, Wall, White
P2WLED-B	2-Wire, Horn Strobe, Wall, White, Bilingual
P2GRLED	2-Wire, Compact Horn Strobe, Wall, Red
P2GRLED-B	2-Wire, Compact Horn Strobe, Wall, Red, Bilingual
P2GWLED	2-Wire, Compact Horn Strobe, Wall, White
P2GWLED-B	2-Wire, Compact Horn Strobe, Wall, White, Bilingual
P2RLED-P	2-Wire, Horn Strobe, Wall, Red, Plain
P2WLED-P	2-Wire, Horn Strobe, Wall, White, Plain
P2RLED-SP	2-Wire, Horn Strobe, Wall, Red, FUEGO
P2WLED-SP	2-Wire, Horn Strobe, Wall, White, FUEGO
PC2RLED	2-Wire, Horn Strobe, Ceiling, Red
PC2RLED-B	2-Wire, Horn Strobe, Ceiling, Red, Bilingual
PC2WLED	2-Wire, Horn Strobe, Ceiling, White
PC2WLED-B	2-Wire, Horn Strobe, Ceiling, White, Bilingual
<b>L-Series with LED Strobes</b>	
SRLED	Strobe, Wall, Red
SRLED-B	Strobe, Wall, Red, Bilingual
<b>SWLED</b>	Strobe, Wall, White
SWLED-B	Strobe, Wall, White, Bilingual
SGRLED	Strobe, Compact, Wall, Red
SGRLED-B	Strobe, Compact, Wall, Red, Bilingual
SGWLED	Strobe, Compact, Wall, White
SGWLED-B	Strobe, Compact, Wall, White, Bilingual
SRLED-P	Strobe, Wall, Red, Plain
SWLED-P	Strobe, Wall, White, Plain
SRLED-SP	Strobe, Wall, Red, FUEGO
SWLED-CLR-ALERT	Strobe, Wall, White, ALERT
SWLED-ALERT	Strobe, Wall, White, ALERT, Amber Lens
SCRLED	Strobe, Ceiling, Red
SCRLED-B	Strobe, Ceiling, Red, Bilingual
SCRLED-P	Strobe, Ceiling, White, Plain
SCWLED	Strobe, Ceiling, White
SCWLED-B	Strobe, Ceiling, White, Bilingual
SCWLED-P	Strobe, Ceiling, White, Plain
SCWLED-CLR-ALERT	Strobe, Ceiling, White, ALERT
<b>L-Series Horns</b>	
HRL*	Horn, Red
HRLA*	Horn, Red, Plain, ULC
HWL*	Horn, White
HWLA*	Horn, White, Plain, ULC
HGRL*	Compact Horn, Red
HGRLA*	Compact Horn, Red, Plain, ULC
HGWL*	Compact Horn, White
HGWLA*	Compact Horn, White, Plain, ULC

Model	Description
<b>LED Lenses</b>	
LENS-A3	Lens LED Amber Wall/Ceiling
LENS-B3	Lens LED Blue Wall/Ceiling
LENS-G3	Lens LED Green Wall/Ceiling
LENS-R3	Lens LED Red Wall/Ceiling
<b>Accessories</b>	
TR-2	Universal Wall Trim Ring Red
TR-2W	Universal Wall Trim Ring White
SBBRL	Wall Surface Mount Back Box, Red
SBBWL	Wall Surface Mount Back Box, White
SBBGRL	Compact Wall Surface Mount Back Box, Red
SBBGWL	Compact Wall Surface Mount Back Box, White
TRC-2	Universal Ceiling Trim Ring, Red
TRC-2W	Universal Ceiling Trim Ring, White
SBBCRL	Ceiling Surface Mount Back Box, Red
SBBCWL	Ceiling Surface Mount Back Box, White
<b>Bezels†</b>	
BZR	Wall Red Bezel Kit
BZW	Wall White Bezel Kit
BZGR	Compact Wall Red Bezel Kit
BZGW	Compact Wall White Bezel Kit
BZRC	Horn Strobe Ceiling Red Bezel Kit
BZWC	Horn Strobe Ceiling White Bezel Kit

### Notes for L-Series With LED Horn Strobes and Strobes:

All -P models have a plain housing (no "FIRE" marking on cover).  
 All -SP models have "FUEGO" marking on cover.  
 All -ALERT models have "ALERT" marking on cover.  
 All -B models have "FIRE/FEU" marking on cover for use in Canadian applications.  
 Amber lenses are not for use in Canadian applications

### Notes for L-Series Horns:

\*Horn-only models are listed for wall or ceiling use.

### Notes for Bezels:

†Each bezel pack ships in a package of 5.  
 Add one of the following extensions for print/language options: -F (FIRE), -AL (ALERT), -EV (EVAC), -AG (AGENT), -P (Plain), -FR (FEU), -PG (FOGO), -SP (FUEGO), -SPE (FUEGO/FIRE).

3825 Ohio Avenue • St. Charles, IL 60174 USA  
 Phone: 800-SENSOR2 • Fax: 630-377-6495  
[www.systemsensor.com](http://www.systemsensor.com)

3333 Unity Drive, Mississauga, ON L5L 3S6 Canada  
 Phone: 800-SENSOR2 • Fax: 905-812-0771  
[www.systemsensor.ca](http://www.systemsensor.ca)

System Sensor® is a registered trademark  
 of Honeywell International, Inc.



©2023 System Sensor.  
 Product specifications subject to change without notice. Visit [www.systemsensor.com](http://www.systemsensor.com)  
 for current product information, including the latest version of this data sheet.  
 AVDS916-01 • 10/03/2023



## DTK-120HWLOK

### Parallel Connected Surge Protective Device

DITEK's DTK-120HWLOK surge protective device is designed and manufactured to meet the standards of the life safety industry. This compact, parallel-mount SPD is widely used to protect fire alarm panels and other dedicated branch circuit loads. Its small footprint enables installation in a variety of locations. The DTK-120HWLOK includes an NFPA 72 2022 10.6.5.4 compatible lockout kit to prevent accidental disconnect of the fire alarm system.



#### Product Features

- Approved for 20A circuit breakers
- NEMA 4X weatherproof enclosure allows for use in harsh environments
- Diagnostic LED provides positive indication of system power and SPD function
- Lockout kit prevents accidental disconnect of fire alarm system

#### Applications

- Fire Alarm Control Panels
- Equipment Panels
- Dedicated Branch Panels

#### Accessories

- DIN Rail Mounting Kit, p/n DTK-DRK

#### Technical Specifications

<b>Voltage Configuration:</b>	120VAC Single $\Phi$ (2W + G)
<b>MCOV:</b>	150V
<b>Protection Modes:</b>	L-G, L-N, N-G
<b>Voltage Protection Rating:</b>	700V L-G, L-N 1500V N-G
<b>Surge Current Rating:</b>	50,000A
<b>SCCR:</b>	100,000A
<b>Nominal Discharge Current Rating (<math>I_n</math>):</b>	10kA

#### Mechanical Specifications

<b>Connection Method:</b>	$\frac{3}{4}$ " NPT Male 18-inch 12 AWG Leads
<b>Housing:</b>	NEMA 4X Polycarbonate
<b>Operating Temperature:</b>	-31°F - 176°F (-35°C - 80°C)
<b>Maximum Humidity:</b>	95% non-condensing
<b>Dimensions:</b>	3.5" L x 1.89" W x 3.4" H (88.9 mm x 48.3 mm x 86.4 mm)
<b>Weight:</b>	0.55 lb (.025 kg)

#### Quality Standards & Approvals

<b>Certifications:</b>	UL1449 5 <sup>th</sup> Edition CSA C22.2 No. 269.1-17
<b>SPD Type:</b>	Type 1
<b>Warranty:</b>	10 Year Limited Warranty





# Product Data Sheet

## IM Series: **IM-1272F1** (UT-1272F1)


### 12 Volt, 7.0 Amp. Hour

#### Specifications

Rated Voltage	12V	
Nominal Capacity	7.0Ah	(C <sub>20</sub> , 1.75V/cell, 20hrs)
Dimensions	Length	5.95 inches ( 151 mm)
	Width	2.56 inches ( 65 mm)
	Container Height	3.68 inches (93.5 mm)
	Total Height	3.92 inches (99.5 mm)
Approx Weight	4.34 lbs (1.97 Kg)	
Terminal	F1	
Container Material	ABS	
Rated Capacity (25°C)	7.00 Ah	(20hr, 0.350A, 1.75V/cell)
	6.53 Ah	(10hr, 0.653A, 1.75V/cell)
	5.85 Ah	(5hr, 1.19A, 1.75V/cell)
	5.30 Ah	(3hr, 1.77A, 1.75V/cell)
	4.27 Ah	(1hr, 4.27A, 1.60V/cell)
Max. Discharge Current	105A (5s)	
Internal Resistance (25°C)	Approx 33mΩ	
Operating Temp. Range	Discharge	5 ~ 122°F (-15 ~ 50°C)
	Charge	-4 ~ 104°F (-20 ~ 40°C)
	Storage	5 ~ 104°F (-15 ~ 40°C)
Nominal Operating Temp. Range	77±5°F (25±3°C)	
Standby/Float Use	Initial Charging Current less than 2.1A. Voltage 13.5V~13.8V at 77°F(25°C)Temp. Coefficient -10mV/°F	
Temperature Effect on Capacity	104°F (40°C)	103%
	77°F (25°C)	100%
	32°F (0°C)	86%
Self Discharge	IM series batteries may be stored for up to 6 months at 77°F(25°C) and then a freshening charge is required. For higher temperatures - time interval will be shorter.	



#### Layout

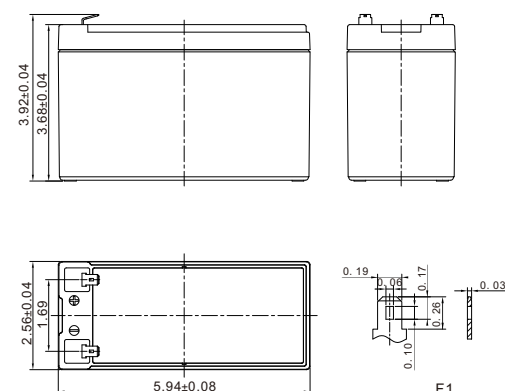

#### Constant Current Discharge (Amperes) at 77°F(25 °C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	17.0	12.5	9.90	8.10	6.12	4.64	3.91	2.90	2.38	1.72	1.36	1.16	0.99	0.780	0.637	0.343
1.80V/cell	18.5	13.2	10.3	8.35	6.28	4.73	3.99	2.95	2.41	1.74	1.38	1.18	1.01	0.790	0.644	0.347
1.75V/cell	19.9	13.8	10.7	8.60	6.43	4.83	4.06	3.00	2.45	1.77	1.40	1.19	1.02	0.800	0.653	0.350
1.70V/cell	21.4	14.4	11.1	8.86	6.57	4.92	4.13	3.05	2.49	1.79	1.42	1.21	1.03	0.809	0.660	0.354
1.67V/cell	22.3	14.8	11.3	9.01	6.67	4.98	4.17	3.08	2.51	1.81	1.43	1.22	1.04	0.816	0.665	0.356
1.60V/cell	24.3	15.7	11.8	9.40	6.87	5.11	4.27	3.14	2.56	1.84	1.46	1.24	1.06	0.829	0.675	0.361

C.O.V - Cutoff Voltage/cell. The battery is fully charged & being discharged to COV

#### Constant Power Discharge (Watts/cell) at 77°F(25 °C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	32.3	23.9	19.1	15.6	11.8	9.01	7.61	5.67	4.65	3.37	2.69	2.29	1.96	1.55	1.27	0.686
1.80V/cell	34.8	25.0	19.7	16.0	12.1	9.15	7.73	5.74	4.71	3.42	2.72	2.32	1.99	1.57	1.28	0.693
1.75V/cell	37.4	26.1	20.3	16.4	12.3	9.30	7.84	5.82	4.77	3.46	2.76	2.35	2.01	1.58	1.29	0.700
1.70V/cell	39.9	27.2	20.9	16.8	12.5	9.40	7.95	5.90	4.84	3.50	2.79	2.37	2.03	1.60	1.31	0.707
1.67V/cell	41.4	27.8	21.3	17.1	12.7	9.50	8.02	5.95	4.87	3.53	2.81	2.39	2.05	1.61	1.32	0.712
1.60V/cell	44.7	29.2	22.1	17.6	13.0	9.70	8.17	6.05	4.95	3.59	2.85	2.43	2.08	1.64	1.34	0.722

C.O.V - Cutoff Voltage/cell. The battery is fully charged & being discharged to COV



# Product Data Sheet

## IM Series: IM-1272F1 (UT-1272F1)

### 12 Volt, 7.0 Amp. Hour

#### Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

#### General Features

- 5 years design life(77°F)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- High purity PbCaSn raw material alloy is used for plate grids, assuring less gassing & low self-discharge rate
- High quality AGM separator: extend cycle life and prevent micro short circuit


#### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in IATF16949,ISO45001, ISO 9001 and ISO 14001 certified production facilities




VdS

#### Discharge Characteristics

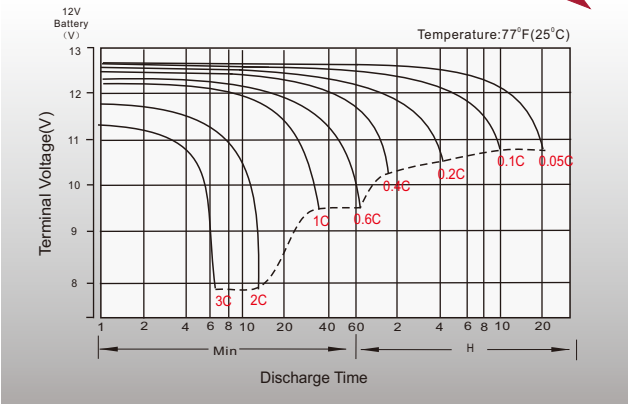


Curves represent Constant Current draw (Amp.)  
1C curve = 1 x Nominal capacity= 7amp. constant draw    0.05C curve = 0.05 x Nominal capacity = 0.35amp. draw


#### Standby/Float Charging Characteristics

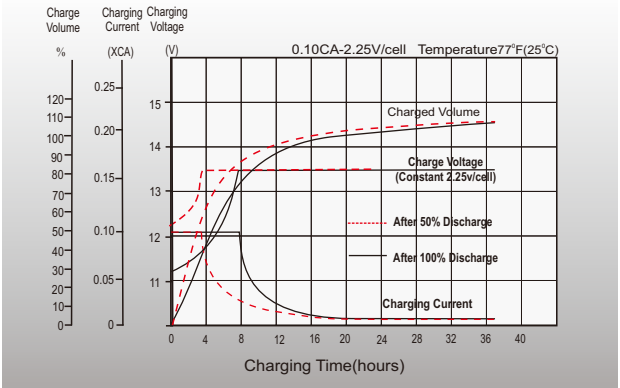

#### Temperature Effectes on Battery Capacity

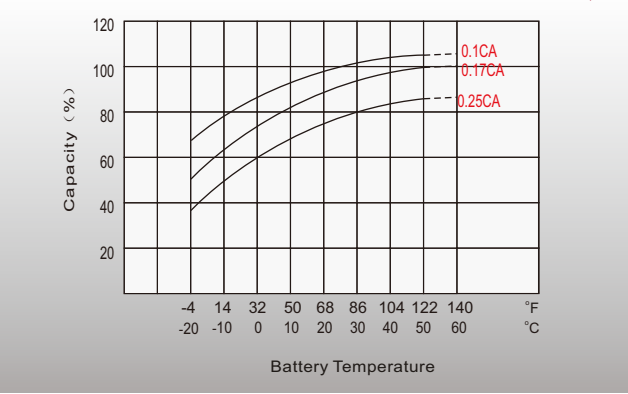

#### Temperature Effectes on Long Term Float Life

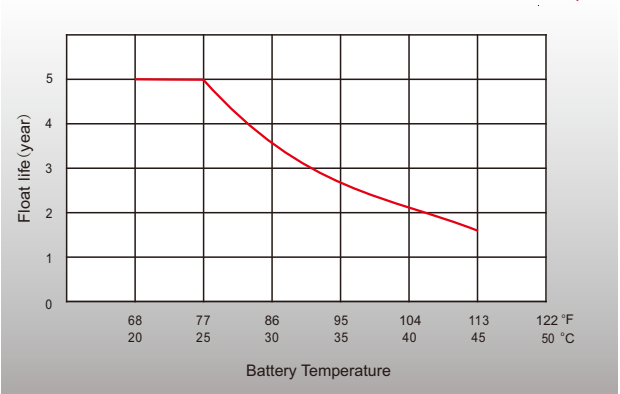

#### Sales Offices

Sales: 1.800.233.6261  
Website: [www.adiglobaldistribution.us](http://www.adiglobaldistribution.us)  
[www.adiglobaldistribution.ca](http://www.adiglobaldistribution.ca)





# Product Data Sheet

## IM Series: **IM-12120** (UT-12120)


### 12 Volt, 12.0 Amp. Hour

#### Specifications

Rated Voltage	12V	
Nominal Capacity	12.0Ah	(C <sub>20</sub> , 1.75V/cell, 20hrs)
Dimensions	Length	5.95 inches (151 mm)
	Width	3.86 inches ( 98 mm)
	Container Height	3.74 inches ( 95 mm)
	Total Height	3.98 inches (101 mm)
Approx Weight	7.14 lbs (3.24 Kg)	
Terminal	F2	
Container Material	ABS	
Rated Capacity (25°C)	12.0 Ah	(20hr, 0.600A, 1.75V/cell)
	11.2 Ah	(10hr, 1.12A, 1.75V/cell)
	10.2 Ah	(5hr, 2.04A, 1.75V/cell)
	9.00 Ah	(3hr, 3.00A, 1.75V/cell)
	7.20 Ah	(1hr, 7.20A, 1.60V/cell)
Max. Discharge Current	180A (5s)	
Internal Resistance (25°C)	Approx 19mΩ	
Operating Temp. Range	Discharge	5 ~ 122°F (-15 ~ 50°C)
	Charge	-4 ~ 104°F (-20 ~ 40°C)
	Storage	5 ~ 104°F (-15 ~ 40°C)
Nominal Operating Temp. Range	77±5°F (25±3°C)	
Standby/Float Use	Initial Charging Current less than 3.6A. Voltage	
	13.5V~13.8V at 77°F(25°C)Temp. Coefficient -10mV/°F	
Temperature Effect on Capacity	104°F (40°C)	103%
	77°F (25°C)	100%
	32°F ( 0°C)	86%
Self Discharge	IM series batteries may be stored for up to 6 months	
	at 77°F(25°C) and then a freshening charge is required. For higher temperatures - time interval will be shorter.	



#### Layout

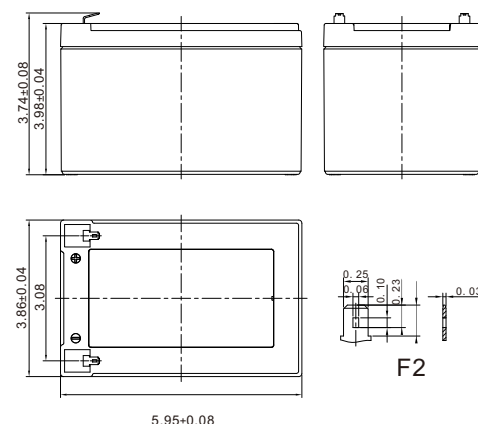

#### Constant Current Discharge (Amperes) at 77°F(25 °C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	30.6	22.7	18.1	14.8	11.0	8.07	6.59	4.81	3.82	2.91	2.34	1.99	1.70	1.34	1.09	0.587
1.80V/cell	33.2	23.9	18.8	15.2	11.3	8.23	6.72	4.90	3.88	2.95	2.37	2.01	1.72	1.35	1.10	0.594
1.75V/cell	35.9	25.1	19.5	15.7	11.5	8.39	6.84	4.98	3.94	3.00	2.40	2.04	1.74	1.37	1.12	0.600
1.70V/cell	38.6	26.2	20.2	16.2	11.8	8.55	6.96	5.06	4.01	3.04	2.43	2.07	1.77	1.39	1.13	0.606
1.67V/cell	40.2	26.9	20.6	16.4	12.0	8.65	7.03	5.11	4.04	3.07	2.45	2.08	1.78	1.40	1.14	0.609
1.60V/cell	43.7	28.6	21.6	17.1	12.3	8.88	7.20	5.22	4.12	3.13	2.50	2.12	1.81	1.42	1.16	0.618

C.O.V - Cutoff Voltage/cell. The battery is fully charged & being discharged to COV

#### Constant Power Discharge (Watts/cell) at 77°F(25 °C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	58.2	43.5	34.8	28.4	21.2	15.7	12.8	9.40	7.49	5.72	4.60	3.92	3.36	2.65	2.17	1.17
1.80V/cell	62.7	45.4	36.0	29.2	21.7	15.9	13.0	9.53	7.58	5.79	4.66	3.97	3.40	2.68	2.19	1.19
1.75V/cell	67.3	47.4	37.1	29.9	22.1	16.2	13.2	9.66	7.68	5.87	4.72	4.02	3.44	2.71	2.22	1.20
1.70V/cell	71.8	49.3	38.2	30.7	22.5	16.4	13.4	9.79	7.78	5.94	4.77	4.06	3.48	2.74	2.24	1.21
1.67V/cell	74.6	50.5	38.9	31.1	22.8	16.6	13.5	9.87	7.84	5.98	4.80	4.09	3.50	2.76	2.26	1.22
1.60V/cell	80.4	53.1	40.4	32.1	23.3	16.9	13.8	10.0	7.97	6.08	4.88	4.15	3.56	2.80	2.29	1.24

C.O.V - Cutoff Voltage/cell. The battery is fully charged & being discharged to COV



# Product Data Sheet

## IM Series: IM-12120 (UT-12120)

### 12 Volt, 12.0 Amp. Hour

#### Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

#### General Features

- 5 years design life(77°F)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- High purity PbCaSn raw material alloy is used for plate grids, assuring less gassing & low self-discharge rate
- High quality AGM separator: extend cycle life and prevent micro short circuit


#### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in IATF16949,ISO45001, ISO 9001 and ISO 14001 certified production facilities




VdS

#### Discharge Characteristics

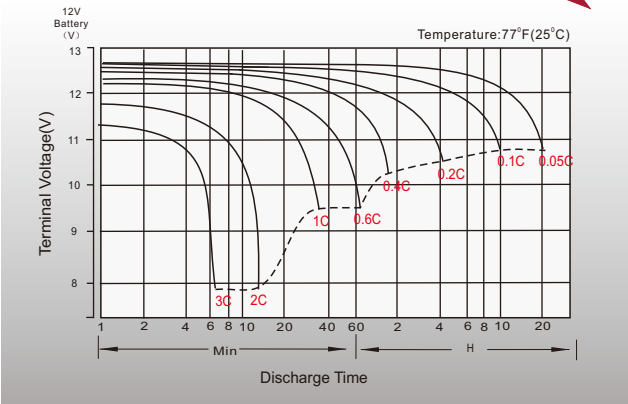


Curves represent Constant Current draw (Amp.)  
1C curve = 1 x Nominal capacity= 12amp. constant draw    0.05C curve = 0.05 x Nominal capacity = 0.60amp. draw


#### Standby/Float Charging Characteristics

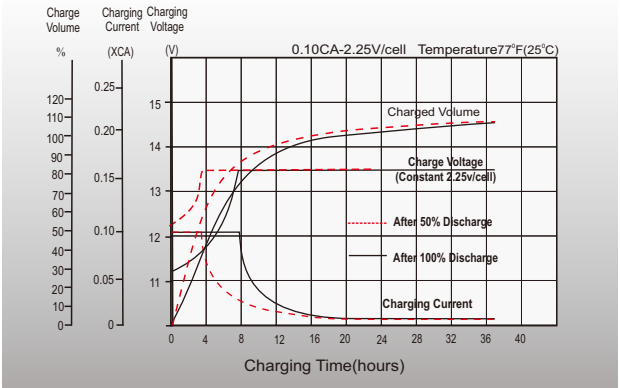

#### Temperature Effectes on Battery Capacity

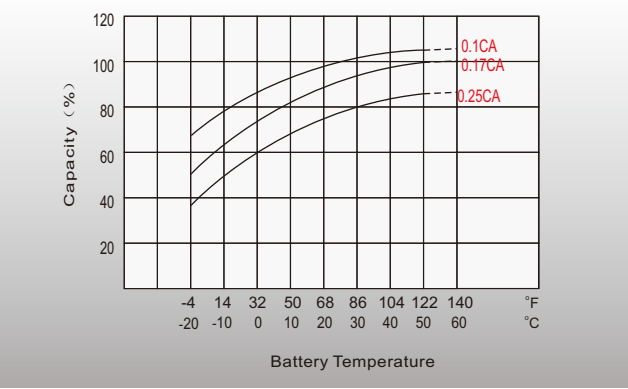

#### Temperature Effectes on Long Term Float Life

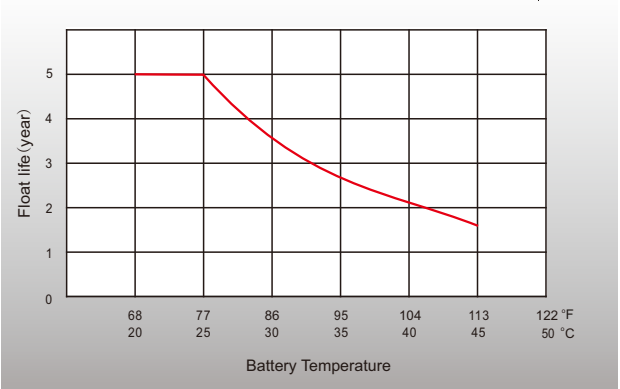

#### Sales Offices

Sales: 1.800.233.6261  
Website: [www.adiglobaldistribution.us](http://www.adiglobaldistribution.us)  
[www.adiglobaldistribution.ca](http://www.adiglobaldistribution.ca)



## Standby Battery Calculation Firelite ES-50X Fire Alarm Control Panel

Protected Premises: Mit. Pisgah FWB Church Date: 9/8/2025

Address: 146 Prospect Church Road

City: Erwin State: NC Zip: 28339

Prepared By: WACO Fire Alarm, LLC Phone: (919) 772-1745

City: Raleigh State: NC

Panel ID: FACP Location: Ex. Building

System Device	Qty	Standby Current Draw		Alarm Current Draw	
		Draw	Standby	Draw	Alarm
ES-50X	1	0.141000	0.141000	0.257000	0.257000
ANN-80 Remote Annunciator	1	0.015000	0.015000	0.040000	0.040000
IPOTS-COM Communicator	1	0.040000	0.040000	0.041000	0.041000
SLE-MAX2-FIRE Cellular Communicator	1	0.085000	0.085000	0.325000	0.325000
SD365 Photo Detector	1	0.000200	0.000200	0.004500	0.004500
BG-12LX Manual Pull Station	5	0.000300	0.001500	0.005000	0.025000
MMF-300 Monitor Module	8	0.000375	0.003000	0.005000	0.040000
PSN-54 Trigger	1	0.000000	0.000000	0.020000	0.020000
P2WLED15	6	0.000000	0.000000	0.035000	0.000000
P2WLED30	3	0.000000	0.000000	0.038000	0.114000
P2WLED75	7	0.000000	0.000000	0.087000	0.000000
SWLED15	1	0.000000	0.000000	0.018000	0.000000
SWLED30	2	0.000000	0.000000	0.022000	0.000000
Total Standby:			0.286	Total Alarm:	0.867

### Secondary Load Requirements **8.32** Amp Hours

Total Secondary Load from the calculation table below.

Current Draw (Amps)		Time (Hours)	Total (AH)
Secondary Standby Load		Required Standby Time	
0.286		24	6.86
Secondary Alarm Load		Required Alarm Time	
0.867		0.084	0.07
Total Secondary Load			6.93
Derating Factor			1.20
Secondary Load Requirements			8.32

### Battery Selection **12** Amp Hours



# Standby Battery Calculation PSN-64 NAC Power Supply

Protected Premises: Mit. Pisgah FWB Church

Date: 9/8/2025

Address: 146 Prospect Church Road

City: Erwin

State: NC

Zip: 28339

Panel ID: RPS

Location: By FACP

System Device	Qty	Standby Current Draw		Alarm Current Draw	
		Draw	Standby	Draw	Alarm
PSN-64 Main Board	1	0.075000	0.075000	0.075000	0.075000
Maximum Current Draw	1	0.000000	0.000000	6.000000	6.000000
Total Standby:			0.075	Total Alarm:	6.075

Secondary Load Requirements **2.77** Amp Hours

Total Secondary Load from the calculation table below.

Current Draw (Amps)		Time (Hours)	Total (AH)
Secondary Standby Load		Required Standby Time	
0.075		24	1.80
Secondary Alarm Load		Required Alarm Time	
6.075		0.084	0.51
Total Secondary Load			2.31
Derating Factor			1.20
Secondary Load Requirements			2.77

Battery Selection **7** Amp Hours

**Point to Point Voltage Drop Analysis**  
**Firelite ES-50X Fire Alarm Control Panel**  
**Source Voltage: 20.4 Nominal System Voltage**

**Project Name:** Mt. Pisgah FWB Church Activities Ctr **Date:** 9/8/2025  
**Circuit No:** N1 **Minimum Voltage:** 16  
**Area Covered:** Activities Center **Wire Gauge:** 14  
**Ohm's per 1,000 ft.:** 3.14

Device Number	Part Number	Current (amps)	Distance (Feet)		Voltage at Device
			Between	Total	
1	P2WLED75	0.087	30	30	20.33
2	SWLED30	0.022	35	65	20.27
3	P2WLED15	0.035	35	100	20.21
4	SWLED30	0.022	40	140	20.15
5	P2WLED15	0.035	30	170	20.11
6	P2WLED15	0.035	35	205	20.07
7	SWLED15	0.018	35	240	20.04
8	P2WLED15	0.035	30	270	20.02
9	P2WLED75	0.087	30	300	20.00
<b>Total Power:</b>		<b>0.376</b>	<b>% Voltage Drop:</b>		<b>-1.96%</b>

NOTE: Wire resistance is doubled in the calculations for two wires. The voltage shown at the last device must not be lower than the manufacturer's listed minimum voltage.

**Go**



**Point to Point Voltage Drop Analysis**  
**Firelite ES-50X Fire Alarm Control Panel**  
**Source Voltage: 20.4 Nominal System Voltage**

**Project Name:** Mt. Pisgah FWB Church Activities Ctr **Date:** 9/8/2025  
**Circuit No:** N2 **Minimum Voltage:** 16  
**Area Covered:** Activities Center **Wire Gauge:** 14  
**Ohm's per 1,000 ft.:** 3.14

Device Number	Part Number	Current (amps)	Distance (Feet)		Voltage at Device
			Between	Total	
1	P2WLED75	0.087	70	70	20.13
2	P2WLED30	0.038	60	130	19.93
3	P2WLED30	0.038	60	190	19.74
4	P2WLED30	0.038	35	225	19.64
5	P2WLED75	0.087	40	265	19.54
6	P2WLED15	0.035	30	295	19.47
7	P2WLED15	0.035	50	345	19.38
8	P2WLED75	0.087	25	370	19.34
9	P2WLED75	0.087	75	445	19.26
10	P2WLED75	0.087	60	505	19.23
<b>Total Power:</b>		<b>0.619</b>	<b>% Voltage Drop:</b>		<b>-5.76%</b>

NOTE: Wire resistance is doubled in the calculations for two wires. The voltage shown at the last device must not be lower than the manufacturer's listed minimum voltage.

Go