



Application for Plan Review

Application # BCCM1811.0004

Date Received: 11.15.18 Received By: djchism

Name of Project: Ann Milton Realty Lillington Office

Physical Address of Project: 107 West Front Street
Lillington, NC 27546

Plans Submitted By: Milton Builders, LLC

Project Phone: (910)-890-0555

Contact Person/Address: Andrew W. Milton
3183 US 421 N.
Lillington, NC 27546

Contact Email: andrew@miltonbuilt homes.com

Contact Phone: (910)-890-0555 ()- -

Contractor's Name/Info: Andrew W. Milton
Milton Builders, LLC

Contractor's Phone: (910)-890-0555

Reviewed For Code Compliance By:

D. Banks Wallace

Chief Deputy Fire Marshal

11/19/2018 11:20:22 AM

- Plans that are submitted will be reviewed as quickly as possible with an average time of review between 7-10 working days.
- Status checks may be conducted on plan reviews by visiting the website <http://htweb.harnett.org/Click2GovBP/Index.jsp> or by calling the Harnett County Central Permitting Office (910-893-7525, Option #2), or the Harnett County Fire Marshal's Office (910-893-7580).
- Approved plans must be picked up from the Central Permitting Office and all fees paid before any required inspections can be conducted.


November 12, 2018

Milton Builders, LLC
Andrew W. Milton
(910)890-0555

Project:
107 West Front Street
Lillington, NC 27546
2,510 Heated Square Feet

Scope of Work
Convert existing back porch to heated square footage
Update HVAC, Electrical, Plumbing, and Insulation
Install new interior and exterior finishes

Red denotes
existing back porch

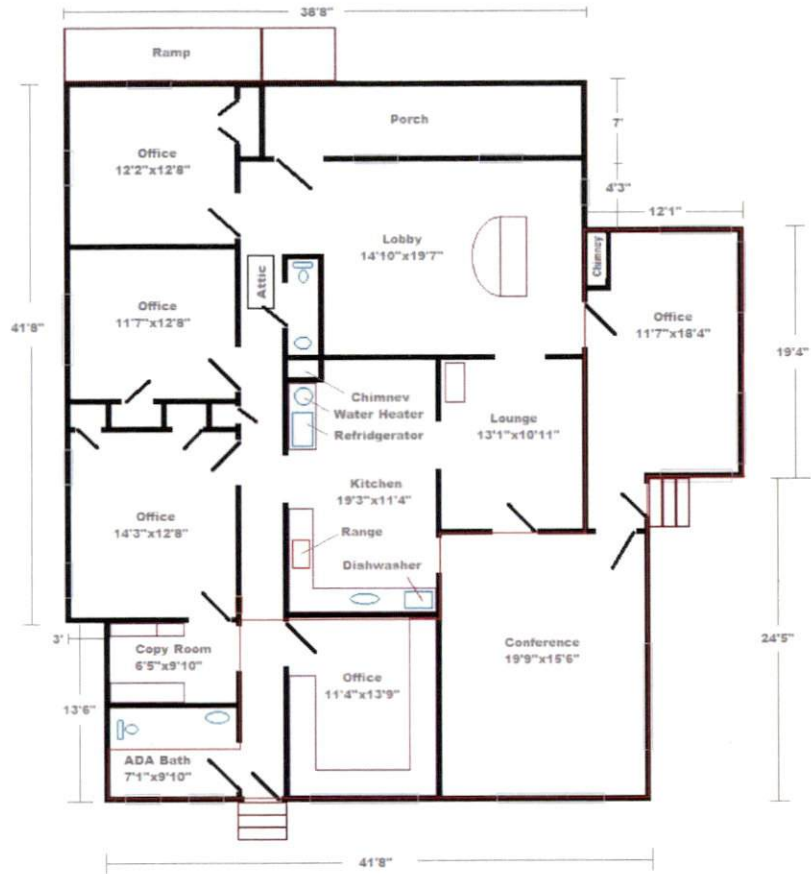


November 12, 2018

Milton Builders, LLC
Andrew W. Milton
(910)890-0555

Project:
107 West Front Street
Lillington, NC 27546
2,510 Heated Square Feet

Scope of Work
Convert existing back porch to heated square footage
Update HVAC, Electrical, Plumbing, and Insulation
Install new interior and exterior finishes

Red denotes
existing back porch

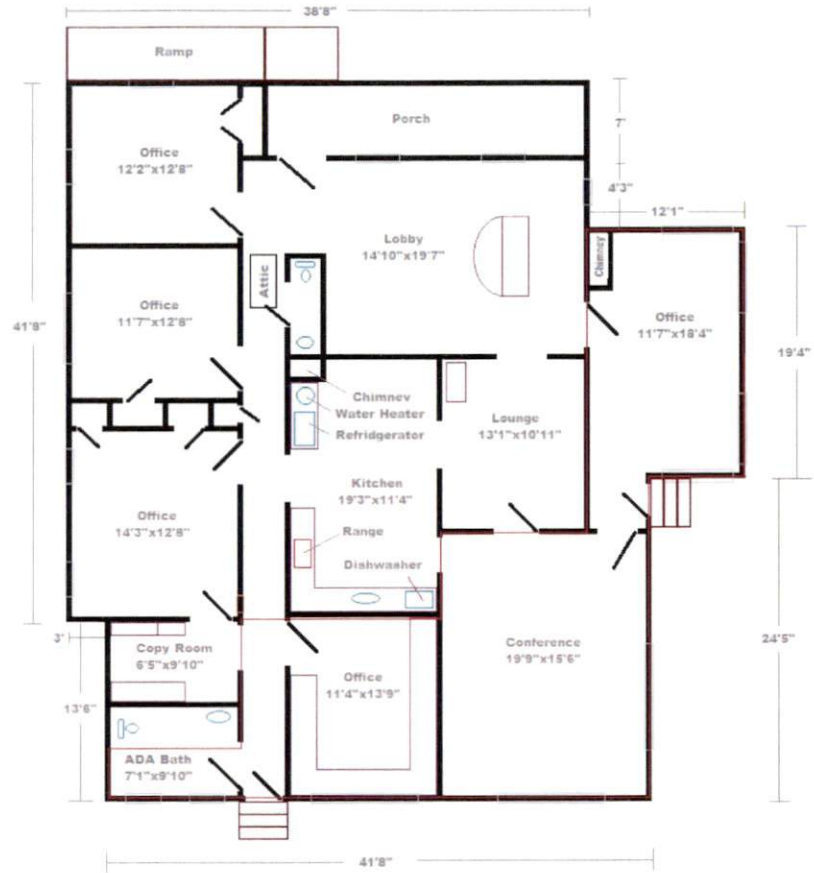

**2012 APPENDIX B
BUILDING CODE SUMMARY
FOR ALL COMMERCIAL PROJECTS
(EXCEPT 1 AND 2-FAMILY DWELLINGS AND TOWNHOUSES)**
(Reproduce the following data on the building plans sheet 1 or 2)

Name of Project: Ann Milton Realty Lillington Office
 Address: 107 West Front Street, Lillington, NC 27546 Zip Code 27546
 Proposed Use: Office
 Owner/Authorized Agent: Andrew Milton Phone # (910) 890-0555 E-Mail andrew@miltonbulthomes.com
 Owned By: City/County Private State
 Code Enforcement Jurisdiction: City Lillington County _____ State _____

LEAD DESIGN PROFESSIONAL: Milton Builders, LLC

| DESIGNER | FIRM | NAME | LICENSE # | TELEPHONE # | E-MAIL |
|--------------------------|--------------------------------|----------------------|----------------|-----------------------|--------|
| Architectural | _____ | _____ | _____ | () _____ | _____ |
| Civil | _____ | _____ | _____ | () _____ | _____ |
| Electrical | <u>Dawson's Electric, Inc.</u> | <u>Travis Dawson</u> | <u>25948-2</u> | <u>(919) 201-3841</u> | _____ |
| Fire Alarm | _____ | _____ | _____ | () _____ | _____ |
| Plumbing | <u>Camden's Plumbing</u> | <u>Paul Camden</u> | <u>18903</u> | <u>(919) 669-4650</u> | _____ |
| Mechanical | <u>S+M Heating + Air</u> | <u>Kent Johnson</u> | <u>17164</u> | <u>(910) 897-5501</u> | _____ |
| Sprinkler-Standpipe | _____ | _____ | _____ | () _____ | _____ |
| Structural | _____ | _____ | _____ | () _____ | _____ |
| Retaining Walls >5' High | _____ | _____ | _____ | () _____ | _____ |
| Other | _____ | _____ | _____ | () _____ | _____ |

2012 EDITION OF NC CODE FOR: New Construction Addition Upfit
EXISTING: Reconstruction Alteration Repair Renovation
CONSTRUCTED: (date) _____ **ORIGINAL USE(S)** (Ch. 3): SFD
RENOVATED: (date) _____ **CURRENT USE(S)** (Ch. 3): _____
PROPOSED USE(S) (Ch. 3): Office - Business Group B

BASIC BUILDING DATA

Construction Type: I-A II-A III-A IV V-A
 (check all that apply) I-B II-B III-B V-B
Sprinklers: No Partial Yes NFPA 13 NFPA 13R NFPA 13D
Standpipes: No Yes Class I II III Wet Dry
Fire District: No Yes (Primary) **Flood Hazard Area:** No Yes

Building Height: (feet) 20'

Gross Building Area:

| FLOOR | EXISTING (SQ FT) | NEW (SQ FT) | SUB-TOTAL |
|-----------------------|------------------|-------------|-----------|
| 6 th Floor | _____ | _____ | _____ |
| 5 th Floor | _____ | _____ | _____ |
| 4 th Floor | _____ | _____ | _____ |
| 3 rd Floor | _____ | _____ | _____ |
| 2 nd Floor | _____ | _____ | _____ |
| Mezzanine | _____ | _____ | _____ |
| 1 st Floor | <u>2510</u> | _____ | _____ |
| Basement | _____ | _____ | _____ |
| TOTAL | <u>2510</u> | _____ | _____ |

ALLOWABLE AREA

Occupancy:

- Assembly A-1 A-2 A-3 A-4 A-5
- Business
- Educational
- Factory F-1 Moderate F-2 Low
- Hazardous H-1 Detonate H-2 Deflagrate H-3 Combust H-4 Health H-5 HPM
- Institutional I-1 I-2 I-3 I-4
I-3 Condition 1 2 3 4 5
- Mercantile
- Residential R-1 R-2 R-3 R-4
- Storage S-1 Moderate S-2 Low High-piled
 Parking Garage Open Enclosed Repair Garage
- Utility and Miscellaneous

Accessory Occupancies:

- Assembly A-1 A-2 A-3 A-4 A-5
- Business
- Educational
- Factory F-1 Moderate F-2 Low
- Hazardous H-1 Detonate H-2 Deflagrate H-3 Combust H-4 Health H-5 HPM
- Institutional I-1 I-2 I-3 I-4
I-3 Condition 1 2 3 4 5
- Mercantile
- Residential R-1 R-2 R-3 R-4
- Storage S-1 Moderate S-2 Low High-piled
 Parking Garage Open Enclosed Repair Garage
- Utility and Miscellaneous

Incidental Uses (Table 508.2.5):

- Furnace room where any piece of equipment is over 400,000 Btu per hour input
- Rooms with boilers where the largest piece of equipment is over 15 psi and 10 horsepower
- Refrigerant machine room
- Hydrogen cutoff rooms, not classified as Group H
- Incinerator rooms
- Paint shops, not classified as Group H, located in occupancies other than Group F
- Laboratories and vocational shops, not classified as Group H, located in a Group E or I-2 occupancy
- Laundry rooms over 100 square feet
- Group I-3 cells equipped with padded surfaces
- Group I-2 waste and linen collection rooms
- Waste and linen collection rooms over 100 square feet
- Stationary storage battery systems having a liquid electrolyte capacity of more than 50 gallons, or a lithium-ion capacity of 1,000 pounds used for facility standby power, emergency power or uninterrupted power supplies
- Rooms containing fire pumps
- Group I-2 storage rooms over 100 square feet
- Group I-2 commercial kitchens
- Group I-2 laundries equal to or less than 100 square feet
- Group I-2 rooms or spaces that contain fuel-fired heating equipment

- Special Uses:** 402 403 404 405 406 407 408 409 410 411 412
 413 414 415 416 417 418 419 420 421 422 423 424
 425 426 427

- Special Provisions:** 509.2 509.3 509.4 509.5 509.6 509.7 509.8 509.9

Mixed Occupancy: No Yes Separation: _____ Hr. Exception: _____

Incidental Use Separation (508.2.5)

This separation is not exempt as a Non-Separated Use (see exceptions).

Non-Separated Use (508.3)

The required type of construction for the building shall be determined by applying the height and area limitations for each of the applicable occupancies to the entire building. The most restrictive type of construction, so determined, shall apply to the entire building.

Separated Use (508.4) - See below for area calculations

For each story, the area of the occupancy shall be such that the sum of the ratios of the actual floor area of each use divided by the allowable floor area for each use shall not exceed 1.

$$\frac{\text{Actual Area of Occupancy A}}{\text{Allowable Area of Occupancy A}} + \frac{\text{Actual Area of Occupancy B}}{\text{Allowable Area of Occupancy B}} \leq 1$$

$$\underline{\hspace{2cm}} + \underline{\hspace{2cm}} + \dots = \underline{\hspace{2cm}} \leq 1.00$$

| STORY NO. | DESCRIPTION AND USE | (A) BLDG AREA PER STORY (ACTUAL) | (B) TABLE 503 ⁵ AREA | (C) AREA FOR FRONTAGE INCREASE ¹ | (D) AREA FOR SPRINKLER INCREASE ² | (E) ALLOWABLE AREA OR UNLIMITED ³ | (F) MAXIMUM BUILDING AREA ⁴ |
|-----------|---------------------|-------------------------------------|---------------------------------------|--|---|---|---|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

¹ Frontage area increases from Section 506.2 are computed thus:

- a. Perimeter which fronts a public way or open space having 20 feet minimum width = _____ (F)
- b. Total Building Perimeter = _____ (P)
- c. Ratio (F/P) = _____ (F/P)
- d. W = Minimum width of public way = _____ (W)
- e. Percent of frontage increase $I_f = 100 [F/P - 0.25] \times W/30 = \underline{\hspace{2cm}} (\%)$

² The sprinkler increase per Section 506.3 is as follows:

- a. Multi-story building $I_s = 200$ percent
- b. Single story building $I_s = 300$ percent

³ Unlimited area applicable under conditions of Section 507.

⁴ Maximum Building Area = total number of stories in the building x E (506.4).

⁵ The maximum area of open parking garages must comply with Table 406.3.5. The maximum area of air traffic control towers must comply with Table 412.1.2.

ALLOWABLE HEIGHT

| | ALLOWABLE (TABLE 503) | INCREASE FOR SPRINKLERS | SHOWN ON PLANS | CODE REFERENCE |
|----------------------------|-----------------------|-------------------------|----------------|----------------|
| Type of Construction | Type _____ | | Type _____ | |
| Building Height in Feet | | Feet = H + 20' = _____ | | |
| Building Height in Stories | | Stories + 1 = _____ | | |

FIRE PROTECTION REQUIREMENTS

| BUILDING ELEMENT | FIRE SEPARATION DISTANCE (FEET) | RATING | | DETAIL # AND SHEET # | DESIGN # FOR RATED ASSEMBLY | DESIGN # FOR RATED PENETRATION | DESIGN # FOR RATED JOINTS |
|---|---------------------------------|--------|------------------------------------|----------------------|-----------------------------|--------------------------------|---------------------------|
| | | REQ'D | PROVIDED (W/ _____)* REDUCTION) | | | | |
| Structural Frame, including columns, girders, trusses | | | | | | | |
| Bearing Walls | | | | | | | |
| Exterior | | | | | | | |
| North | | | | | | | |
| East | | | | | | | |
| West | | | | | | | |
| South | | | | | | | |
| Interior | | | | | | | |
| Nonbearing Walls and Partitions | | | | | | | |
| Exterior walls | | | | | | | |
| North | | | | | | | |
| East | | | | | | | |
| West | | | | | | | |
| South | | | | | | | |
| Interior walls and partitions | | | | | | | |
| Floor Construction Including supporting beams and joists | | | | | | | |
| Roof Construction Including supporting beams and joists | | | | | | | |
| Shaft Enclosures - Exit | | | | | | | |
| Shaft Enclosures - Other | | | | | | | |
| Corridor Separation | | | | | | | |
| Occupancy Separation | | | | | | | |
| Party/Fire Wall Separation | | | | | | | |
| Smoke Barrier Separation | | | | | | | |
| Tenant Separation | | | | | | | |
| Incidental Use Separation | | | | | | | |

* Indicate section number permitting reduction

LIFE SAFETY SYSTEM REQUIREMENTS

- Emergency Lighting: No Yes
- Exit Signs: No Yes
- Fire Alarm: No Yes
- Smoke Detection Systems: No Yes Partial _____
- Panic Hardware: No Yes

LIFE SAFETY PLAN REQUIREMENTS

Life Safety Plan Sheet #: _____

- Fire and/or smoke rated wall locations (Chapter 7)
- Assumed and real property line locations

- Exterior wall opening area with respect to distance to assumed property lines (705.8)
- Existing structures within 30' of the proposed building
- Occupancy types for each area as it relates to occupant load calculation (Table 1004.1.1)
- Occupant loads for each area
- Exit access travel distances (1016)
- Common path of travel distances (1014.3 & 1028.8)
- Dead end lengths (1018.4)
- Clear exit widths for each exit door
- Maximum calculated occupant load capacity each exit door can accommodate based on egress width (1005.1)
- Actual occupant load for each exit door
- A separate schematic plan indicating where fire rated floor/ceiling and/or roof structure is provided for purposes of occupancy separation
- Location of doors with panic hardware (1008.1.10)
- Location of doors with delayed egress locks and the amount of delay (1008.1.9.7)
- Location of doors with electromagnetic egress locks (1008.1.9.8)
- Location of doors equipped with hold-open devices
- Location of emergency escape windows (1029)
- The square footage of each fire area (902)
- The square footage of each smoke compartment (407.4)
- Note any code exceptions or table notes that may have been utilized regarding the items above

ACCESSIBLE DWELLING UNITS
(SECTION 1107)

| TOTAL UNITS | ACCESSIBLE UNITS REQUIRED | ACCESSIBLE UNITS PROVIDED | TYPE A UNITS REQUIRED | TYPE A UNITS PROVIDED | TYPE B UNITS REQUIRED | TYPE B UNITS PROVIDED | TOTAL ACCESSIBLE UNITS PROVIDED |
|-------------|---------------------------|---------------------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------------------------|
| | | | | | | | |

ACCESSIBLE PARKING
(SECTION 1106)

| LOT OR PARKING AREA | TOTAL # OF PARKING SPACES | | # OF ACCESSIBLE SPACES PROVIDED | | | TOTAL # ACCESSIBLE UNITS PROVIDED |
|---------------------|---------------------------|----------|---------------------------------|-------------------|-----------------|-----------------------------------|
| | REQUIRED | PROVIDED | REGULAR WITH 5' ACCESS AISLE | VAN SPACES WITH | | |
| | | | | 132" ACCESS AISLE | 8' ACCESS AISLE | |
| | | | | | | |
| TOTAL | | | | | | |

STRUCTURAL DESIGN

DESIGN LOADS:

Importance Factors: Wind (I_w) 100 mph
 Snow (I_s) _____
 Seismic (I_e) _____

Live Loads: Roof N/A psf
 Mezzanine N/A psf
 Floor 50 psf

Ground Snow Load: 5 psf

Wind Load: Basic Wind Speed 100 mph (ASCE-7)
 Exposure Category _____
 Wind Base Shears (for MWFRS) $V_x =$ _____ $V_y =$ _____

SEISMIC DESIGN CATEGORY: A B C D

Provide the following Seismic Design Parameters:

Occupancy Category (Table 1604.5) I II III IV

Spectral Response Acceleration S_s _____ %g S_1 _____ %g

Site Classification (Table 1613.5.2) A B C D E F

Data Source: Field Test Presumptive Historical Data

Basic structural system (check one)

- Bearing Wall Dual w/Special Moment Frame
- Building Frame Dual w/Intermediate R/C or Special Steel
- Moment Frame Inverted Pendulum

Seismic base shear: $V_x =$ _____ $V_y =$ _____

Analysis Procedure: Simplified Equivalent Lateral Force Dynamic

Architectural, Mechanical, Components anchored? Yes No

LATERAL DESIGN CONTROL: Earthquake Wind

SOIL BEARING CAPACITIES:

Field Test (provide copy of test report) _____ psf

Presumptive Bearing capacity _____ psf

Pile size, type, and capacity _____

SPECIAL INSPECTIONS REQUIRED: Yes No

**PLUMBING FIXTURE REQUIREMENTS
(TABLE 2902.1)**

2 - 1/2 baths

| USE | | WATERCLOSETS | | URINALS | LAVATORIES | | SHOWERS/ TUBS | DRINKING FOUNTAINS | |
|-------|----------|--------------|--------|---------|------------|--------|------------------|--------------------|------------|
| | | MALE | FEMALE | | MALE | FEMALE | | REGULAR | ACCESSIBLE |
| SPACE | EXISTING | | | | | | | | |
| | NEW | | | | | | | | |
| | REQUIRED | | | | | | | | |

SPECIAL APPROVALS

Special approval: (Local Jurisdiction, Department of Insurance, OSC, DPI, DHHS, ICC, etc., describe below)

ENERGY SUMMARY

ENERGY REQUIREMENTS:

The following data shall be considered minimum and any special attribute required to meet the energy code shall also be provided. Each Designer shall furnish the required portions of the project information for the plan data sheet. If performance method, state the annual energy cost for the standard reference design vs annual energy cost for the proposed design.

Climate Zone: 3 4 5

Method of Compliance:

- Prescriptive (Energy Code)
 Performance (Energy Code)
 Prescriptive (ASHRAE 90.1)
 Performance (ASHRAE 90.1)

THERMAL ENVELOPE

Roof/ceiling Assembly (each assembly)

Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: 38
Skylights in each assembly: _____
U-Value of skylight: _____
total square footage of skylights in each assembly: _____

Exterior Walls (each assembly)

Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: 15
Openings (windows or doors with glazing)
U-Value of assembly: _____
Solar heat gain coefficient: _____
projection factor: _____
Door R-Values: _____

Walls below grade (each assembly)

Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: _____

Floors over unconditioned space (each assembly)

Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: 19

Floors slab on grade

Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: _____
Horizontal/vertical requirement: _____
slab heated: _____

MECHANICAL SUMMARY

MECHANICAL SYSTEMS, SERVICE SYSTEMS AND EQUIPMENT

Thermal Zone

winter dry bulb: _____
summer dry bulb: _____

Interior design conditions

winter dry bulb: _____
summer dry bulb: _____
relative humidity: _____

Building heating load: _____

Building cooling load: _____

Mechanical Spacing Conditioning System

Unitary

description of unit: _____
heating efficiency: _____
cooling efficiency: _____
size category of unit: _____

Boiler

Size category. If oversized, state reason.: _____

Chiller

Size category. If oversized, state reason.: _____

List equipment efficiencies: _____

ELECTRICAL SUMMARY

ELECTRICAL SYSTEM AND EQUIPMENT

Method of Compliance:

Energy Code: Prescriptive Performance
ASHRAE 90.1: Prescriptive Performance

Lighting schedule (each fixture type)

lamp type required in fixture
number of lamps in fixture
ballast type used in the fixture
number of ballasts in fixture
total wattage per fixture
total interior wattage specified vs. allowed (whole building or space by space)
total exterior wattage specified vs. allowed

Additional Prescriptive Compliance

- 506.2.1 More Efficient Mechanical Equipment
- 506.2.2 Reduced Lighting Power Density
- 506.2.3 Energy Recovery Ventilation Systems
- 506.2.4 Higher Efficiency Service Water Heating
- 506.2.5 On-Site Supply of Renewable Energy
- 506.2.6 Automatic Daylighting Control Systems