


	1	2	3	4	5	6	7	8	9																																																
H	<p>with structural steel angles. The completed core and coil shall then be bolted to the base of the enclosure but isolated therefrom by means of rubber, vibration-absorbing mounts. There shall be no metal-to-metal contact between the core and coil and the enclosure. On transformers 500 kVA and smaller, the vibration isolating system shall be designed to provide a permanent fastening of the core and coil to the enclosure. Sound isolating systems requiring the complete removal of all fastening devices will not be acceptable. Sound levels shall be guaranteed by the manufacturer not to exceed the following: 25 to 50 kVA - 45 DB; 51 to 150 kVA - 50 DB; 151 to 300 kVA - 55 DB; 301 to 500 kVA - 60 DB.</p> <p>E. Transformers 24 kVA and larger shall be in a heavy gauge, sheet steel, ventilated enclosure. The ventilating openings shall be designed to prevent accidental access to live parts in accordance with UL, NEMA, and National Electrical Code standard for ventilated enclosures. Transformers 25 kVA through 112.5 kVA shall be designed so that they can be either floor or wall mounted. Above 112.5 kVA, they shall be floor-mounted design. The entire transformer enclosure shall be degreased, cleaned, phosphatized, primed and finished with a gray, baked enamel.</p> <p>F. Transformers shall be compliant with the 2016 DOE efficiency standards:</p>	<p>25. Trip unit shall provide local trip indication.</p> <p>26. Ground-fault protection shall be available for solidly grounded three-phase, three-wire or three-phase, four-wire systems. Trip unit shall be capable of the following types of ground-fault protection: residual, source ground return, and modified differential. Ground-fault sensing systems may be changed in the field.</p> <p>27. Ground-fault settings for circuit breaker sensor sizes 1200 A or below shall be in nine bands from 0.2 to 1.0 times In. The ground-fault settings for circuit breakers above 1200 A shall be nine bands from 500 to 1200 A.</p> <p>28. Trip units shall be available to provide real time metering. Metering functions include current, voltage, power and frequency. Metering accuracy shall be 1.5% current, 0.5% voltage, and 2% power. These accuracy's shall be total system including CT and meter and shall be of reading not full scale in a range of 5 = 500%.</p> <p>29. Provide energy reducing active arc flash mitigation system to comply with NEC 240.87 for all breakers rated 1200 amps or can be adjusted to 1200 amps or higher.</p> <p>E. Distribution Circuit Breakers</p>																																																							
G	<p>Table I.6—Electrical Efficiencies for All Low-Voltage Dry-Type Distribution Transformer</p> <table border="1"><thead><tr><th colspan="2">Equipment Class 3 (Single-Phase)</th><th colspan="2">Equipment Class 4 (Three-Phase)</th></tr><tr><th>kVA</th><th>%</th><th>kVA</th><th>%</th></tr></thead><tbody><tr><td>15</td><td>97.70</td><td>15</td><td>97.89</td></tr><tr><td>25</td><td>98.00</td><td>30</td><td>98.23</td></tr><tr><td>37.5</td><td>98.20</td><td>45</td><td>98.40</td></tr><tr><td>50</td><td>98.30</td><td>75</td><td>98.60</td></tr><tr><td>75</td><td>98.50</td><td>112.5</td><td>98.74</td></tr><tr><td>100</td><td>98.60</td><td>150</td><td>98.83</td></tr><tr><td>167</td><td>98.70</td><td>225</td><td>98.94</td></tr><tr><td>250</td><td>98.80</td><td>300</td><td>99.02</td></tr><tr><td>333</td><td>98.90</td><td>500</td><td>99.14</td></tr><tr><td></td><td>750</td><td>99.23</td><td>1,000</td><td>99.28</td></tr></tbody></table>	Equipment Class 3 (Single-Phase)		Equipment Class 4 (Three-Phase)		kVA	%	kVA	%	15	97.70	15	97.89	25	98.00	30	98.23	37.5	98.20	45	98.40	50	98.30	75	98.60	75	98.50	112.5	98.74	100	98.60	150	98.83	167	98.70	225	98.94	250	98.80	300	99.02	333	98.90	500	99.14		750	99.23	1,000	99.28							
Equipment Class 3 (Single-Phase)		Equipment Class 4 (Three-Phase)																																																							
kVA	%	kVA	%																																																						
15	97.70	15	97.89																																																						
25	98.00	30	98.23																																																						
37.5	98.20	45	98.40																																																						
50	98.30	75	98.60																																																						
75	98.50	112.5	98.74																																																						
100	98.60	150	98.83																																																						
167	98.70	225	98.94																																																						
250	98.80	300	99.02																																																						
333	98.90	500	99.14																																																						
	750	99.23	1,000	99.28																																																					
H	<p>G. Transformers that are of the floor-mounted type shall be mounted on Korfund Vibration Eliminators of the pad type.</p> <p>H. Transformers shall be as manufactured by ABB - General Electric, Square D, Siemens, or Eaton.</p>																																																								
F	<p>2.4 MAIN SWITCHBOARD</p> <p>A. General</p> <p>1. Provide where indicated, a front and rear accessible dead front type, completely metal enclosed, self-supporting structure independent of wall supports. It shall consist of the required number of vertical sections bolted together to form one rigid switchboard approximately 90° high incorporating switching and protective devices of the number, ratings and type noted herein or shown with necessary interconnections, instrumentation and control wiring. The sides, top and rear shall be covered with removable screw-on plates. Front plates shall be sectionalized and removable. All covers shall be secured by self-tapping screws. Ventilation openings shall be provided where required. The switchboard shall be vermin proof.</p> <p>2. All sections of the switchboard shall be 20 inches deep except service sections containing large ampacity main circuit breaker or pressure contact type main fusible switch which may be deeper. All section of the switchboard shall align so that the back of the complete structure may be placed flush against a wall. Construction shall allow maintenance of incoming line terminations, main device connections and all main bus bolted connections to be performed with front and rear access.</p> <p>3. The feeder or branch devices shall be removable from the front and shall be panel mounted with the necessary device line and load connections front accessible.</p> <p>4. All exterior and interior steel surfaces of the switchboard shall be cleaned and finished with gray dried enamel over a rust-inhibiting phosphatized coating.</p> <p>5. Small wiring, necessary fuse blocks and terminal blocks within the switchboard shall be furnished when required. All groups of control wires leaving the switchboard shall be provided with terminal blocks with numbering strips.</p> <p>B. Bussing</p> <p>1. The bus shall be tin plated aluminum or silver plated copper adequately braced and supported to withstand mechanical forces exerted during short circuit conditions. The main horizontal bus bars shall be mounted on glass polyester insulators with all three phases arranged in the same vertical plane. The main bus shall be braced for short circuits up to the RMS ampere value as shown.</p> <p>2. A ground bus shall be provided firmly secured to each vertical structure and shall extend the entire length of the switchboard. A ground lug shall be furnished attached to the ground bus in an accessible location.</p> <p>3. Provide a removable link (solid bar) in the neutral bus where the main disconnect device is provided.</p> <p>4. Provide a bonding strap from the neutral bus to the switchboard frame. The bonding strap shall be located on the line side of the removable neutral link.</p> <p>C. Main Circuit Breaker</p> <p>1. Circuit breaker shall be draw-out type [manually] [electrically] operated. Acceptable manufacturers are Square D Masterpact or equal by GE, Siemens, Eaton.</p> <p>2. The case of the circuit breaker shall be a polyester thermostat material providing high dielectric strength.</p> <p>3. Interrupting rating shall be available up to 200,000 amperes RMS symmetrical without fuses.</p> <p>4. All circuit breaker operating mechanisms are to be two-step, fully-stored energy devices for quick-make, quick-break operation with a maximum of a five-cycle closing time. Open-close-open (O-C-O) cycle shall be possible without recharging. Motor operator shall automatically charge when tripping and energizing of the operating handle or an operation cycle of the circuit breaker motor is to charge the closing springs (step one) and operation of a local "close" button is to close the circuit breaker contact (step two). Closing the circuit breaker contacts shall automatically close the opening springs.</p> <p>5. Current-carrying components shall be completely isolated from the accessory mounting area and double insulated from the operator with accessory cover in place.</p> <p>6. Each phase inside the circuit breaker shall be completely isolated from other phases and ground by polyester thermostat material.</p> <p>7. Padlocking provisions shall be furnished to receive up to three padlocks when circuit breaker is in the disconnected position, positively preventing unauthorized closing of the circuit breaker contacts.</p> <p>8. Provisions for locking in the key, two key locks shall be furnished allowing locking in the disconnected position. Provisions for locking in the connected, test and disconnected positions by padlock or key lock shall be available as an option.</p> <p>9. Located on the face of the circuit breaker shall be buttons, with optional lockable clear cover, to open and close the circuit breaker and indicators to show the position of the circuit breaker contacts, status of the closing springs, and circuit breaker position in the cell. An indicator shall show "charged-not OK to close" if closing springs are charged but circuit breaker is not ready to close. Circuit breaker locking system must have positive stops at the connected, test, disconnected and withdrawn positions.</p> <p>10. Circuit breaker must be equipped with an interlock to discharge the stored energy spring before the circuit breaker can be withdrawn from its cell. Circuit breaker must provide a positive ground contact check between the circuit breaker and cell when the accessory cover is removed while the circuit breaker is in the connected, test or disconnected positions.</p> <p>11. Primary connectors that can be rotated to provide flexible vertical or horizontal connections shall be available as an option. Front connections shall also be available for shallow depth equipment designs.</p> <p>12. Ready-to-close contact must be available to indicate remotely that the circuit breaker is "ready to close." The circuit breaker is ready to close when it is open, spring mechanism is charged, a maintained closing order is not present, a maintained opening order is not present, and the circuit breaker is in an operational position.</p> <p>13. Secondary wiring shall be front accessible and available in cage clamp or ring terminal connections. Secondary wiring must not be accessible when switchgear door is closed.</p> <p>14. Circuit breaker shall provide long service life. The 3200 A circuit breaker frame and those of lower ratings must be certified to perform a minimum of 10,000 operations without maintenance. The 4000 A and 5000 A frames must be certified to 5,000 operations without maintenance.</p> <p>15. Circuit breaker shall be equipped with a visual contact wear indicator.</p> <p>16. Low-voltage power circuit breaker arc chutes containing asbestos will NOT be accepted.</p> <p>17. Circuit breaker trip system shall be an electronic trip unit.</p> <p>18. All trip units shall be removable to allow for field upgrades.</p> <p>19. Trip Units shall incorporate "True RMS Sensing", and have LED long-time pickup indications.</p> <p>20. Trip unit functions shall consist of adjustable long-time pickup and delay, optional short-time pickup and delay, instantaneous and ground-fault pickup and delay.</p> <p>21. Adjustable long-time pickup (tr) and delay shall be available in an adjustable rating plug that is UL Listed as field-replaceable. Adjustable rating plug shall allow for nine long-time pickup settings from 0.4 to 1 times the sensor plug (In). Other adjustable rating plugs shall be available for more precise settings to match the application. Long-time delay settings shall be in nine bands from 0.5–24 seconds at six times Ir.</p> <p>22. Short-time pickup shall allow for nine settings from 1.5 to 10 times Ir. Short-time delay shall be in nine bands from 0.1–0.4 s / 2/ t ON and 0–0.4 s / t OFF.</p> <p>23. Instantaneous settings on the trip units with LSI protection shall be available in nine bands from 2 to 15 times In. The instantaneous setting shall also have an OFF setting when short-time pickup is provided.</p> <p>24. All trip units shall have the capability for the adjustments to be set and read locally by rotating a switch.</p>																																																								
A																																																									

DRAWING NO.

CFD-XXX-E-004-XXXXX

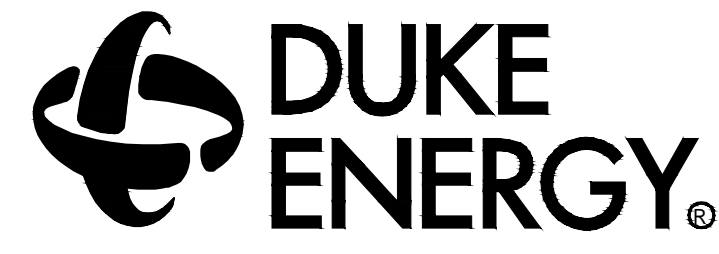

MAILING ADDRESS:
P.O. BOX 1007
CHARLOTTE, NC 28201

Safety Expectations:




- Reduce Risk
- Remove Exposures to Hazards
- Reinforce Safe Behavior



BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minuet Ln.
Charlotte, North Carolina 28217
(p) 704-367-9333 (f) 704-367-9386

© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.

BWA JOB # 2022-0632

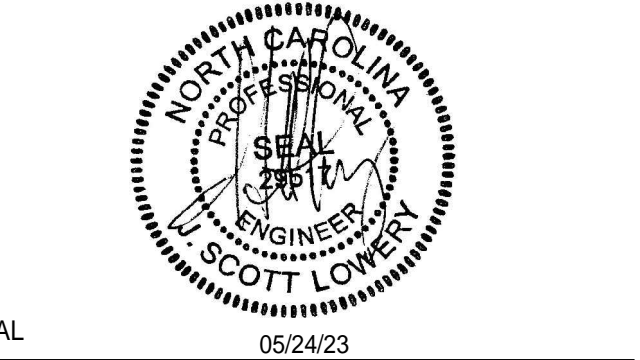

DUNN OPERATIONS CENTER

1269 JONESBORO RD.
HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

REVISION																		ISSUED FOR CONSTRUCTION	
DRAWN BY																			
DATE																			05-24-23

PROJECT NO:

DRAWING NUMBER

CFD-XXX-E-004-XXXXX

ELECTRONIC FILE NAME:

DRAWN BY: JFE DATE:

CHK'D BY: JSL DATE:

E-MAIL: SLOWERY@BARRETTWOODYARD.COM

THIS DESIGN DRAWING IS THE EXCLUSIVE PROPERTY OF DUKE ENERGY CORPORATION AND IS CONFIDENTIAL. IT SHALL NOT BE REPRODUCED, COPIED, OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM DUKE ENERGY CORPORATION. THE INFORMATION SHOULD ONLY BE USED FOR THE SPECIFIC PROJECT INTENDED.

SHEET TITLE:

SPECIFICATIONS - ELECTRICAL

SHEET NO.

E-004

0

1.2 RELATED DOCUMENTS
A. General Conditions
B. Electrical Section General Provisions
C. Conduit
D. Wire and Cable
1.3 MANUFACTURER'S SERVICES
A. Shop drawings shall be submitted for approval within 30 days after receipt of contract.

1. Complete bill of materials.
2. Sets of catalog cut sheets for standard equipment.
3. Sets of shop drawings detailing all mechanical and electrical equipment including on line diagrams, wire counts, internal wiring, and physical dimensions of each item.

1.4 QUALITY ASSURANCE
A. Manufacturer's products shall be listed by Underwriters Laboratories, Inc. (U.L.) and comply with the National Electrical Code (NEC) and local building codes that apply.
B. The equipment specified herein shall be the coordinated product of a single manufacturer.

1.5 WARRANTY
A. All equipment shall be warranted free of defects in materials and workmanship for a period of eighteen (18) months from date of shipment or twelve (12) months from date to turn-on, whichever occurs first.

PART 2 - PRODUCTS
2.1 MANUFACTURER'S REQUIREMENTS.

A. The equipment herein specified is manufactured by Macro Electronics Corporation of Austin, Texas, (512) 837-8100 and shall serve to indicate the quality of equipment required.
B. Other manufacturers who wish to bid must submit a complete bill of materials with company information listing qualifications and experience to the Architect ten days prior to bid date for permission to bid.

2.2 SYSTEM TESTING
A. All dimmers shall be assembled into the dimmer cabinets and all interwiring completed at the factory prior to shipment.
B. This system shall have a dimmer cabinet constructed of #14 U.S. gauge steel, welded, and painted in a textured medium blue color two part epoxy type paint.

2.3 DIMMER CABINETS
A. The cabinets shall contain all dimmer modules, controls, circuitry, relays, contactors, power supplies, primary and secondary circuit breakers, barriered section for power separation of emergency lighting circuits, and all wiring as required for lighting areas to be controlled from the dimmer cabinet.
B. This system shall have a dimmer cabinet constructed of #14 U.S. gauge steel, welded, and painted in a textured medium blue color two part epoxy type paint.

2.4 DIMMING MODULES
A. The dimming modules shall be 100% solid state electronic employing U.L. Recognized line isolated silicon Controlled Rectifiers (SCR) as power handling devices.
B. The Silicon Controlled Rectifiers, along with the filter inductor and control printed circuit board, shall be mounted in modular dimming units.

A. The dimmer power circuit shall contain a high inductance toroidal filter choke to minimize radio frequency interference (R.F.I.) and reduce filament noise.
B. The dimmer module control circuitry shall be contained on plug-in printed circuit cards.
E. The dimmer power circuit shall contain a high inductance toroidal filter choke to minimize radio frequency interference (R.F.I.) and reduce filament noise.

H. All dimmer modules shall be U.L. listed to control the lighting loads connected to it.
I. All dimmer types shall be available in capacity ratings from 1440 watts to 12,000 watts at 120 volts and 5500 watts to 27,700 watts at 277 volts.
2.5 DIMMER MODULE TYPES
A. Each dimmer system may require one or more types of dimmers.
2.6 EIGHT SCENE PRESET CONTROL
A. The master station shall consist of eight Preset Select switches, Maximum (full on), Off and Manual select switches, Integral Infrared Receiver for preset recall, Record and station Enable key switch, and up to sixteen manual control channel sliders and a programmable fade rate controller.

1. Incandescent dimmers
a. Incandescent dimmers shall be available to operate tungsten lamps including quartz and halogen varieties at 120 volts, 240 volts, and 277 volts.
2.6 EIGHT SCENE PRESET CONTROL
A. The master station shall consist of eight Preset Select switches, Maximum (full on), Off and Manual select switches, Integral Infrared Receiver for preset recall, Record and station Enable key switch, and up to sixteen manual control channel sliders and a programmable fade rate controller.
B. Each slide controller shall be a 30mm linear potentiometer with an integral LED indicator in the handle.

PART 3 - EXECUTION
3.1 INSTALLATION
A. It shall be the responsibility of the Electrical Contractor to receive and store the necessary materials and equipment for dimming system.

2.5 FUEL SYSTEM
A. Provide a diesel skid mounted fuel tank with all required black iron fuel oil piping.
2.6 OUTDOOR HOUSING AND EXHAUST MUFFLER
A. Housing shall consist of an enclosure to completely enclose the engine generator and accessories.
B. Exhaust muffler shall be mounted on top of housing.
2.7 INDOOR UNIT EXHAUST SYSTEM
A. A critical type silencer/muffler, companion flanges and flexible stainless steel exhaust fittings shall be provided according to the manufacturer's recommendations.

END OF SECTION
SECTION 26 61 00
EMERGENCY SYSTEM
PART 1 - GENERAL
1.1 DESCRIPTION
A. All work specified in this Section shall comply with the provisions of Section 26 01 00.

1.2 SUBMITTALS
A. Furnish information showing manufacturers' model numbers, dimensions and weights for the engine, generator and major auxiliary equipment.
B. Submit copies of pertinent drawings and schematic diagrams for approval and include the following:
1. Engine generator set including plans and elevations clearly indicating entrance points for each of the interconnections required.
2. Engine generator/exciter control cubicle.
3. Fuel consumption rate at various loads, ventilation and combustion CFM requirements.
4. Exhaust mufflers and vibration isolators.
5. Battery charger, battery and battery racks.
6. Day tank fuel connection points.
7. Automatic load transfer control switch.
8. Actual electrical diagrams including schematic diagrams and inter-connection wiring diagrams for all equipment to be provided.
9. Legends for all devices on all diagrams.
10. Weather-protective housing.

2.1 MANUFACTURER
A. The equipment shall be as manufactured by Cummins's, Detroit Diesel Caterpillar/Olympian or Kohler of the size and ratings indicated.
B. Equipment shall include weather-protective housing for outdoor use.
2.2 ENGINE
A. The engine shall be water cooled in-line or vee-type two or four stroke cycle compression ignition diesel.
C. The specified standby KW shall be for continuous electrical service during interruption of the normal utility source and shall be certified by the manufacturer for the actual unit supplied.

PART 2 - PRODUCTS
2.1 MANUFACTURER
A. The equipment shall be as manufactured by Cummins's, Detroit Diesel Caterpillar/Olympian or Kohler of the size and ratings indicated.
B. Equipment shall include weather-protective housing for outdoor use.
2.2 ENGINE
A. The engine shall be water cooled in-line or vee-type two or four stroke cycle compression ignition diesel. It shall meet specifications when operation on Number 2 domestic burner oil.

mounted instruments, water temperature gauge, lubrication oil pressure gauge and battery charging ammeter.
B. A gear driven hydraulic governor shall maintain frequency regulation not to exceed 3% to 5% from no load to full rated load.
C. The unit shall be mounted on a structural steel sub-base and shall be provided with suitable isolators.
D. Safety shut-off for high water temperature, low oil pressure overspeed and engine overcrank, with alarm for low water temperature shall be provided.
E. Guards shall be provided over all exposed moving parts as required by OSHA.

2.3 GENERATOR
A. The generator shall be rated for continuous standby service at ratings indicated with 0.8 power factor, 277/480 volts, three-phase, four wire, 60 hertz, 1800 RPM.
B. The generator shall be a three phase, 60 hertz, single bearing, rotating field, synchronous type built to NEMA standards.
C. The generator shall be a three phase, 60 hertz, single bearing, rotating field, synchronous type built to NEMA standards.

2.4 COOLING SYSTEM
A. A radiator with blower type fan shall be provided to maintain safe operation at 110 degrees F. ambient temperature.
B. The engine cooling system shall be pretreated by the system supplier for the inhibition of internal corrosion and freezing.
2.5 FUEL SYSTEM
A. Provide a diesel skid mounted fuel tank with all required black iron fuel oil piping.

2.6 OUTDOOR HOUSING AND EXHAUST MUFFLER
A. Housing shall consist of an enclosure to completely enclose the engine generator and accessories.
B. Exhaust muffler shall be mounted on top of housing.
2.7 INDOOR UNIT EXHAUST SYSTEM
A. A critical type silencer/muffler, companion flanges and flexible stainless steel exhaust fittings shall be provided according to the manufacturer's recommendations.

2.8 AUTOMATIC STARTING SYSTEM
A. A DC electric starting system with positive engagement shall be provided.
B. Fully automatic generator set start-stop controls in the generator control panel shall be provided.
C. A belt driven battery charging alternator shall be provided with transistorized voltage regulator.
D. A lead-acid storage battery set of the heavy duty starting type shall be provided.

2.9 GENERATOR CONTROL PANEL
A. A generator mounted NEMA 1 type vibration isolation control panel shall be provided.
1. Frequency Meter, 3 1/2", dial type.
2. Voltmeter, 3 1/2", 2% accuracy.
3. Ammeter, 3 1/2", 2% accuracy.
4. Ammeter/Voltmeter phase selector switch.
5. Automatic starting controls as specified.
6. Voltage level adjustment rheostat.
7. Contacts for remote alarms wired to terminal strips.
8. Individual fault indicator lights for low oil pressure, high water temperature, overspeed, overcrank and low water temperature.
9. Three position function switch marked, RUN-STOP and REMOTE.
10. Running time meter, oil pressure, battery charging ammeter and water temperature gauges.

2.10 MAIN LINE CIRCUIT BREAKERS
A. Provide main-line, molded case circuit breakers sized as shown and mounted upon the generator.
B. The trip unit for each pole shall have elements providing inverse time delay during overload conditions and instantaneous magnetic tripping for short circuit protection.

END OF SECTION
SECTION 26 65 00
SURGE PROTECTION DEVICES
A. The unit shall be shipped to the job by the manufacturer's authorized dealer having a parts and service facility within a 120 mile radius of the job.
B. Operating and maintenance instruction manual shall be furnished and procedures explained to operating personnel.
3.5 SYSTEM SERVICE CONTRACT
A. The supplier of the standby power system must furnish a copy of, and make available to the Owner, his standard service contract which, at the Owner's option, may be accepted or refused.

meet standards as established by U.L., NEMA and the N.E.C.
2.11 AUTOMATIC LOAD TRANSFER SWITCHES
A. The amperage rating of the automatic load transfer switch shall be as shown.
B. The automatic transfer switch shall be mechanically linked on both the emergency and the normal side.
C. The automatic load transfer control shall be rated for continuous duty when enclosed in a non-ventilated NEMA 1 enclosure.

D. The transfer switch shall be as listed under U.L. 1008.
E. The automatic load transfer switch shall include the following accessories:
1. Engine starting contacts to provide for generator starting.
2. Full phase protection.
3. Test switch, to simulate a power outage.
4. Adjustable time delay on engine starting to override momentary outages and nuisance voltage dips.
5. Adjustable time delay on transfer of load to emergency source.
6. Adjustable time delay on retransfer of load to normal with 5 minute cool-down timer wherein the generator set runs unloaded after transfer to line.

7. Plant exerciser to start and run the generator set with or without load each 168 hours for a 30 minute interval.
8. One auxiliary contact closed on emergency and one auxiliary contact open on emergency.
9. Pilot lights to indicate the normal and emergency position of the transfer switch.
10. Isolated (underground) neutral bar.
11. Disconnect plug.
2.12 WEATHER-PROTECTIVE ENCLOSURE
A. Enclosure and all other items to be designed and built by manufacturer as an integral part of the entire generator set.

B. Provide baked enamel finish with primer and finish coat to be painted before assembly.
C. Unit shall have coolant and oil drains outside the unit to facilitate maintenance.
D. Mount generator on 4 inch thick re-enforced 3000 psi concrete pad.
3.2 MANUFACTURING
A. The unit shall be shipped to the job by the manufacturer's authorized dealer having a parts and service facility within a 120 mile radius of the job.

3.3 TESTING
A. Prior to acceptance of the installation, equipment shall be tested to show it is free of any defects and will start automatically and be subjected to full load test through the use of portable, dry-type load banks supplied for this purpose at the job by the generator set supplier.
B. The load bank shall be capable of definite and precise incremental loading and shall not be dependent on the generator control instrumentation to read amperage and voltage of each phase.
C. Saltwater brine tanks or those load banks requiring water as a source for cooling are not acceptable for this purpose and are disallowed and shall not be utilized for this test.
D. Load bank testing shall be done in the presence of the Owner or his appointed representative only after the unit is permanently installed in accordance with the Contract Documents.

3.4 START UP AND INSTRUCTIONS
A. On completion of the installation, start up shall be performed by the engine manufacturers' trained dealer service representative.
B. Operating and maintenance instruction manual shall be furnished and procedures explained to operating personnel.
3.5 SYSTEM SERVICE CONTRACT
A. The supplier of the standby power system must furnish a copy of, and make available to the Owner, his standard service contract which, at the Owner's option, may be accepted or refused.

3.6 GUARANTEE
A. Equipment provided under this Section shall be guaranteed against defective parts and workmanship under terms of the manufacturer's and dealer's standard warranty.
B. The trip unit for each pole shall have elements providing inverse time delay during overload conditions and instantaneous magnetic tripping for short circuit protection.


END OF SECTION
SECTION 26 65 00
SURGE PROTECTION DEVICES
A. Equipment provided under this Section shall be guaranteed against defective parts and workmanship under terms of the manufacturer's and dealer's standard warranty.
B. The trip unit for each pole shall have elements providing inverse time delay during overload conditions and instantaneous magnetic tripping for short circuit protection.

DRAWING NO.
CFD-XXX-E-005-XXXXX
DUKE ENERGY
MAILING ADDRESS:
P.O. BOX 1007
CHARLOTTE, NC 28201

Safety Expectations:
ILLNESS Reduce Risk
ZERO Remove Exposures to Hazards
INJURY Reinforce Safe Behavior



BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minuet LN.
Charlotte, North Carolina 28217
(p) 704-357-9333 (f) 704-357-9886
© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.
BWA JOB # 2022-0632

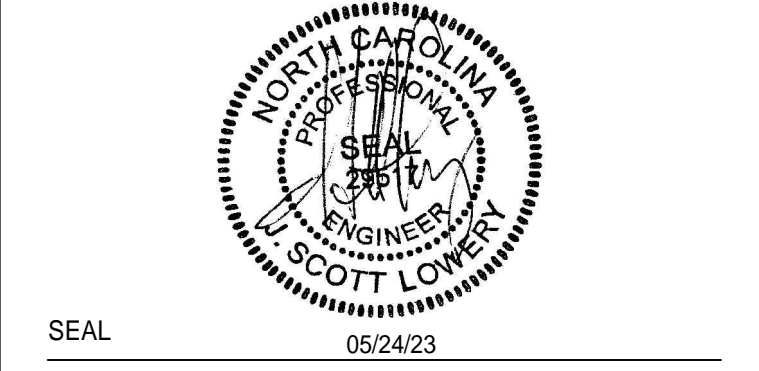

DUNN OPERATIONS CENTER
1269 JONESBORO RD.
HARNETT COUNTY, NC 28334

OPERATIONS BUILDING


Table with columns: REVISION, DATE, DRAWN BY, ISSUED FOR CONSTRUCTION, and a grid for revision tracking.

PROJECT NO:
DRAWING NUMBER
CFD-XXX-E-005-XXXXX
ELECTRONIC FILE NAME:
DRAWN BY: JFE
CHK'D BY: JSL DATE:
E-MAIL: SLOWERY@BARRETTWOODYARD.COM
SHEET TITLE:
SPECIFICATIONS - ELECTRICAL
SHEET NO.
E-005

1 2 3 4 5 6 7 8 9

Table with 9 columns and multiple rows. Row 1: 2. General Operation. Row 2: 2.1 CONDUIT AND WIRE. Row 3: 2.2 MAIN FIRE ALARM CONTROL PANEL. Row 4: 2.3 SYSTEM COMPONENTS. Row 5: 2.4 ALARM. Row 6: 2.5 BATTERIES. Row 7: 2.6 ELEVATOR VISUAL SIGNAL (NC & FLA). Row 8: 2.7 SMOKE DAMPERS. Row 9: 2.8 SMOKE DETECTORS. Row 10: 2.9 SMOKE DETECTOR SENSITIVITY. Row 11: 2.10 SMOKE DETECTOR RESPONSE. Row 12: 2.11 SMOKE DETECTOR SENSITIVITY ADJUSTMENT. Row 13: 2.12 SMOKE DETECTOR RESPONSE. Row 14: 2.13 SMOKE DETECTOR SENSITIVITY ADJUSTMENT. Row 15: 2.14 SMOKE DETECTOR RESPONSE.

CFD-XXX-E-007-XXXXX. DUKE ENERGY. SAFETY EXPECTATIONS: ZERO ILLNESS, ZERO INJURY, ZERO DEATH. BWA JOB # 2022-0632.

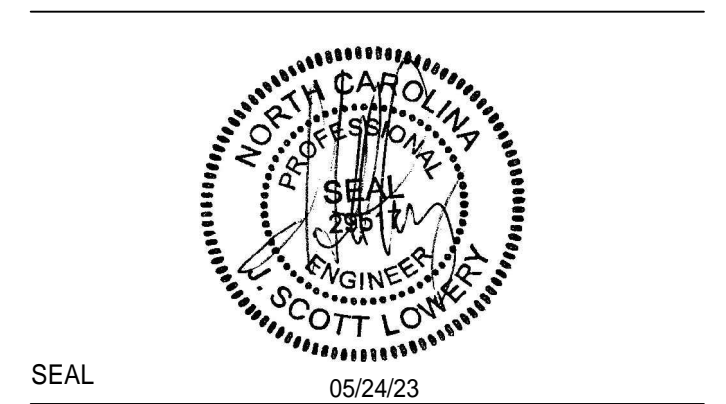

DUNN OPERATIONS CENTER OPERATIONS BUILDING


Revision table with columns: MARK, DATE, DESCRIPTION, REVISION. Includes rows for SUBMITTALS, SHOP DRAWINGS, and SYSTEM DRAWINGS.

PROJECT NO: DRAWING NUMBER: CFD-XXX-E-007-XXXXX. ELECTRONIC FILE NAME: DRAWN BY: JFE. SHEET TITLE: SPECIFICATIONS - ELECTRICAL. SHEET NO: E-007.

LIGHTING FIXTURE SCHEDULE									
FIXTURE TYPE	MANUFACTURER AND CATALOG INFORMATION	LAMPS			DRIVER		TOTAL WATTS	DESCRIPTION	MOUNTING
		QTY.	TYPE	WATTS	QTY.	TYPE			
F1	RECESSED 2'x4' FIXTURE. MANUFACTURER TO BE DETERMINED.	-	LED 5000LUM 4000K	39.6W	1	DRIVER 0-10V	39.6W	2'x4' LED TROFFER. UNIVERSAL VOLTAGE.	RECESSED
F2	RECESSED 2'x2' FIXTURE. MANUFACTURER TO BE DETERMINED.	-	LED 3900LUM 4000K	31W	1	DRIVER 0-10V	31W	2'x2' LED TROFFER. UNIVERSAL VOLTAGE.	RECESSED
F2E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 3900LUM 4000K	31W	1	DRIVER 0-10V	31W	2'x2' LED TROFFER. UNIVERSAL VOLTAGE.	RECESSED
F3	RECESSED DOWN LIGHT. MANUFACTURER TO BE DETERMINED.	-	LED 6500LUM 4000K	47.2W	1	DRIVER 0-10V	47.2W	RECESSED DOWNLIGHT. UNIVERSAL VOLTAGE.	RECESSED
F3E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 6500LUM 4000K	47.2W	1	DRIVER 0-10V	47.2W	RECESSED DOWNLIGHT. UNIVERSAL VOLTAGE.	RECESSED
F4	LINEAR LED PENDANT. MANUFACTURER TO BE DETERMINED. *LENGTHS VARY*	-	LED 6633LUM 4000K	62W	1	DRIVER 0-10V	62W	RECESSED LINEAR LED PENDANT. UNIVERSAL VOLTAGE.	RECESSED
F4E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 6633LUM 4000K	62W	1	DRIVER 0-10V	62W	RECESSED LINEAR LED PENDANT. UNIVERSAL VOLTAGE.	RECESSED
F5	DECORATIVE PENDANT. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	50W	1	DRIVER 0-10V	50W	LINEAR LED PENDANT. 120V. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT.	PENDANT
F6	LED HIGH BAY FIXTURE. MANUFACTURER TO BE DETERMINED.	-	LED 24000LUM 4000K	172W	1	DRIVER 0-10V	172W	LED HIGH BAY FIXTURE. UNIVERSAL VOLTAGE. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT. PROVIDE INTEGRAL OCCUPANCY SENSORS IN FIXTURE.	SUSPENDED
F6E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 24000LUM 4000K	172W	1	DRIVER 0-10V	172W	LED HIGH BAY FIXTURE. UNIVERSAL VOLTAGE. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT. PROVIDE INTEGRAL OCCUPANCY SENSORS IN FIXTURE.	SUSPENDED
F7	WET LOCATION LISTED DOWNLIGHT. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	60W	1	DRIVER 0-10V	60W	WET LOCATION LISTED. UNIVERSAL VOLTAGE.	CEILING
F8	WET LOCATION LISTED WALL PACK. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	60W	1	DRIVER 0-10V	60W	WET LOCATION LISTED. UNIVERSAL VOLTAGE.	WALL
F8E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 2000LUM	60W	1	DRIVER 0-10V	60W	WET LOCATION LISTED. UNIVERSAL VOLTAGE.	WALL
F9		-							
F10		-							
FEM	RECESSED EMERGENCY FIXTURE. COOPER AEL2 SERIES OR APPROVED EQUAL PROVIDED WITH 90 MINUTE BATTERY PACK.	-	LED 5W	5W	1	DRIVER 5W	5W	RECESSED EMERGENCY FIXTURE ABOVE DOOR MULLION. UNIVERSAL VOLTAGE.	ABOVE DOOR
FEX	LED EXIT SIGN. USE WHITE POLYCARBONATE IN THE WAREHOUSE. USE LED EDGE LIT IN OFFICE AREAS	-	LED 5W	5W	1	DRIVER 5W	5W	LED EXIT SIGN. UNIVERSAL VOLTAGE.	WALL/CEILING


LIGHT FIXTURE SCHEDULE NOTES:

- ALL FINISH TYPES SHOULD BE COORDINATED WITH THE ARCHITECT/INTERIOR DESIGNER(S).
- ALL TRIMS AND INSTALLATION REQUIREMENTS SHALL BE COORDINATED WITH THE CEILING TYPE IN WHICH IT IS TO BE INSTALLED. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT CEILING TYPE FOR WHICH THE FIXTURE IS TO BE INSTALLED.
- ALL FLUORESCENT FIXTURES TO BE PROVIDED WITH INTERNAL BALLAST DISCONNECTING MEANS.
- ANY LOW-VOLTAGE CLASS 2 WIRING OUTSIDE THE LIGHT FIXTURE HOUSING SHALL BE PLENUM RATED, I.E. TYPE CL-2P, IN COMPLIANCE WITH NEC ARTICLE 725.179. THIS APPLIES TO POWER WIRING AND CONTROL WIRING.

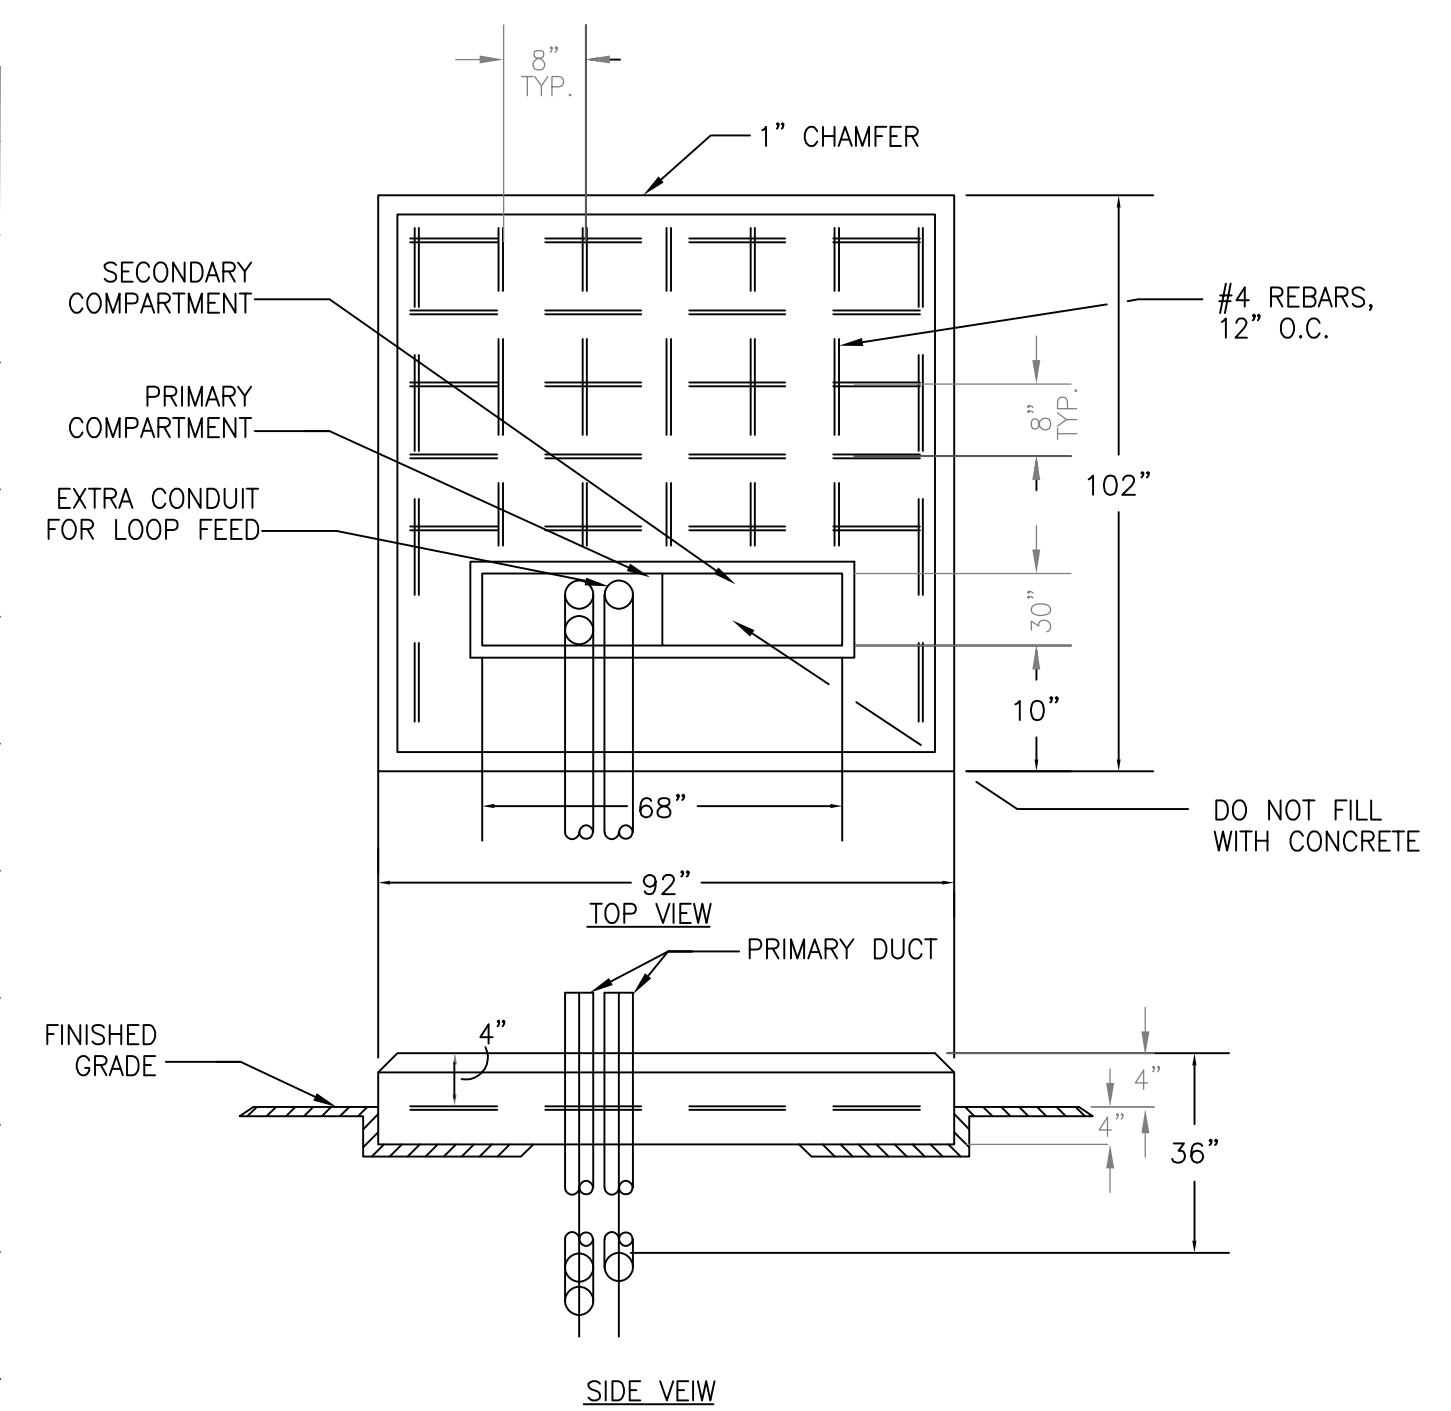


2 TRANSFORMER PAD DETAIL
E-008 NOT TO SCALE

- GENERAL NOTES:**
(APPLIES ONLY TO THIS DETAIL 2/E-002)
- CONFIRM DIMENSIONS WITH POWER COMPANY, DUKE ENERGY.
 - SERVICE DUCT SHALL BE LOCATED IN THE EXTREME RIGHT SIDE OF THE SECONDARY COMPARTMENT.
 - PRIMARY DUCT SHALL EXTEND BEYOND EDGE OF PAD IN DIRECTION OF INCOMING CABLES.
 - MATERIAL FOR PRIMARY DUCT SHALL BE FURNISHED BY POWER COMPANY.
 - THE PAD SHALL HAVE A MINIMUM CLEARANCE OF 10' FROM ALL BUILDINGS.
 - CONCRETE SHALL HAVE A MINIMUM ULTIMATE 28 DAY COMPRESSIVE STRENGTH OF NOT LESS THAN 3000 POUNDS. PAD SHALL BE CURED NOT LESS THAN 72 HOURS.
 - SOIL UNDERNEATH PADS SHALL BE FREE OF ROOTS AND OTHER ORGANIC MATERIALS AND BE THOROUGHLY TAMPED TO PREVENT WASHING. EXERCISE CARE IN BACKFILLING AND GRADING AROUND PAD.
 - USE FIRE ANT CONTROL (ON 9220092158) UNDER ENTIRE PAD INCLUDING OPENINGS.
 - OTHER UTILITIES ARE NOT TO BE INSTALLED UNDER TRANSFORMER PAD.

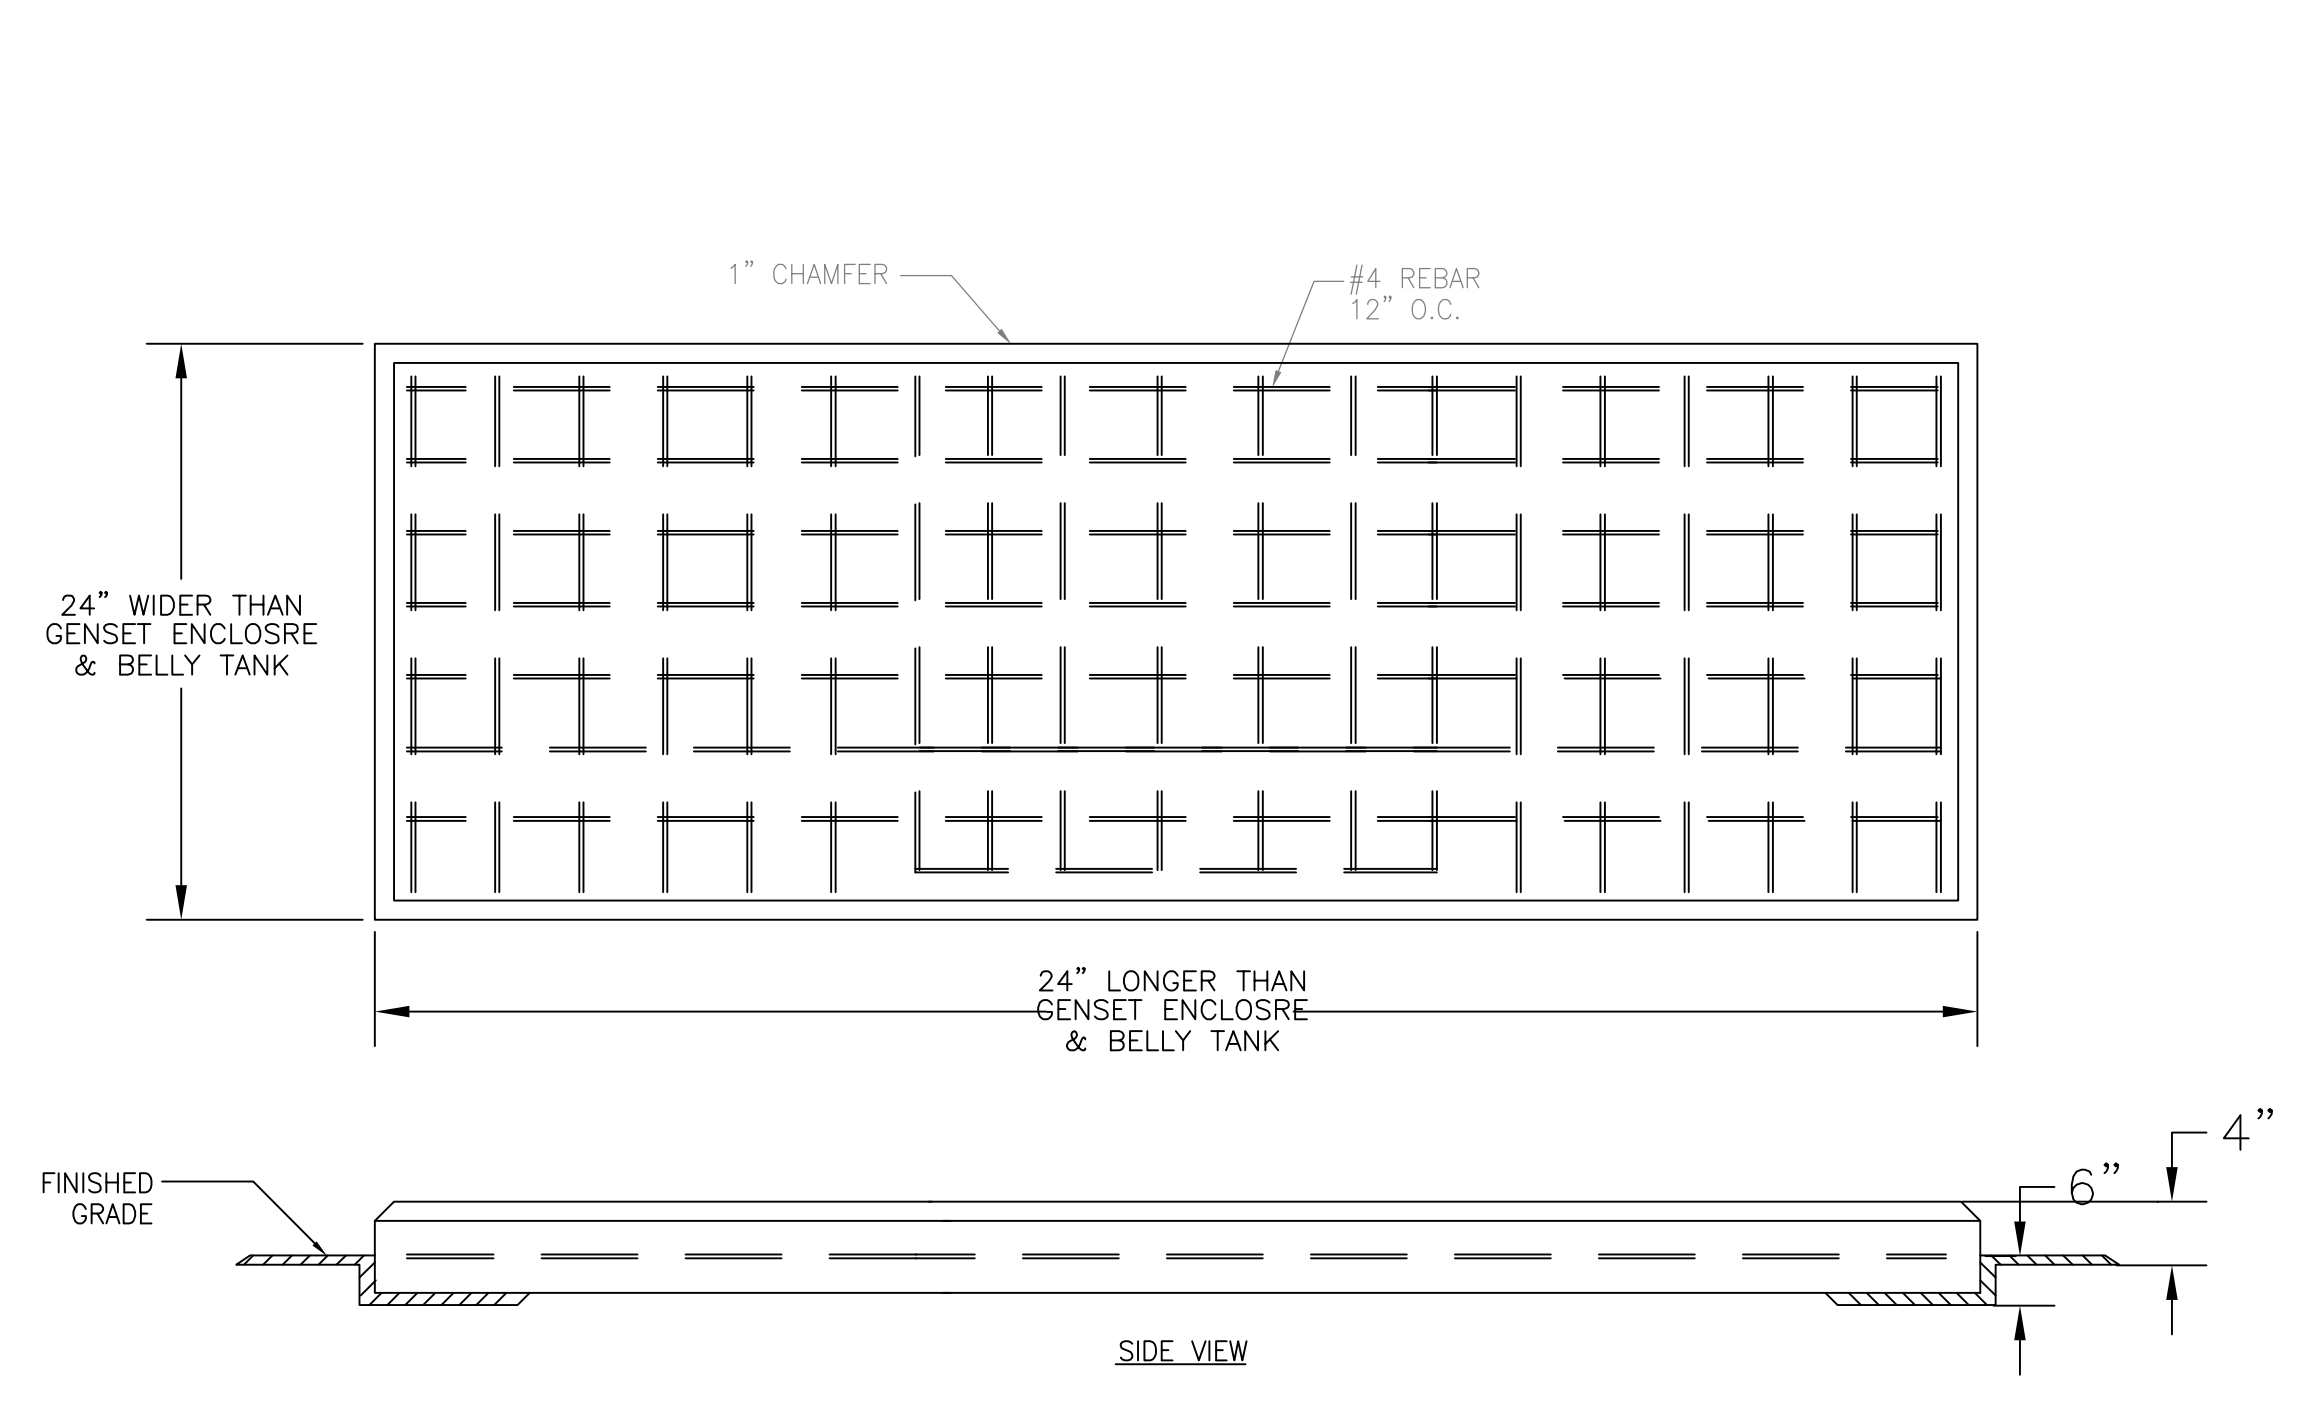


3 GENERATOR PAD DETAIL
E-008 NOT TO SCALE

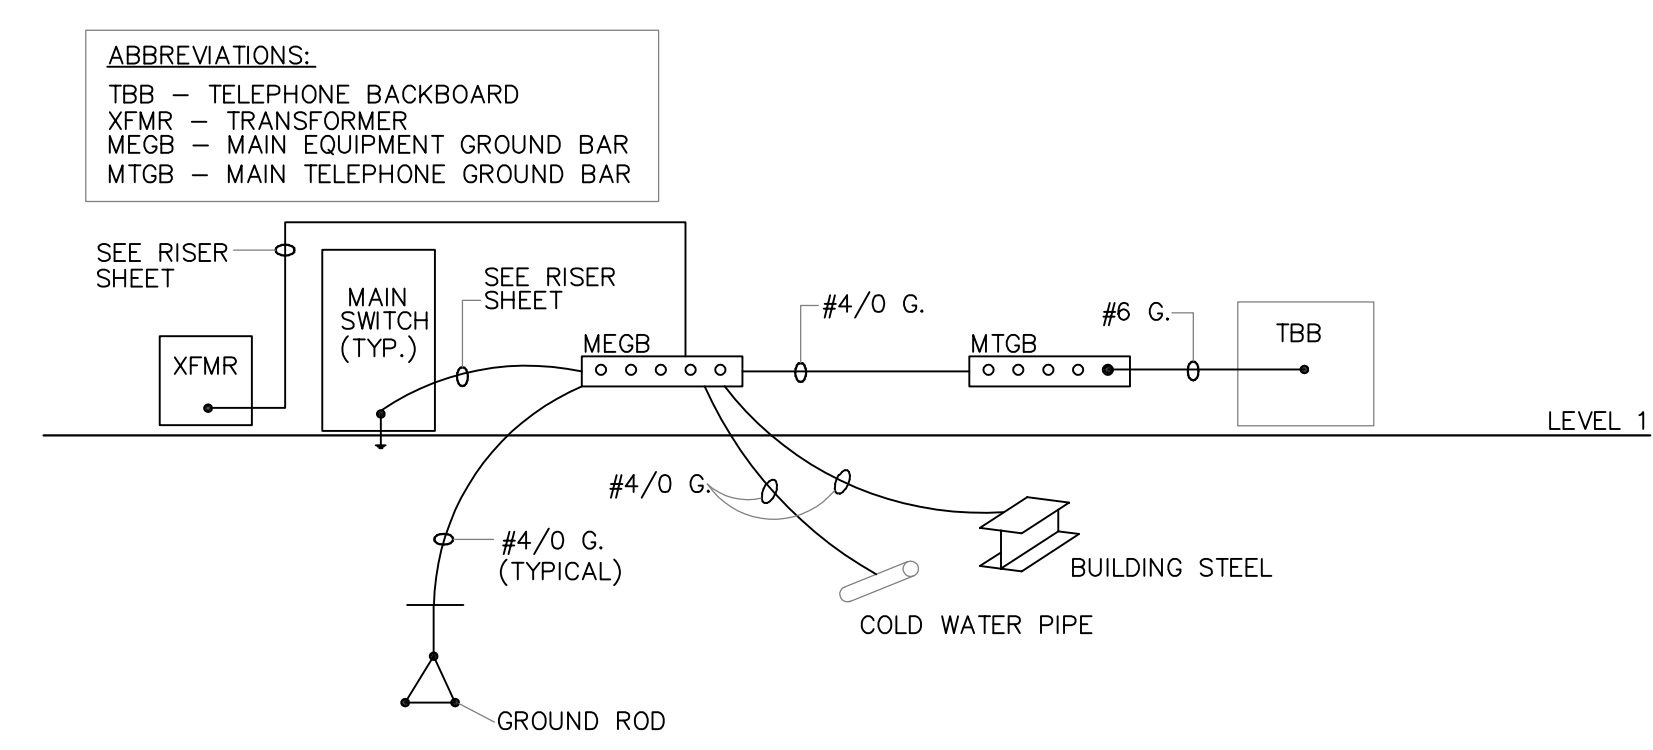

4 GROUNDING RISER DETAIL
E-008 NOT TO SCALE

- GENERAL NOTE:**
(APPLY THIS DETAIL ONLY 4/E-002)
- GROUNDING RISER DETAIL PER SPECIFICATIONS 261000 SECTION 3.08.
 - ALL CONDUCTORS SHALL BE CONTINUOUS. PROVIDE AN EXOTHERMIC WELD AT ALL JOINTS AND SPLICES.
 - MTGB AND TBB LOCATION TO BE DETERMINED IN THE WAREHOUSE UPFIT PHASE.

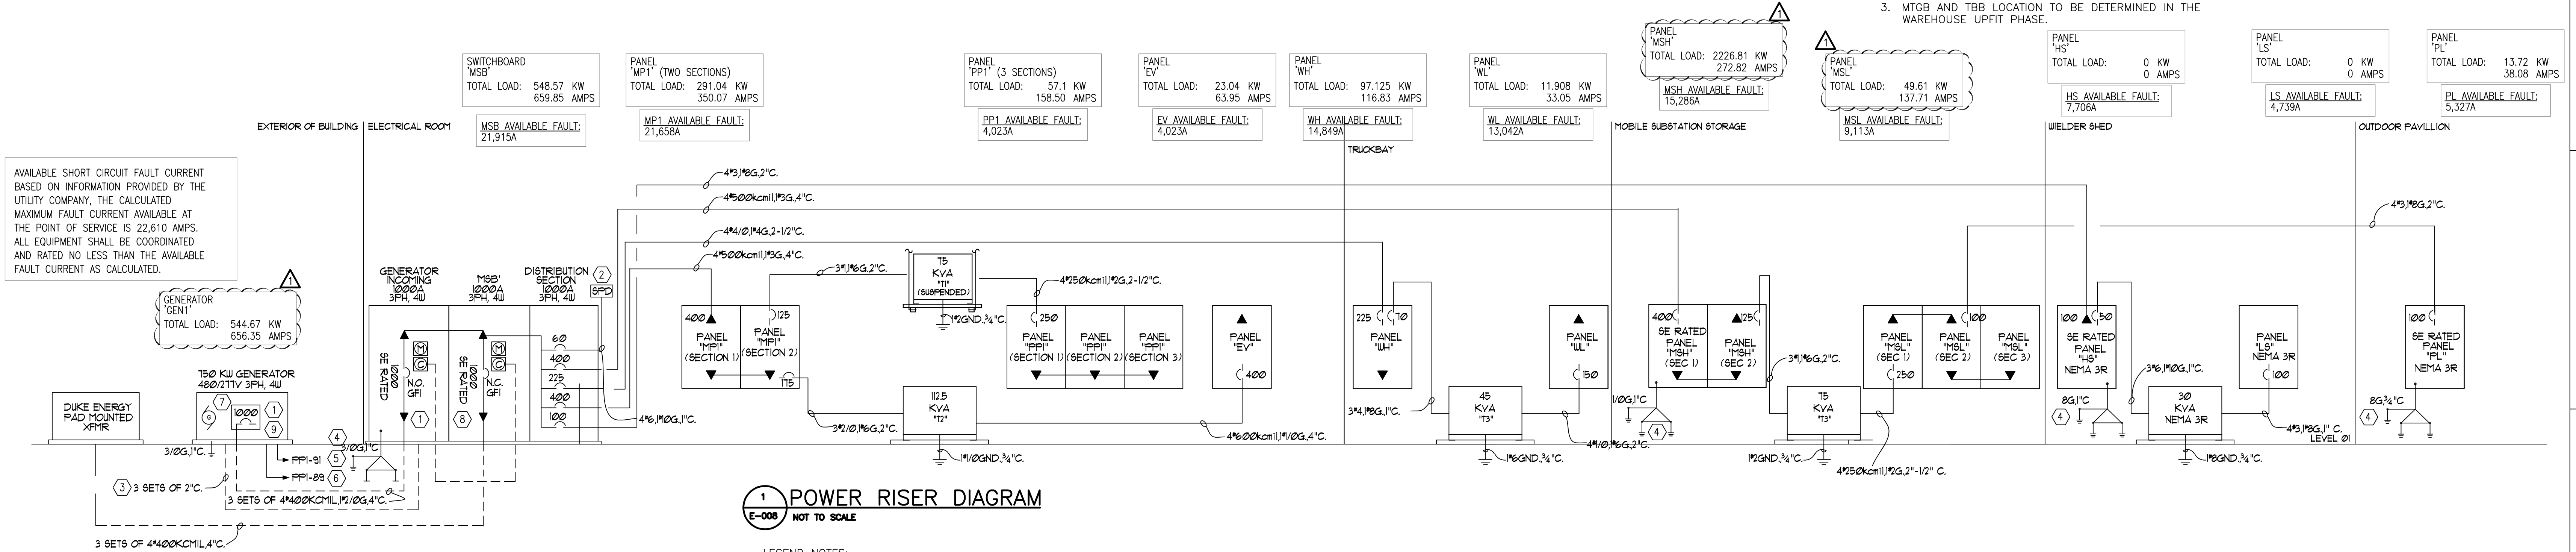

1 POWER RISER DIAGRAM
E-008 NOT TO SCALE

- LEGEND NOTES:**
(APPLIES THIS SHEET ONLY)
- GENERATOR WILL NOT BE PARALLELED TO THE UTILITY. PROVIDE SENSING AND CONTROLS FOR AUTOMATIC SYNCHRONIZING. PROVIDE RELAYS FOR SYNC CHECK CONTROL POWER FOR CPT'S WILL BE DELIVERED BY BUILDING UTILITY POWER. PROVIDE A SWITCHING PAIR OF BREAKERS AS SHOWN WITH AUTO-THROW-OVER CONTROLS WITH SELECTABLE AUTOMATIC OR MANUAL CONTROL. PROVIDE ADJUSTABLE TIME DELAY FOR AUTOMATIC MODE OPERATION. THE SPECIFICATIONS FOR THE SWITCHBOARD SHALL BE COORDINATED WITH THE UPFIT.
 - SURGE PROTECTIVE DEVICE SHALL BE SSI SHL3Y2 OR APPROVED EQUAL.
 - (3) SETS 2" CONDUIT FOR POWER, CONTROL CABLING, AND ONE SPARE FROM GENERATOR TO BUILDING MAIN ELECTRICAL ROOM.
 - GROUND PER N.E.C. 250.
 - PROVIDE POWER TO BLOCK HEATER.
 - PROVIDE POWER TO BATTERY CHARGER.
 - GENERATOR SHALL BE GENERAC 'SD750' SERIES 750KW INDUSTRIAL DIESEL GENERATOR. PROVIDE WITH UL142 2,233 GALLON SUB-BASE TANK RATED FOR 32 HOUR RUNTIME AT 100% LOAD. LEVEL 1 SOUND ATTENUATION WEATHERPROOF ENCLOSURE RATED 80DBA @ 23FT. AND VERTICAL DISCHARGE SECTION. PROVIDE ALL CONTROL WIRING FOR INTEGRATED FUNCTION WITH THE BUILDING SWITCHBOARD.
 - LABEL PER NEC 110.16.
 - THE EMERGENCY SYSTEM SHALL BE NON-SEPARATELY DERIVED. THE BREAKERS THAT TRANSFER FROM UTILITY TO EMERGENCY SHALL BE THREE POLE. REMOVE THE BOND STRAP AT THE GENERATOR FOR THE 3 POLE SWITCHING.

DRAWING NO.
CFD-XXX-E-008-XXXXX

MAILING ADDRESS:
P.O. BOX 1007
CHARLOTTE, NC 28201

Safety Expectations:
ILLNESS ZERO Reduce Risk
INJURY ZERO Remove Exposures to Hazards
Reinforce Safe Behavior

BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minuet Ln.
Charlotte, North Carolina 28217
(p) 704-357-9333 (f) 704-357-9886

This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.
BWA JOB # 2022-0632

SEAL 06/29/23

DUNN OPERATIONS CENTER

1269 JONESBORO RD.
HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

REVISION	DATE	BY	DESCRIPTION
1	05-29-23	JFE	ISSUED FOR CONSTRUCTION
2	05-24-23	JFE	OWNER CHANGES

PROJECT NO:
DRAWING NUMBER
CFD-XXX-E-008-XXXXX

ELECTRONIC FILE NAME:
DRAWN BY: JFE
CHK'D BY: JSL DATE:
E-MAIL: SLOWERY@BARRETTWOODYARD.COM

THIS DESIGN DRAWING IS THE EXCLUSIVE PROPERTY OF DUKE ENERGY CORPORATION AND IS NOT TO BE REPRODUCED, COPIED, OR OTHERWISE USED WITHOUT PRIOR WRITTEN PERMISSION OF DUKE ENERGY CORPORATION. THE INFORMATION SHOWN HEREIN IS FOR THE SPECIFIC PROJECT INTENDED.


SHEET TITLE:
POWER RISER DIAGRAM & DETAILS

SHEET NO.
E-008

LIGHTING FIXTURE SCHEDULE								
FIXTURE TYPE	MANUFACTURER AND CATALOG INFORMATION	LAMPS		DRIVER		TOTAL WATTS	DESCRIPTION	MOUNTING
		QTY.	TYPE	WATTS	QTY.			
F1	RECESSED 2'x4' FIXTURE. MANUFACTURER TO BE DETERMINED.	-	LED 5000LUM 4000K	39.6W	1	DRIVER 0-10V	2'x4' LED TROFFER. UNIVERSAL VOLTAGE.	RECESSED
F2	RECESSED 2'x2' FIXTURE. MANUFACTURER TO BE DETERMINED.	-	LED 3900LUM 4000K	31W	1	DRIVER 0-10V	2'x2' LED TROFFER. UNIVERSAL VOLTAGE.	RECESSED
F2E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 3900LUM 4000K	31W	1	DRIVER 0-10V	2'x2' LED TROFFER. UNIVERSAL VOLTAGE.	RECESSED
F3	RECESSED DOWN LIGHT. MANUFACTURER TO BE DETERMINED.	-	LED 6500LUM 4000K	47.2W	1	DRIVER 0-10V	RECESSED DOWNLIGHT. UNIVERSAL VOLTAGE.	RECESSED
F3E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 6500LUM 4000K	47.2W	1	DRIVER 0-10V	RECESSED DOWNLIGHT. UNIVERSAL VOLTAGE.	RECESSED
F4	LINEAR LED PENDANT. MANUFACTURER TO BE DETERMINED. *LENGTHS VARY*	-	LED 6633LUM 4000K	62W	1	DRIVER 0-10V	RECESSED LINEAR LED PENDANT. UNIVERSAL VOLTAGE.	RECESSED
F4E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 6633LUM 4000K	62W	1	DRIVER 0-10V	RECESSED LINEAR LED PENDANT. UNIVERSAL VOLTAGE.	RECESSED
F5	DECORATIVE PENDANT. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	50W	1	DRIVER 0-10V	LINEAR LED PENDANT. 120V. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT.	PENDANT
F6	LED HIGH BAY FIXTURE. MANUFACTURER TO BE DETERMINED.	-	LED 24000LUM 4000K	172W	1	DRIVER 0-10V	LED HIGH BAY FIXTURE. UNIVERSAL VOLTAGE. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT. PROVIDE INTEGRAL OCCUPANCY SENSORS IN FIXTURE.	SUSPENDED
F6E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 24000LUM 4000K	172W	1	DRIVER 0-10V	LED HIGH BAY FIXTURE. UNIVERSAL VOLTAGE. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT. PROVIDE INTEGRAL OCCUPANCY SENSORS IN FIXTURE.	SUSPENDED
F7	WET LOCATION LISTED DOWNLIGHT. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	60W	1	DRIVER 0-10V	WET LOCATION LISTED. UNIVERSAL VOLTAGE.	CEILING
F8	WET LOCATION LISTED WALL PACK. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	60W	1	DRIVER 0-10V	WET LOCATION LISTED. UNIVERSAL VOLTAGE.	WALL
F8E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.	-	LED 2000LUM	60W	1	DRIVER 0-10V	WET LOCATION LISTED. UNIVERSAL VOLTAGE.	WALL
F9								
F10								
FEM	RECESSED EMERGENCY FIXTURE. COOPER AEL2 SERIES OR APPROVED EQUAL PROVIDED WITH 90 MINUTE BATTERY PACK.	-	LED 5W	5W	1	DRIVER 5W	RECESSED EMERGENCY FIXTURE ABOVE DOOR MULLION. UNIVERSAL VOLTAGE.	ABOVE DOOR
FEX	LED EXIT SIGN. USE WHITE POLYCARBONATE IN THE WAREHOUSE. USE LED EDGE LIT IN OFFICE AREAS	-	LED 5W	5W	1	DRIVER 5W	LED EXIT SIGN. UNIVERSAL VOLTAGE.	WALL/CEILING

LIGHT FIXTURE SCHEDULE NOTES:


- ALL FINISH TYPES SHOULD BE COORDINATED WITH THE ARCHITECT/INTERIOR DESIGNER(S).
- ALL TRIMS AND INSTALLATION REQUIREMENTS SHALL BE COORDINATED WITH THE CEILING TYPE IN WHICH IT IS TO BE INSTALLED. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT CEILING TYPE FOR WHICH THE FIXTURE IS TO BE INSTALLED.
- ALL FLUORESCENT FIXTURES TO BE PROVIDED WITH INTERNAL BALLAST DISCONNECTING MEANS.
- ANY LOW-VOLTAGE CLASS 2 WIRING OUTSIDE THE LIGHT FIXTURE HOUSING SHALL BE PLENUM RATED, I.E. TYPE CL-2P, IN COMPLIANCE WITH NEC ARTICLE 725.179. THIS APPLIES TO POWER WIRING AND CONTROL WIRING.

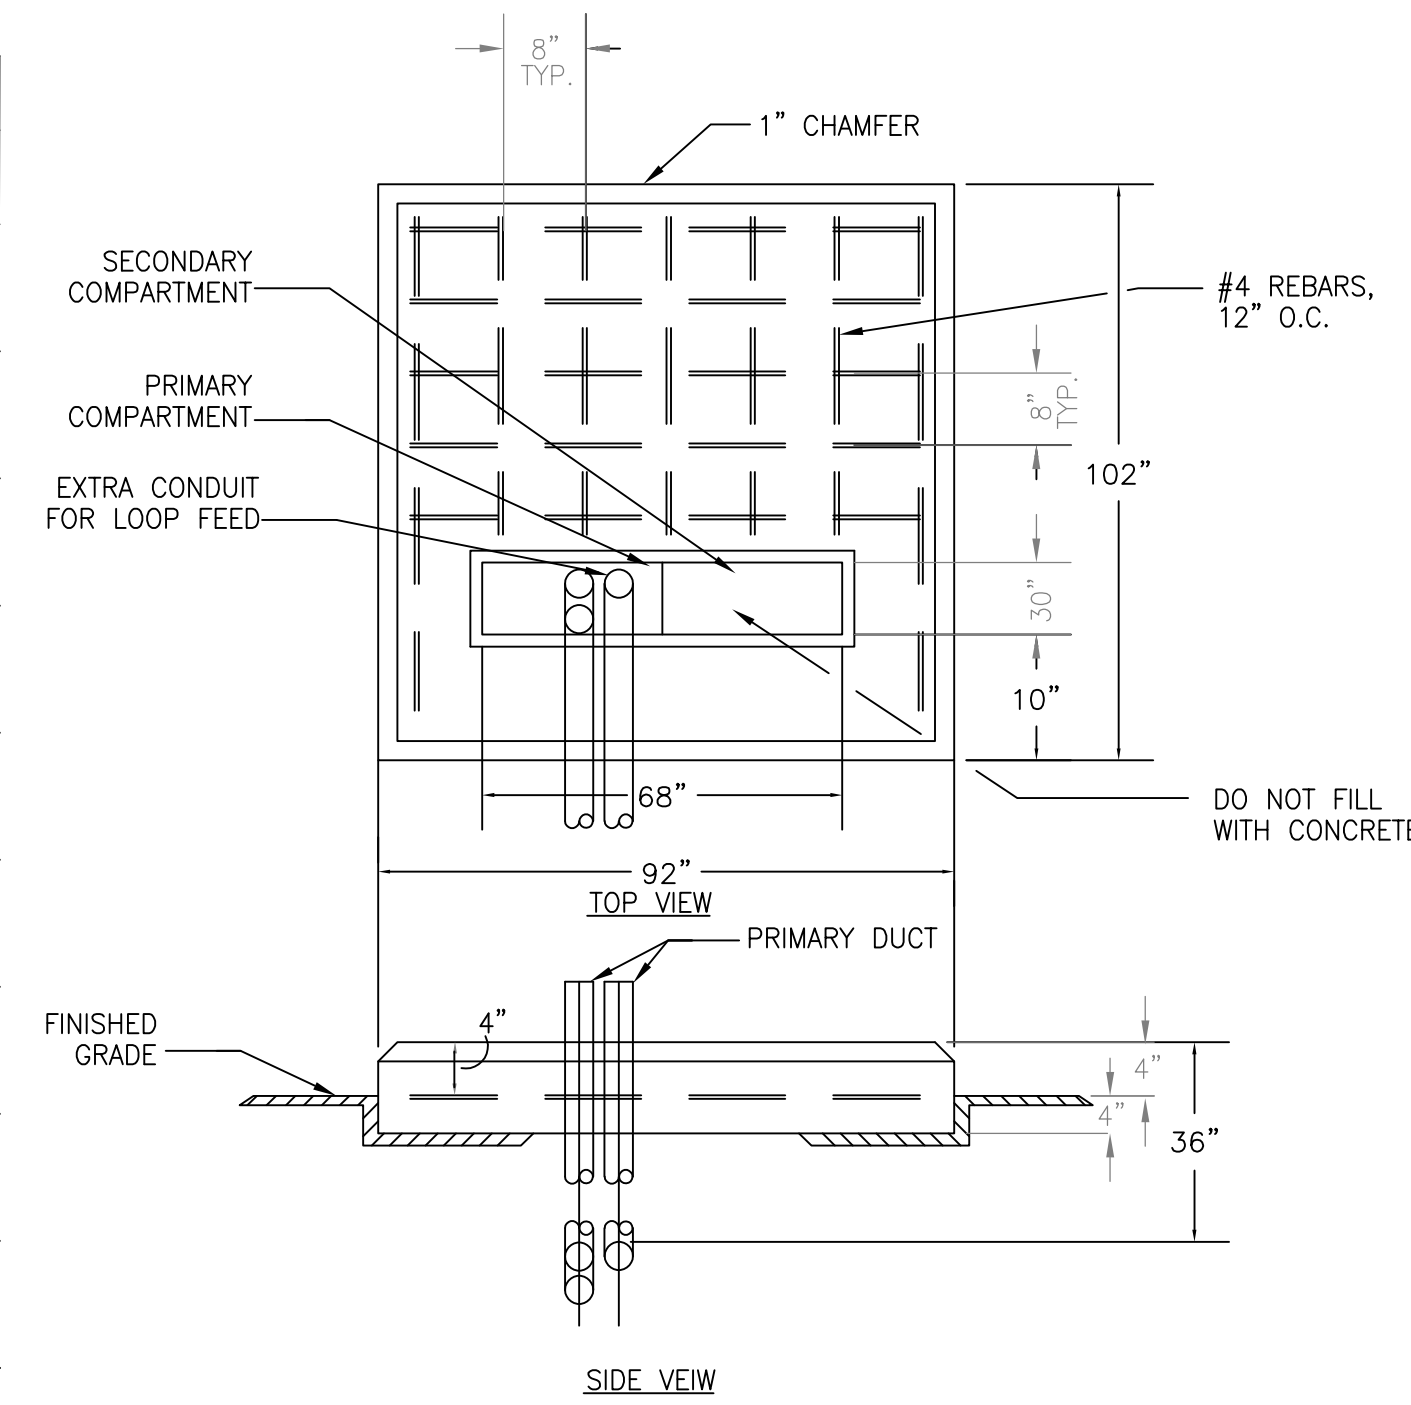


2 TRANSFORMER PAD DETAIL
E-008 NOT TO SCALE

GENERAL NOTES:
(APPLIES ONLY TO THIS DETAIL 2/E-002)

- CONFIRM DIMENSIONS WITH POWER COMPANY, DUKE ENERGY.
- SERVICE DUCT SHALL BE LOCATED IN THE EXTREME RIGHT SIDE OF THE SECONDARY COMPARTMENT
- PRIMARY DUCT SHALL EXTEND BEYOND EDGE OF PAD IN DIRECTION OF INCOMING CABLES.
- MATERIAL FOR PRIMARY DUCT SHALL BE FURNISHED BY POWER COMPANY.
- THE PAD SHALL HAVE A MINIMUM CLEARANCE OF 10' FROM ALL BUILDINGS.
- CONCRETE SHALL HAVE A MINIMUM ULTIMATE 28 DAY COMPRESSIVE STRENGTH OF NOT LESS THAN 3000 POUNDS. PAD SHALL BE CURED NOT LESS THAN 72 HOURS.
- SOIL UNDERNEATH PADS SHALL BE FREE OF ROOTS AND OTHER ORGANIC MATERIALS AND BE THOROUGHLY TAMPED TO PREVENT WASHING. EXERCISE CARE IN BACKFILLING AND GRADING AROUND PAD.
- USE FIRE ANT CONTROL (CN 9220092158) UNDER ENTIRE PAD INCLUDING OPENINGS.
- OTHER UTILITIES ARE NOT TO BE INSTALLED UNDER TRANSFORMER PAD.

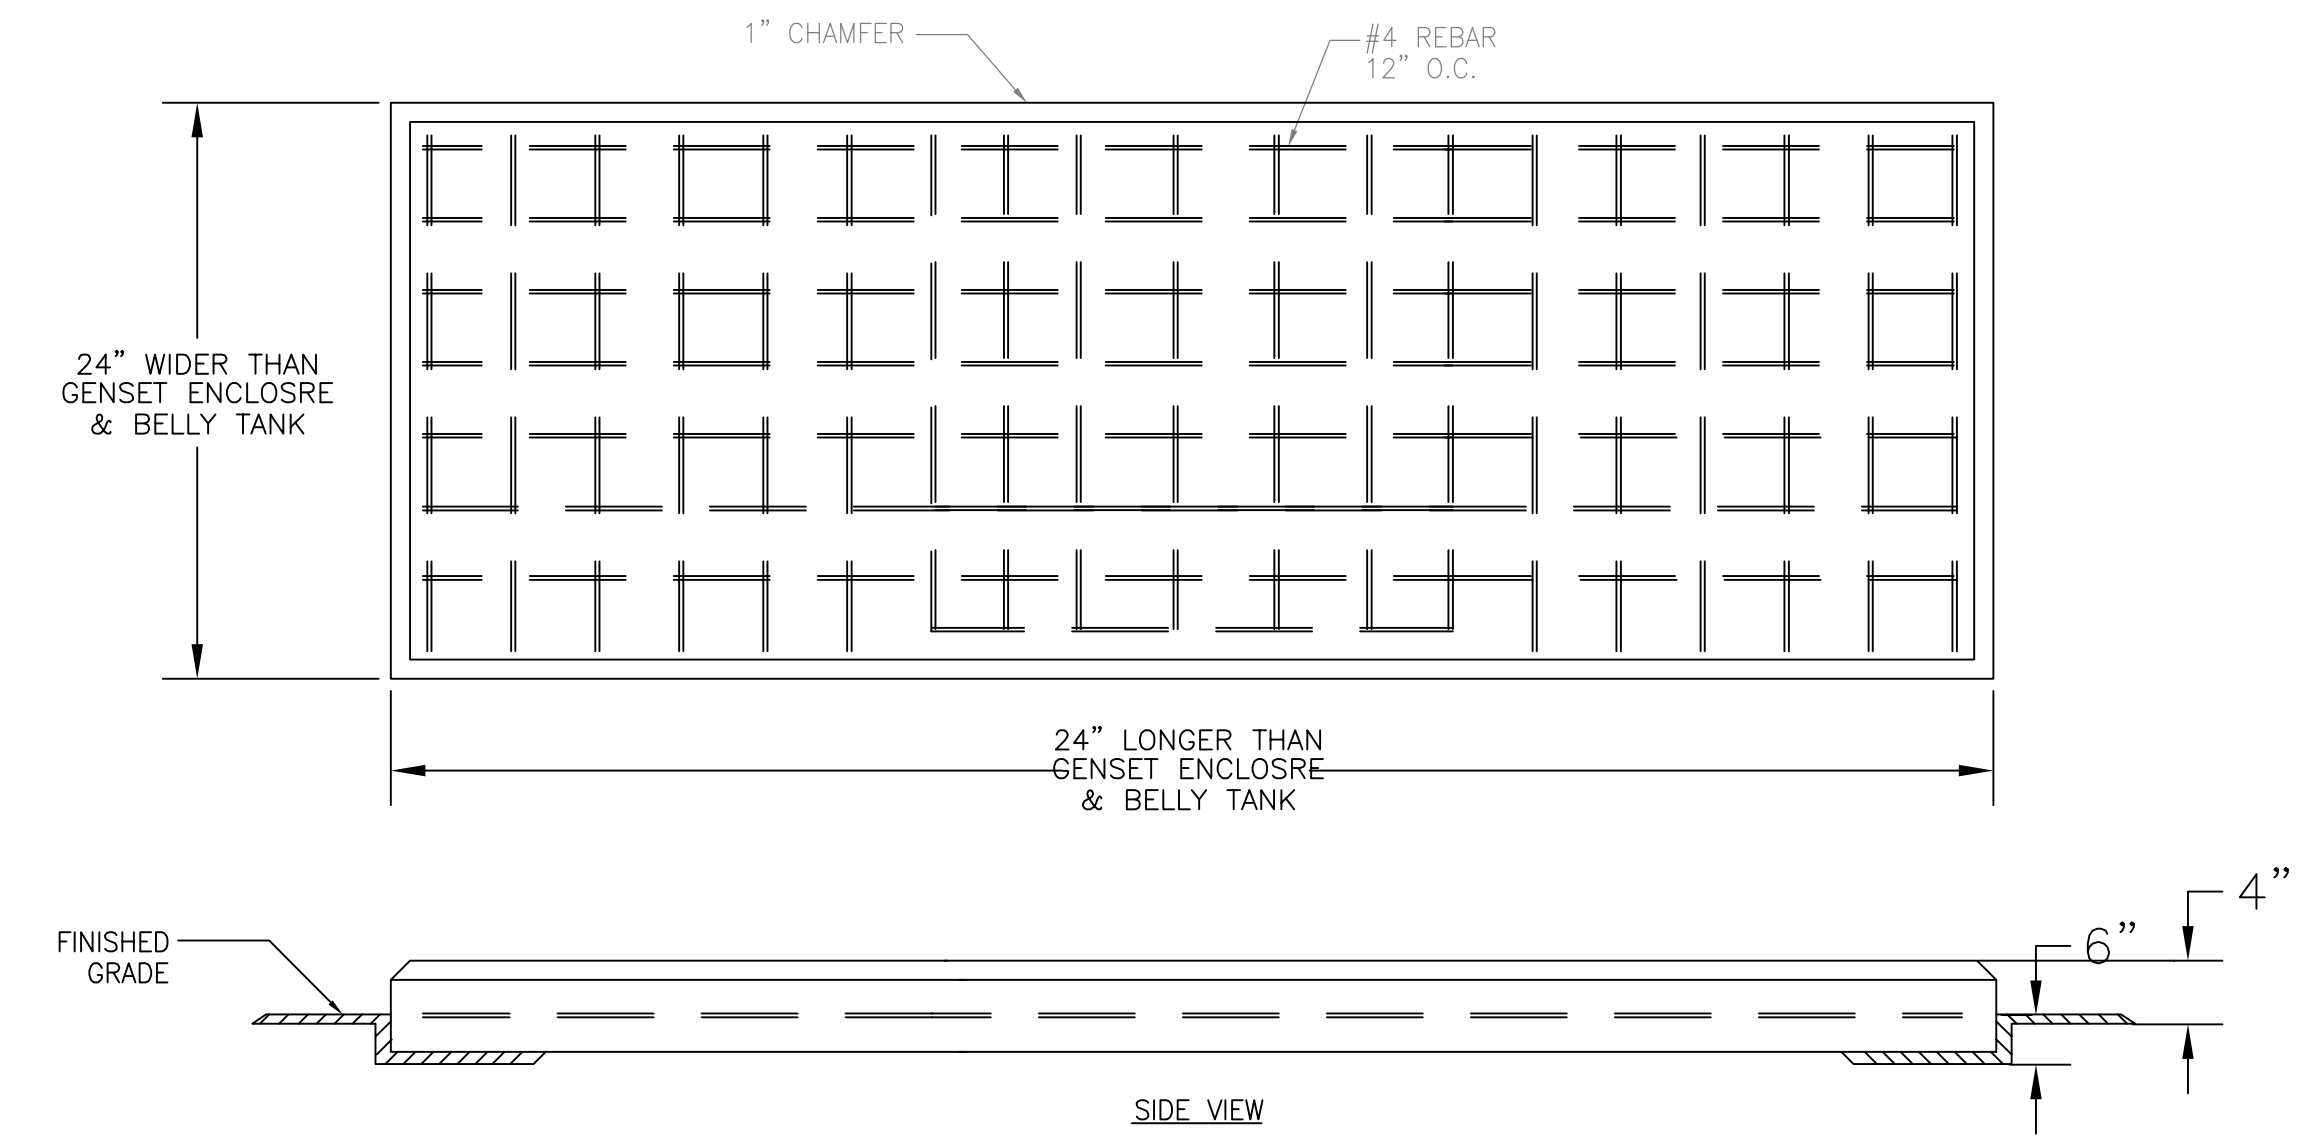


3 GENERATOR PAD DETAIL
E-008 NOT TO SCALE

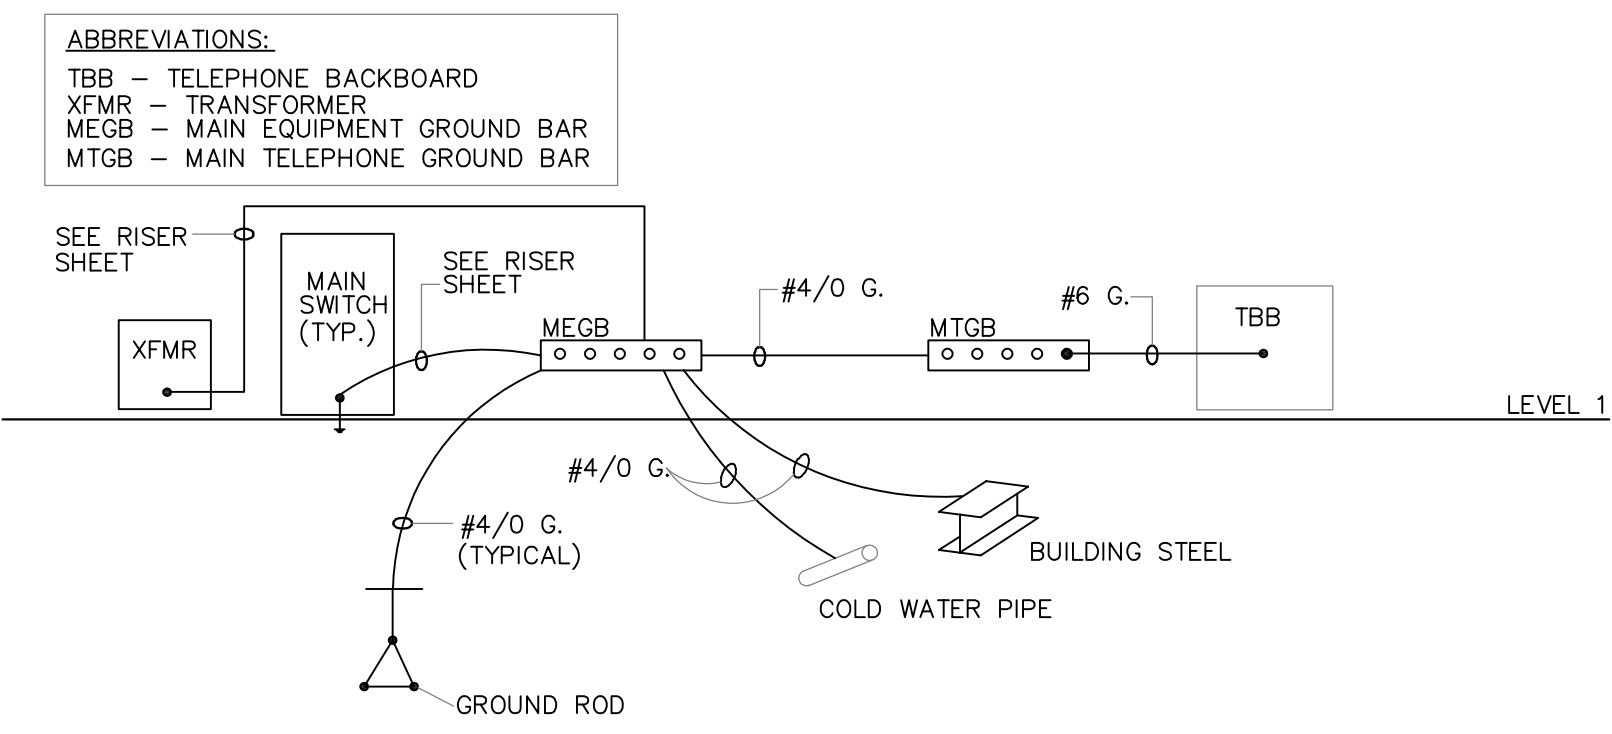

4 GROUNDING RISER DETAIL
E-008 NOT TO SCALE

GENERAL NOTE:
(APPLY THIS DETAIL ONLY 4/E-002)

- GROUNDING RISER DETAIL PER SPECIFICATIONS 261000 SECTION 3.08.
- ALL CONDUCTORS SHALL BE CONTINUOUS. PROVIDE AN EXOTHERMIC WELD AT ALL JOINTS AND SPLICES.
- MTGB AND TBB LOCATION TO BE DETERMINED IN THE WAREHOUSE UPFIT PHASE.

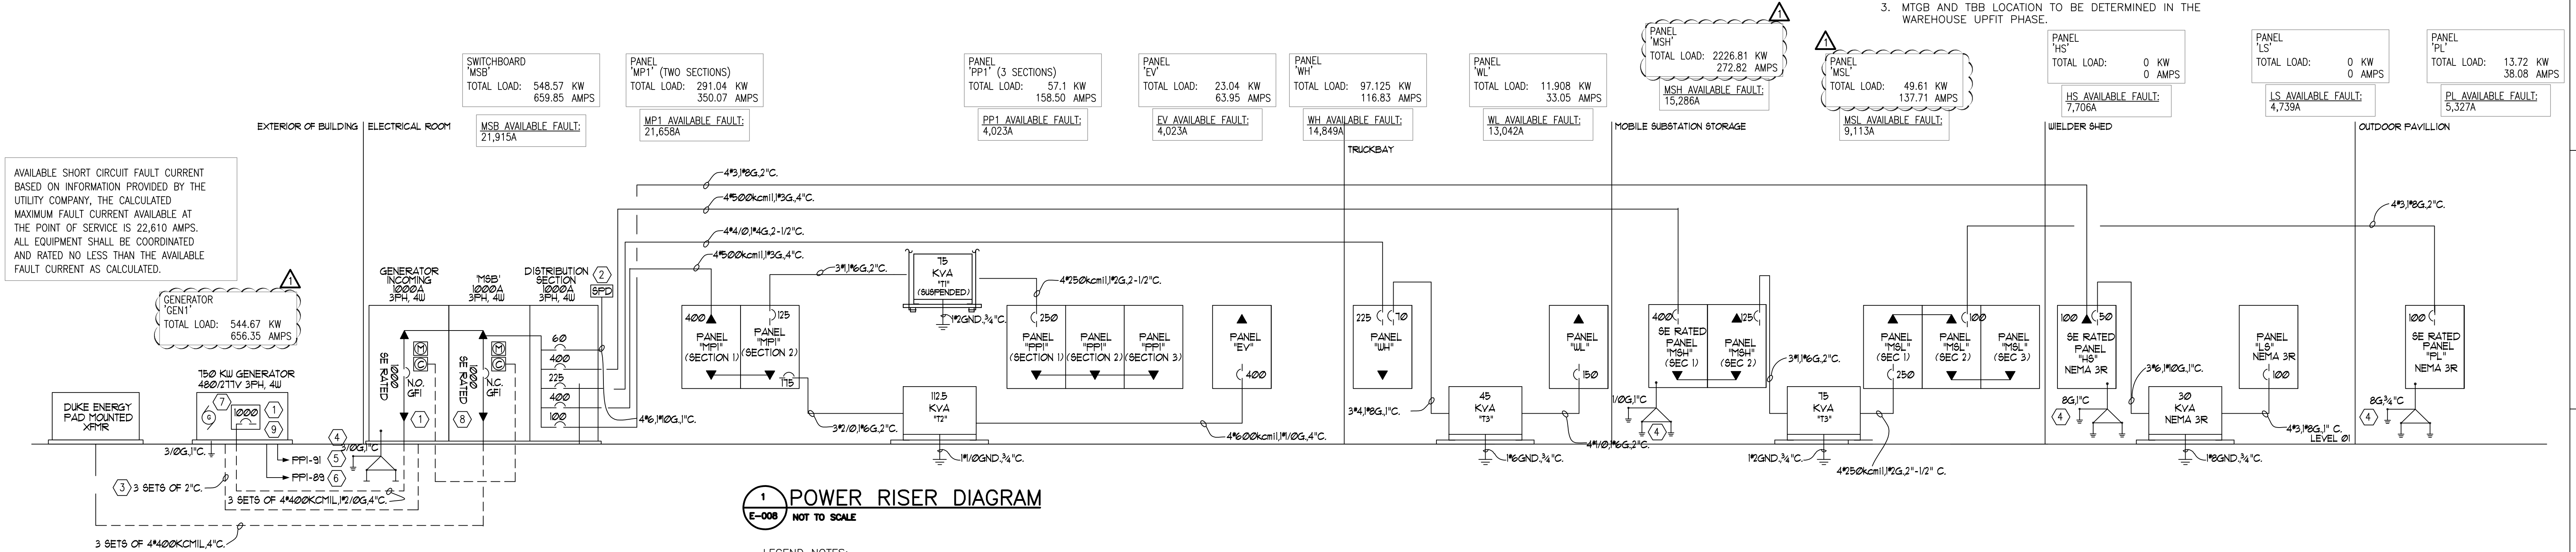



1 POWER RISER DIAGRAM
E-008 NOT TO SCALE

LEGEND NOTES:
(APPLIES THIS SHEET ONLY)


- GENERATOR WILL NOT BE PARALLELED TO THE UTILITY. PROVIDE SENSING AND CONTROLS FOR AUTOMATIC SYNCHRONIZING. PROVIDE RELAYS FOR SYNC CHECK CONTROL POWER FOR CPT'S WILL BE DELIVERED BY BUILDING UTILITY POWER. PROVIDE A SWITCHING PAIR OF BREAKERS AS SHOWN WITH AUTO-THROW-OVER CONTROLS WITH SELECTABLE AUTOMATIC OR MANUAL CONTROL. PROVIDE ADJUSTABLE TIME DELAY FOR AUTOMATIC MODE OPERATION. THE SPECIFICATIONS FOR THE SWITCHBOARD SHALL BE COORDINATED WITH THE UPFIT.
- SURGE PROTECTIVE DEVICE SHALL BE SSI SHL3Y2 OR APPROVED EQUAL.
- (3) SETS 2" CONDUIT FOR POWER, CONTROL CABLING, AND ONE SPARE FROM GENERATOR TO BUILDING MAIN ELECTRICAL ROOM.
- GROUND PER N.E.C. 250.
- PROVIDE POWER TO BLOCK HEATER.
- PROVIDE POWER TO BATTERY CHARGER.
- GENERATOR SHALL BE GENERAC 'SD750' SERIES 750KW INDUSTRIAL DIESEL GENERATOR. PROVIDE WITH UL142 2,233 GALLON SUB-BASE TANK RATED FOR 32 HOUR RUNTIME AT 100% LOAD. LEVEL 1 SOUND ATTENUATION WEATHERPROOF ENCLOSURE RATED 80DBA @ 23FT. AND VERTICAL DISCHARGE SECTION. PROVIDE ALL CONTROL WIRING FOR INTEGRATED FUNCTION WITH THE BUILDING SWITCHBOARD.
- LABEL PER NEC 110.16.
- THE EMERGENCY SYSTEM SHALL BE NON-SEPARATELY DERIVED. THE BREAKERS THAT TRANSFER FROM UTILITY TO EMERGENCY SHALL BE THREE POLE. REMOVE THE BOND STRAP AT THE GENERATOR FOR THE 3 POLE SWITCHING.



MAILING ADDRESS:
P.O. BOX 1007
CHARLOTTE, NC 28201

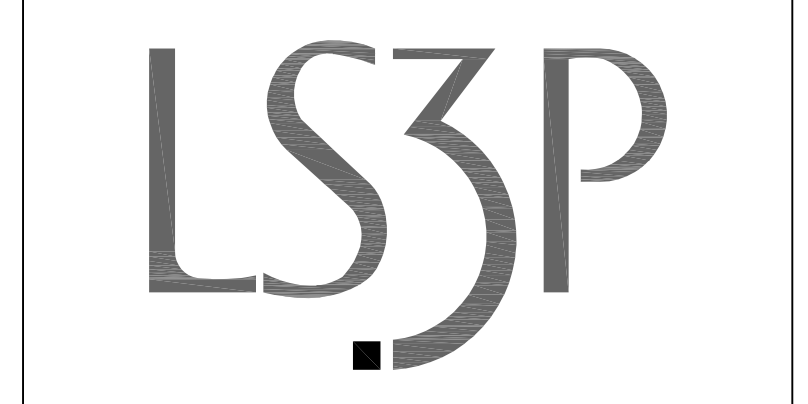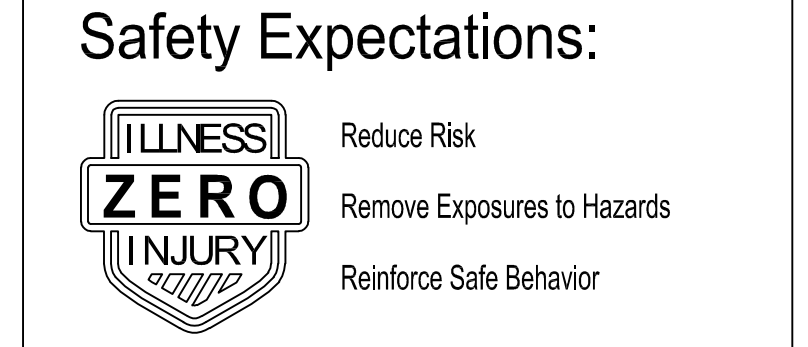

BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minuet LN.
Charlotte, North Carolina 28217
(p) 704-357-9333 (f) 704-357-9886
© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.
BWA JOB # 2022-0632

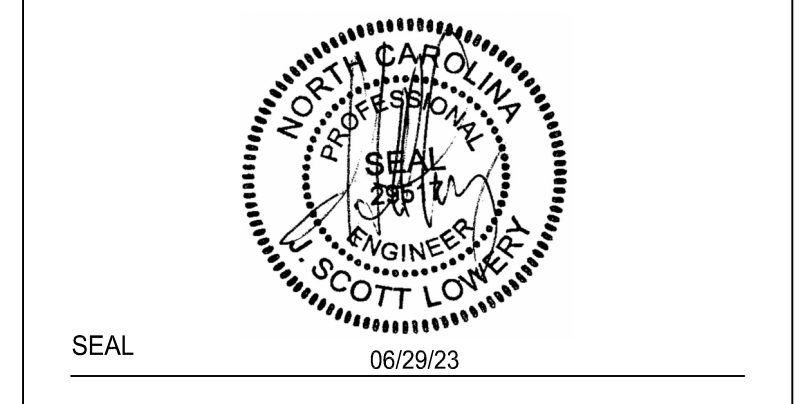

DUNN OPERATIONS CENTER

1269 JONESBORO RD.
HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

MARK	DATE	DESCRIPTION	ISSUED FOR CONSTRUCTION
	05-29-23	OWNER CHANGES	
	05-24-23		

PROJECT NO. _____
DRAWING NUMBER **CFD-XXX-E-008-XXXXX**

ELECTRONIC FILE NAME: _____
DRAWN BY: JFE
CHK'D BY: JSL DATE: _____
E-MAIL: SLOWERY@BARRETTWOODYARD.COM


POWER RISER DIAGRAM & DETAILS

SHEET NO. **E-008**

LIGHTING FIXTURE SCHEDULE										
FIXTURE TYPE	MANUFACTURER AND CATALOG INFORMATION	QTY.	LAMPS TYPE	WATTS	BALLAST/DRIVER TYPE	WATTS	TOTAL WATTS	INPUT VOLTAGE	DESCRIPTION	MOUNTING
F1	MANUFACTURER: METALUX MODEL#: CRUZE ST 24C22	-	LED 5500LUM 4000K 80+CRI	50.1W	1 LED DRIVER 0-10V DIMMING	50.1W	50.1W	UNIVERSAL	RECESSED 2X4 LED TROFFER	RECESSED
F2	SAME AS TYPE ABOVE EXCEPT PROVIDED WITH A 90 MIN EMERGENCY BATTERY.									
F3	MANUFACTURER: METALUX MODEL#: CRUZE ST 22C22	-	LED 5500LUM 4000K 80+CRI	39.4W	1 LED DRIVER 0-10V DIMMING	39.4W	39.4W	UNIVERSAL	RECESSED 2X2 LED TROFFER	RECESSED
F4	SAME AS TYPE ABOVE EXCEPT PROVIDED WITH A 90 MIN EMERGENCY BATTERY.									
F5	MANUFACTURER: LUMENWERX MODEL#: VIOLA 4" DOWNLIGHT	-	LED 1849LUM 4000K 80+CRI	19.7W	1 LED DRIVER 0-10V DIMMING	19.7W	19.7W	UNIVERSAL	RECESSED 4" SQUARE DOWNLIGHT	RECESSED
F6	SAME AS TYPE ABOVE EXCEPT PROVIDED WITH A 90 MIN EMERGENCY BATTERY.									
F3E	MANUFACTURER: AXIS LIGHTING MODEL#: BEAM SQUARE 2	-	LED 1200LUM/FT 4000K 80+CRI	10W/FT	1 LED DRIVER 0-10V DIMMING	10W/FT	10W/FT	UNIVERSAL	RECESSED LINEAR LED	SURFACE
F4E	SAME AS TYPE ABOVE EXCEPT PROVIDED WITH A 90 MIN EMERGENCY BATTERY.									
F5	DECORATIVE PENDANT. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	50W	1 DRIVER 0-10V	50W	50W	UNIVERSAL	LINEAR LED PENDANT. 120V. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT.	PENDANT
F6	MANUFACTURER: METALUX MODEL#: UHB	-	LED 24000LUM 4000K	197W	1 DRIVER 0-10V	197W	197W	UNIVERSAL	LED HIGH BAY FIXTURE. UNIVERSAL VOLTAGE. REFER TO ARCHITECTURAL DETAILS FOR MOUNTING HEIGHT. PROVIDE INTEGRAL OCCUPANCY SENSORS IN FIXTURE.	SUSPENDED
F6	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.									
F7	WET LOCATION LISTED DOWNLIGHT. MANUFACTURER TO BE DETERMINED.	-	LED 2000LUM	60W	1 DRIVER 0-10V	60W	60W	UNIVERSAL	WET LOCATION LISTED.	CEILING
F8	EXTERIOR WALL PACK. COOPER LUMARK WP LED SERIES. OR APPROVED EQUAL.	-	LED 2000LUM	60W	1 DRIVER 0-10V	60W	60W	UNIVERSAL	WET LOCATION LISTED.	WALL
F8E	SAME AS ABOVE EXCEPT EQUIPPED WITH AN EMERGENCY BATTERY PACK.									
F9	MANUFACTURER: LUMARK MODEL#: PREVAL DISCRETE LED	-	LED 52086LUM 4000K	366W	1 LED DRIVER 0-10V DIMMING	366W	366W	UNIVERSAL	POLE LIGHT.	RECESSED
F10	MANUFACTURER: LUMARK MODEL#: PREVAL DISCRETE LED	-	LED 52086LUM 4000K	732W	1 LED DRIVER 0-10V DIMMING	732W	732W	UNIVERSAL	POLE LIGHT. TWO HEADS.	RECESSED
F10E	RECESSED EMERGENCY FIXTURE. COOPER AEL2 SERIES OR APPROVED EQUAL. PROVIDED WITH 90 MINUTE BATTERY PACK.	-	LED 5W	5W	1 LED DRIVER	5W	5W	UNIVERSAL	RECESSED EMERGENCY FIXTURE ABOVE DOOR MULLION. UNIVERSAL VOLTAGE.	AS REQUIRED.
X/E	MANUFACTURER: SURE-LITES MODEL#: ES SERIES	-	LED 5W	5W	1 LED DRIVER	5W	5W	UNIVERSAL	EXISTING AND NEW EXIT SIGNS. RED LETTERING. CONFIRM FINISH WITH ARCHITECT. EQUIPPED WITH 90 MIN BATTERY BACKUP.	AS REQUIRED.

LIGHT FIXTURE SCHEDULE NOTES:


- ALL FINISH TYPES SHOULD BE COORDINATED WITH THE ARCHITECT/INTERIOR DESIGNER(S).
- ALL TRIMS AND INSTALLATION REQUIREMENTS SHALL BE COORDINATED WITH THE CEILING TYPE IN WHICH IT IS TO BE INSTALLED. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT CEILING TYPE FOR WHICH THE FIXTURE IS TO BE INSTALLED.
- REFER TO THE ARCHITECTURAL REFLECTED CEILING PLANS AND MILLWORK DETAILS, WHERE APPLICABLE, FOR THE INTENDED MOUNTING LOCATION OF ALL LIGHT FIXTURES WITHIN.
- ALL FLUORESCENT FIXTURES TO BE PROVIDED WITH INTERNAL BALLAST DISCONNECTING MEANS.
- FIXTURE TYPES NOTED ON PLAN WITH SUFFIX 'E' INDICATES FIXTURE TO BE PROVIDED WITH 90 MINUTE MINIMUM BATTERY BACK-UP. (E.G. L1E, L2E, ETC...). ALL EXIT AND EMERGENCY FIXTURES SHALL BE FED FROM LOCAL LIGHTING BRANCH CIRCUIT PER NEC 700.12(1)(2).
- ANY LOW-VOLTAGE CLASS 2 WIRING OUTSIDE THE LIGHT FIXTURE HOUSING SHALL BE PLENUM RATED, I.E. TYPE CL-2P, IN COMPLIANCE WITH NEC ARTICLE 725.179. THIS APPLIES TO POWER WIRING AND CONTROL WIRING.

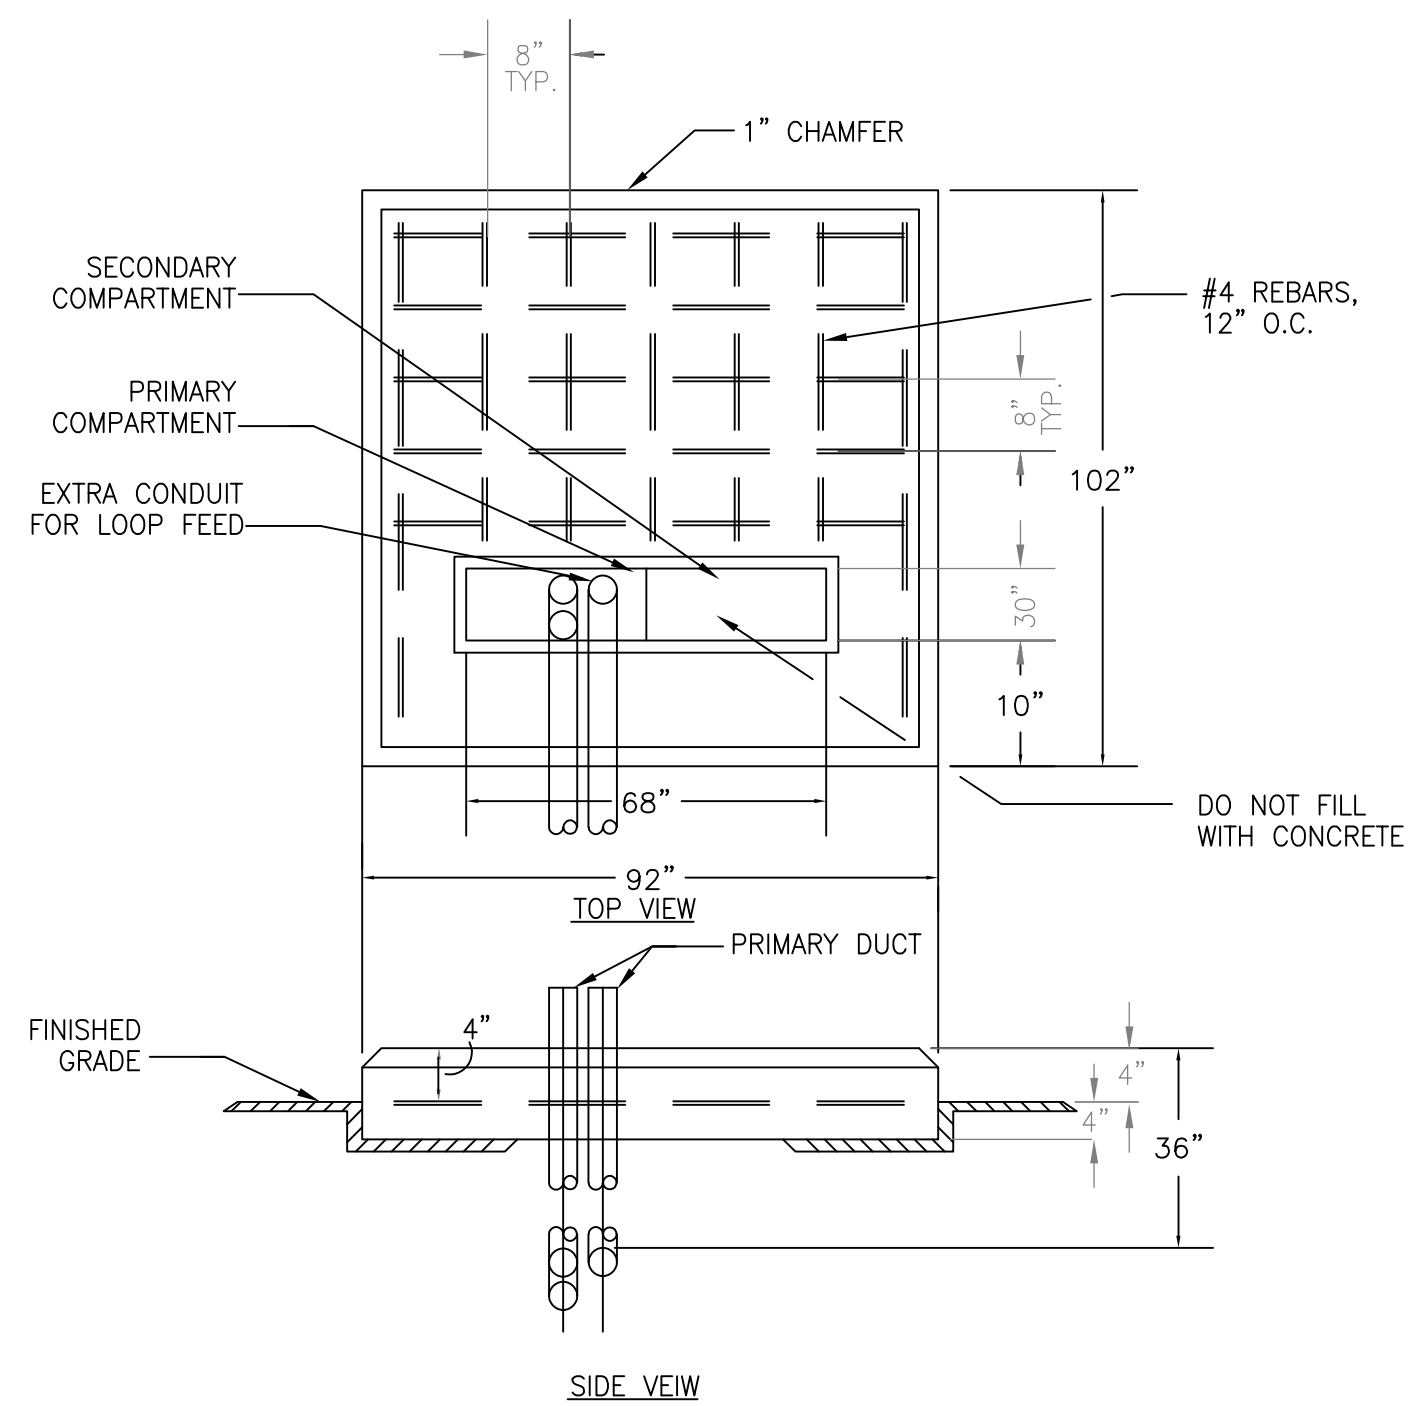

2 TRANSFORMER PAD DETAIL
E-008 NOT TO SCALE

GENERAL NOTES:
(APPLIES ONLY TO THIS DETAIL 2/E-002)


- CONFIRM DIMENSIONS WITH POWER COMPANY, DUKE ENERGY.
- SERVICE DUCT SHALL BE LOCATED IN THE EXTREME RIGHT SIDE OF THE SECONDARY COMPARTMENT
- PRIMARY DUCT SHALL EXTEND BEYOND EDGE OF PAD IN DIRECTION OF INCOMING CABLES.
- MATERIAL FOR PRIMARY DUCT SHALL BE FURNISHED BY POWER COMPANY.
- THE PAD SHALL HAVE A MINIMUM CLEARANCE OF 10' FROM ALL BUILDINGS.
- CONCRETE SHALL HAVE A MINIMUM ULTIMATE 28 DAY COMPRESSIVE STRENGTH OF NOT LESS THAN 3000 POUNDS. PAD SHALL BE CURED NOT LESS THAN 72 HOURS.
- SOIL UNDERNEATH PADS SHALL BE FREE OF ROOTS AND OTHER ORGANIC MATERIALS AND BE THOROUGHLY TAMPED TO PREVENT WASHING. EXERCISE CARE IN BACKFILLING AND GRADING AROUND PAD.
- USE FIRE ANT CONTROL (CN 9220092158) UNDER ENTIRE PAD INCLUDING OPENINGS.
- OTHER UTILITIES ARE NOT TO BE INSTALLED UNDER TRANSFORMER PAD.

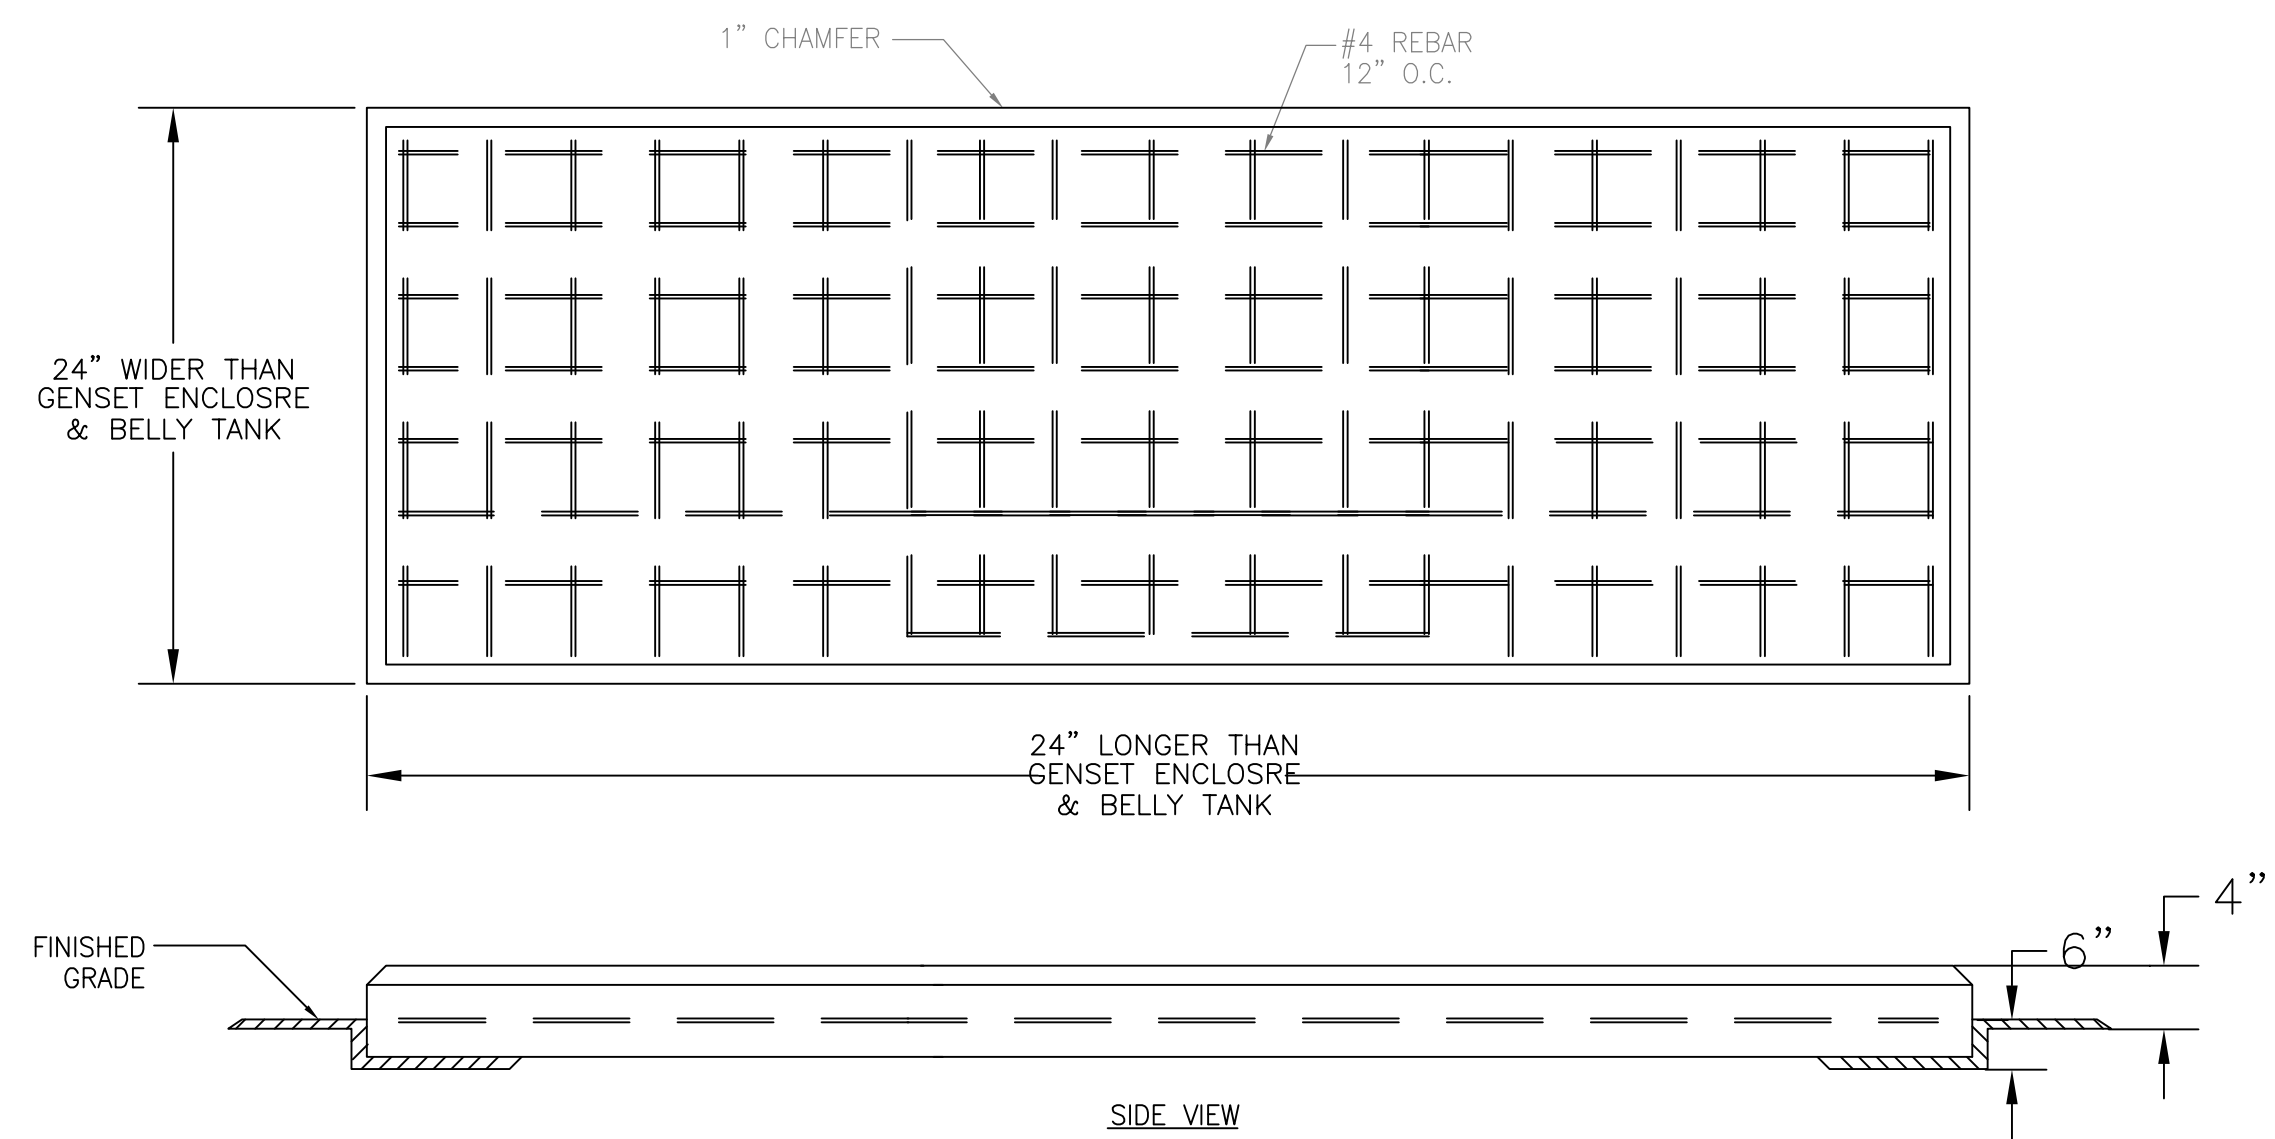

3 GENERATOR PAD DETAIL
E-008 NOT TO SCALE

ABBREVIATIONS:


- TBB - TELEPHONE BACKBOARD
- XFMR - TRANSFORMER
- MEGB - MAIN EQUIPMENT GROUND BAR
- MTGB - MAIN TELEPHONE GROUND BAR

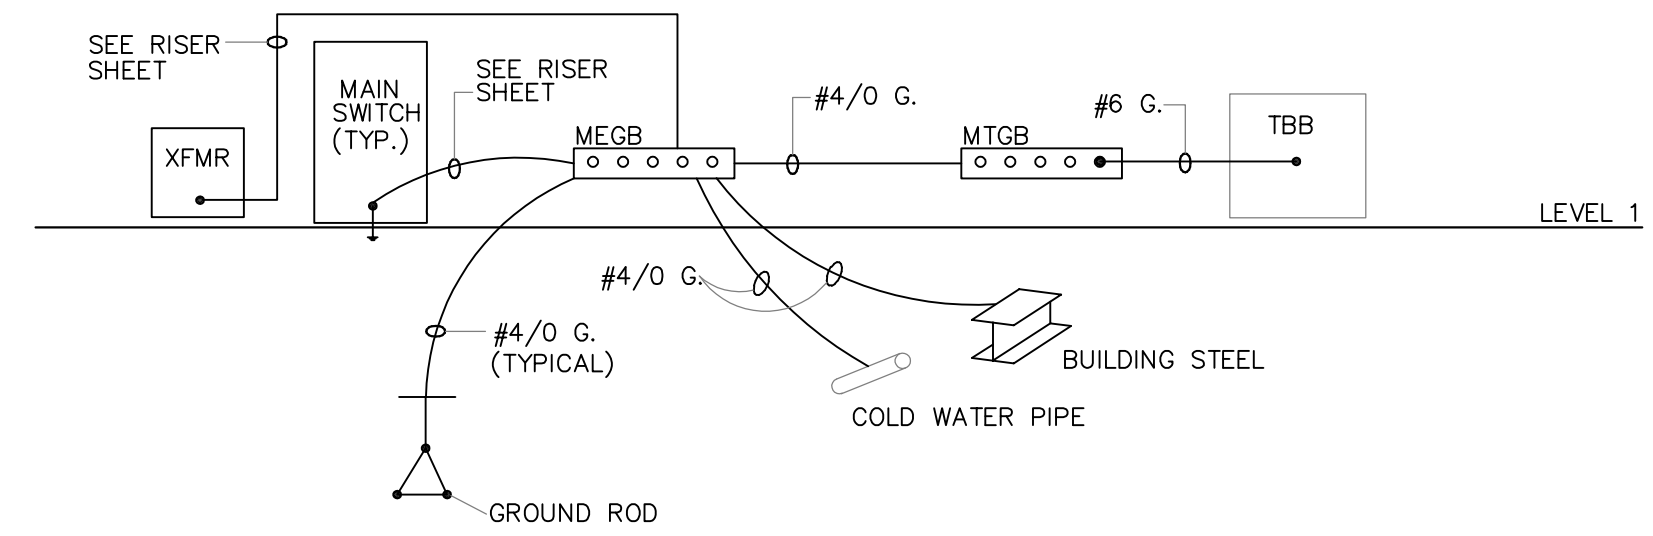

4 GROUNDING RISER DETAIL
E-008 NOT TO SCALE

GENERAL NOTE:
(APPLY THIS DETAIL ONLY 4/E-002)

- GROUNDING RISER DETAIL PER SPECIFICATIONS 261000 SECTION 3.08.
- ALL CONDUCTORS SHALL BE CONTINUOUS. PROVIDE AN EXOTHERMIC WELD AT ALL JOINTS AND SPLICES.
- MTGB AND TBB LOCATION TO BE DETERMINED IN THE WAREHOUSE UPFIT PHASE.

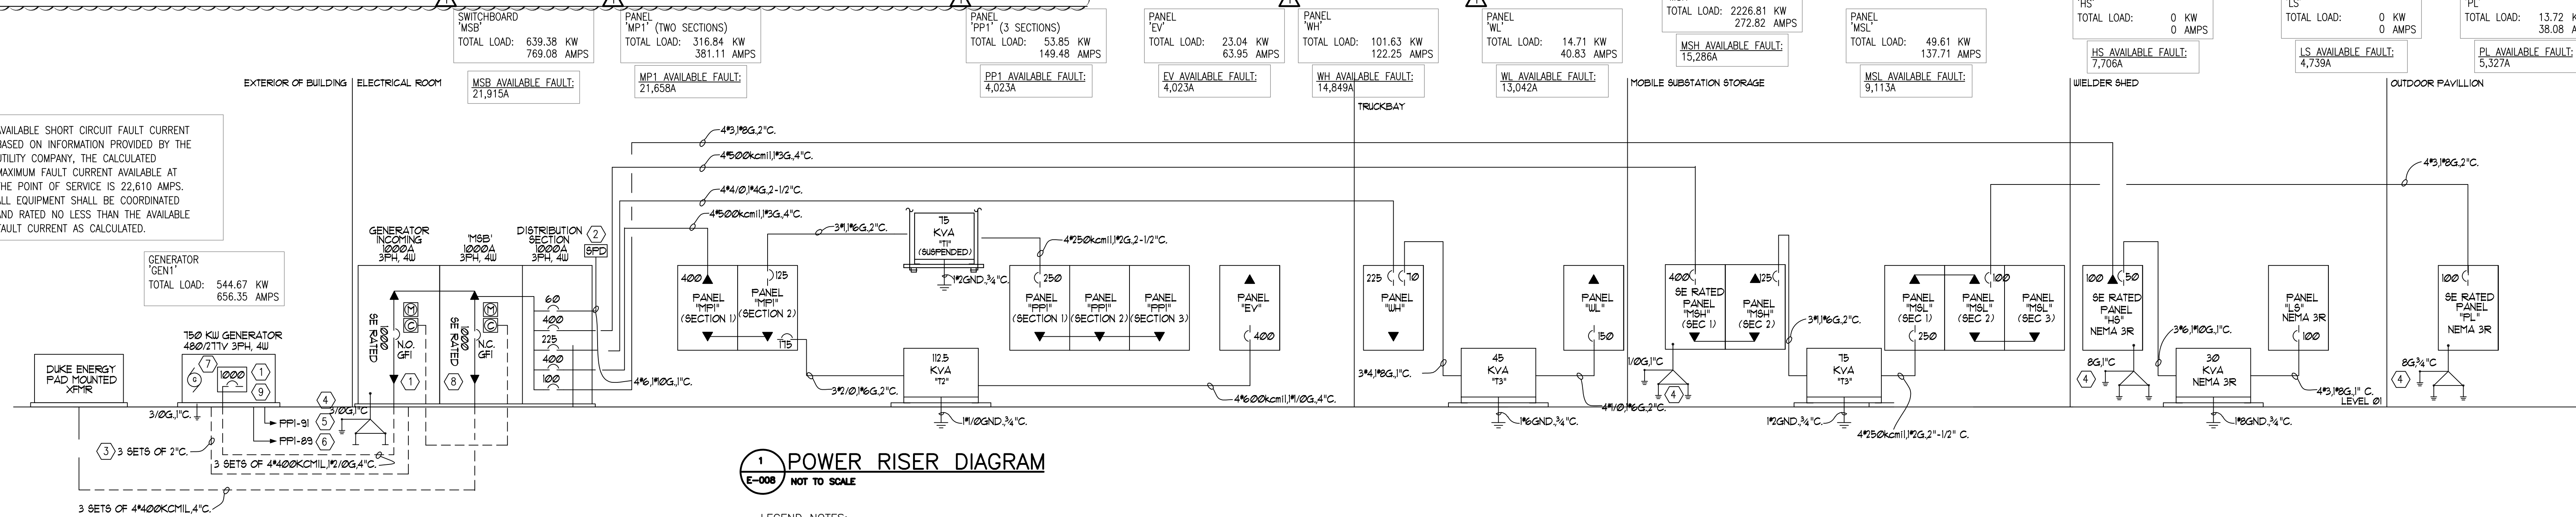

1 POWER RISER DIAGRAM
E-008 NOT TO SCALE

LEGEND NOTES:
(APPLIES THIS SHEET ONLY)

- GENERATOR WILL NOT BE PARALLELED TO THE UTILITY. PROVIDE SENSING AND CONTROLS FOR AUTOMATIC SYNCHRONIZING. PROVIDE RELAYS FOR SYNC CHECK CONTROL POWER FOR CPT'S WILL BE DELIVERED BY BUILDING UTILITY POWER. PROVIDE A SWITCHING PAIR OF BREAKERS AS SHOWN WITH AUTO-THROW-OVER CONTROLS WITH SELECTABLE AUTOMATIC OR MANUAL CONTROL. PROVIDE ADJUSTABLE TIME DELAY FOR AUTOMATIC MODE OPERATION. THE SPECIFICATIONS FOR THE SWITCHBOARD SHALL BE COORDINATED WITH THE UPFIT.
- SURGE PROTECTIVE DEVICE SHALL BE SSI SHL3Y2 OR APPROVED EQUAL.
- (3) SETS 2" CONDUIT FOR POWER, CONTROL CABLING, AND ONE SPARE FROM GENERATOR TO BUILDING MAIN ELECTRICAL ROOM.
- GROUND PER N.E.C. 250.
- PROVIDE POWER TO BLOCK HEATER.
- PROVIDE POWER TO BATTERY CHARGER.
- GENERATOR SHALL BE GENERAC 'SD750' SERIES 750KW INDUSTRIAL DIESEL GENERATOR. PROVIDE WITH UL142 2,233 GALLON SUB-BASE TANK RATED FOR 32 HOUR RUNTIME AT 100% LOAD. LEVEL 1 SOUND ATTENUATION WEATHERPROOF ENCLOSURE RATED 80DBA @ 23FT, AND VERTICAL DISCHARGE SECTION. PROVIDE ALL CONTROL WIRING FOR INTEGRATED FUNCTION WITH THE BUILDING SWITCHBOARD.
- LABEL PER NEC 110.16.
- THE EMERGENCY SYSTEM SHALL BE NON-SEPARATELY DERIVED. THE BREAKERS THAT TRANSFER FROM UTILITY TO EMERGENCY SHALL BE THREE POLE. REMOVE THE BOND STRAP AT THE GENERATOR FOR THE 3 POLE SWITCHING.

MAILING ADDRESS:
P.O. BOX 1007
CHARLOTTE, NC 28201


Safety Expectations:



LS3P

BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minuet LN,
Charlotte, North Carolina 28217
(p) 704-357-9333 (f) 704-357-9885

© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.
BWA JOB # 2022-0632

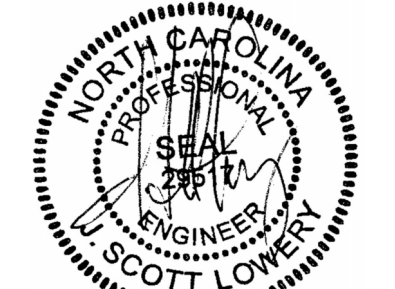

SEAL 02/14/24

DUNN OPERATIONS CENTER

1269 JONESBORO RD.
HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

REVISION	DATE	BY	DESCRIPTION
1	02/14/24	JFE	ISSUED FOR CONSTRUCTION
2	03/22/23	JFE	LIGHTING UPDATE
3	05/24/23	JFE	REVISION

PROJECT NO:
DRAWING NUMBER
CFD-XXX-E-008-XXXXX

ELECTRONIC FILE NAME:

DRAWN BY: JFE

CHK'D BY: JSL DATE:

E-MAIL: SLOWERY@BARRETTWOYARD.COM

THIS DESIGN DRAWING IS THE EXCLUSIVE PROPERTY OF DUKE ENERGY CORPORATION AND IS TO BE USED ONLY FOR THE PROJECT SPECIFICALLY IDENTIFIED THEREIN. IT IS NOT TO BE REPRODUCED, COPIED, OR DISSEMINATED WITHOUT WRITTEN PERMISSION FROM DUKE ENERGY CORPORATION. ANY INFORMATION SHOULD ONLY BE USED FOR THE SPECIFIC PROJECT INTENDED.

SHEET TITLE:

POWER RISER DIAGRAM & DETAILS

SHEET NO.

E-008

NEW PANEL MSB SECTION 1 AIC 42K SE RATED 1000 MCB. VOLTAGE: 277/480 3. PHASE: 3. AMP: MAIN: 3. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 40.54 KVA. HEAT: 100% : = 138.945 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 258.68 KVA. LIGHTING: 125%: = 47.04875 KVA. MISC: 100%: = 48.68 KVA. WATER HEATER: 125%: = 19 KVA. ELEVATORS: PER NEC: = 0 KVA. KITCHEN EQUIP: PER NEC : = 0 KVA. TOTAL DEMAND LOAD KW: = 645.89375 KVA. TOTAL DEMAND LOAD AMPS: = 658.00 AMP.

NEW PANEL MP1 SECTION 1 AIC 22K. VOLTAGE: 277/480 3. PHASE: 3. AMP: MAIN: 400 MLO. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 25.34 KVA. HEAT: 100% : = 138.945 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 181.78 KVA. LIGHTING: 125%: = 16.05375 KVA. MISC: 100%: = 63.52 KVA. WATER HEATER: 125%: = 15.25 KVA. ELEVATORS: PER NEC: = 0 KVA. KITCHEN EQUIP: PER NEC : = 0 KVA. TOTAL DEMAND LOAD KW: = 401.94375 KVA. TOTAL DEMAND LOAD AMPS: = 363.19 AMP.

NEW PANEL MP1 SECTION 2 AIC 42K. VOLTAGE: 277/480 3. PHASE: 3. AMP: MAIN: 400 MLO. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 17.19 KVA. HEAT: 100% : = 0 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 0 KVA. LIGHTING: 125%: = 0 KVA. MISC: 100%: = 0 KVA. WATER HEATER: 125%: = 0 KVA. ELEVATORS: PER NEC: = 0 KVA. KITCHEN EQUIP: PER NEC : = 0 KVA. TOTAL DEMAND LOAD KW: = 0 KVA. TOTAL DEMAND LOAD AMPS: = 0 AMP.

NEW PANEL PP1 SECTION 1 AIC 10K. VOLTAGE: 120/208 3. PHASE: 3. AMP: MAIN: 250 MCB. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 25.61 KVA. HEAT: 100% : = 0 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 12.9 KVA. LIGHTING: 125%: = 0.45 KVA. MISC: 100%: = 18.84 KVA. WATER HEATER: 125%: = 0 KVA. ELEVATORS: PER NEC: = 0 KVA. KITCHEN EQUIP: PER NEC : = 0 KVA. TOTAL DEMAND LOAD KW: = 37.80 KVA. TOTAL DEMAND LOAD AMPS: = 18.83 AMP.

NEW PANEL PP1 SECTION 2 AIC 10K. VOLTAGE: 120/208 3. PHASE: 3. AMP: MAIN: 250 MCB. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 21.60 KVA. HEAT: 100% : = 0.00 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 3.95 KVA. LIGHTING: 125%: = 10.32 KVA. MISC: 100%: = 0.00 KVA. WATER HEATER: 125%: = 0.00 KVA. ELEVATORS: PER NEC: = 0.00 KVA. KITCHEN EQUIP: PER NEC : = 0.00 KVA. TOTAL DEMAND LOAD KW: = 25.57 KVA. TOTAL DEMAND LOAD AMPS: = 12.37 AMP.

NEW PANEL PP1 SECTION 3 AIC 10K. VOLTAGE: 120/208 3. PHASE: 3. AMP: MAIN: 250 MCB. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 0.79 KVA. HEAT: 100% : = 0.00 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 8.95 KVA. LIGHTING: 125%: = 0.36 KVA. MISC: 100%: = 8.80 KVA. WATER HEATER: 125%: = 0.00 KVA. ELEVATORS: PER NEC: = 0.00 KVA. KITCHEN EQUIP: PER NEC : = 0.00 KVA. TOTAL DEMAND LOAD KW: = 18.93 KVA. TOTAL DEMAND LOAD AMPS: = 9.57 AMP.

NEW PANEL BV SECTION 1 AIC 10K. VOLTAGE: 120/208 3. PHASE: 3. AMP: MAIN: 400 MCB. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 0 KVA. HEAT: 100% : = 0 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 0 KVA. LIGHTING: 125%: = 23.04 KVA. MISC: 100%: = 23.04 KVA. WATER HEATER: 125%: = 0 KVA. ELEVATORS: PER NEC: = 0 KVA. KITCHEN EQUIP: PER NEC : = 0 KVA. TOTAL DEMAND LOAD KW: = 23.04 KVA. TOTAL DEMAND LOAD AMPS: = 63.95 AMP.


NEW PANEL WH SECTION 1 AIC 22K. VOLTAGE: 277/480 3. PHASE: 3. AMP: MAIN: 225 MCB. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.

TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 1.8 KVA. HEAT: 100% : = 77.4 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 13.41 KVA. LIGHTING: 125%: = 4.515 KVA. MISC: 100%: = 0 KVA. WATER HEATER: 125%: = 0 KVA. ELEVATORS: PER NEC: = 0 KVA. KITCHEN EQUIP: PER NEC : = 0 KVA. TOTAL DEMAND LOAD KW: = 97.125 KVA. TOTAL DEMAND LOAD AMPS: = 116.83 AMP.

NEW PANEL WL SECTION 1 AIC 10K. VOLTAGE: 120/208 3. PHASE: 3. AMP: MAIN: 150 MCB. Description table with columns for KW, BKR, CK, PH, CK, BKR, KW, DESCRIPTION. Includes totals for A, B, C and CONN. kw, Amps.


TOTAL DEMAND LOAD. RECEIPTS: 100% 1ST 10 KW + 50% REMAINING: = 1.8 KVA. HEAT: 100% : = 77.4 KVA. AC/MOTORS: 125% LARGEST + 100% REMAINING: = 9.908 KVA. LIGHTING: 125%: = 0 KVA. MISC: 100%: = 0.2 KVA. WATER HEATER: 125%: = 0 KVA. ELEVATORS: PER NEC: = 0 KVA. KITCHEN EQUIP: PER NEC : = 0 KVA. TOTAL DEMAND LOAD KW: = 11.908 KVA. TOTAL DEMAND LOAD AMPS: = 33.05 AMP.

DRAWING NO. CFD-XXX-E-009-XXXX

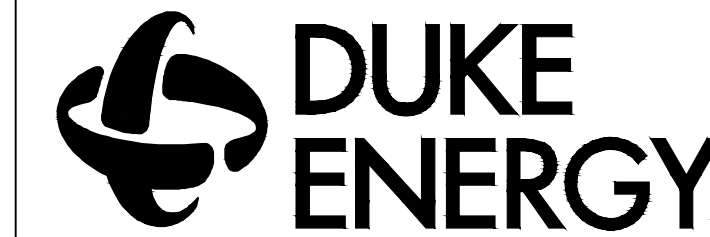


MAILING ADDRESS: P.O. BOX 1007 CHARLOTTE, NC 28201

Safety Expectations:

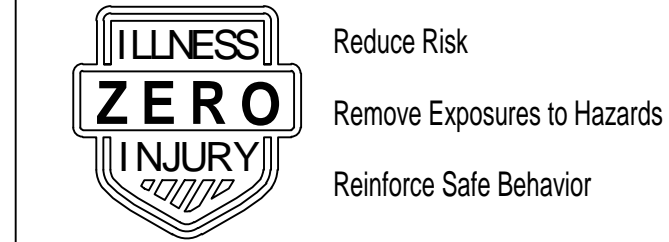

BW & A Barrett, Woodyard and Associates, Inc. License # C-2225 420 Minnet Ln. Charlotte, North Carolina 28217 (p) 704-367-9333 (f) 704-367-9886

This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project. BWA JOB # 2022-0632

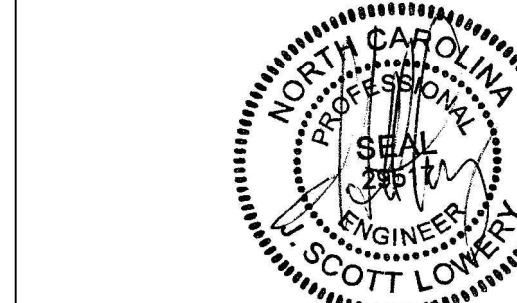

DUNN OPERATIONS CENTER

1269 JONESBORO RD. HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

REVISION table with columns for DATE, MARK, DATE, REVISION, and ISSUED FOR CONSTRUCTION.

PROJECT NO. DRAWING NUMBER

CFD-XXX-E-009-XXXX

ELECTRONIC FILE NAME:

DRAWN BY: JFE


CHK'D BY: JSL DATE:

E-MAIL: SLOWERY@BARRETTWOODYARD.COM

SHEET TITLE: PANEL SCHEDULES - ELECTRICAL


SHEET NO. E-009

	1	2	3	4	5	6	7	8	9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
H			<table border="1"><thead><tr><th colspan="10">NEW PANEL MSH SECTION 1</th><th colspan="2">AIC 22K SE RATED</th></tr><tr><th>VOLTAGE:</th><th colspan="3">277/480 3</th><th colspan="3">AMP: MAIN:</th><th colspan="4">400 MCB</th><th colspan="2"></th></tr></thead><tbody><tr><td>DESCRIPTION</td><td>KW</td><td>BKR</td><td>CK</td><td>PH</td><td>CK</td><td>BKR</td><td>KW</td><td>DESCRIPTION</td><td></td><td></td><td></td><td></td></tr><tr><td>WAREHOUSE LTS</td><td>3.612</td><td>20/1</td><td>7</td><td>A</td><td>2</td><td>15/3</td><td>0.663</td><td>EP-A</td><td></td><td></td><td></td><td></td></tr><tr><td>WAREHOUSE LTS</td><td>1.422</td><td>20/1</td><td>3</td><td>B</td><td>4</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>PAN</td><td>1.67</td><td>20/3</td><td>5</td><td>C</td><td>6</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>1.67</td><td></td><td>7</td><td>A</td><td>8</td><td>15/3</td><td>0.663</td><td>EP-A</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>1.67</td><td></td><td>9</td><td>B</td><td>10</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10 TON CRANE</td><td>7.59</td><td>40/3</td><td>11</td><td>C</td><td>12</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>7.58</td><td></td><td>13</td><td>A</td><td>14</td><td>15/3</td><td>0.663</td><td>EP-A</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>7.58</td><td></td><td>15</td><td>B</td><td>16</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>UH-A</td><td>4.3</td><td>20/3</td><td>17</td><td>C</td><td>18</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>19</td><td>A</td><td>20</td><td>15/3</td><td>0.663</td><td>EP-A</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>21</td><td>B</td><td>22</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WALLPACK LTS</td><td>0.36</td><td>20/1</td><td>23</td><td>C</td><td>24</td><td></td><td>0.663</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>UH-A</td><td>4.3</td><td>20/3</td><td>25</td><td>A</td><td>26</td><td>20/1</td><td>3</td><td>WATER HEATER</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>27</td><td>B</td><td>28</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>29</td><td>C</td><td>30</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td>UH-A</td><td>4.3</td><td>20/3</td><td>31</td><td>A</td><td>32</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>33</td><td>B</td><td>34</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>35</td><td>C</td><td>36</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td>UH-A</td><td>4.3</td><td>20/3</td><td>37</td><td>A</td><td>38</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>39</td><td>B</td><td>40</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>4.3</td><td></td><td>41</td><td>C</td><td>42</td><td>20/1</td><td>0</td><td>SPARE</td><td></td><td></td><td></td><td></td></tr><tr><td>75KVA</td><td>18.00</td><td>180/3</td><td>SUB</td><td>A</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>XMFR TO</td><td>22.25</td><td>125</td><td>P2</td><td>B</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>PANEL MSL</td><td>18.75</td><td></td><td>ED</td><td>C</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>A TOTAL</td><td>53.71</td><td></td><td>VLL</td><td>PH</td><td></td><td></td><td>0.00</td><td>RECEPTACLES</td><td></td><td></td><td></td><td></td></tr><tr><td>B TOTAL</td><td>52.77</td><td></td><td>480</td><td>3</td><td></td><td></td><td>59.56</td><td>HEATING</td><td></td><td></td><td></td><td></td></tr><tr><td>C TOTAL</td><td>48.22</td><td></td><td></td><td></td><td></td><td></td><td>27.76</td><td>AC/MOTORS</td><td></td><td></td><td></td><td></td></tr><tr><td>SECTION 2 TOTAL kW</td><td>79.39</td><td></td><td></td><td></td><td></td><td></td><td>5.39</td><td>LIGHTING</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>MISC.</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>3.00</td><td>WATER HEATERS</td><td></td><td></td><td></td><td></td></tr><tr><td>CONN. kW</td><td>234.10</td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>ELEVATORS</td><td></td><td></td><td></td><td></td></tr><tr><td>CONN. Amps</td><td>281.59</td><td></td><td></td><td></td><td></td><td></td><td>0.00</td><td>KITCHEN EQUIP</td><td></td><td></td><td></td><td></td></tr><tr><td>TOTAL DEMAND LOAD</td><td colspan="12">RECEPTS: 100% 1ST 10 KW + 50% REMAINING: = 19.39 KVA</td></tr><tr><td></td><td colspan="12">HEAT: 100% : = 138.945 KVA</td></tr><tr><td></td><td colspan="12">AC/MOTORS: 125% LARGEST + 100% REMAINING: = 56.38 KVA</td></tr><tr><td></td><td colspan="12">LIGHTING: 125%: = 6.7425 KVA</td></tr><tr><td></td><td colspan="12">MISC: 100%: = 1.6 KVA</td></tr><tr><td></td><td colspan="12">WATER HEATER: 125%: = 3.75 KVA</td></tr><tr><td></td><td colspan="12">ELEVATORS: PER NEC: = 0 KVA</td></tr><tr><td></td><td colspan="12">KITCHEN EQUIP: PER NEC : = 0 KVA</td></tr><tr><td></td><td colspan="12">TOTAL DEMAND LOAD KW: = 226.8075 KVA</td></tr><tr><td></td><td colspan="12">TOTAL DEMAND LOAD AMPS: = 272.82 AMP</td></tr></tbody></table>	NEW PANEL MSH SECTION 1										AIC 22K SE RATED		VOLTAGE:	277/480 3			AMP: MAIN:			400 MCB						DESCRIPTION	KW	BKR	CK	PH	CK	BKR	KW	DESCRIPTION					WAREHOUSE LTS	3.612	20/1	7	A	2	15/3	0.663	EP-A					WAREHOUSE LTS	1.422	20/1	3	B	4		0.663						PAN	1.67	20/3	5	C	6		0.663							1.67		7	A	8	15/3	0.663	EP-A						1.67		9	B	10		0.663						10 TON CRANE	7.59	40/3	11	C	12		0.663							7.58		13	A	14	15/3	0.663	EP-A						7.58		15	B	16		0.663						UH-A	4.3	20/3	17	C	18		0.663							4.3		19	A	20	15/3	0.663	EP-A						4.3		21	B	22		0.663						WALLPACK LTS	0.36	20/1	23	C	24		0.663						UH-A	4.3	20/3	25	A	26	20/1	3	WATER HEATER						4.3		27	B	28	20/1	0	SPARE						4.3		29	C	30	20/1	0	SPARE					UH-A	4.3	20/3	31	A	32	20/1	0	SPARE						4.3		33	B	34	20/1	0	SPARE						4.3		35	C	36	20/1	0	SPARE					UH-A	4.3	20/3	37	A	38	20/1	0	SPARE						4.3		39	B	40	20/1	0	SPARE						4.3		41	C	42	20/1	0	SPARE					75KVA	18.00	180/3	SUB	A									XMFR TO	22.25	125	P2	B									PANEL MSL	18.75		ED	C									A TOTAL	53.71		VLL	PH			0.00	RECEPTACLES					B TOTAL	52.77		480	3			59.56	HEATING					C TOTAL	48.22						27.76	AC/MOTORS					SECTION 2 TOTAL kW	79.39						5.39	LIGHTING												0.00	MISC.												3.00	WATER HEATERS					CONN. kW	234.10						0.00	ELEVATORS					CONN. Amps	281.59						0.00	KITCHEN EQUIP					TOTAL DEMAND LOAD	RECEPTS: 100% 1ST 10 KW + 50% REMAINING: = 19.39 KVA													HEAT: 100% : = 138.945 KVA													AC/MOTORS: 125% LARGEST + 100% REMAINING: = 56.38 KVA													LIGHTING: 125%: = 6.7425 KVA													MISC: 100%: = 1.6 KVA													WATER HEATER: 125%: = 3.75 KVA													ELEVATORS: PER NEC: = 0 KVA													KITCHEN EQUIP: PER NEC : = 0 KVA													TOTAL DEMAND LOAD KW: = 226.8075 KVA													TOTAL DEMAND LOAD AMPS: = 272.82 AMP																				
NEW PANEL MSH SECTION 1										AIC 22K SE RATED																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
VOLTAGE:	277/480 3			AMP: MAIN:			400 MCB																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
DESCRIPTION	KW	BKR	CK	PH	CK	BKR	KW	DESCRIPTION																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
WAREHOUSE LTS	3.612	20/1	7	A	2	15/3	0.663	EP-A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
WAREHOUSE LTS	1.422	20/1	3	B	4		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
PAN	1.67	20/3	5	C	6		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	1.67		7	A	8	15/3	0.663	EP-A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	1.67		9	B	10		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
10 TON CRANE	7.59	40/3	11	C	12		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	7.58		13	A	14	15/3	0.663	EP-A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	7.58		15	B	16		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
UH-A	4.3	20/3	17	C	18		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	4.3		19	A	20	15/3	0.663	EP-A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	4.3		21	B	22		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
WALLPACK LTS	0.36	20/1	23	C	24		0.663																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
UH-A	4.3	20/3	25	A	26	20/1	3	WATER HEATER																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	4.3		27	B	28	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	4.3		29	C	30	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
UH-A	4.3	20/3	31	A	32	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	4.3		33	B	34	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	4.3		35	C	36	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
UH-A	4.3	20/3	37	A	38	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	4.3		39	B	40	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	4.3		41	C	42	20/1	0	SPARE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
75KVA	18.00	180/3	SUB	A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
XMFR TO	22.25	125	P2	B																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
PANEL MSL	18.75		ED	C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
A TOTAL	53.71		VLL	PH			0.00	RECEPTACLES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
B TOTAL	52.77		480	3			59.56	HEATING																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
C TOTAL	48.22						27.76	AC/MOTORS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
SECTION 2 TOTAL kW	79.39						5.39	LIGHTING																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
							0.00	MISC.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
							3.00	WATER HEATERS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
CONN. kW	234.10						0.00	ELEVATORS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
CONN. Amps	281.59						0.00	KITCHEN EQUIP																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
TOTAL DEMAND LOAD	RECEPTS: 100% 1ST 10 KW + 50% REMAINING: = 19.39 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	HEAT: 100% : = 138.945 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	AC/MOTORS: 125% LARGEST + 100% REMAINING: = 56.38 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	LIGHTING: 125%: = 6.7425 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	MISC: 100%: = 1.6 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	WATER HEATER: 125%: = 3.75 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	ELEVATORS: PER NEC: = 0 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	KITCHEN EQUIP: PER NEC : = 0 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	TOTAL DEMAND LOAD KW: = 226.8075 KVA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	TOTAL DEMAND LOAD AMPS: = 272.82 AMP																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
G																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
E																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
D																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
B																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				

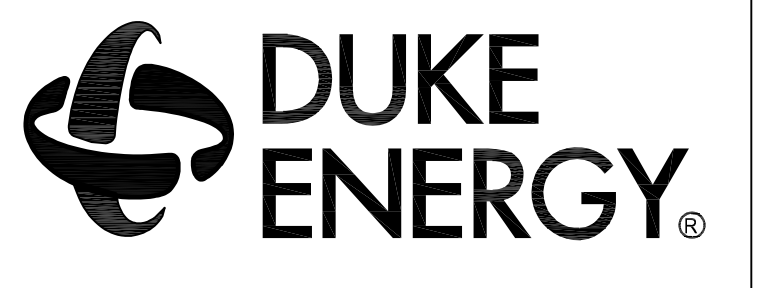


MAILING ADDRESS: P.O. BOX 1007 CHARLOTTE, NC 28201

Safety Expectations:
Remove Risk
Reduce Exposure to Hazards
Reinforce Safe Behavior

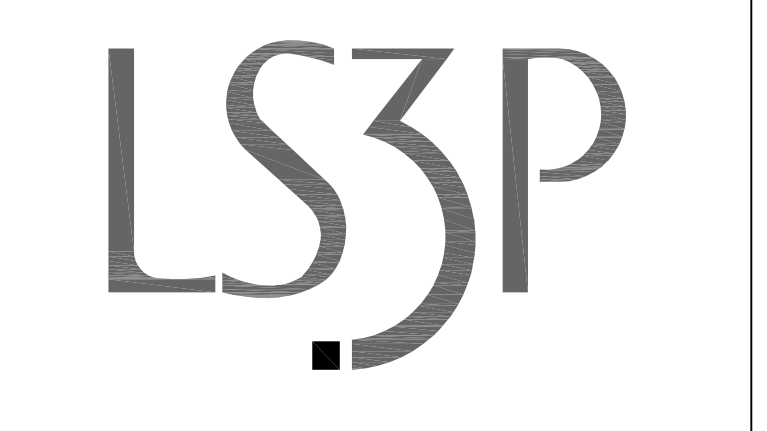


BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minuet LN. Charlotte, North Carolina 28217
(p) 704-357-9333 (f) 704-357-9886
© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project. BWA JOB # 2022-0632

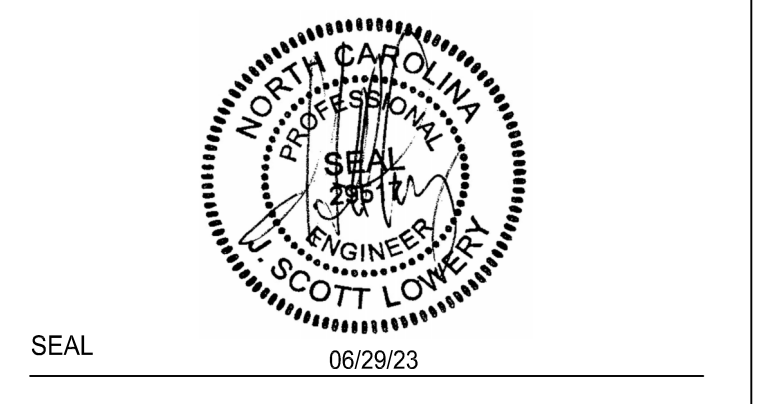

DUNN OPERATIONS CENTER
1269 JONESBORO RD. HARNETT COUNTY, NC 28334
OPERATIONS BUILDING

REVISION	DATE	BY	DESCRIPTION

PROJECT NO: DRAWING NUMBER CFD-XXX-E-010-XXXXX
ELECTRONIC FILE NAME:
DRAWN BY: JFE
CHK'D BY: JSL DATE:
E-MAIL: SLOWERY@BARRETTWOODYARD.COM
SHEET TITLE: PANEL SCHEDULES - ELECTRICAL
SHEET NO. E-010

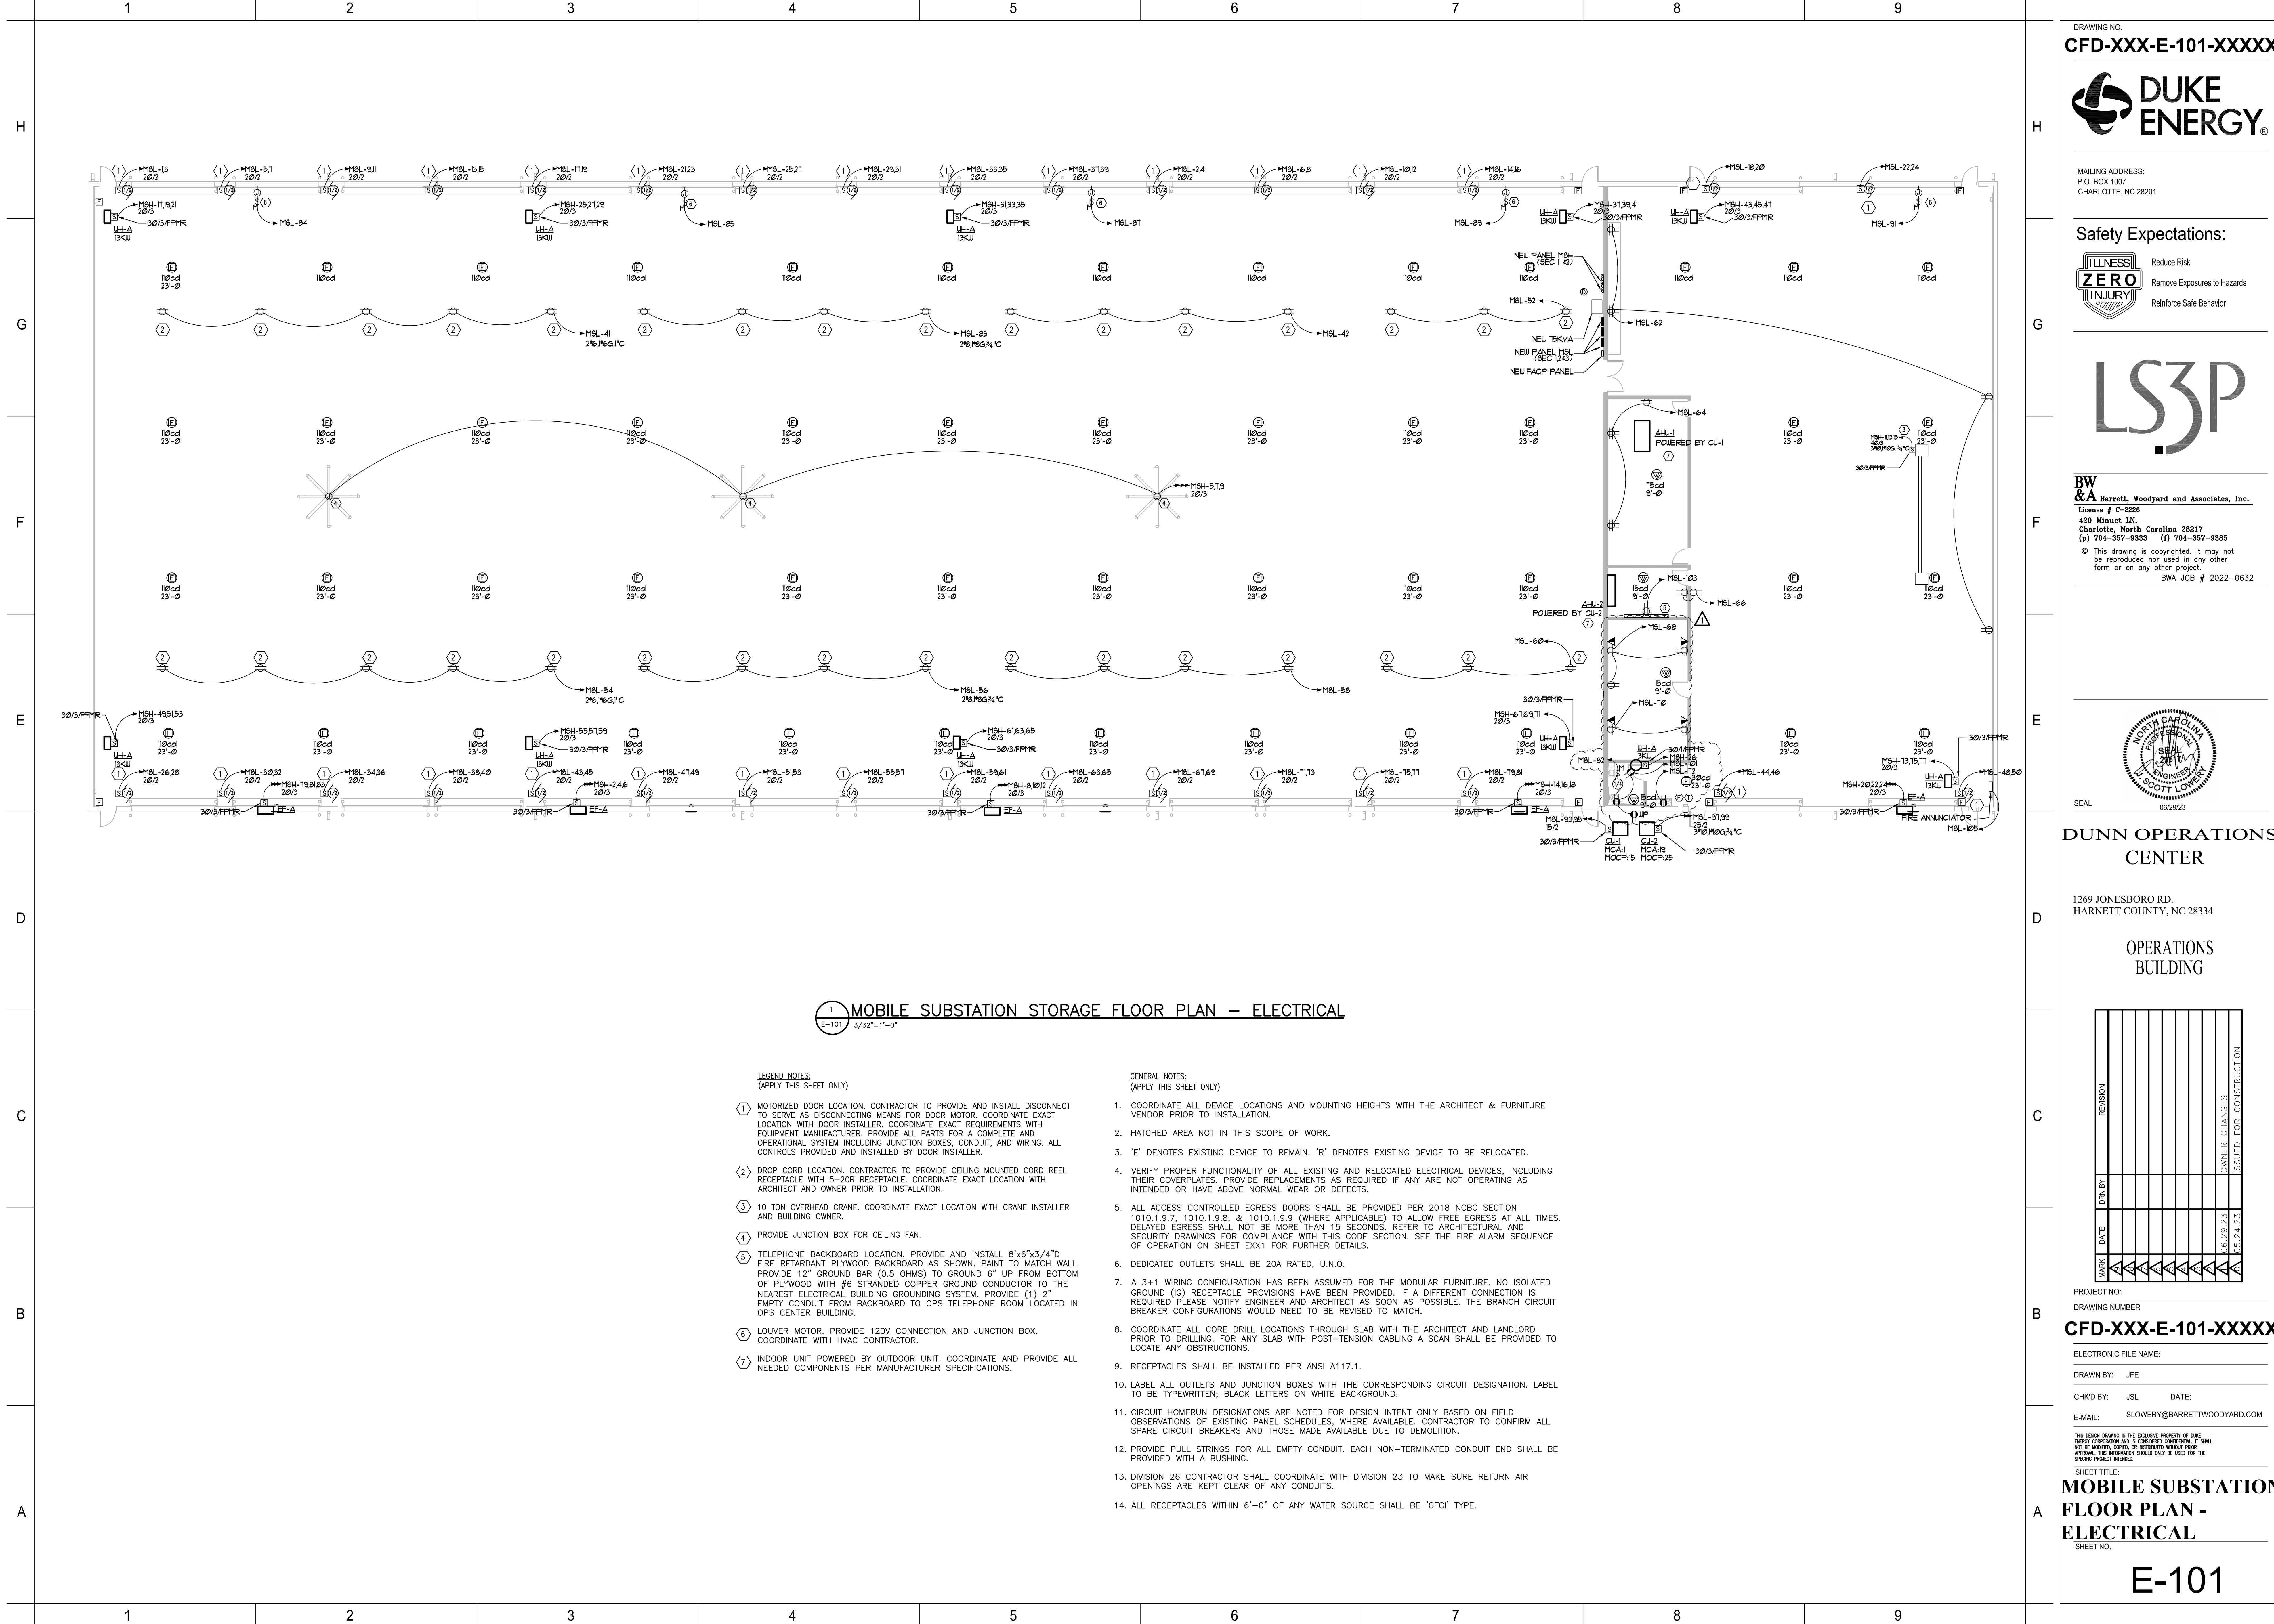

1 MOBILE SUBSTATION STORAGE FLOOR PLAN - ELECTRICAL
E-101 1/32"=1'-0"


LEGEND NOTES:
(APPLY THIS SHEET ONLY)

- 1) MOTORIZED DOOR LOCATION. CONTRACTOR TO PROVIDE AND INSTALL DISCONNECT TO SERVE AS DISCONNECTING MEANS FOR DOOR MOTOR. COORDINATE EXACT LOCATION WITH DOOR INSTALLER. COORDINATE EXACT REQUIREMENTS WITH EQUIPMENT MANUFACTURER. PROVIDE ALL PARTS FOR A COMPLETE AND OPERATIONAL SYSTEM INCLUDING JUNCTION BOXES, CONDUIT, AND WIRING. ALL CONTROLS PROVIDED AND INSTALLED BY DOOR INSTALLER.
- 2) DROP CORD LOCATION. CONTRACTOR TO PROVIDE CEILING MOUNTED CORD REEL RECEPTACLE WITH 5-20R RECEPTACLE. COORDINATE EXACT LOCATION WITH ARCHITECT AND OWNER PRIOR TO INSTALLATION.
- 3) 10 TON OVERHEAD CRANE. COORDINATE EXACT LOCATION WITH CRANE INSTALLER AND BUILDING OWNER.
- 4) PROVIDE JUNCTION BOX FOR CEILING FAN.
- 5) TELEPHONE BACKBOARD LOCATION. PROVIDE AND INSTALL 8'x6'x3/4" D FIRE RETARDANT PLYWOOD BACKBOARD AS SHOWN. PAINT TO MATCH WALL. PROVIDE 12" GROUND BAR (0.5 OHMS) TO GROUND 6" UP FROM BOTTOM OF PLYWOOD WITH #6 STRANDED COPPER GROUND CONDUCTOR TO THE NEAREST ELECTRICAL BUILDING GROUNDING SYSTEM. PROVIDE (1) 2" EMPTY CONDUIT FROM BACKBOARD TO OPS TELEPHONE ROOM LOCATED IN OPS CENTER BUILDING.
- 6) LOUVER MOTOR. PROVIDE 120V CONNECTION AND JUNCTION BOX. COORDINATE WITH HVAC CONTRACTOR.
- 7) INDOOR UNIT POWERED BY OUTDOOR UNIT. COORDINATE AND PROVIDE ALL NEEDED COMPONENTS PER MANUFACTURER SPECIFICATIONS.

GENERAL NOTES:
(APPLY THIS SHEET ONLY)


1. COORDINATE ALL DEVICE LOCATIONS AND MOUNTING HEIGHTS WITH THE ARCHITECT & FURNITURE VENDOR PRIOR TO INSTALLATION.
2. HATCHED AREA NOT IN THIS SCOPE OF WORK.
3. 'E' DENOTES EXISTING DEVICE TO REMAIN. 'R' DENOTES EXISTING DEVICE TO BE RELOCATED.
4. VERIFY PROPER FUNCTIONALITY OF ALL EXISTING AND RELOCATED ELECTRICAL DEVICES, INCLUDING THEIR COVERPLATES. PROVIDE REPLACEMENTS AS REQUIRED IF ANY ARE NOT OPERATING AS INTENDED OR HAVE ABOVE NORMAL WEAR OR DEFECTS.
5. ALL ACCESS CONTROLLED EGRESS DOORS SHALL BE PROVIDED PER 2018 NBC SECTION 1010.1.9.7, 1010.1.9.8, & 1010.1.9.9 (WHERE APPLICABLE) TO ALLOW FREE EGRESS AT ALL TIMES. DELAYED EGRESS SHALL NOT BE MORE THAN 15 SECONDS. REFER TO ARCHITECTURAL AND SECURITY DRAWINGS FOR COMPLIANCE WITH THIS CODE SECTION. SEE THE FIRE ALARM SEQUENCE OF OPERATION ON SHEET EXX1 FOR FURTHER DETAILS.
6. DEDICATED OUTLETS SHALL BE 20A RATED, U.N.O.
7. A 3+1 WIRING CONFIGURATION HAS BEEN ASSUMED FOR THE MODULAR FURNITURE. NO ISOLATED GROUND (IG) RECEPTACLE PROVISIONS HAVE BEEN PROVIDED. IF A DIFFERENT CONNECTION IS REQUIRED PLEASE NOTIFY ENGINEER AND ARCHITECT AS SOON AS POSSIBLE. THE BRANCH CIRCUIT BREAKER CONFIGURATIONS WOULD NEED TO BE REVISED TO MATCH.
8. COORDINATE ALL CORE DRILL LOCATIONS THROUGH SLAB WITH THE ARCHITECT AND LANDLORD PRIOR TO DRILLING. FOR ANY SLAB WITH POST-TENSION CABLING A SCAN SHALL BE PROVIDED TO LOCATE ANY OBSTRUCTIONS.
9. RECEPTACLES SHALL BE INSTALLED PER ANSI A117.1.
10. LABEL ALL OUTLETS AND JUNCTION BOXES WITH THE CORRESPONDING CIRCUIT DESIGNATION. LABEL TO BE TYPED IN BLACK LETTERS ON WHITE BACKGROUND.
11. CIRCUIT HOMERUN DESIGNATIONS ARE NOTED FOR DESIGN INTENT ONLY BASED ON FIELD OBSERVATIONS OF EXISTING PANEL SCHEDULES, WHERE AVAILABLE. CONTRACTOR TO CONFIRM ALL SPARE CIRCUIT BREAKERS AND THOSE MADE AVAILABLE DUE TO DEMOLITION.
12. PROVIDE PULL STRINGS FOR ALL EMPTY CONDUIT. EACH NON-TERMINATED CONDUIT END SHALL BE PROVIDED WITH A BUSHING.
13. DIVISION 26 CONTRACTOR SHALL COORDINATE WITH DIVISION 23 TO MAKE SURE RETURN AIR OPENINGS ARE KEPT CLEAR OF ANY CONDUITS.
14. ALL RECEPTACLES WITHIN 6'-0" OF ANY WATER SOURCE SHALL BE 'GFCI' TYPE.

DRAWING NO. CFD-XXX-E-101-XXXXX

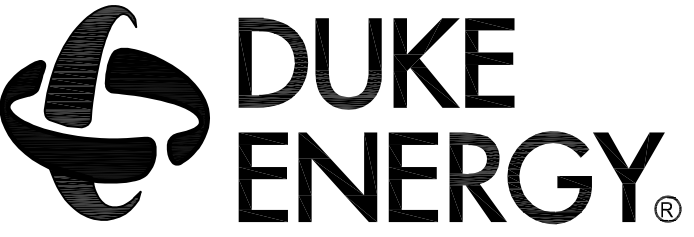


MAILING ADDRESS:
P.O. BOX 1007
CHARLOTTE, NC 28201

Safety Expectations:

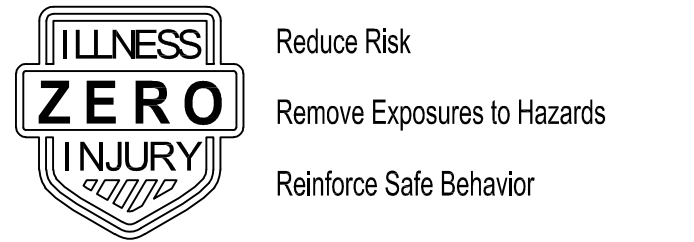

BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minnet Ln.
Charlotte, North Carolina 28217
(p) 704-357-9333 (f) 704-357-9386
© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.
BWA JOB # 2022-0632

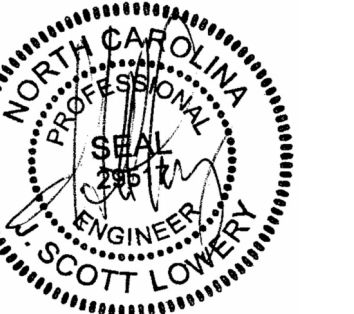

DUNN OPERATIONS CENTER

1269 JONESBORO RD.
HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

MARK	DATE	DESCRIPTION	ISSUED FOR CONSTRUCTION

PROJECT NO: _____
DRAWING NUMBER: _____

CFD-XXX-E-101-XXXXX

ELECTRONIC FILE NAME: _____

DRAWN BY: JFE


CHK'D BY: JSL DATE: _____

E-MAIL: SLOWERY@BARRETTWOODYARD.COM

THIS DESIGN DRAWING IS THE EXCLUSIVE PROPERTY OF DUK ENERGY CORPORATION AND IS CONSIDERED CONFIDENTIAL. IT SHALL NOT BE REPRODUCED, COPIED, OR DISSEMINATED WITHOUT PRIOR WRITTEN PERMISSION FROM DUK ENERGY CORPORATION. ANY VIOLATION OF THIS INFORMATION SHALL BE PUNISHED AS PROHIBITED BY LAW.

SHEET TITLE:
MOBILE SUBSTATION FLOOR PLAN - ELECTRICAL

SHEET NO. **E-101**

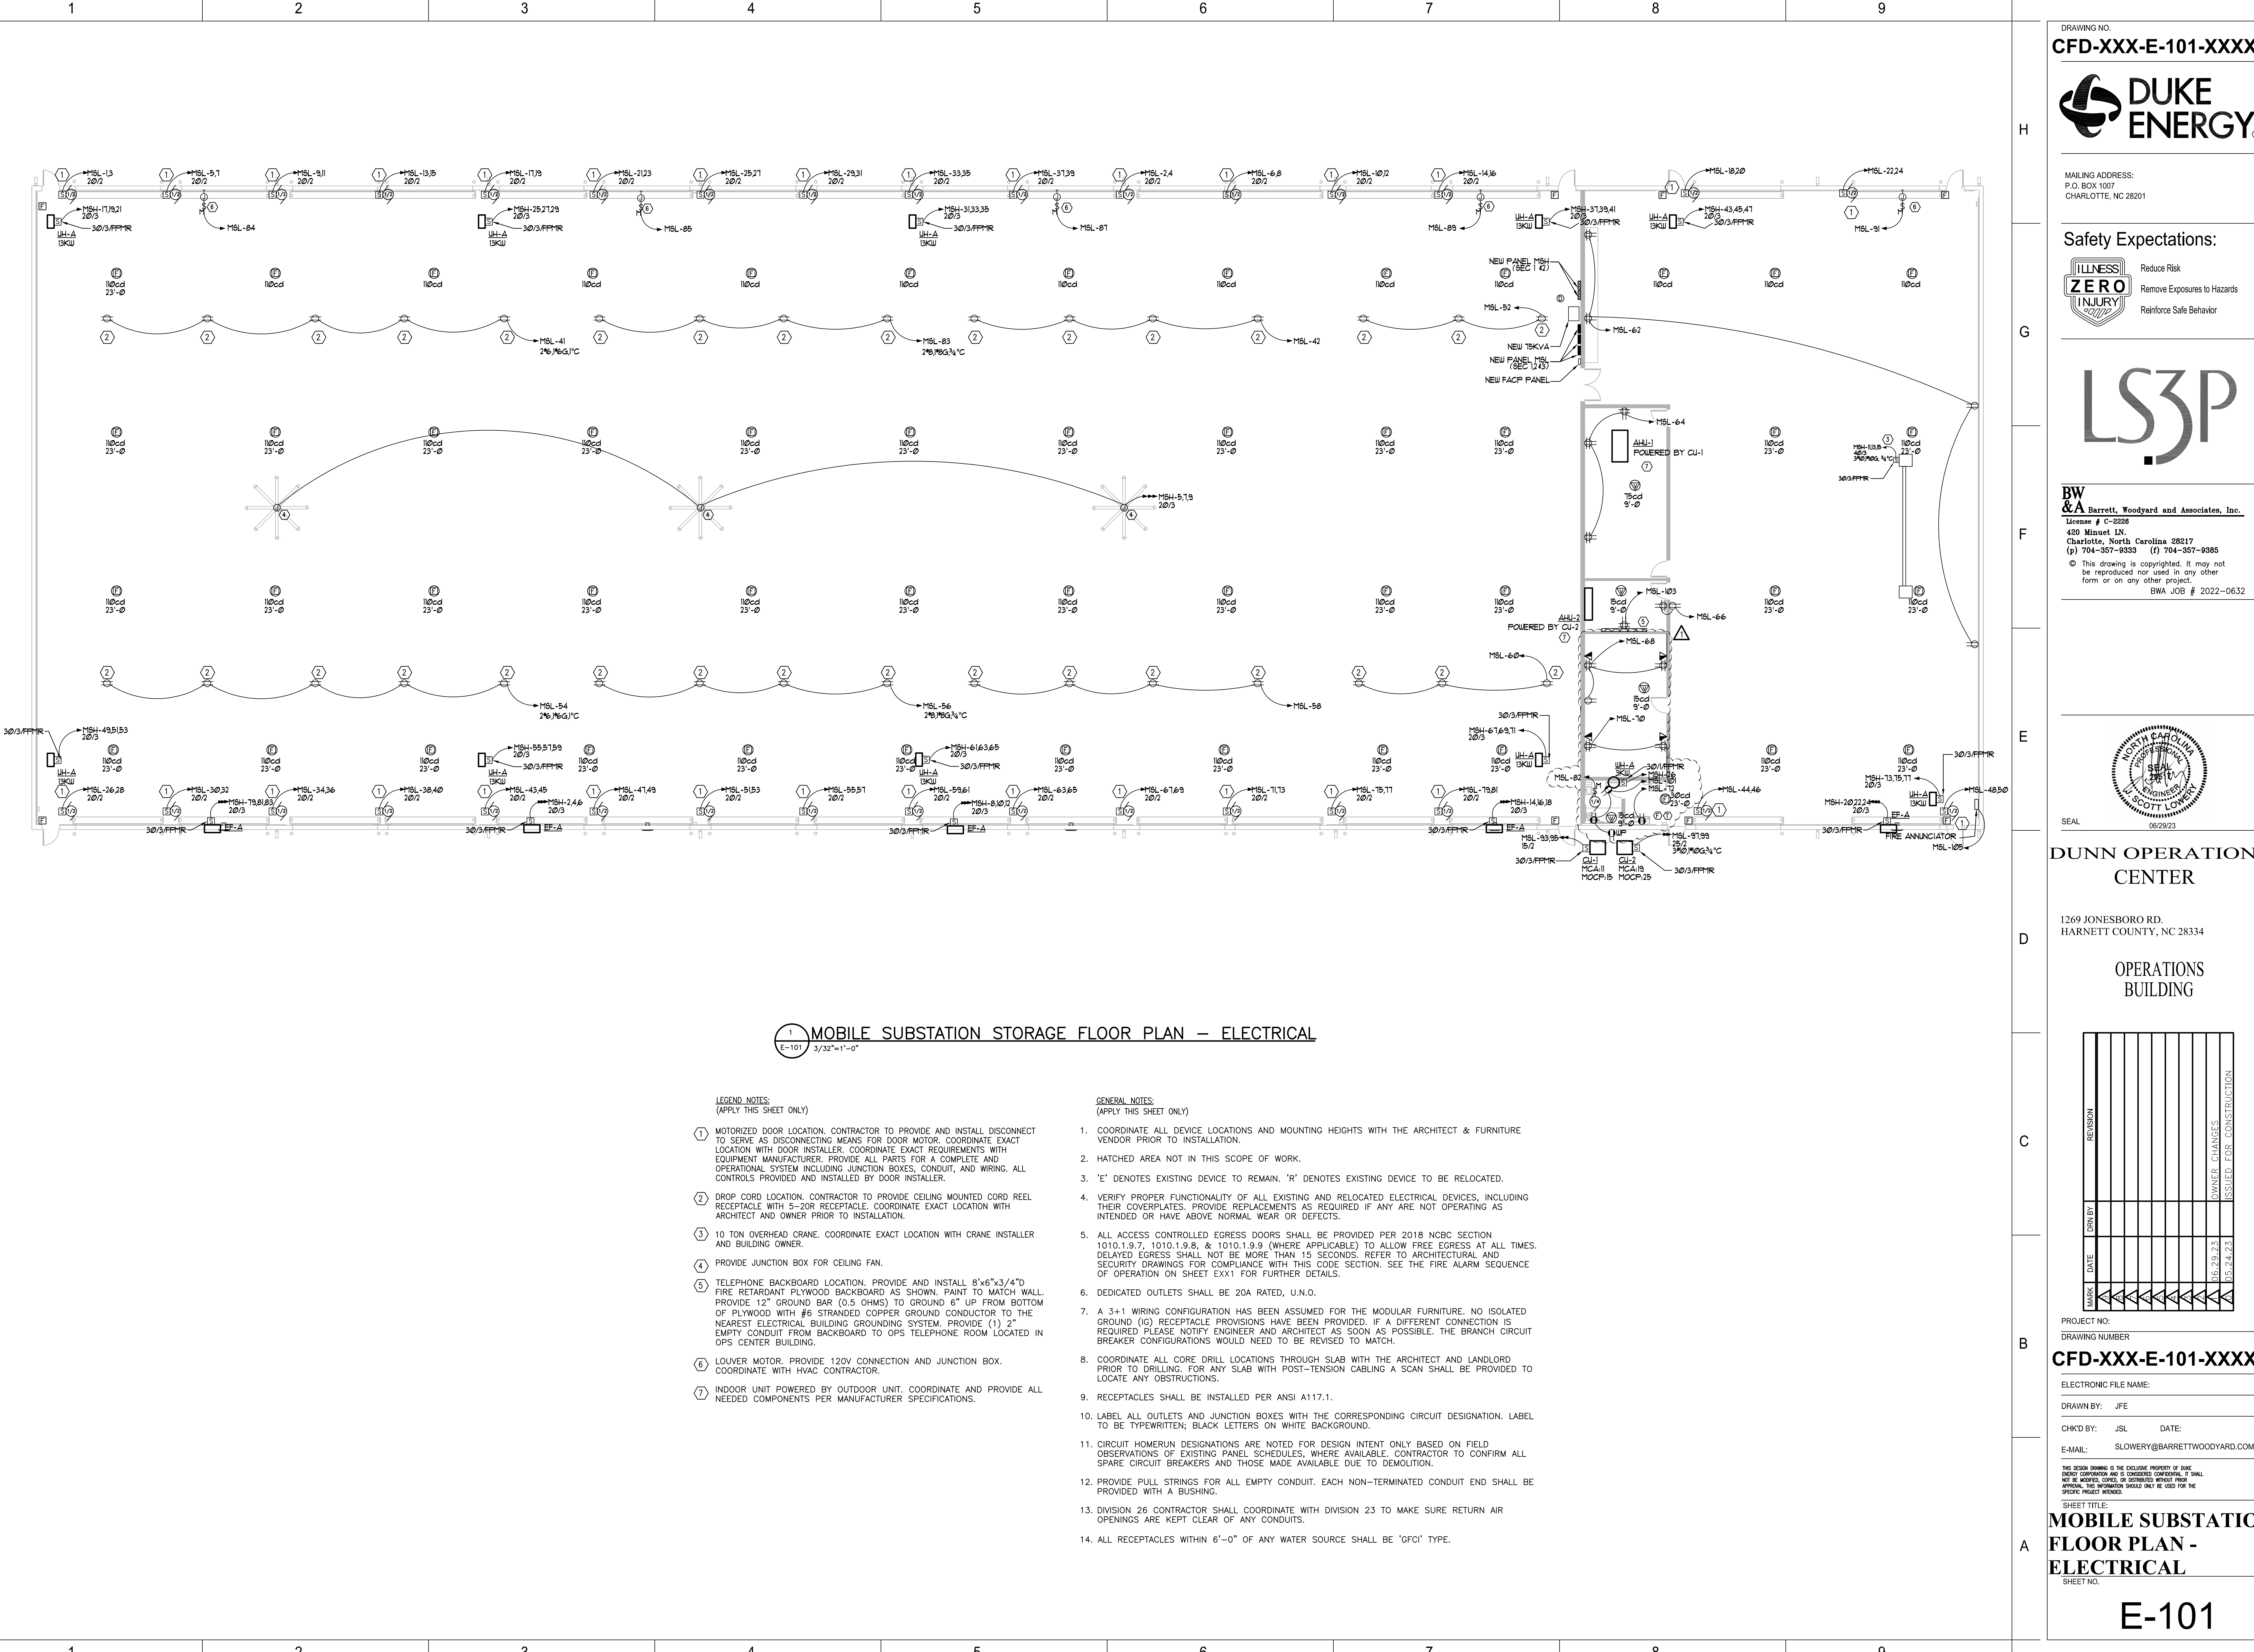

1 MOBILE SUBSTATION STORAGE FLOOR PLAN - ELECTRICAL
E-101 3/32"=1'-0"


LEGEND NOTES:
(APPLY THIS SHEET ONLY)

- ① MOTORIZED DOOR LOCATION. CONTRACTOR TO PROVIDE AND INSTALL DISCONNECT TO SERVE AS DISCONNECTING MEANS FOR DOOR MOTOR. COORDINATE EXACT LOCATION WITH DOOR INSTALLER. COORDINATE EXACT REQUIREMENTS WITH EQUIPMENT MANUFACTURER. PROVIDE ALL PARTS FOR A COMPLETE AND OPERATIONAL SYSTEM INCLUDING JUNCTION BOXES, CONDUIT, AND WIRING. ALL CONTROLS PROVIDED AND INSTALLED BY DOOR INSTALLER.
- ② DROP CORD LOCATION. CONTRACTOR TO PROVIDE CEILING MOUNTED CORD REEL RECEPTACLE WITH 5-20R RECEPTACLE. COORDINATE EXACT LOCATION WITH ARCHITECT AND OWNER PRIOR TO INSTALLATION.
- ③ 10 TON OVERHEAD CRANE. COORDINATE EXACT LOCATION WITH CRANE INSTALLER AND BUILDING OWNER.
- ④ PROVIDE JUNCTION BOX FOR CEILING FAN.
- ⑤ TELEPHONE BACKBOARD LOCATION. PROVIDE AND INSTALL 8'x6'x3/4" D FIRE RETARDANT PLYWOOD BACKBOARD AS SHOWN. PAINT TO MATCH WALL. PROVIDE 12" GROUND BAR (0.5 OHMS) TO GROUND 6" UP FROM BOTTOM OF PLYWOOD WITH #6 STRANDED COPPER GROUND CONDUCTOR TO THE NEAREST ELECTRICAL BUILDING GROUNDING SYSTEM. PROVIDE (1) 2" EMPTY CONDUIT FROM BACKBOARD TO OPS TELEPHONE ROOM LOCATED IN OPS CENTER BUILDING.
- ⑥ LOUVER MOTOR. PROVIDE 120V CONNECTION AND JUNCTION BOX. COORDINATE WITH HVAC CONTRACTOR.
- ⑦ INDOOR UNIT POWERED BY OUTDOOR UNIT. COORDINATE AND PROVIDE ALL NEEDED COMPONENTS PER MANUFACTURER SPECIFICATIONS.

GENERAL NOTES:
(APPLY THIS SHEET ONLY)


1. COORDINATE ALL DEVICE LOCATIONS AND MOUNTING HEIGHTS WITH THE ARCHITECT & FURNITURE VENDOR PRIOR TO INSTALLATION.
2. HATCHED AREA NOT IN THIS SCOPE OF WORK.
3. 'E' DENOTES EXISTING DEVICE TO REMAIN. 'R' DENOTES EXISTING DEVICE TO BE RELOCATED.
4. VERIFY PROPER FUNCTIONALITY OF ALL EXISTING AND RELOCATED ELECTRICAL DEVICES, INCLUDING THEIR COVERPLATES. PROVIDE REPLACEMENTS AS REQUIRED IF ANY ARE NOT OPERATING AS INTENDED OR HAVE ABOVE NORMAL WEAR OR DEFECTS.
5. ALL ACCESS CONTROLLED EGRESS DOORS SHALL BE PROVIDED PER 2018 NCBC SECTION 1010.1.9.7, 1010.1.9.8, & 1010.1.9.9 (WHERE APPLICABLE) TO ALLOW FREE EGRESS AT ALL TIMES. DELAYED EGRESS SHALL NOT BE MORE THAN 15 SECONDS. REFER TO ARCHITECTURAL AND SECURITY DRAWINGS FOR COMPLIANCE WITH THIS CODE SECTION. SEE THE FIRE ALARM SEQUENCE OF OPERATION ON SHEET EXX1 FOR FURTHER DETAILS.
6. DEDICATED OUTLETS SHALL BE 20A RATED, U.N.O.
7. A 3+1 WIRING CONFIGURATION HAS BEEN ASSUMED FOR THE MODULAR FURNITURE. NO ISOLATED GROUND (IG) RECEPTACLE PROVISIONS HAVE BEEN PROVIDED. IF A DIFFERENT CONNECTION IS REQUIRED PLEASE NOTIFY ENGINEER AND ARCHITECT AS SOON AS POSSIBLE. THE BRANCH CIRCUIT BREAKER CONFIGURATIONS WOULD NEED TO BE REVISED TO MATCH.
8. COORDINATE ALL CORE DRILL LOCATIONS THROUGH SLAB WITH THE ARCHITECT AND LANDLORD PRIOR TO DRILLING. FOR ANY SLAB WITH POST-TENSION CABLING A SCAN SHALL BE PROVIDED TO LOCATE ANY OBSTRUCTIONS.
9. RECEPTACLES SHALL BE INSTALLED PER ANSI A117.1.
10. LABEL ALL OUTLETS AND JUNCTION BOXES WITH THE CORRESPONDING CIRCUIT DESIGNATION. LABEL TO BE TYPED/WRITTEN; BLACK LETTERS ON WHITE BACKGROUND.
11. CIRCUIT HOMERUN DESIGNATIONS ARE NOTED FOR DESIGN INTENT ONLY BASED ON FIELD OBSERVATIONS OF EXISTING PANEL SCHEDULES, WHERE AVAILABLE. CONTRACTOR TO CONFIRM ALL SPARE CIRCUIT BREAKERS AND THOSE MADE AVAILABLE DUE TO DEMOLITION.
12. PROVIDE PULL STRINGS FOR ALL EMPTY CONDUIT. EACH NON--TERMINATED CONDUIT END SHALL BE PROVIDED WITH A BUSHING.
13. DIVISION 26 CONTRACTOR SHALL COORDINATE WITH DIVISION 23 TO MAKE SURE RETURN AIR OPENINGS ARE KEPT CLEAR OF ANY CONDUITS.
14. ALL RECEPTACLES WITHIN 6'-0" OF ANY WATER SOURCE SHALL BE 'GFCI' TYPE.

DRAWING NO. **CFD-XXX-E-101-XXXXX**

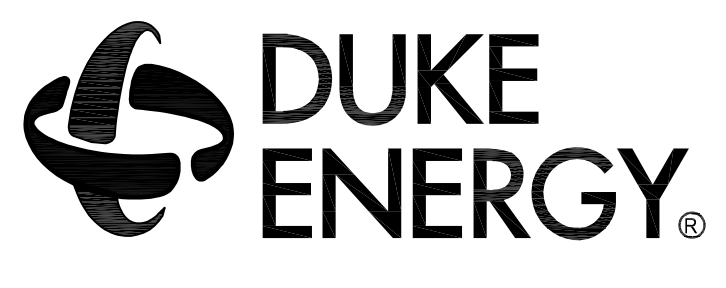


MAILING ADDRESS:
P.O. BOX 1007
CHARLOTTE, NC 28201

Safety Expectations:

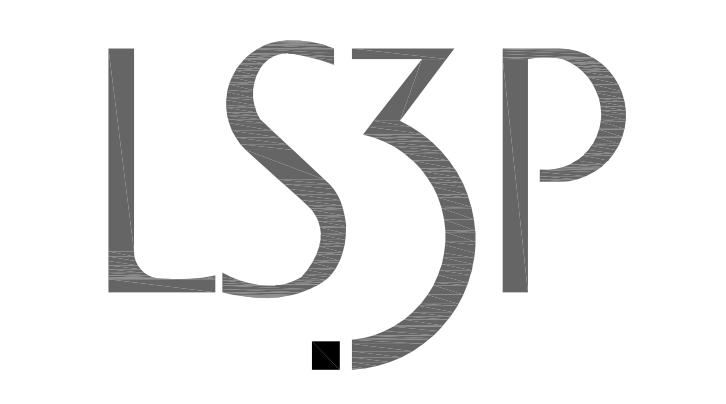

BW & A Barrett, Woodyard and Associates, Inc.
License # C-2225
420 Minnet Ln.
Charlotte, North Carolina 28217
(p) 704-357-9333 (f) 704-357-9886
© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.
BWA JOB # 2022-0632

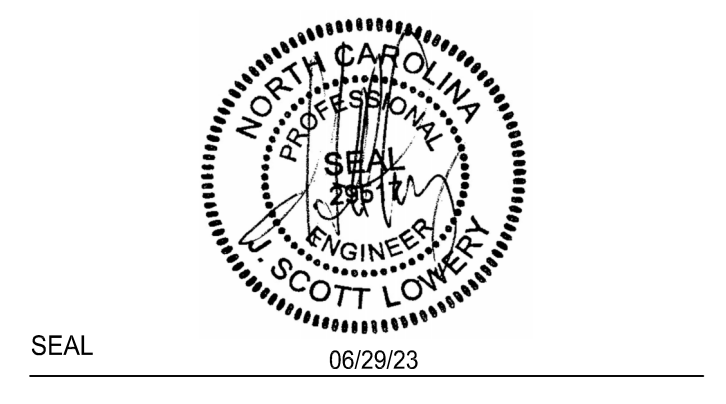

DUNN OPERATIONS CENTER

1269 JONESBORO RD.
HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

MARK	DATE	DESCRIPTION


PROJECT NO.
DRAWING NUMBER

CFD-XXX-E-101-XXXXX

ELECTRONIC FILE NAME:
DRAWN BY: JFE
CHK'D BY: JSL DATE:
E-MAIL: SLOWERY@BARRETTWOODYARD.COM

SHEET TITLE:
MOBILE SUBSTATION FLOOR PLAN - ELECTRICAL

SHEET NO.
E-101

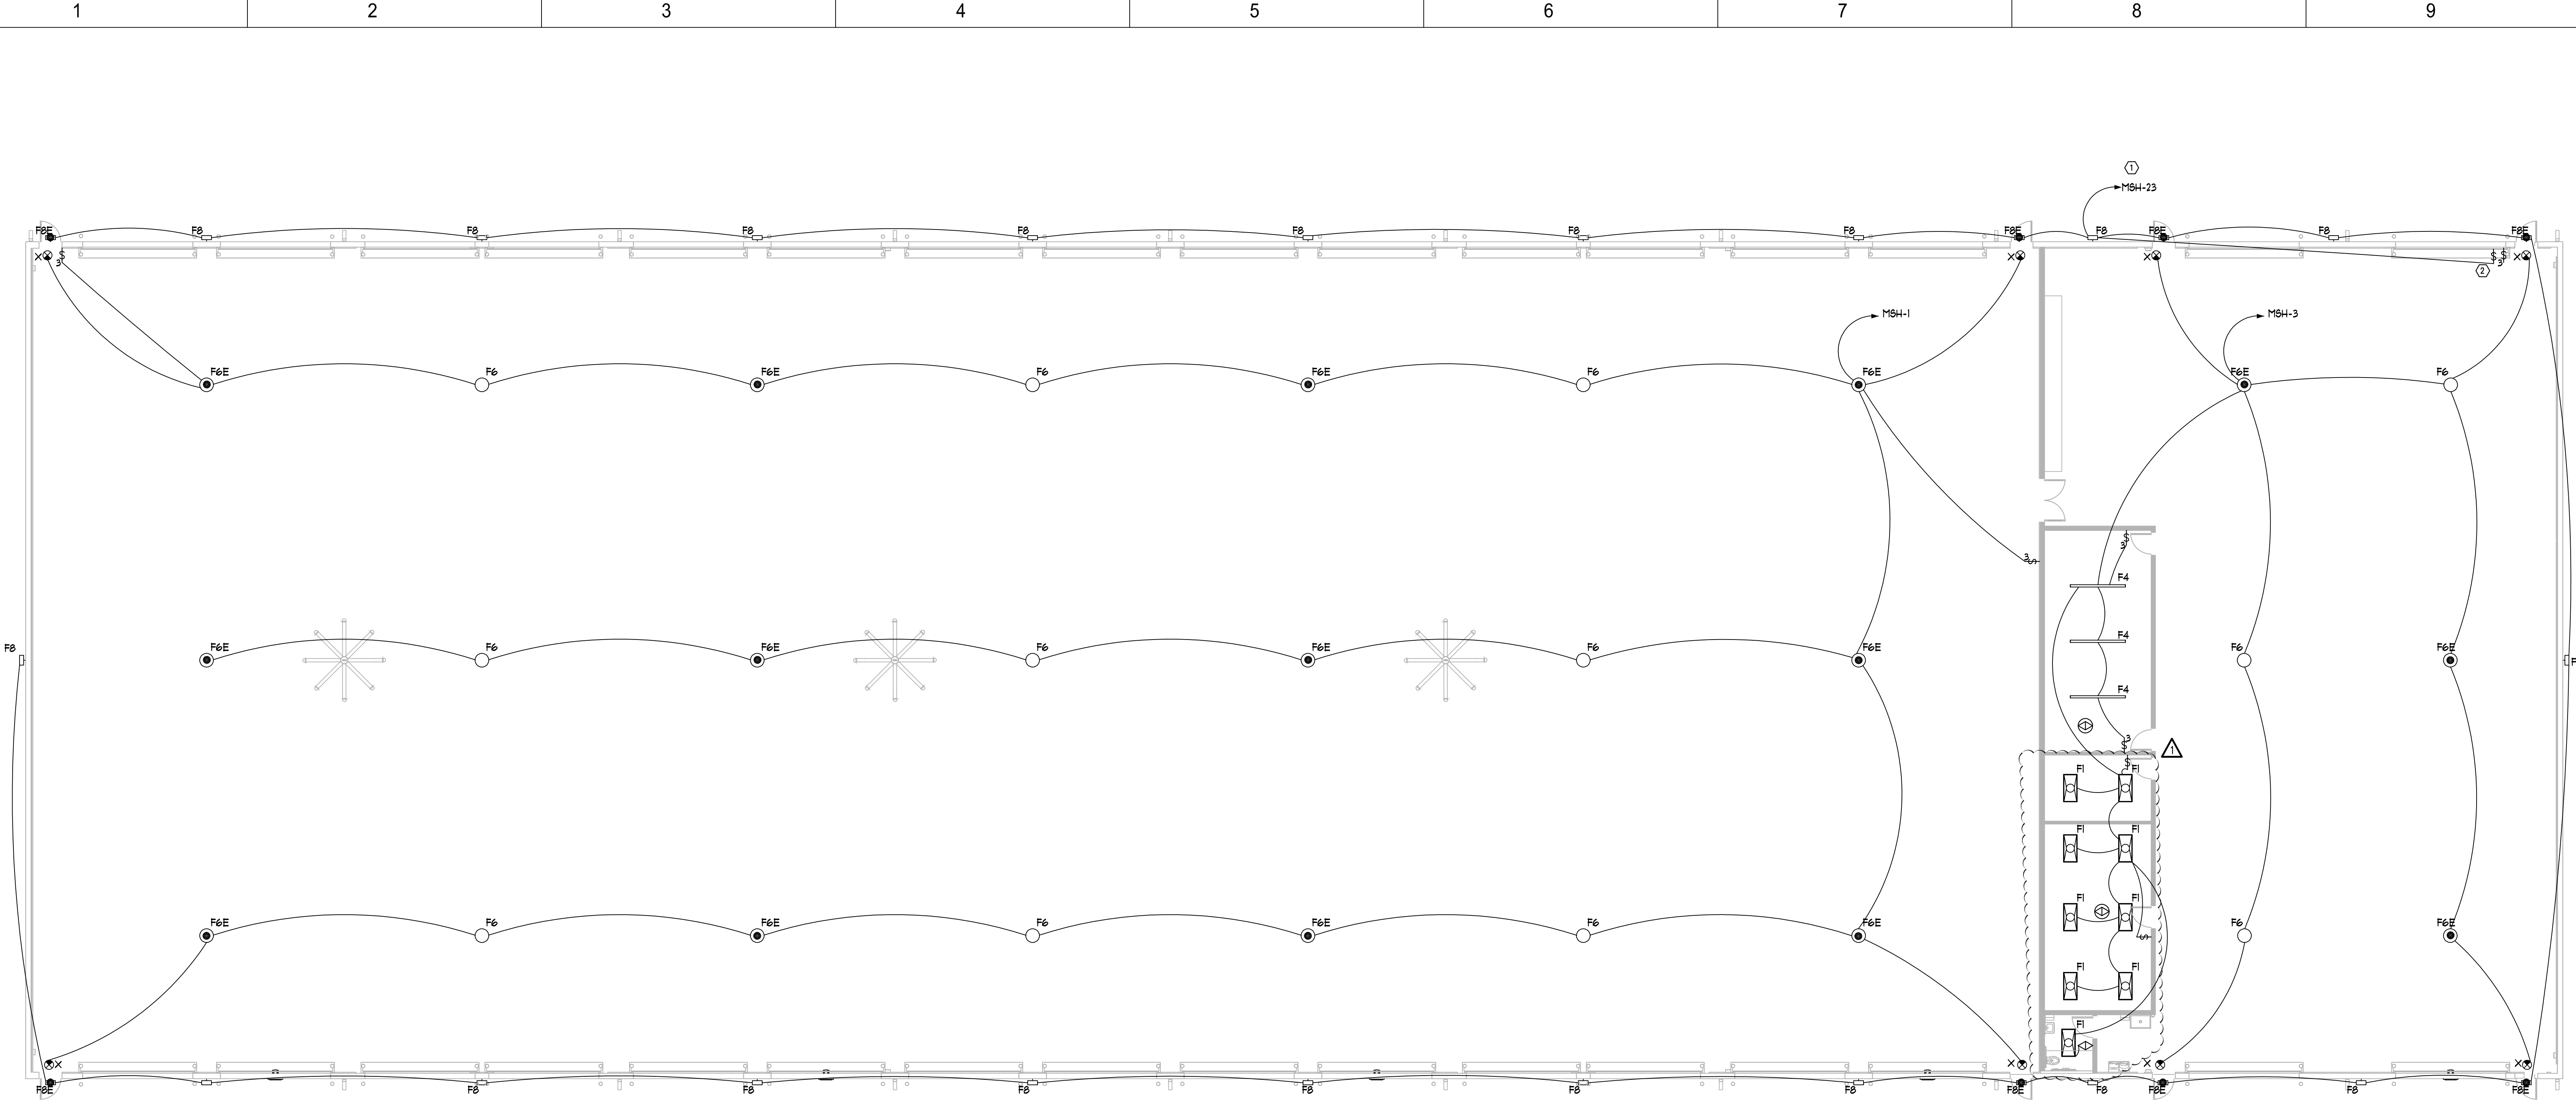

1 MOBILE SUBSTATION STORAGE FLOOR PLAN - LIGHTING
E-201 3/32"=1'-0"

LEGEND NOTES:
 (APPLY TO THIS SHEET ONLY)

- (1) PROVIDE PHOTO CELL FOR CONTROL.
- (2) OVERRIDE FOR EXTERIOR LIGHTS.

GENERAL NOTES:
 (APPLY THIS SHEET ONLY)


1. COORDINATE EXACT LOCATION AND MOUNTING HEIGHTS WITH ARCHITECTURAL PLANS. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS, DETAILS, AND LIGHTING NOTES FOR FURTHER INFORMATION OF DEVICE PLACEMENT AND OTHER RELEVANT INFORMATION.
2. ALL SWITCHES FOR LIGHTS, SHADES, ETC. WHICH ARE SHOWN TO BE MOUNTED IN THE SAME GENERAL AREA SHALL BE GANGED TOGETHER AND SHARE A MULTI-GANG COVER PLATE WHERE POSSIBLE.
3. REFER TO SHEET E-101C FOR LOCATION OF ELECTRICAL DISTRIBUTION PANELS.
4. ALL EXIT SIGNS ARE TYPE 'X' UNLESS OTHERWISE NOTED.
5. WALL MOUNTED OCCUPANCY SENSORS W/ SINGLE OVERRIDE SHALL BE LUTRON #MS-OPSGM2-DV-WH. WALL MOUNTED OCCUPANCY SENSORS W/ DUAL OVERRIDE SHALL BE LUTRON #MS-OPSG-DDV-WH.
6. THE CEILING MOUNTED OCCUPANCY SENSOR IS TO BE LUTRON LOS-COT-2000-WH OR APPROVED EQUAL. PROVIDE POWER PACK AS REQUIRED TO COMPLETE SYSTEM. CONNECT TO THE SUPPLY SIDE OF THE SWITCH IN THIS SPACE. DEVICE SHALL CONTROL ALL SWITCHES IN THIS SPACE (I.E. SWITCHES SHALL BE ON THE LOAD SIDE OF THE SENSOR).
7. CONTRACTOR TO CLEAN AND RE-LAMP ALL EXISTING AND/OR RELOCATED FIXTURES.
8. PROVIDE NEW DISCONNECTING MEANS AS REQUIRED FOR ALL DISCONNECTED/ RECONNECTED RELOCATED FLUORESCENT LIGHT FIXTURES PER NEC 410.130.G.
9. LOWER CASE LETTERS IN LIGHTING FIXTURES AND ADJACENT TO SWITCHES IN EACH INDIVIDUAL ROOM/AREA INDICATE WHICH LIGHT FIXTURE IS TO BE CONTROLLED FROM EACH CORRESPONDING SWITCH IN THAT ROOM/AREA.
10. ALL CONTROL CABLING PROVIDED AS A PART OF ANY LIGHTING CONTROL SYSTEM SHALL BE PLENUM RATED.
11. CIRCUIT HOMERUN DESIGNATIONS ARE NOTED FOR DESIGN INTENT ONLY BASED ON FIELD OBSERVATIONS OF EXISTING PANEL SCHEDULES, WHERE AVAILABLE. CONTRACTOR TO CONFIRM ALL SPARE CIRCUIT BREAKERS AND THOSE MADE AVAILABLE DUE TO DEMOLITION.

Safety Expectations:

Reduce Risk
 Remove Exposures to Hazards
 Reinforce Safe Behavior



BW & A Barrett, Woodyard and Associates, Inc.
 License # C-2225
 420 Minuet Ln.
 Charlotte, North Carolina 28217
 (p) 704-357-9333 (f) 704-357-9385
© This drawing is copyrighted. It may not be reproduced nor used in any other form or on any other project.
 BWA JOB # 2022-0632

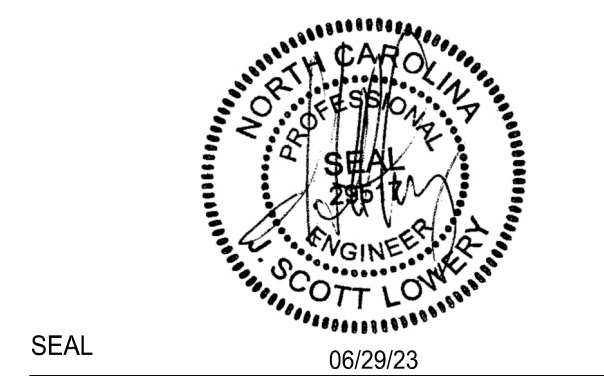

DUNN OPERATIONS CENTER

1269 JONESBORO RD.
 HARNETT COUNTY, NC 28334

OPERATIONS BUILDING

MARK	DATE	REVISION	OWNER CHANGES

PROJECT NO:
 DRAWING NUMBER

CFD-XXX-E-201-XXXXX

ELECTRONIC FILE NAME:
 DRAWN BY: JFE

CHK'D BY: JSL DATE:
 E-MAIL: SLOWERY@BARRETTWOODYARD.COM

THIS DESIGN DRAWING IS THE EXCLUSIVE PROPERTY OF DWG. ANY REUSE, REPRODUCTION, OR DISSEMINATION WITHOUT THE WRITTEN PERMISSION OF DWG. IS PROHIBITED. THE INFORMATION SHOWN SHOULD ONLY BE USED FOR THE SPECIFIC PROJECT INTENDED.

MOBILE SUBSTATION FLOOR PLAN - LIGHTING

E-201