



Scott E. Wyssling, PE
Coleman D. Larsen, SE, PE
Gregory T. Elvestad, PE

76 North Meadowbrook Drive
Alpine, UT 84004
office (201) 874-3483
swyssling@wysslingconsulting.com

September 30, 2022

Legacy Solar
3333 Digital Drive #600
Lehi, UT 84043

Re: Engineering Services
Kent Residence
190 Kent Lane, Coats NC
12.710 kW System

To Whom It May Concern:

We have received information regarding solar panel installation on the roof of the above referenced structure. Our evaluation of the structure is to verify the existing capacity of the roof system and its ability to support the additional loads imposed by the proposed solar system.

A. Site Assessment Information

1. Site visit documentation identifying attic information including size and spacing of framing for the existing roof structure.
2. Design drawings of the proposed system including a site plan, roof plan and connection details for the solar panels. This information will be utilized for approval and construction of the proposed system.

B. Description of Structure:

Roof Framing: 2x8 dimensional lumber at 16" on center with purlin supports at midspan.
Roof Material: Composite Asphalt Shingles
Roof Slope: 33, 45, & 48 degrees
Attic Access: Accessible
Foundation: Permanent

C. Loading Criteria Used

- **Dead Load**
 - Existing Roofing and framing = 7 psf
 - New Solar Panels and Racking = 3 psf
 - TOTAL = 10 PSF
- **Live Load** = 20 psf (reducible) – 0 psf at locations of solar panels
- **Ground Snow Load** = 20 psf
- **Wind Load** based on ASCE 7-10
 - Ultimate Wind Speed = 115 mph (based on Risk Category II)
 - Exposure Category B

Analysis performed of the existing roof structure utilizing the above loading criteria is in accordance with the North Carolina Residential Code (2015 IRC), including provisions allowing existing structures to not require strengthening if the new loads do not exceed existing design loads by 105% for gravity elements and 110% for seismic elements. This analysis indicates that the existing framing will support the additional panel loading without damage, if installed correctly.


D. Solar Panel Anchorage

1. The solar panels shall be mounted in accordance with the most recent Unirac installation manual. If during solar panel installation, the roof framing members appear unstable or deflect non-uniformly, our office should be notified before proceeding with the installation.
2. Connection on the roof is utilizing (4) ½" or #14 screws into the existing decking to resist uplift forces. Contractor to verify installation to be performed in accordance with the Unirac recommendations. Pull out values per screw are based on National Design Specification values for CDX plywood and are identified as 208 lbs/inch. Based on ½" sheathing the value per screw would be 104 lbs providing 416 lbs uplift resistance per attachment.
3. Considering the wind speed, roof slopes, size and spacing of framing members, and condition of the roof, the panel supports shall be placed no greater than 60" on center.
4. Panel supports connections shall be staggered to distribute load to adjacent framing members.

Based on the above evaluation, this office certifies that with the racking and mounting specified, the existing roof system will adequately support the additional loading imposed by the solar system. This evaluation is in conformance with the North Carolina Residential Code, current industry standards, and is based on information supplied to us at the time of this report.

Should you have any questions regarding the above or if you require further information do not hesitate to contact me.

Very truly yours,

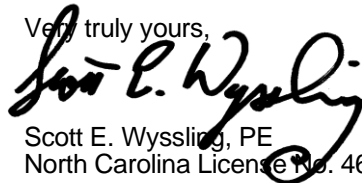
Scott E. Wyssling, PE
North Carolina License No. 46546



Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84004
North Carolina COA # P-2308

Signed 9/30/2022

THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

PROJECT DESCRIPTION:

31x410 SOLAREVER USA HC 108M SE-182*91-410M-108N (410W) MODULES
 ROOF MOUNTED SOLAR PHOTOVOLTAIC MODULES
 SYSTEM SIZE: 12.71 kW DC STC
 SYSTEM SIZE: 8.99 kW AC

SYSTEM SUMMARY

- 31 SOLAREVER USA HC 108M SE-182*91-410M-108N (410W) MODULES
- 31 ENPHASE IQ8PLUS-72-2-US MICRO-INVERTERS, 240V
- 01 ENPHASE IQ LOAD CONTROLLER
- 01 ENPHASE ENPOWER SMART SWITCH R2

DESIGN CRITERIA

WIND SPEED	115
EXPOSURE CATEGORY	B
RISK CATEGORY	II
MOUNTING METHOD	ROOF MOUNT
GROUND SNOW LOAD	20

CODE COMPLIANCE

ALL WORK SHALL COMPLY WITH ALL STATE AND LOCAL CODES, ORDINANCES AND ANY OTHER REGULATING AUTHORITIES WHICH HAVE AUTHORITY OVER ANY PORTION OF THE WORK.

AHJ NOTES:

ALL WORK SHALL COMPLY WITH THE
 2018 NORTH CAROLINA BUILDING CODE / 2018 IBC
 2018 NORTH CAROLINA RESIDENTIAL CODE / 2018 IRC
 2018 NORTH CAROLINA FIRE CODE / 2018 IFC

ELECTRICAL CODE:

ALL ELECTRICAL WORK SHALL COMPLY WITH THE
 2017 NATIONAL ELECTRIC CODE.

GPS COORDINATES: 35.418847, -78.659555

GENERAL INSTALLATION NOTES

1. INSTALLER SHALL ASSUME FULL RESPONSIBILITY AND LIABILITY FOR COMPLIANCE WITH REGULATIONS PER FEDERAL OSHA AND LOCAL REGULATIONS PERTAINING TO WORK PRACTICES, PROTECTION OF WORKERS AND VISITORS TO THE SITE.
2. INSTALLER SHALL VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS AT SITE BEFORE COMMENCING WORK.
3. CONTRACTOR SHALL FURNISH ALL MATERIAL EXCEPT AS SPECIFIED IN THE CONTRACT AND/OR THESE DRAWINGS.
4. ALL MATERIALS SHALL BE IN NEW AND UNUSED CONDITION.
5. MANUFACTURER'S MATERIAL EQUIPMENT, ETC. SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS AND INSTRUCTIONS.
6. THE INSTALLER SHALL BECOME FAMILIAR WITH ALL UTILITY AS-BUILT PLANS AND THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES, PAVEMENT OR IMPROVEMENTS.
7. CONTRACTOR SHALL VERIFY EXISTING CONDITIONS AND NOTIFY THE OWNER OF DISCREPANCIES REQUIRING FURTHER CLARIFICATION BEFORE PROCEEDING WITH THE WORKS.
8. INSTALL ALL ASPECTS OF THIS PROJECT IN ACCORDANCE WITH THE SPECIFICATIONS AND AS NOTED ON DRAWINGS ISSUED FOR CONSTRUCTION.
9. CONDUCTORS EXPOSED TO SUNLIGHT SHALL BE LISTED AS SUNLIGHT RESISTANT PER 310.0(D)
10. WORKING CLEARANCES AROUND THE EXISTING AND NEW ELECTRICAL EQUIPMENT WILL BE MAINTAINED IN ACCORDANCE WITH NEC 110.26
11. EXACT CONDUIT RUN LOCATIONS SUBJECT TO CHANGE
12. ROOF PENETRATIONS ARE SEALED.
13. INVERTER IS LISTED TO UL-1741 "UTILITY INTERACTIVE"
14. VISIBLE, LABELED, LOCKABLE DISCONNECT LOCATED LESS THAN 10' FROM UTILITY METER

SHEET INDEX

- PV-0 COVER SHEET
- PV-1 PLOT PLAN WITH ROOF PLAN
- PV-2 ROOF PLAN WITH MODULES
- PV-3 ATTACHMENT DETAIL
- PV-4 ELECTRICAL LINE DIAGRAM
- PV-5 ATTIC PHOTO
- PV-6 ELECTRICAL PHOTOS
- PV-7 PLACARDS
- PV-8 ADDITIONAL NOTES
- PV-9 JOB HAZARD ANALYSIS
- PV-10+ EQUIPMENT SPECIFICATIONS



1 HOUSE PHOTO
 PV-0 SCALE: NTS



2 VICINITY MAP
 PV-0 SCALE: NTS



LGCY POWER
 3333 DIGITAL DR #600, LEHI,
 UT 84043, UNITED STATES
 855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	BY
	09-30-2022	C



Wyssling Consulting, PLLC
 375 Meadowbrook Drive Alpine UT 84004
 North Carolina COA # P-2308

Signed 9/30/2022

THIS SEAL HAS BEEN REPRODUCED FOR SIGNING AND IS NOT VALID UNLESS IT IS USED IN ACCORDANCE WITH THE RULES AND REGULATIONS OF THE BOARD OF EXAMINERS AND DATE. PRINTED COPIES OF THIS SEAL ARE NOT CONSIDERED SIGNED AND VALID. THE SIGNATURE MUST BE VERIFIED WITH THE ORIGINAL ELECTRONIC COPIES.

ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - Arkent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

SHEET NAME

COVER SHEET

SHEET SIZE

ANSI B
 11" X 17"

SHEET NUMBER


PV-0

MODULE TYPE, DIMENSIONS & WEIGHT

NUMBER OF MODULES = 31 MODULES
 MODULE TYPE = SOLAREVER USA HC 108M SE-182*91-410M-108N (410W) MODULES
 MODULE WEIGHT = 47.4 LBS / 21.5 KG.
 MODULE DIMENSIONS = 67.87"x 44.64" = 21.04 SF
 UNIT WEIGHT OF ARRAY = 2.25 PSF

SYSTEM SUMMARY
 31 SOLAREVER USA HC 108M SE-182*91-410M-108N (410W) MODULES
 31 ENPHASE IQ8PLUS-72-2-US MICRO-INVERTERS, 240V
 01 ENPHASE IQ LOAD CONTROLLER
 01 ENPHASE ENPOWER SMART SWITCH R2
 SYSTEM SIZE: 12.71 KW DC STC

BACK OF HOUSE

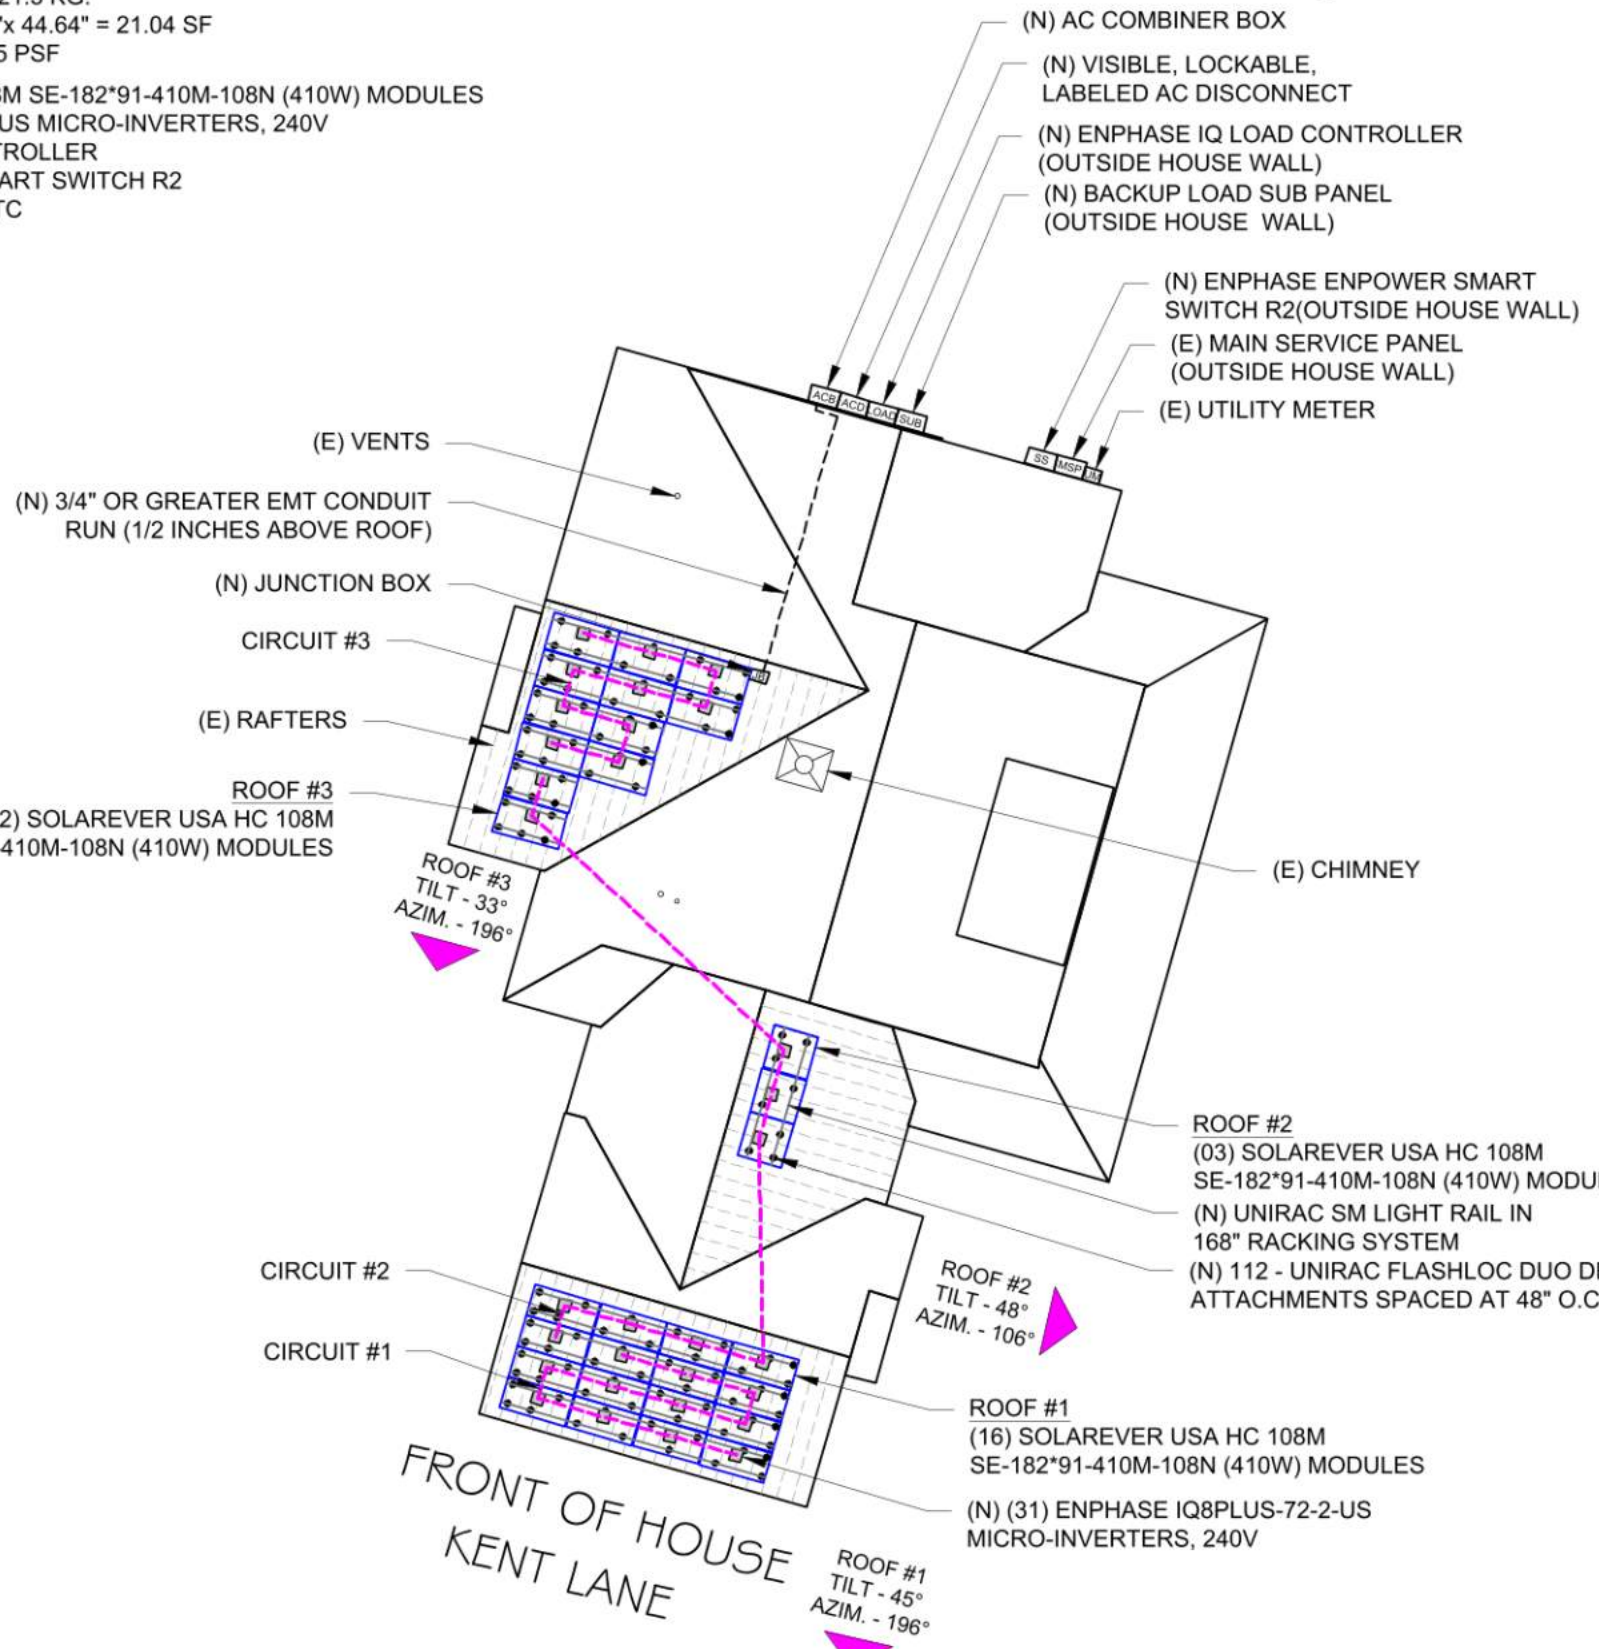

ROOF DESCRIPTION				
ROOF TYPE			COMP SHINGLE ROOF	
ROOF	ROOF TILT	AZIMUTH	FRAMING SIZE	FRAMING SPACING
#1	45°	196°	2"x8"	16" O.C.
#2	48°	106°	2"x8"	16" O.C.
#3	33°	196°	2"x8"	16" O.C.

TOTAL ARRAY AREA WITH MOUNTING ROOF AREA				
ROOF	# OF MODULES	ARRAY AREA (Sq. Ft.)	MOUNTING ROOF AREA (Sq. Ft.)	ROOF AREA COVERED BY ARRAY (%)
#1	16	336.64	371	90.74
#2	03	63.12	273	23.12
#3	12	252.48	393	64.24

TOTAL ARRAY AREA WITH MOUNTING ROOF AREA				
ROOF	# OF MODULES	ARRAY AREA (Sq. Ft.)	MOUNTING ROOF AREA (Sq. Ft.)	ROOF AREA COVERED BY ARRAY (%)
#1-#3	31	652.23	1037	62.976

LGCY POWER
 LGCY POWER
 3333 DIGITAL DR #600, LEHI, UT 84043, UNITED STATES
 855-353-4899

Alex Nelson
 LICENSE NUMBER: U33945


REVISIONS		
DESCRIPTION	DATE	BY
	09-30-2022	



Wyssling Consulting, PLLC
 7 Meadowbrook Drive Alpine UT 84004
 North Carolina COA # P-2308

Signed 9/30/2022

THIS PLAN HAS BEEN REVIEWED, DESIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

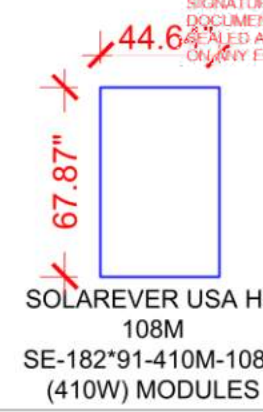

LEGEND	
	- MICRO-INVERTERS
	- UTILITY METER
	- JUNCTION BOX
	- AC COMBINER BOX
	- BACKUP LOAD PANEL
	- SUB PANEL
	- ENPHASE ENPOWER SMART SWITCH R2
	- ENPHASE IQ LOAD CONTROLLER
	- MAIN SERVICE PANEL
	- VENTS, CHIMNEY (ROOF OBSTRUCTION)
	- CONDUIT RUN
	- RAFTERS
	- ROOF ATTACHMENT
	- RAIL
	- CIRCUIT



ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - Arkent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001


SHEET NAME
ROOF PLAN WITH MODULES

SHEET SIZE
**ANSI B
 11" X 17"**

SHEET NUMBER
PV-2

SYSTEM SUMMARY

- 31 SOLAREVER USA HC 108M SE-182*91-410M-108N (410W) MODULES
 - 31 ENPHASE IQ8PLUS-72-2-US MICRO-INVERTERS, 240V
 - 01 ENPHASE IQ LOAD CONTROLLER
 - 01 ENPHASE ENPOWER SMART SWITCH R2
- SYSTEM SIZE: 12.71 KW DC STC

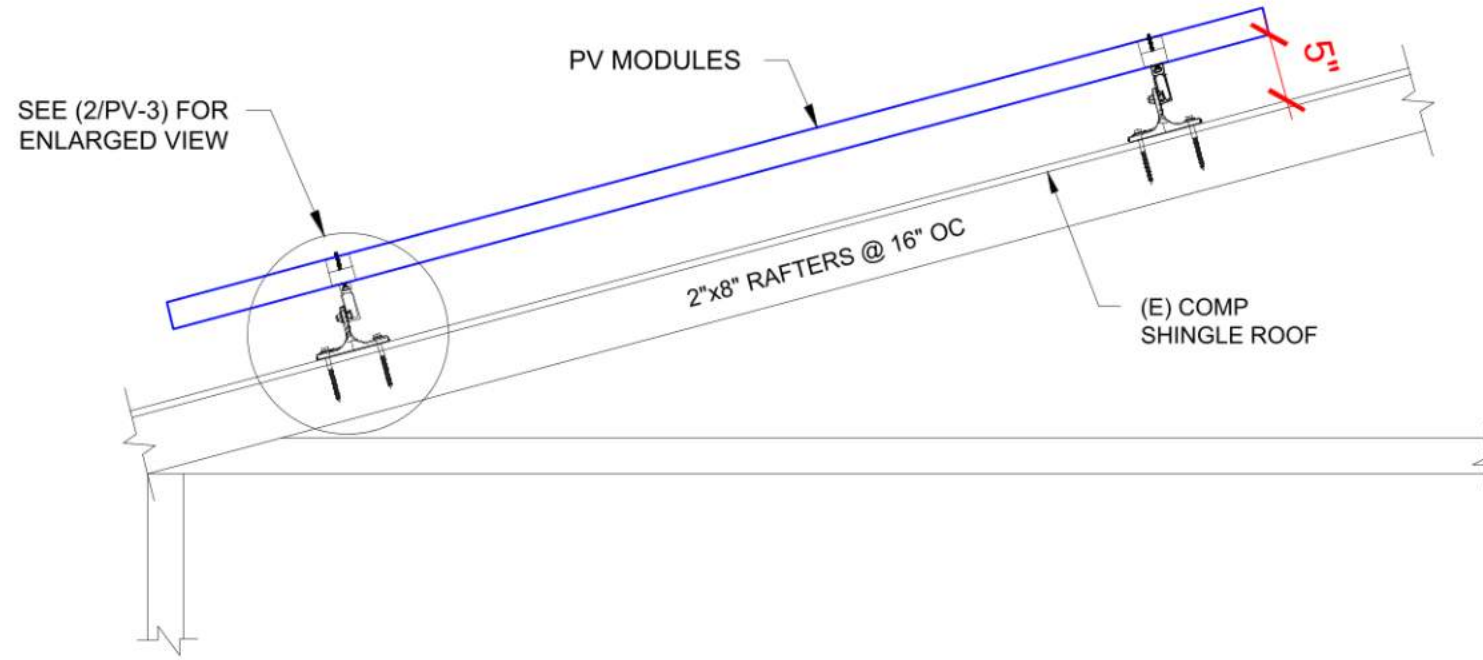


SEE (2/PV-3) FOR ENLARGED VIEW

1 ATTACHMENT DETAIL (SIDE VIEW)

PV-3

SCALE: NTS

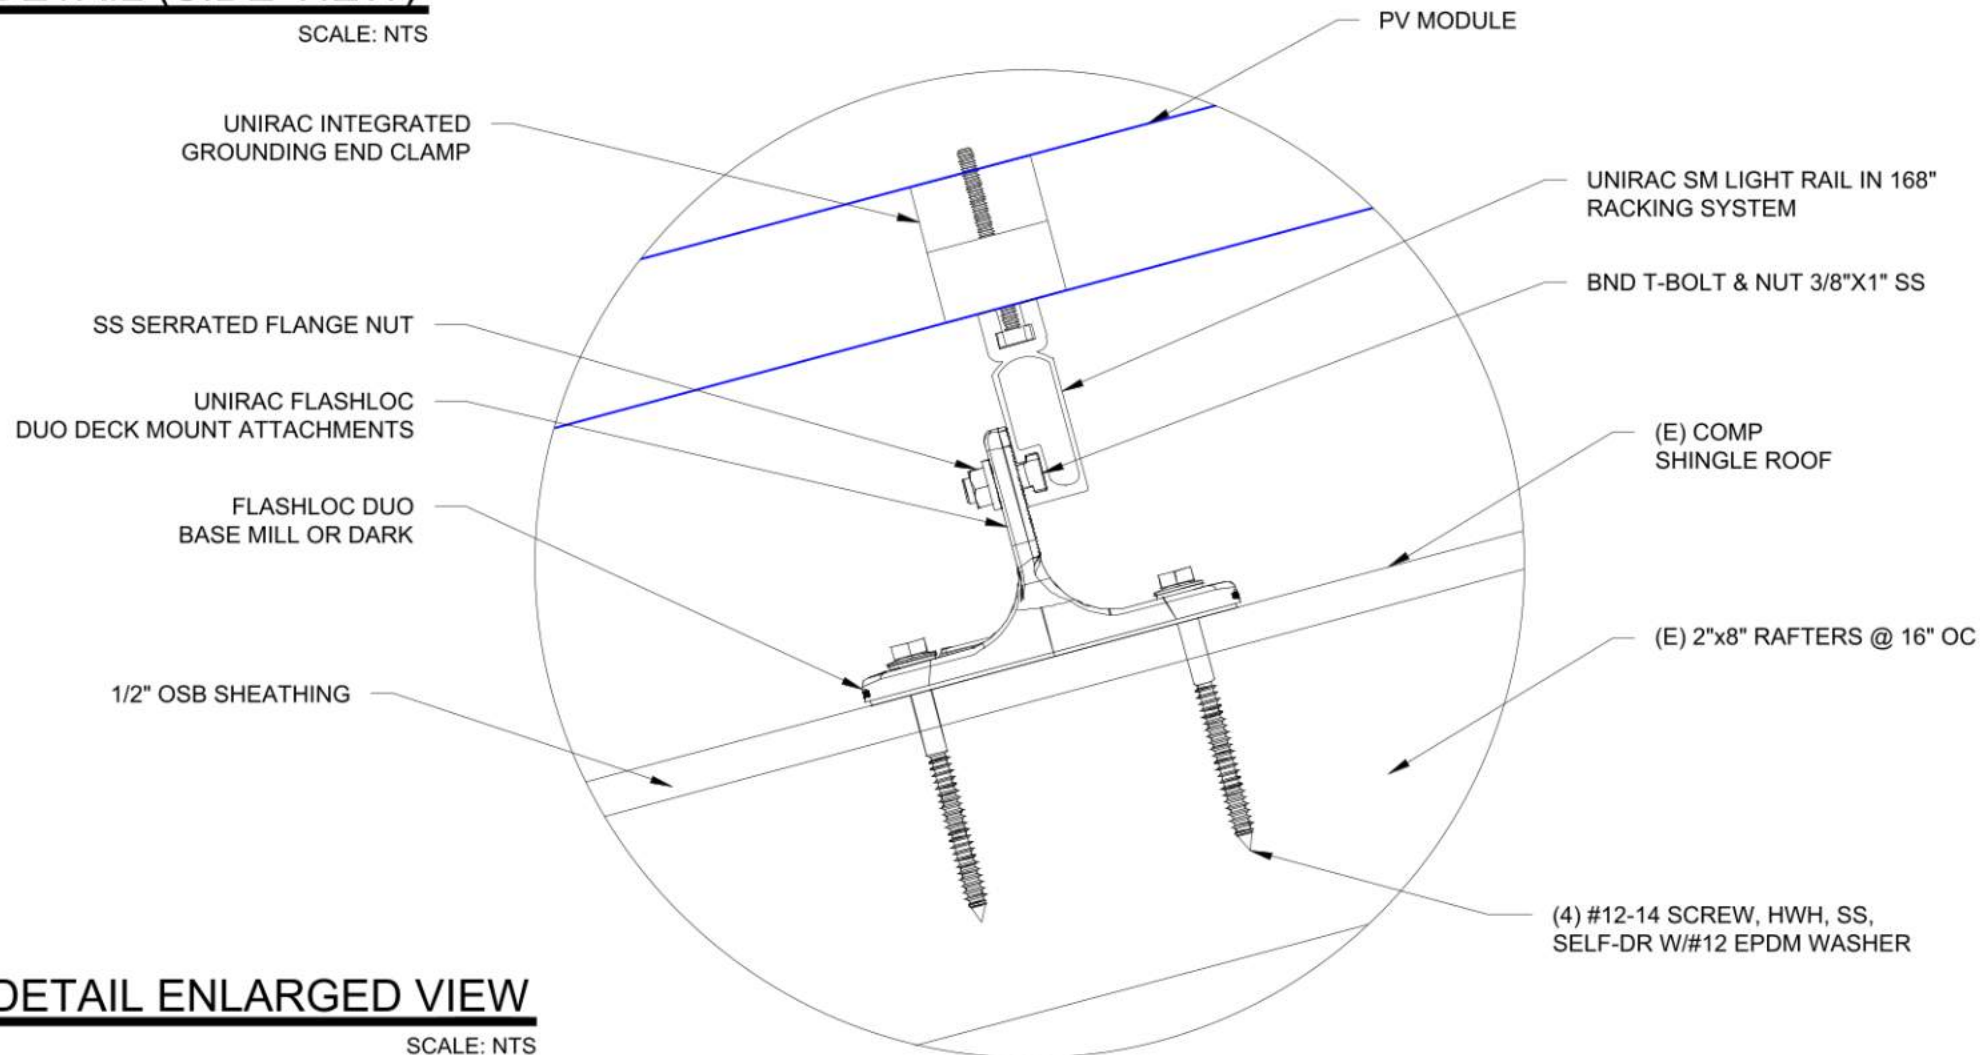

2 ATTACHMENT DETAIL ENLARGED VIEW

PV-3

SCALE: NTS



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS		
DESCRIPTION	DATE	BY
	09-30-2022	



Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84004
North Carolina COA # P-2308

Signed 9/30/2022

THIS PLAN HAS BEEN ELECTRONICALLY DESIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

ALLEN KENT

190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

ATTACHMENT
DETAIL

SHEET SIZE

ANSI B
11" X 17"




SHEET NUMBER

PV-3

INVERTER SPECIFICATIONS	
MANUFACTURER	ENPHASE IQ8PLUS-72-2-US
MAX. DC VOLT RATING	60 VOLTS
MAX. POWER AT 40 C	290 WATTS
NOMINAL AC VOLTAGE	240 VOLTS
MAX. AC CURRENT	1.21 AMPS
MAX. OCPD RATING	20 AMPS
MAX. PANELS/CIRCUIT	13
SHORT CIRCUIT CURRENT	15 AMPS

THIS PANEL IS FED BY MULTIPLE SOURCES (UTILITY AND SOLAR)	
AC OUTPUT CURRENT	37.51A
NOMINAL AC VOLTAGE	240V

(N) (31) (ENPHASE IQ8PLUS-72-2-US MICRO-INVERTERS, 240V, 1.21A MAX CEC WEIGHTED EFFICIENCY 97.0% NEMA 4R, UL LISTED, INTERNAL GFDI)

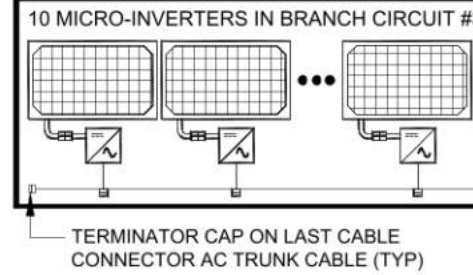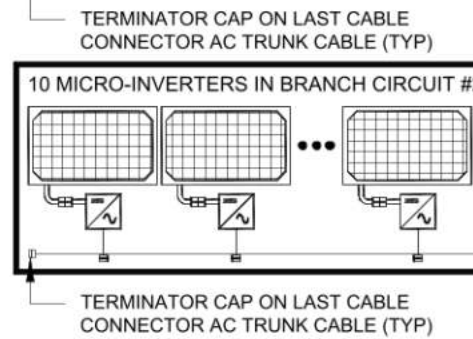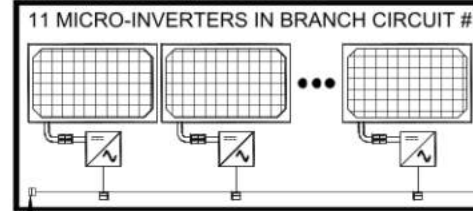

SOLAR MODULE SPECIFICATIONS	
MANUFACTURER / MODEL #	Solarever USA HC 108M SE-182*91-410M-108N (410WATTS)
VMP	31.35V
IMP	13.08A
VOC	37.12V
ISC	13.96A
MODULE DIMENSION	67.87"L x 44.64"W x 1.37"D (In Inch)

(31) SOLAREVER USA HC 108M SE-182*91-410M-108N (410W) MODULES
 (31) ENPHASE IQ8PLUS-72-2-US MICRO-INVERTERS, 240V
 (01) ENPHASE IQ LOAD CONTROLLER
 (01) ENPHASE ENPOWER SMART SWITCH R2
 (01) CIRCUIT OF 11 MODULES WITH MICRO INVERTERS &
 (02) CIRCUITS OF 10 MODULES WITH MICRO INVERTERS
 CONNECTED IN SERIES PER CIRCUIT
 SYSTEM SIZE: 12.71 KW DC STC

ENPHASE Q CABLE TO BE ATTACHED TO RAIL MIN. 3-1/2" ABOVE ROOF SURFACE

FOR WIRES SMALLER THAN #1 REMOVE LUG AND USE AN APPROVED UL RING TERMINAL

- NOTE:
1. CONDUIT AND CONDUCTOR SPECIFICATIONS ARE BASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING AS REQUIRED BY FIELD CONDITIONS.
 2. 30% OF MICROINVERTER AC POWER = MAX POWER OF LARGEST SINGLE LOAD
 3. MAX. POWER OF LARGEST SINGLE LOAD SHOULD NOT EXCEED 11.25A

Rooftop conductor ampacities designed in compliance with art. 690.8, Tables 310.15(B)(2)(a), 310.15(B)(3)(a), 310.15(B)(3)(c), 310.15(B)(16), Chapter 9 Table 4, 5, & 9. Location specific temperature obtained from ASHRAE 2017 data tables

RECORD LOW TEMP	-10°
AMBIENT TEMP (HIGH TEMP 2%)	37°
CONDUIT HEIGHT	0.5"
ROOF TOP TEMP	59°
CONDUCTOR TEMPERATURE RATE	90°

LGCY POWER
 LGCY POWER
 3333 DIGITAL DR #600, LEHI,
 UT 84043, UNITED STATES
 855-353-4899


Alex Nelson
 LICENSE NUMBER: U33945

REVISIONS		
DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - Arkent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

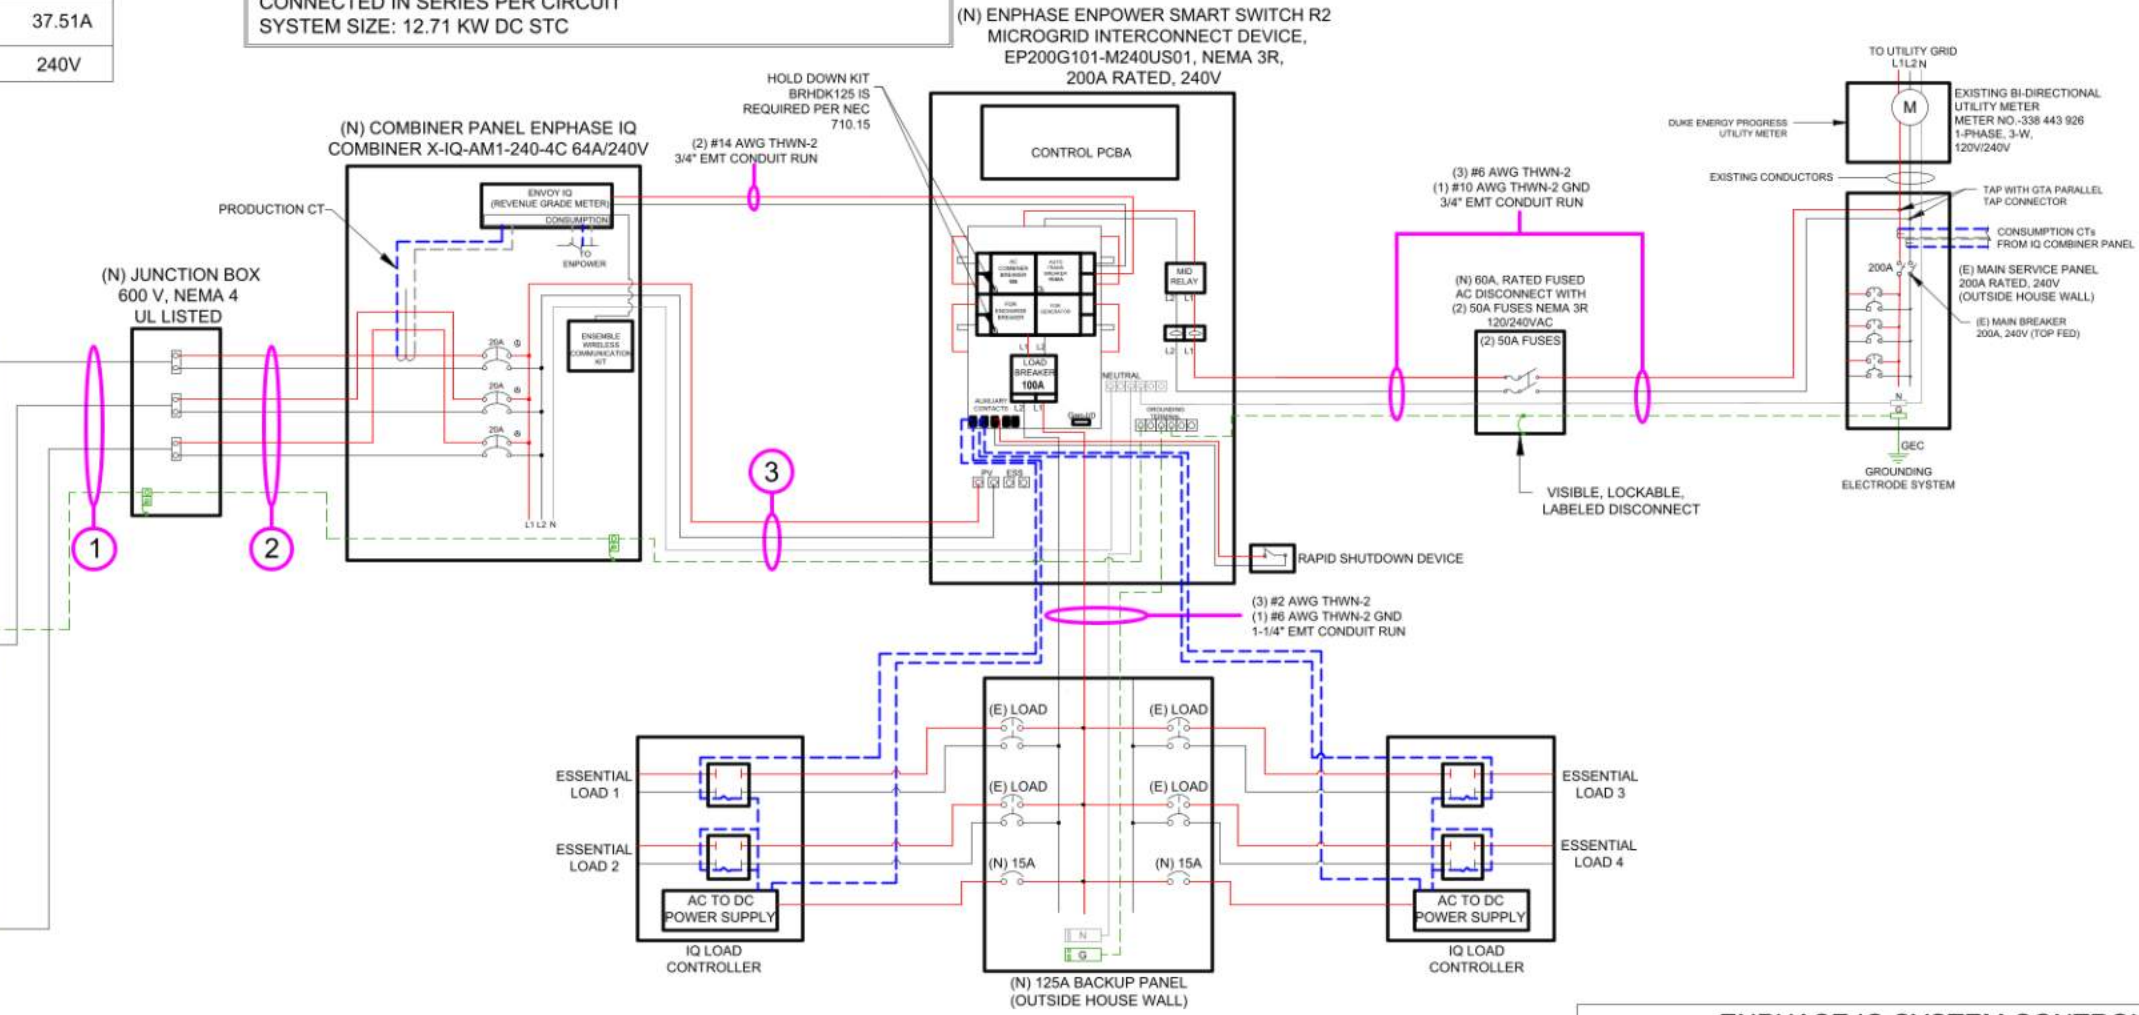

ENPHASE IQ SYSTEM CONTROLLER 2	
MANUFACTURER	EP200G101-M240US01
NOMINAL VOLTAGE / RANGE	240 VAC / 100 - 310 VAC
MAX. CONT. CURRENT	160 AMPS
MAX. OUTPUT OCPD	200 AMPS
MAX. OCPD FOR STORAGE BRANCH	80 AMPS
MAX. OCPD FOR PV COMBINER BRANCH	80 AMPS

WIRE TAG #	WIRE FROM --	CONDUIT	WIRE QTY	WIRE GAUGE	WIRE TYPE ENPHASE Q-CABLE INCLUDES #12 GROUND	TEMP RATING:	WIRE AMP	TEMP DE-RATE:	CONDUIT FILL:	WIRE OCP:	TERMINAL 75°C RATING:	INVERTER QTY:	NOC:	NEC:	STRING AMPS	GRND SIZE	GRND WIRE TYPE
1	ARRAY TO JUNCTION BOX	-	3	#12	Q-CABLE	90°	30A x	0.91 x	1.00 =	27.30A	25A	11	x 1.21 x 1.25 =	16.64A	#6	BARE CU	
2	JUNCTION BOX TO COMBINER PANEL	3/4" EMT	6	#10	THWN-2	75°	35A x	0.88 x	0.80 =	24.64A	35A	11	x 1.21 x 1.25 =	16.64A	#10	THWN-2	
3	COMBINER PANEL TO EMPOWER SMART SWITCH	3/4" EMT	3	#6	THWN-2	75°	65A x	0.88 x	1.00 =	57.20A	65A	31	x 1.21 x 1.25 =	46.89A	#10	THWN-2	

SHEET NAME
ELECTRICAL LINE DIAGRAM

SHEET SIZE
**ANSI B
 11" X 17"**

SHEET NUMBER
PV-4



LGCY POWER

LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

ATTIC PHOTO

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-5



Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

ELECTRICAL
PHOTOS

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-6

1) COMBINER PANEL
NEC 705.12(B)(3)(4)
LOCATED AT AC COMBINER PANEL

WARNING

PHOTOVOLTAIC SYSTEM
COMBINER PANEL
DO NOT ADD LOADS

2) AC DISCONNECT
NEC 690.54
LOCATED ON AC DISCONNECT

PHOTOVOLTAIC SYSTEM AC DISCONNECT

OPERATING VOLTAGE 240 VOLTS
OPERATING CURRENT 37.51 AMPS

3) PV SOLAR BREAKER
NEC 705.12(B)(3)(2)
LOCATED NEXT TO THE PV BREAKER

PV SOLAR BREAKER

DO NOT RELOCATE THIS
OVERCURRENT DEVICE

4) PV CONDUCTORS
NEC 690.31(D)(2)
LOCATED ON CABLE TRAYS, JUNCTION BOXES AND CONDUIT

WARNING: PHOTOVOLTAIC POWER SOURCE

LABELS MUST BE VISIBLE AFTER INSTALLATION.
LABELS MUST BE LOCATED ON EVERY SECTION OF
THE WIRING SYSTEM SEPARATED BY WALLS,
FLOORS OR OTHER PARTITIONS AND MUST NOT BE
SEPARATED BY MORE THAN 10'


5) RAPID SHUTDOWN
NEC 690.56(C)(2)
LOCATED ON AC DISCONNECT

RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM

6) DUEL POWER SOURCES
NEC 690.56(C)
MUST BE LOCATED ON THE MAIN SERVICE PANEL

SOLAR SYSTEM EQUIPPED WITH RAPID SHUTDOWN

TURN RAPID SHUTDOWN
SWITCH TO THE "OFF"
POSITION TO SHUT DOWN
PV SYSTEM AND REDUCE
SHOCK HAZARD IN THE
ARRAY



7) ELECTRIC SHOCK HAZARD
NEC 690.13(B)
LOCATED ON AC DISCONNECT & PRODUCTION METER

WARNING

ELECTRIC SHOCK HAZARD

TERMINALS ON BOTH LINE AND LOAD SIDES
MAY BE ENERGIZED IN THE OPEN POSITION

8) DUAL POWER SUPPLY
NEC 705.12(B)(3)
MUST BE LOCATED ON THE MAIN SERVICE PANEL

WARNING

DUAL POWER SUPPLY

SOURCES: UTILITY GRID AND
PV SOLAR ELECTRIC SYSTEM

LABELING NOTES:


1. LABELS CALLED OUT ACCORDING TO ALL COMMON CONFIGURATIONS. ELECTRICIAN TO DETERMINE EXACT REQUIREMENTS IN THE FIELD PER CURRENT NEC AND LOCAL CODES AND MAKE APPROPRIATE ADJUSTMENTS.

2. LABELING REQUIREMENTS BASED ON THE NATIONAL ELECTRIC CODE, OSHA STANDARD 19010.145, ANSI Z535.

3. MATERIAL BASED ON THE REQUIREMENTS OF THE AUTHORITY HAVING JURISDICTION.


4. LABELS TO BE OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED [NEC 110.21] THEY SHALL BE PERMANENTLY ATTACHED, WEATHER/SUNLIGHT RESISTANT, AND SHALL NOT BE HAND WRITTEN NEC 11.21(B)

5. LABELS TO BE A MINIMUM LETTER HEIGHT OF 3/8", WHITE ON RED BACKGROUND; REFLECTIVE, AND PERMANENTLY AFFIXED [IFC 605.11.1.1]

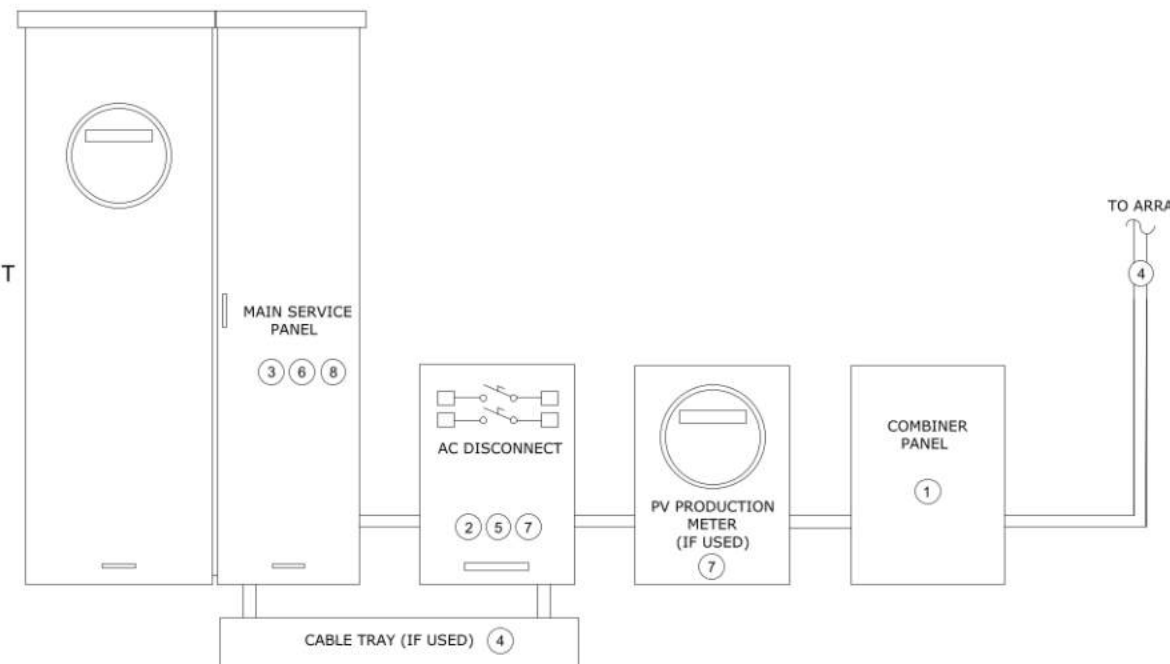

CAUTION

POWER TO THIS BUILDING IS ALSO SUPPLIED FROM THE FOLLOWING SOURCES WITH DISCONNECTS LOCATED AS SHOWN AT: MAIN SERVICE PANEL & UTILITY METER, AC COMBINER BOX, ENPOWER, BACKUP LOAD PANEL

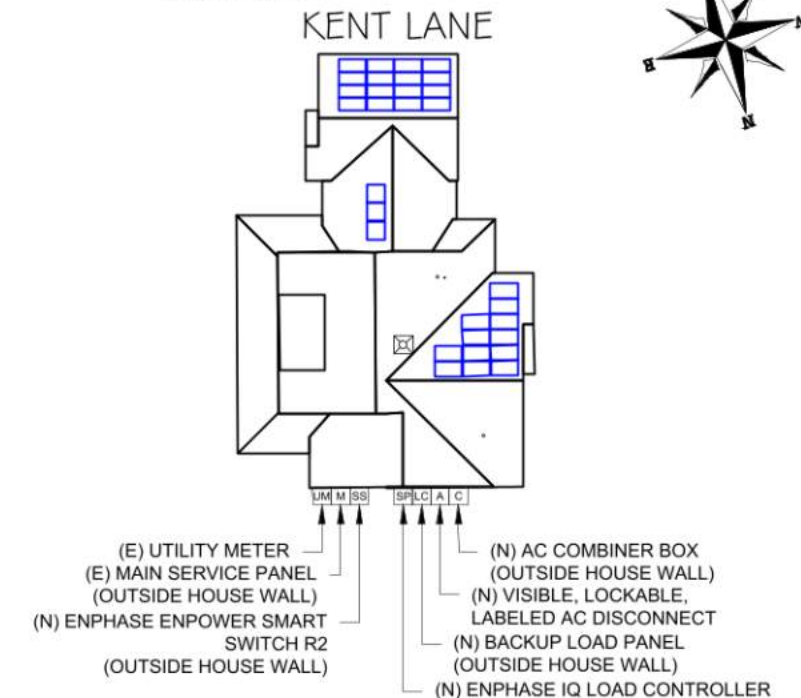

190 KENT LANE, COATS, NC 27521 USA



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

PLACARDS

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-7

ALL LABELS MUST BE PERMANENTLY ATTACHED, MUST BE WEATHER AND SUNLIGHT RESISTANT AND MAY NOT BE HAND-WRITTEN

ELECTRICAL NOTES:

1. EACH MODULE TO BE GROUNDED USING THE SUPPLIED CONNECTION POINT PER MANUFACTURER'S REQUIREMENTS. ALL SOLAR MODULES, EQUIPMENT, AND METALLIC COMPONENTS ARE TO BE BONDED. IF THE EXISTING GROUNDING ELECTRODE SYSTEM CAN NOT BE VERIFIED OR IS ONLY METALLIC WATER PIPING.
2. ALL PLAQUES AND SIGNAGE REQUIRED BY THE LATEST EDITION OF NATIONAL ELECTRICAL CODE. LABEL SHALL BE METALLIC OR PLASTIC, ENGRAVED OR MACHINE PRINTED IN ACCORDANCE WITH NEC REQUIREMENTS. PLAQUE SHALL BE UV RESISTANT IF EXPOSED TO SUNLIGHT.
3. EXPOSED NON-CURRENT CARRYING METAL PARTS OF ELECTRICAL EQUIPMENT SHALL BE GROUNDED IN ACCORDANCE WITH 250.134 OR 250.138(A).
4. CONFIRM LINE SIDE VOLTAGE AT ELECTRIC UTILITY SERVICE PRIOR TO CONNECTING INVERTER. VERIFY SERVICE VOLTAGE IS WITHIN INVERTER VOLTAGE OPERATIONAL RANGE.
5. OUTDOOR EQUIPMENT SHALL BE NEMA-3R RATED OR BETTER.
6. ELECTRICAL CONTRACTOR TO PROVIDE CONDUIT EXPANSION JOINTS AND ANCHOR CONDUIT RUNS AS REQUIRED PER NEC.
7. ALL WIRING MUST BE PROPERLY SUPPORTED BY DEVICES OR MECHANICAL MEANS DESIGNED AND LISTED FOR SUCH USE, AND FOR ROOF-MOUNTED SYSTEMS, WIRING MUST BE PERMANENTLY AND COMPLETELY HELD OFF OF THE ROOF SURFACE. NEC 110.2 - 110.4 / 300.4



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

ADDITIONAL NOTES

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-8



JOB HAZARD ANALYSIS

CUSTOMER NAME/JOB ID: _____ CUSTOMER ADDRESS _____
 INSTALL DATE ____ - ____ - ____ Time ____ : ____ am/pm

FIELD DESIGN REQUEST FORM

JOB INFORMATION

JOB NAME: _____ DATE: _____
 ADDRESS: _____

CHANGE REQUEST

WHO AUTHORIZED THE CHANGE: _____
 DESCRIBE THE NEEDED CHANGE & WHY: _____

NEW DESIGN LAYOUT

DRAW THE MOUNTING PLANE SHOWING THE NEW MODULE LAYOUT:

INSTALLER NAME(PRINT): _____

I UNDERSTAND AND AGREE TO THE CHANGES MADE ABOVE:

 CUSTOMER NAME CUSTOMER SIGNATURE DATE

HAZARD CATEGORY	HAZARD TYPE	HAZARD CONTROL MEASURES
LADDER SAFETY	<ul style="list-style-type: none"> • LOCATION • CONDITION • WORKING CLEARANCE 	
FALL PROTECTION	<ul style="list-style-type: none"> • WORKING 6' OR HIGHER 	
ELECTRICAL SAFETY	<ul style="list-style-type: none"> • ARCH FLASH • ELECTRIC SHOCK/ELECTROCUTION 	
WEATHER CONDITIONS	<ul style="list-style-type: none"> • HEAT/COLD TEMP • RAINY/ICY/WINDY 	
PUBLIC SAFETY	<ul style="list-style-type: none"> • WORK/OBJECTS OVERHEAD • SLIPS/TRIPS/FALLS • ACCESS TO LIVE ELECTRICAL 	

NEAREST EMERGENCY FACILITY _____
 CONTACT IMMEDIATLY IN EMERGENCY (911 AND/OR) _____

GENERAL SITE DIScription/NOTES

CREW MEMBERS ON SITE FOR INSTALL

NAME	SIGNATURE
FMU/LMD-	

ELECTRICAL COMPLETION PHOTOS QR CODE



ROOFTOP INSTALLATION PHOTOS QR CODE



MPU COMPLETION PHOTOS QR CODE



LGCY POWER
 3333 DIGITAL DR #600, LEHI,
 UT 84043, UNITED STATES
 855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - Arkent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

SHEET NAME
JOB HAZARD ANALYSIS

SHEET SIZE
 ANSI B
 11" X 17"

SHEET NUMBER
PV-9



Module HC 108M

400-410 Watt

Positive power tolerance of 0~+3%
HALF CELL - MONO PERC 108 CELL

KEY FEATURES



9 Busbar Solar Cell

9 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



High Efficiency

Higher module conversion efficiency (up to 20.38%) benefit from half cell structure (low resistance characteristic).



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.


LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty 25 Year Linear Power Warranty

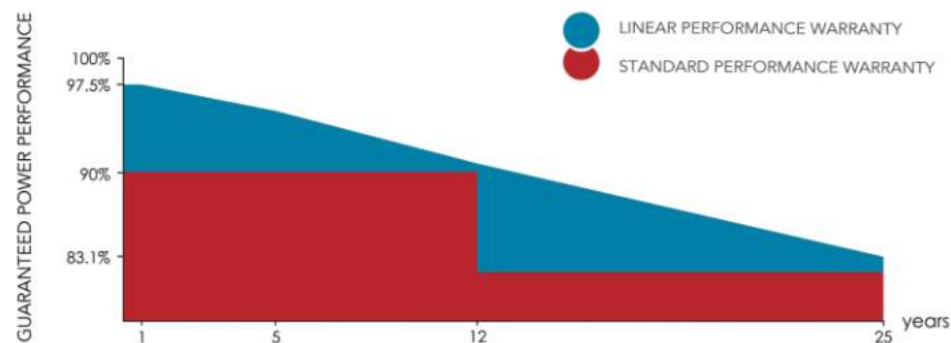


ISO9001:2015 certified factory
 UL61703 certified product

ENGINEERING DRAWINGS

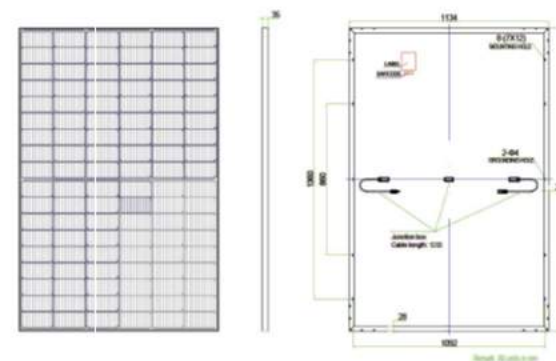

ENGINEERING DRAWINGS

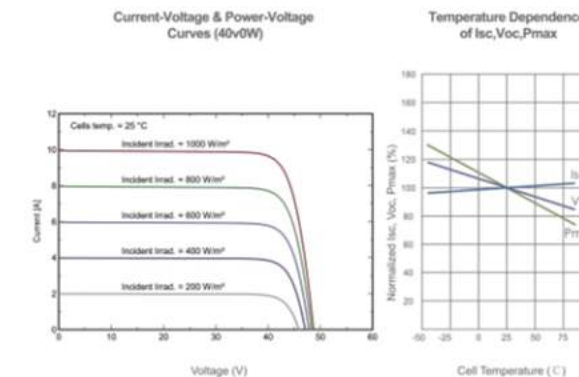

MECHANICAL CHARACTERISTICS

Cell Type	Mono PERC 182x91mm
No. of Half-cells	108 (6x18)
Dimensions	1724x1134x35mm (67.87x44.64x1.37 inch)
Weight	21.5 kg (47.4 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TUV 1x4.0mm ² , 450mm, (-) 1200mm or Customized Length

PACKAGING CONFIGURATION

(Two pallets = One stack)

31pcs/pallet, 62pcs/stack, 868pcs/53FT Truck

SPECIFICATIONS

Module Type	SE-182*91-400M-108N		SE-182*91-405M-108N		SE-182*91-410M-108N	
	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	400W	300W	405W	304W	410W	308W
Maximum Power Voltage (Vmp)	31.06	28.90	31.21	20.04	31.35	29.20
Maximum Power Current (Imp)	12.88	10.39	12.98	10.47	13.08	10.55
Open-circuit Voltage (Voc)	36.83	35.01	36.98	35.16	37.12	35.29
Short-circuit Current (Isc)	13.76	11.09	13.86	11.18	13.96	11.26
Module Efficiency STC (%)	20.46%		20.72%		20.97%	
Operating Temperature (°C)	-40°C ~ +85°C					
Maximum System Voltage	1500VDC (IEC)					
Maximum Series Fuse Rating	20A					
Power Tolerance	0~+3%					
Temperature Coefficients of Pmax	-0.35%/°C					
Temperature Coefficients of Voc	-0.29%/°C					
Temperature Coefficients of Isc	0.048%/°C					
Nominal Operating Cell Temperature (NOCT)	45±2°C					

STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

*Power measurement tolerance: ± 3%

Contact us!

Become the best solar company for the world +1(956) 308 3075 contact@solareverusa.com



LGCY POWER
 3333 DIGITAL DR #600, LEHI,
 UT 84043, UNITED STATES
 855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT

190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - Arkent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

SHEET NAME

EQUIPMENT
 SPECIFICATION

SHEET SIZE

ANSI B
 11" X 17"

SHEET NUMBER

PV-10



IQ8 and IQ8+ Microinverters

Our newest IQ8 Microinverters are the industry's first microgrid-forming, software-defined microinverters with split-phase power conversion capability to convert DC power to AC power efficiently. The brain of the semiconductor-based microinverter is our proprietary application-specific integrated circuit (ASIC) which enables the microinverter to operate in grid-tied or off-grid modes. This chip is built in advanced 55nm technology with high speed digital logic and has super-fast response times to changing loads and grid events, alleviating constraints on battery sizing for home energy systems.



Part of the Enphase Energy System, IQ8 Series Microinverters integrate with the Enphase IQ Battery, Enphase IQ Gateway, and the Enphase App monitoring and analysis software.



IQ8 Series Microinverters redefine reliability standards with more than one million cumulative hours of power-on testing, enabling an industry-leading limited warranty of up to 25 years.



Connect PV modules quickly and easily to IQ8 Series Microinverters using the included Q-DCC-2 adapter cable with plug-n-play MC4 connectors.



IQ8 Series Microinverters are UL Listed as PV Rapid Shut Down Equipment and conform with various regulations, when installed according to manufacturer's instructions.

Easy to install

- Lightweight and compact with plug-n-play connectors
- Power Line Communication (PLC) between components
- Faster installation with simple two-wire cabling

High productivity and reliability

- Produce power even when the grid is down*
- More than one million cumulative hours of testing
- Class II double-insulated enclosure
- Optimized for the latest high-powered PV modules

Microgrid-forming

- Complies with the latest advanced grid support**
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles
- Meets CA Rule 21 (UL 1741-SA) requirements

* Only when installed with IQ System Controller 2, meets UL 1741.

** IQ8 and IQ8Plus supports split phase, 240V installations only.

IQ8 and IQ8+ Microinverters

INPUT DATA (DC)		IQ8-60-2-US	IQ8PLUS-72-2-US
Commonly used module pairings ¹	W	235 – 350	235 – 440
Module compatibility		60-cell/120 half-cell	60-cell/120 half-cell, 66-cell/132 half-cell and 72-cell/144 half-cell
MPPT voltage range	V	27 – 37	29 – 45
Operating range	V	25 – 48	25 – 58
Min/max start voltage	V	30 / 48	30 / 58
Max input DC voltage	V	50	60
Max DC current ² [module Isc]	A		15
Overvoltage class DC port			II
DC port backfeed current	mA		0
PV array configuration		1x1 Ungrounded array; No additional DC side protection required; AC side protection requires max 20A per branch circuit	
OUTPUT DATA (AC)		IQ8-60-2-US	IQ8PLUS-72-2-US
Peak output power	VA	245	300
Max continuous output power	VA	240	290
Nominal (L-L) voltage/range ³	V	240 / 211 – 264	
Max continuous output current	A	1.0	1.21
Nominal frequency	Hz	60	
Extended frequency range	Hz	50 – 68	
AC short circuit fault current over 3 cycles	Arms	2	
Max units per 20 A (L-L) branch circuit ⁴		16	13
Total harmonic distortion		<5%	
Overvoltage class AC port		III	
AC port backfeed current	mA	30	
Power factor setting		1.0	
Grid-tied power factor (adjustable)		0.85 leading – 0.85 lagging	
Peak efficiency	%	97.5	97.6
CEC weighted efficiency	%	97	97
Night-time power consumption	mW	60	
MECHANICAL DATA			
Ambient temperature range		-40°C to +60°C (-40°F to +140°F)	
Relative humidity range		4% to 100% (condensing)	
DC Connector type		MC4	
Dimensions (HxWxD)		212 mm (8.3") x 175 mm (6.9") x 30.2 mm (1.2")	
Weight		1.08 kg (2.38 lbs)	
Cooling		Natural convection – no fans	
Approved for wet locations		Yes	
Pollution degree		PD3	
Enclosure		Class II double-insulated, corrosion resistant polymeric enclosure	
Environ. category / UV exposure rating		NEMA Type 6 / outdoor	
COMPLIANCE			
Certifications		CA Rule 21 (UL 1741-SA), UL 62109-1, UL1741/IEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01	

(1) No enforced DC/AC ratio. See the compatibility calculator at <https://link.enphase.com/module-compatibility>
 (2) Maximum continuous input DC current is 10.6A (3) Nominal voltage range can be extended beyond nominal if required by the utility. (4) Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS		
DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - ArKent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

SHEET NAME
EQUIPMENT SPECIFICATION

SHEET SIZE
**ANSI B
 11" X 17"**

SHEET NUMBER
PV-11

Enphase IQ Combiner 4/4C

X-IQ-AM1-240-4
X-IQ-AM1-240-4C



X-IQ-AM1-240-4C

X-IQ-AM1-240-4



To learn more about Enphase offerings, visit enphase.com

The **Enphase IQ Combiner 4/4C** with Enphase IQ Gateway and integrated LTE-M1 cell modem (included only with IQ Combiner 4C) consolidates interconnection equipment into a single enclosure and streamlines IQ microinverters and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.

Smart

- Includes IQ Gateway for communication and control
- Includes Enphase Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), included only with IQ Combiner 4C
- Includes solar shield to match Enphase IQ Battery aesthetics and deflect heat
- Flexible networking supports Wi-Fi, Ethernet, or cellular
- Optional AC receptacle available for PLC bridge
- Provides production metering and consumption monitoring

Simple

- Centered mounting brackets support single stud mounting
- Supports bottom, back and side conduit entry
- Up to four 2-pole branch circuits for 240 VAC plug-in breakers (not included)
- 80A total PV or storage branch circuits

Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- Five-year limited warranty
- Two years labor reimbursement program coverage included for both the IQ Combiner SKU's
- UL listed



Enphase IQ Combiner 4/4C

MODEL NUMBER

IQ Combiner 4 (X-IQ-AM1-240-4) IQ Combiner 4 with Enphase IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and consumption monitoring (+/- 2.5%). Includes a silver solar shield to match the IQ Battery system and IQ System Controller 2 and to deflect heat.

IQ Combiner 4C (X-IQ-AM1-240-4C) IQ Combiner 4C with Enphase IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and consumption monitoring (+/- 2.5%). Includes Enphase Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), a plug-and-play industrial-grade cell modem for systems up to 60 microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, where there is adequate cellular service in the installation area.) Includes a silver solar shield to match the IQ Battery and IQ System Controller and to deflect heat.

ACCESSORIES AND REPLACEMENT PARTS (not included, order separately)

Ensemble Communications Kit COMMS-CELLMODEM-M1-06	- Includes COMMS-KIT-01 and CELLMODEM-M1-06-SP-05 with 5-year Sprint data plan for Ensemble sites
CELLMODEM-M1-06-SP-05	- 4G based LTE-M1 cellular modem with 5-year Sprint data plan
CELLMODEM-M1-06-AT-05	- 4G based LTE-M1 cellular modem with 5-year AT&T data plan
Circuit Breakers	Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers.
BRK-10A-2-240V	Circuit breaker, 2 pole, 10A, Eaton BR210
BRK-15A-2-240V	Circuit breaker, 2 pole, 15A, Eaton BR215
BRK-20A-2P-240V	Circuit breaker, 2 pole, 20A, Eaton BR220
BRK-15A-2P-240V-B	Circuit breaker, 2 pole, 15A, Eaton BR215B with hold down kit support
BRK-20A-2P-240V-B	Circuit breaker, 2 pole, 20A, Eaton BR220B with hold down kit support
EPLC-01	Power line carrier (communication bridge pair), quantity - one pair
XA-SOLARSHIELD-ES	Replacement solar shield for IQ Combiner 4/4C
XA-PLUG-120-3	Accessory receptacle for Power Line Carrier in IQ Combiner 4/4C (required for EPLC-01)
XA-ENV-PCBA-3	Replacement IQ Gateway printed circuit board (PCB) for Combiner 4/4C
X-IQ-NA-HD-125A	Hold down kit for Eaton circuit breaker with screws.

ELECTRICAL SPECIFICATIONS

Rating	Continuous duty
System voltage	120/240 VAC, 60 Hz
Eaton BR series busbar rating	125 A
Max. continuous current rating	65 A
Max. continuous current rating (input from PV/storage)	64 A
Max. fuse/circuit rating (output)	90 A
Branch circuits (solar and/or storage)	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. total branch circuit breaker rating (input)	80A of distributed generation / 95A with IQ Gateway breaker included
Production metering CT	200 A solid core pre-installed and wired to IQ Gateway
Consumption monitoring CT (CT-200-SPLIT)	A pair of 200 A split core current transformers

MECHANICAL DATA

Dimensions (WxHxD)	37.5 x 49.5 x 16.8 cm (14.75" x 19.5" x 6.63"). Height is 21.06" (53.5 cm) with mounting brackets.
Weight	7.5 kg (16.5 lbs)
Ambient temperature range	-40° C to +46° C (-40° to 115° F)
Cooling	Natural convection, plus heat shield
Enclosure environmental rating	Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction
Wire sizes	<ul style="list-style-type: none"> • 20 A to 50 A breaker inputs: 14 to 4 AWG copper conductors • 60 A breaker branch input: 4 to 1/0 AWG copper conductors • Main lug combined output: 10 to 2/0 AWG copper conductors • Neutral and ground: 14 to 1/0 copper conductors Always follow local code requirements for conductor sizing.
Altitude	To 2000 meters (6,560 feet)

INTERNET CONNECTION OPTIONS

Integrated Wi-Fi	802.11b/g/n
Cellular	CELLMODEM-M1-06-SP-05, CELLMODEM-M1-06-AT-05 (4G based LTE-M1 cellular modem). Note that an Enphase Mobile Connect cellular modem is required for all Ensemble installations.
Ethernet	Optional, 802.3, Cat5E (or Cat 6) UTP Ethernet cable (not included)

COMPLIANCE

Compliance, IQ Combiner	UL 1741, CAN/CSA C22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003 Production metering: ANSI C12.20 accuracy class 0.5 (PV production) Consumption metering: accuracy class 2.5
Compliance, IQ Gateway	UL 60601-1/CANCSA 22.2 No. 61010-1

To learn more about Enphase offerings, visit enphase.com

© 2021 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Combiner 4/4C, and other names are trademarks of Enphase Energy, Inc. Data subject to change. 10-21-2021



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT

190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-12

Enphase IQ Envoy

The **Enphase IQ Envoy™** communications gateway delivers solar production and energy consumption data to Enphase Enlighten™ monitoring and analysis software for comprehensive, remote maintenance and management of the Enphase IQ System.

With integrated revenue grade production metering and optional consumption monitoring, Envoy IQ is the platform for total energy management and integrates with the Enphase Ensemble™ and the Enphase IQ Battery™.



Smart

- Enables web-based monitoring and control
- Bidirectional communications for remote upgrades
- Supports power export limiting and zeroexport applications

Simple

- Easy system configuration using Enphase Installer Toolkit™ mobile app
- Flexible networking with Wi-Fi, Ethernet, or cellular

Reliable

- Designed for installation indoors or outdoors
- Five-year warranty

Enphase IQ Envoy

MODEL NUMBERS

Enphase IQ Envoy™ ENV-IQ-AM1-240	Enphase IQ Envoy communications gateway with integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and optional consumption monitoring (+/- 2.5%). Includes one 200A continuous rated production CT (current transformer).
-------------------------------------	---

ACCESORIES (Order Separately)

Enphase Mobile Connect™ CELLMODEM-M1 (4G based LTE-M/5-year data plan) CELLMODEM-M1-B (4G-based LTE-M1/5-year data plan)	Plug and play industrial grade cellular modem with data plan for systems up to 60 microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, where there is adequate cellular service in the installation area.)
Consumption Monitoring CT CT-200-SPLIT	Split-core consumption CTs enable whole home metering.
Ensemble Communications Kit COMMS-KIT-01	Installed at the IQ Envoy. For communications with Enphase Encharge™ storage and Enphase Enpower™ smart switch. Includes USB cable for connection to IQ Envoy or Enphase IQ Combiner™ and allows wireless communication with Encharge and Enpower.

POWER REQUIREMENTS

Power requirements	120/240 VAC split-phase. Max 20 A overcurrent protection required.
Typical Power Consumption	5W

CAPACITY

Number of microinverters polled	Up to 600
---------------------------------	-----------

MECHANICAL DATA

Dimensions (WxHxD)	21.3 x 12.6 x 4.5 cm (8.4" x 5" x 1.8")
Weight	17.6 oz (498 g)
Ambient temperature range	-40° to 65° C (-40° to 149° F) -40° to 46° C (-40° to 115° F) if installed in an enclosure
Environmental rating	IP30. For installation indoors or in an NRTL-certified, NEMA type 3R enclosure.
Altitude	To 2000 meters (6,560 feet)
Production CT	- Limited to 200A of continuous current / 250A OCPD – 72kW AC - Internal aperture measures 19.36mm to support 250MCM THWN conductors (max) - UL2808 certified for revenue grade metering
Consumption CT	- For electrical services to 250A with parallel runs up to 500A - Internal aperture measures 0.84" x 0.96" (21.33mm x 24.38mm) to support 3/0 THWN conductor - UL2808 certified, for use at service entrance for services up to 250Vac

INTERNET CONNECTION OPTIONS

Integrated Wi-Fi	802.11b/g/n
Ethernet	802.3, Cat5E (or Cat 6) UTP Ethernet cable (not included)
Mobile	CELLMODEM-M1 (4G) or CELLMODEM-M1-B (4G). Not included. Note that an Enphase Mobile Connect cellular modem is required for all Ensemble installations.

COMPLIANCE

Compliance	UL 61010-1 CAN/CSA C22.2 No. 61010-1 47 CFR, Part 15, Class B, ICES 003 IEC/EN 61010-1:2010, EN50065-1, EN61000-4-5, EN61000-6-1, EN61000-6-2 Metering: ANSI C12.20 accuracy class 0.5 (PV production only)
------------	--



To learn more about Enphase offerings, visit enphase.com



To learn more about Enphase offerings, visit enphase.com

© 2021 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Envoy, and other trademarks or service names are the trademarks of Enphase Energy, Inc. Data subject to change. 06-30-2021



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - ArKent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-13

Enphase Q Cable and Accessories

The **Enphase Q Cable™** and accessories are part of the sixth generation Enphase IQ System™. These products provide simplicity, reliability, and faster installation times.



Enphase Q Cable

- Two-wire, double-insulated Enphase Q Cable is 50% lighter than the previous generation Enphase cable
- Four-wire (three-phase) option also available
- New cable numbering and plug and play connectors speed up installation and simplify wire management
- Link connectors eliminate cable waste



Field-Wireable Connectors





- Easily connect Q cables on the roof without complex wiring
- Make connections from any open connector and center feed any section of cable within branch limits
- Available in male and female connector types

Enphase Q Cable Accessories

Q CABLE SPECIFICATIONS	
Voltage rating	600V (connector rating up to 250 V)
Cable temperature rating	90° C wet/dry
UV exposure rating	EN ISO 492-2
Environmental protection rating	IEC 60529 IP67
Compliance	RoHS, OIL RES I, CE, UV resistant
Cable insulator rating	H07BQ-F
Flame rating	IEC 60332-1-2

Q CABLE TYPES / ORDERING OPTIONS					
Model Number	Max Nominal Voltage	Ampacity Rating	Connector Spacing	PV Module Orientation	Connector Count per Box
Q-25-10-240 (single-phase)	250 VAC	25 A	1.3 m	Portrait	240
Q-25-17-240 (single-phase)	250 VAC	25 A	2.0 m	Landscape (60-cell)	240
Q-25-20-200 (single-phase)	250 VAC	25 A	2.3 m	Landscape (72-cell)	200
Q-25-10-3P-200 (three-phase)	250 VAC	25 A	1.3 m	Portrait	200
Q-25-17-3P-160 (three-phase)	250 VAC	25 A	2.0 m	Landscape (60-cell)	160
Q-25-20-3P-160 (three-phase)	250 VAC	25 A	2.3 m	Landscape (72-cell)	160

ENPHASE Q CABLE ACCESSORIES		
Name	Model Number	Description
Raw Q Cable (single-phase)	Q-25-RAW-300	300 meters cable with no connectors
Raw Q Cable (three-phase)	Q-25-RAW-3P-300	300 meters cable with no connectors
Field-wireable connector (male)	Q-CONN-R-10M	Make connections using single-phase cable
Field-wireable connector (male)	Q-CONN-3P-10M	Make connections using three-phase cable
Field-wireable connector (female)	Q-CONN-R-10F	Make connections from any Q Cable (single-phase) open connector
Field-wireable connector (female)	Q-CONN-3P-10F	Make connections from any Q Cable (three-phase) open connector
Cable Clip	ET-CLIP-100	Used to fasten cabling to the racking or to secure looped cabling
Disconnect tool	Q-DISC-10	Disconnect tool for Q Cable connectors, DC connectors, and AC module mount
Disconnect tool	Q-DISC-3P-10	Disconnect tool for three-phase Field wireable connectors
Q Cable sealing caps (female)	Q-SEAL-10	One needed to cover each unused connector on the cabling
Terminator (single-phase)	Q-TERM-R-10	Terminator cap for unused single-phase cable ends
Terminator (three-phase)	Q-TERM-3P-10	Terminator cap for unused three-phase cable ends
Replacement DC Adaptor (MC4)	Q-DCC-2-INT	DC adaptor to MC4 (max voltage 100 VDC)

	TERMINATOR Terminator cap for unused cable ends, sold in packs of ten (Q-TERM-R-10 / Q-TERM-3P-10)		SEALING CAPS Sealing caps for unused cable connections, sold in packs of ten (Q-SEAL-10)
	DISCONNECT TOOL Plan to use at least one per installation, sold in packs of ten (Q-DISC-10) Three-phase model (Q-DISC-3P-10)		CABLE CLIP Used to fasten cabling to the racking or to secure looped cabling, sold in packs of one hundred (ET-CLIP-100)

To learn more about Enphase offerings, visit enphase.com/in

© 2018 Enphase Energy. All rights reserved. All trademarks or brands used are the property of Enphase Energy, Inc. 2018-11-26



LGCY POWER
 3333 DIGITAL DR #600, LEHI,
 UT 84043, UNITED STATES
 855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS		
DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - ArKent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

SHEET NAME

EQUIPMENT
 SPECIFICATION

SHEET SIZE

ANSI B
 11" X 17"

SHEET NUMBER

PV-14



Enphase IQ System Controller 2

The **Enphase IQ System Controller 2** connects the home to grid power, the IQ Battery system, and solar PV. It provides microgrid interconnection device (MID) functionality by automatically detecting and seamlessly transitioning the home energy system from grid power to backup power in the event of a grid failure. It consolidates interconnection equipment into a single enclosure and streamlines grid independent capabilities of PV and storage installations by providing a consistent, pre-wired solution for residential applications.



Reliable

- Durable NEMA type 3R enclosure
- Ten-year limited warranty

Smart

- Controls safe connectivity to the grid
- Automatically detects grid outages
- Provides seamless transition to backup

Simple

- Connects to the load or service equipment¹ side of the main load panel
- Centered mounting brackets support single stud mounting
- Supports conduit entry from the bottom, bottom left side, and bottom right side
- Supports whole home and partial home backup and subpanel backup
- Up to 200A main breaker support
- Includes neutral-forming transformer for split phase 120/240V backup operation
- IQ System Controller supports backward compatibility with older generation of PV microinverters (M215, M250 and S series), making it simple for home owners to upgrade their systems
- Easy integration with generator from major manufacturers

1. IQ System Controller 2 is not suitable for use as service equipment in Canada.

To learn more about Enphase offerings, visit enphase.com



Enphase IQ System Controller 2

MODEL NUMBER	
EP200G101-M240US01	Enphase IQ System Controller 2 with neutral-forming transformer (NFT), Microgrid Interconnect Device (MID), breakers, and screws. Streamlines grid-independent capabilities of PV and battery installations.
ACCESSORIES and REPLACEMENT PARTS	
EP200G-NA-XA-E3	Replacement IQ System Controller 2 printed circuit board
EP200G-NA-HD-200A	Eaton type BR circuit breaker hold-down screw kit, BRHDK125
CT-200-SPLIT	200 A split core current transformers for Generator metering (+/- 2.5%)
Circuit breakers (as needed) ^{2,3}	Not included, must order separately:
• BRK-100A-2P-240V: Main breaker, 2 pole, 100A, 25kAIC, CSR2100	• BRK-20A-2P-240V-B: Circuit breaker, 2 pole, 20A, 10kAIC, BR220B
• BRK-125A-2P-240V: Main breaker, 2 pole, 125A, 25kAIC, CSR2125N	• BRK-30A-2P-240V: Circuit breaker, 2 pole, 30A, 10kAIC, BR230B
• BRK-150A-2P-240V: Main breaker, 2 pole, 150A, 25kAIC, CSR2150N	• BRK-40A-2P-240V: Circuit breaker, 2 pole, 40A, 10kAIC, BR240B
• BRK-175A-2P-240V: Main breaker, 2 pole, 175A, 25kAIC, CSR2175N	• BRK-60A-2P-240V: Circuit breaker, 2 pole, 60A, 10kAIC, BR260
• BRK-200A-2P-240V: Main breaker, 2 pole, 200A, 25kAIC, CSR2200N	• BRK-80A-2P-240V: Circuit breaker, 2 pole, 80A, 10kAIC, BR280
EP200G-HNDL-R1	IQ System Controller 2 installation handle kit (order separately)
EP200G-LITKIT	IQ System Controller 2 literature kit, including labels, feed-through headers, screws, filler plates, and QIG
BRK-20A40A-2P-240V	2 pole, 20A/40A, 10kAIC, BQC220240
ELECTRICAL SPECIFICATIONS	
Assembly rating	Continuous operation at 100% of its rating
Nominal voltage / range (L-L)	240 VAC / 100 - 310 VAC
Voltage measurement accuracy	±1% V nominal (±1.2V L-N and ±2.4V L-L)
Auxiliary contact for load control, excess PV control, and generator two-wire control	24V, 1A
Nominal frequency / range	60 Hz / 56 - 63 Hz
Frequency measurement accuracy	±0.1 Hz
Maximum continuous current rating	160A
Maximum input overcurrent protection device	200A
Maximum output overcurrent protection device	200A
Maximum overcurrent protection device rating for Generator circuit*	80A
Maximum overcurrent protection device rating for storage branch circuit* (the storage branch circuit can be replaced with PV)	80A
Maximum overcurrent protection device rating for IQ8 PV combiner branch circuit*	80A
Neutral Forming Transformer (NFT)	<ul style="list-style-type: none"> • Breaker rating (pre-installed): 40A between L1 and Neutral, 40A between L2 and Neutral • Continuous rated power: 3600VA • Maximum continuous unbalance current: 30A @ 120V • Peak rated power: 8800VA for 30 seconds • Peak unbalanced current: 80A @ 120V for 30 seconds
MECHANICAL DATA	
Dimensions (WxHxD)	50cm x 91.6cm x 24.6cm (19.7 in x 36 in x 9.7 in)
Weight	39.4 kg (87 lbs)
Ambient temperature range	-40° C to +50° C (-40° F to 122° F)
Cooling	Natural convection, plus heat shield
Enclosure environmental rating	Outdoor, NEMA type 3R, polycarbonate construction
Altitude	To 2500 meters (8200 feet)
WIRE SIZES	
Connections (All lugs are rated to 90C)	<ul style="list-style-type: none"> • Main lugs and backup load lugs • CSR breaker bottom wiring lugs • BR breakers (wire provided) • AC combiner lugs, Encharge lugs, and generator lugs • Neutral (large lugs)
Neutral and ground bars	<ul style="list-style-type: none"> Large holes (5/16-24 UNF) Small holes (10-32 UNF)
	<ul style="list-style-type: none"> Cu/Al: 1 AWG - 300 KCMIL Cu/Al: 2 AWG - 300 KCMIL 6 AWG 14 AWG - 2 AWG Cu/Al: 6 AWG - 300 KCMIL 14 AWG - 1/0 AWG 14 AWG - 6 AWG
COMPLIANCE	
Compliance	UL 1741, UL 1741 SA, UL 1741 PCS, UL1998, UL869A, UL67 ³ , UL508 ⁴ , UL50E ⁵ , CSA 22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003, AC156. IQ System Controller 2 is approved for Use as Service Equipment in the United States ⁵ .

2. Compatible with BRHDK125 Hold-Down Kit to comply with 2017 NEC 710.15E for back-fed circuit breakers.
3. The IQ System Controller 2 is rated 22 kAIC.
4. Not included. Installer must provide properly rated breaker per circuit breaker list above.
5. Sections from these standards were used during the safety evaluation and included in the UL 1741 listing.

To learn more about Enphase offerings, visit enphase.com

© 2021 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ System Controller 2, and other names are the trademarks of Enphase Energy, Inc. Data subject to change. 10-20-2021



Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-15

FLASHLOC™ DUO

THE MOST VERSATILE DIRECT TO DECK ATTACHMENT




FLASHLOC™ DUO is the most versatile direct to deck and rafter attachment for composition shingle and rolled comp roofs. The all-in-one mount installs fast — no kneeling on hot roofs to install flashing, no prying or cutting shingles, no pulling nails. Simply drive the required number of screws to secure the mount and inject sealant into the base. **FLASHLOC's** patented TRIPLE SEAL technology preserves the roof and protects the penetration with a permanent pressure seal. Kitted with two rafter screws, sealant and hardware for maximum convenience (deck screws sold separately). Don't just divert water, **LOC it out!**



PROTECT THE ROOF

Install a high-strength waterproof attachment without lifting, prying or damaging shingles.

APRIL2021_FLASHLOC2DUO_V1

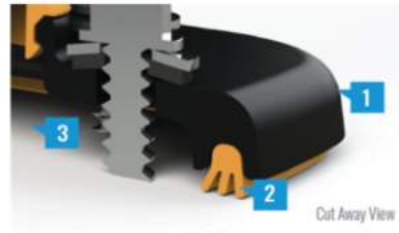

LOC OUT WATER

With an outer shield **1** contour-conforming gasket **2** and pressurized sealant chamber **3** the Triple Seal technology delivers a 100% waterproof connection.



HIGH-SPEED INSTALL

Simply drive the required number of screws and inject sealant into the port **4** to create a permanent pressure seal.

FLASHLOC™ DUO

INSTALLATION GUIDE



PRE-INSTALL: CLEAN SURFACE AND MARK LOCATION

Ensure existing roof structure is capable of supporting loads prescribed in Flashloc Duo D&E Guide. Clean roof surface of dirt, debris, snow and ice.

Snap chalk lines for attachment rows. On shingle roofs, snap lines 1/4" below upslope edge of shingle course. This line will be used to align the upper edge of the mount.

NOTE: Space mounts per span charts found in Flashloc Duo D&E Guide.



STEP ONE: SECURE

ATTACHING TO A RAFTER: Place FLASHLOC DUO over rafter location and align upper edge of mount with horizontal chalk line. Secure mount with the two (2) provided rafter screws. **BACKFILL ALL PILOT HOLES WITH SEALANT.**

ATTACHING TO SHEATHING: Place FLASHLOC DUO over desired location and align upper edge of mount with horizontal chalk line. Secure mount with the two (2) provided rafter screws. Next, secure mount with four (4) deck screws by drilling through the FLASHLOC DUO deck mount hole locations. Unirac recommends using a drill as opposed to an impact gun to prevent over-tightening or stripping roof sheathing.

IMPORTANT: SECURELY ATTACH MOUNT BUT DO NOT OVERTIGHTEN SCREWS.



STEP TWO: SEAL

Insert tip of UNIRAC approved sealant into port and inject until sealant exits vent. Continue array installation, attaching rails to mounts with provided T-bolts.

NOTE: When FLASHLOC DUO is installed over gap between shingle tabs or vertical joints, fill gap/joint with sealant between mount and upslope edge of shingle course.

CUT SHINGLES AS REQUIRED: DO NOT INSTALL THE FLASHLOC SLIDER ACCROSS THICKNESS VARIATIONS GREATER THAN 1/8" SUCH AS THOSE FOUND IN HIGH DEFINITION SHINGLES.

NOTE: When installing included rail attachment hardware, torque T-bolt nut to 30 ft-lbs.

NOTE: If an exploratory hole falls outside of the area covered by the sealant, flash hole accordingly.



USE ONLY UNIRAC APPROVED SEALANTS. PLEASE CONTACT UNIRAC FOR FULL LIST OF COMPATIBLE SEALANTS.



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT

190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - ArKent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-16

FASTER INSTALLATION. 25-YEAR WARRANTY.

FOR QUESTIONS OR CUSTOMER SERVICE VISIT UNIRAC.COM OR CALL (505) 248-2702

FASTER INSTALLATION. 25-YEAR WARRANTY.

FOR QUESTIONS OR CUSTOMER SERVICE VISIT UNIRAC.COM OR CALL (505) 248-2702

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION





SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-17

PART TABLE	
P/N	DESCRIPTION
004275M	FLASHLOC DUO MILL, 20 PACK
004275D	FLASHLOC DUO DARK, 20 PACK

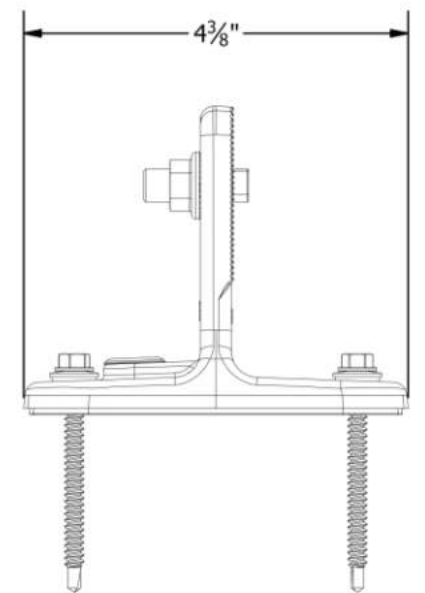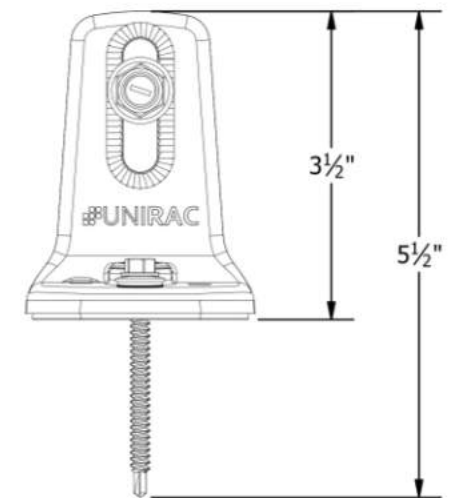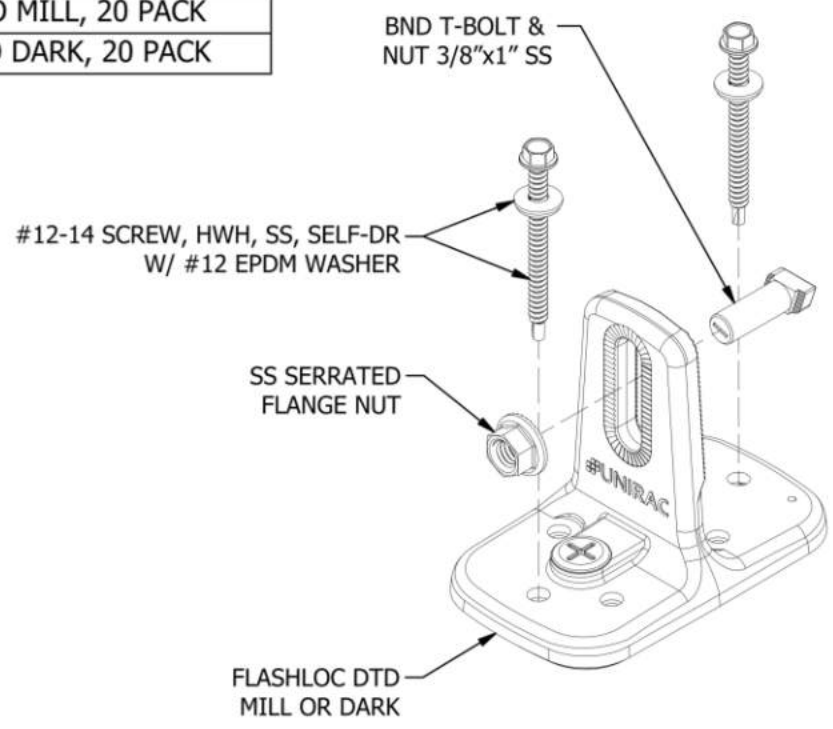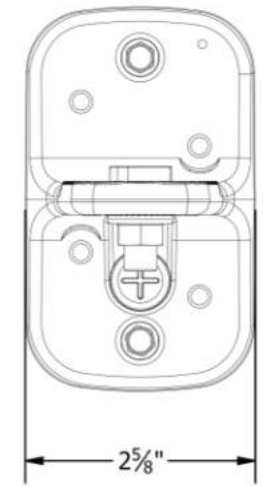

UNIRAC
1411 BROADWAY BLVD. NE
ALBUQUERQUE, NM 87102 USA
PHONE: 505.242.6411
WWW.UNIRAC.COM

PRODUCT LINE:	SOLARMOUNT
DRAWING TYPE:	ASSEMBLY DETAIL
DESCRIPTION:	FLASHLOC DUO KIT
REVISION DATE:	4/29/2021

DRAWING NOT TO SCALE
ALL DIMENSIONS ARE
NOMINAL

PRODUCT PROTECTED BY
ONE OR MORE US PATENTS
LEGAL NOTICE

FL-A04
SHEET

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT SPECIFICATION


SHEET SIZE

**ANSI B
11" X 17"**


SHEET NUMBER

PV-18




PRO SERIES END CLAMP

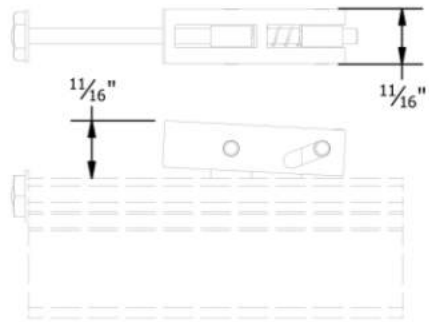

PRO SERIES MID CLAMP

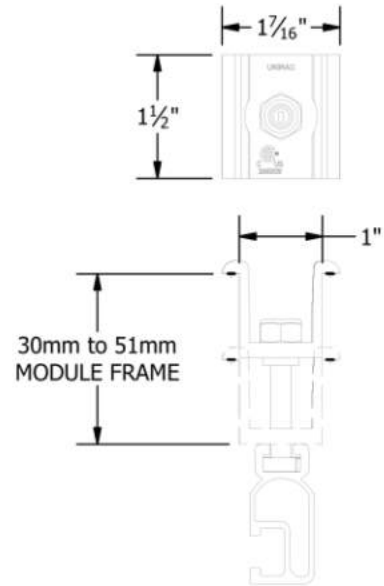

PART # TABLE	
P/N	DESCRIPTION
302035M	ENDCLAMP PRO
302030M	MIDCLAMP PRO - MILL
302030D	MIDCLAMP PRO - DRK

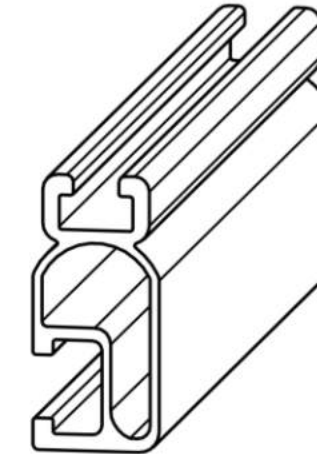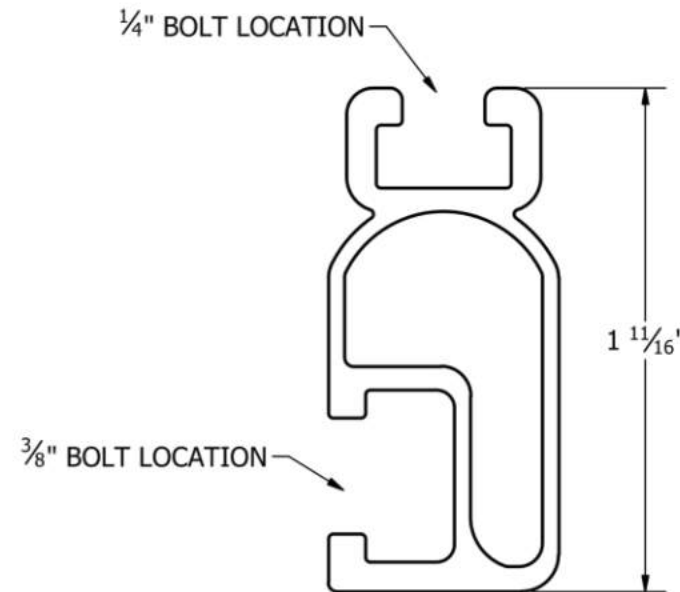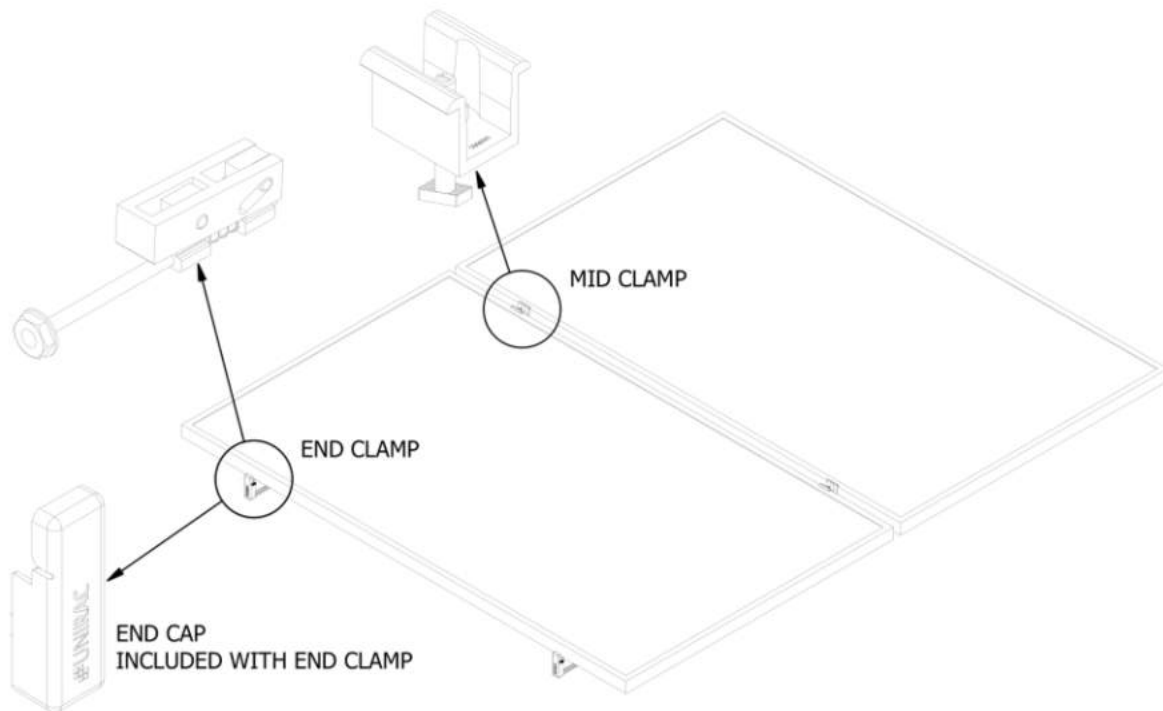

PART # TABLE		
P/N	DESCRIPTION	LENGTH
315168M	SM LIGHT RAIL 168" MILL	168"
315168D	SM LIGHT RAIL 168" DRK	168"
315240M	SM LIGHT RAIL 240" MILL	240"
315240D	SM LIGHT RAIL 240" DRK	240"

UNIRAC
1411 BROADWAY BLVD. NE
ALBUQUERQUE, NM 87102 USA
PHONE: 505.242.6411
WWW.UNIRAC.COM

PRODUCT LINE:	SOLARMOUNT
DRAWING TYPE:	PART & ASSEMBLY
DESCRIPTION:	PRO SERIES BONDING CLAMPS
REVISION DATE:	10/26/2017

DRAWING NOT TO SCALE
ALL DIMENSIONS ARE
NOMINAL

PRODUCT PROTECTED BY
ONE OR MORE US PATENTS

LEGAL NOTICE

SM-A01
SHEET

UNIRAC
1411 BROADWAY BLVD. NE
ALBUQUERQUE, NM 87102 USA
PHONE: 505.242.6411
WWW.UNIRAC.COM

PRODUCT LINE:	SOLARMOUNT
DRAWING TYPE:	PART DETAIL
DESCRIPTION:	LIGHT RAIL
REVISION DATE:	9/11/2017

DRAWING NOT TO SCALE
ALL DIMENSIONS ARE
NOMINAL

PRODUCT PROTECTED BY
ONE OR MORE US PATENTS

LEGAL NOTICE

SM-P02
SHEET

SYSTEM LEVEL FIRE CLASSIFICATION


The system fire class rating requires installation in the manner specified in the SOLARMOUNT Installation Guide. SOLARMOUNT has been classified to the system level fire portion of UL 1703. This UL 1703 classification has been incorporated into our UL 2703 product certification. SOLARMOUNT has achieved system level performance for steep sloped roofs. System level fire performance is inherent in the SOLARMOUNT design, and no additional mitigation measures are required. The fire classification rating is only valid on roof pitches greater than 2:12 (slopes \geq 2 inches per foot, or 9.5 degrees). The system is to be mounted over fire resistant roof covering rated for the application. There is no required minimum or maximum height limitation above the roof deck to maintain the system fire rating for SOLARMOUNT. Module Types & System Level Fire Ratings are listed below:

Rail Type	Module Type	System Level Fire Rating	Rail Direction	Module Orientation	Mitigation Required
Standard Rail	Type 1, Type 2, Type 3 & Type 10	Class A, Class B & Class C	East-West	Landscape OR Portrait	None Required
			North-South	Landscape OR Portrait	None Required
Light Rail	Type 1 & Type 2	Class A, Class B & Class C	East-West	Landscape OR Portrait	None Required
			North-South	Landscape OR Portrait	None Required

This racking system may be used to ground and/or mount a PV module complying with UL1703 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

UL2703 CERTIFICATION MARKING LABEL

Unirac SOLARMOUNT is listed to UL 2703. Certification marking is embossed on all mid clamps as shown. Labels with additional information will be provided. After the racking system is fully assembled, a single label should be applied to the SOLARMOUNT rail at the edge of the array. Note: The sticker label should be placed such that it is visible, but not outward facing.

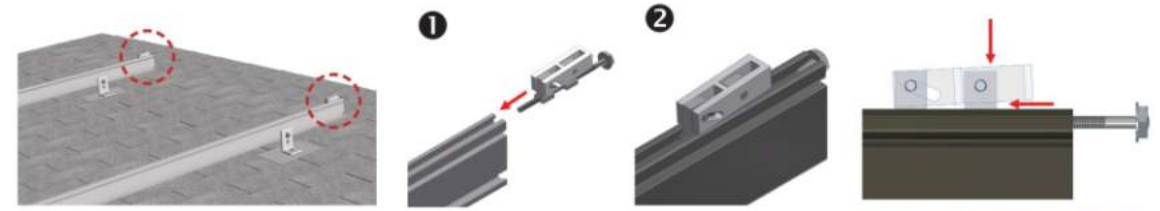


INSTALL MODULE END CLAMPS: The End clamp is supplied as an assembly with a 1/2" hex head bolt that is accessible at the ends of rails. The clamp should be installed on the rails prior to installing end modules.

INSTALL END CLAMPS ON RAIL: Slide end clamp on to rail by engaging the two T-guide brackets with the top slot of the rails. Ensure bolt is extended as far as possible so that clamp is positioned at max. distance from end of rail.

POSITION END CLAMPS: Slide end clamp assembly on to rail until bolt head engages with end of rail. End clamps are positioned on rails prior to the first end module and prior to the last end module.


NOTE: To assist insertion of clamp into rail slot, Pressure may be applied to top or side of bracket as shown. Do not force clamp into rail by pushing on bolt with excessive force.

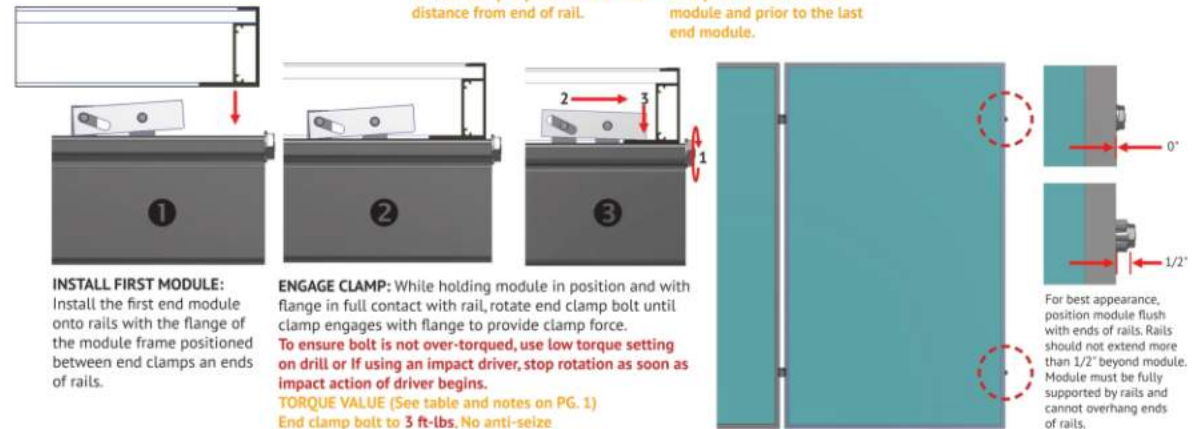

INSTALL FIRST MODULE: Install the first end module onto rails with the flange of the module frame positioned between end clamps at an ends of rails.


ENGAGE CLAMP: While holding module in position and with flange in full contact with rail, rotate end clamp bolt until clamp engages with flange to provide clamp force. To ensure bolt is not over-torqued, use low torque setting on drill or if using an impact driver, stop rotation as soon as impact action of driver begins. TORQUE VALUE (See table and notes on PG. 1) End clamp bolt to 3 ft-lbs, No anti-seize.

For best appearance, position module flush with ends of rails. Rails should not extend more than 1/2" beyond module. Module must be fully supported by rails and cannot overhang ends of rails.

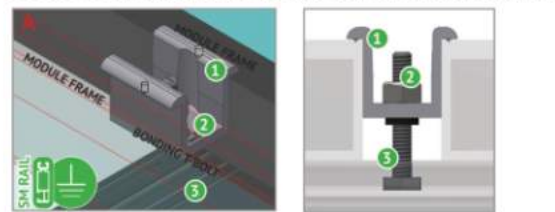

BONDING MIDCLAMP ASSEMBLY

- Aluminum mid clamp with stainless steel bonding pins that pierce module frame anodization to bond module to module through clamp
- Stainless steel nut bonds aluminum clamp to stainless steel T-bolt
- Serrated T-bolt head penetrates rail anodization to bond T-bolt, nut, clamp, and modules to SM rail

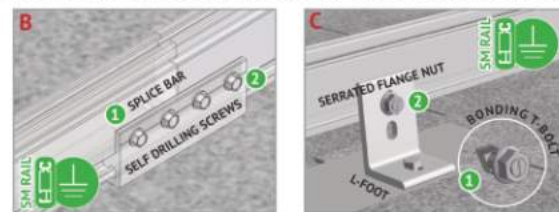



BONDING RAIL SPLICE BAR

- Stainless steel self drilling screws drill and tap into splice bar and rail, creating bond between splice bar and each rail section
- Aluminum splice bar spans across rail gap to create rail to rail bond. Rail on at least one side of splice will be grounded.

Note: Splice bar and beaded connection are non-structural. The splice bar function is rail alignment and bonding.

RAIL TO L-FOOT w/BONDING T-BOLT

- Serrated flange nut removes L-foot anodization to bond T-bolt, nut, and L-foot to grounded SM rail
- Serrated T-bolt head penetrates rail anodization to bond T-bolt, nut, and L-foot to grounded SM rail

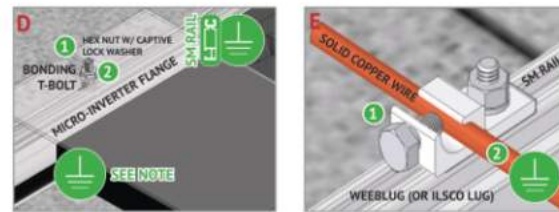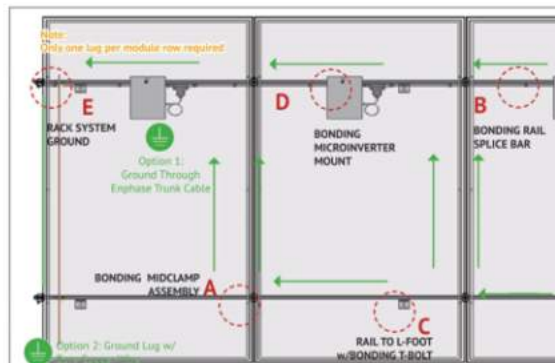


BONDING MICROINVERTER MOUNT

- Hex nut with captive lock washer bonds metal microinverter flange to stainless steel T-bolt
- Serrated T-bolt head penetrates rail anodization to bond T-bolt, nut, and L-foot to grounded SM rail. System ground including racking and modules may be achieved through the trunk cable of approved microinverter systems. See page 1 for details.

RACK SYSTEM GROUND


- WEEB washer dimples pierce anodized rail to create bond between rail and lug
- Solid copper wire connected to lug is routed to provide final system ground connection. NOTE: Race lug can also be used when secured to the side of the rail. See page 1-3 for details.

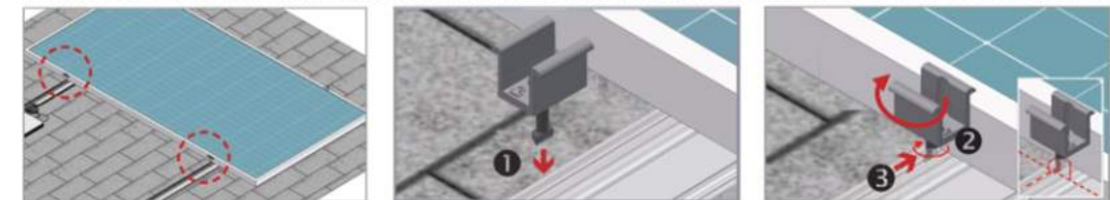

INSTALL MIDCLAMPS: Midclamp is supplied as an assembly with a T-bolt for module installation. Clamp assemblies may be positioned in rail near point of use prior to module placement.

INSERT MIDCLAMP ASSEMBLY: Insert 1/4" T-Bolt into top slot of rail

MIDCLAMP: Rotate midclamp assembly and slide until clamp is against module frame. Do not tighten nut until next module is in position. Ensure bolt is perpendicular to rail.

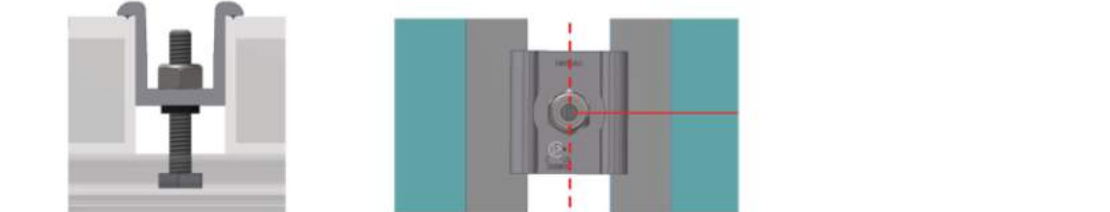

PLACE ADJACENT MODULE AGAINST CLAMPS: Modules must be tight against clamps with no gaps. Tighten nut to required torque.

POSITION INDICATOR - SERRATED T-BOLT: Verify the T-bolt position indicator is perpendicular to the rail.

TORQUE VALUE (See table and notes on PG. A) 11 ft-lbs. No anti-seize.

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - ArKent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT SPECIFICATION




SHEET SIZE

ANSI B
11" X 17"


SHEET NUMBER

PV-19

PART # TABLE	
P/N	DESCRIPTION
240905C	SFM TRIM CLIP
008015S	SFM WIRE BONDING CLIP

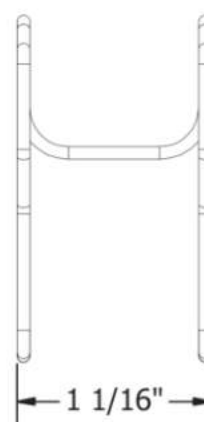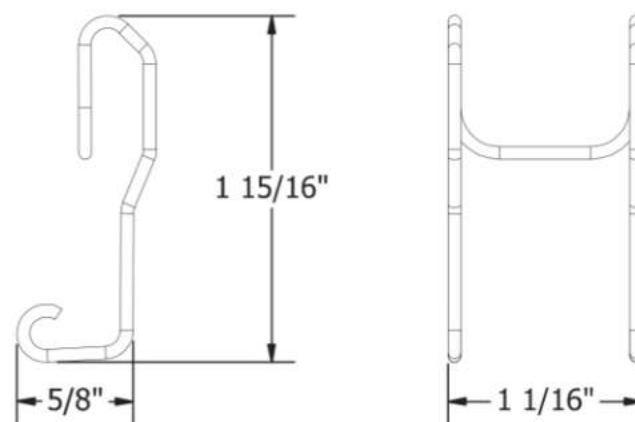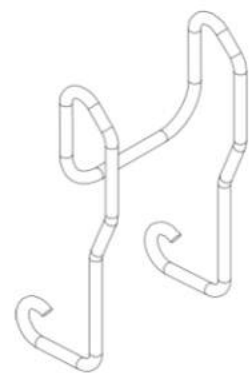

TRIM CLIP

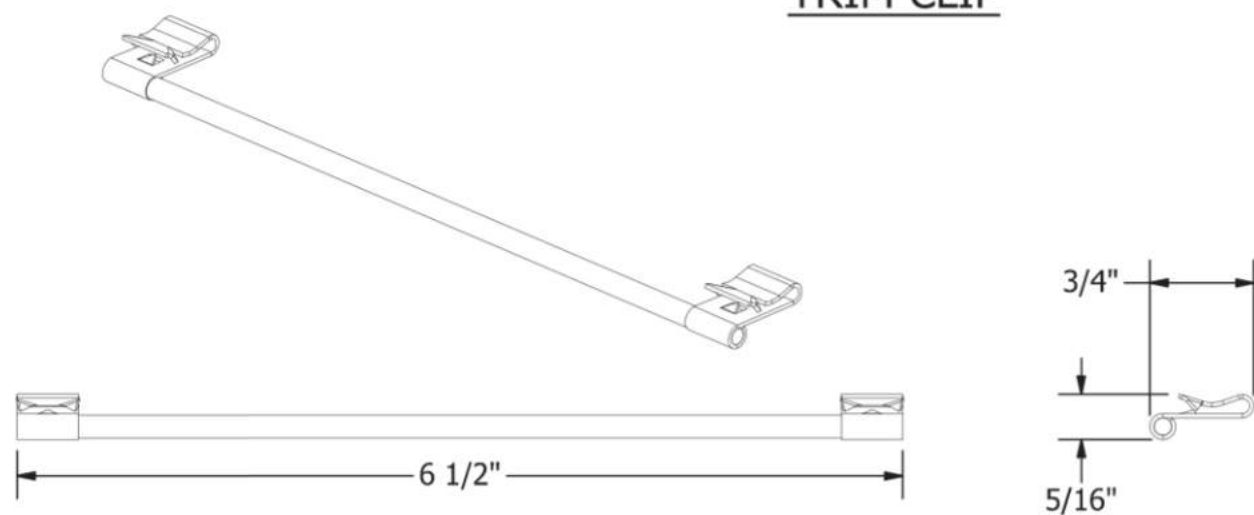

WIRE BONDING CLIP

UNIRAC
 1411 BROADWAY BLVD. NE
 ALBUQUERQUE, NM 87102 USA
 PHONE: 505.242.6411
 WWW.UNIRAC.COM

PRODUCT LINE:	SFMCR
DRAWING TYPE:	PART
DESCRIPTION:	TRIM CLIP / WIRE BONDING CLIP
REVISION DATE:	6/27/2018

DRAWING NOT TO SCALE
 ALL DIMENSIONS ARE
 NOMINAL

PRODUCT PROTECTED BY
 ONE OR MORE US PATENTS
 LEGAL NOTICE

SFMCR-P04
 SHEET

LGCY POWER
 LGCY POWER
 3333 DIGITAL DR #600, LEHI,
 UT 84043, UNITED STATES
 855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS		
DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - Arkent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

SHEET NAME

EQUIPMENT
 SPECIFICATION

SHEET SIZE

ANSI B
 11" X 17"

SHEET NUMBER

PV-20



Descriptive Report and Test Results

MASTER CONTRACT: 266909
 REPORT: 70131735
 PROJECT: 80050628

Page No: 11
 Date Issued: September 29, 2020



LGCY POWER
 3333 DIGITAL DR #600, LEHI,
 UT 84043, UNITED STATES
 855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

MASTER CONTRACT: 266909
 REPORT: 70131735
 PROJECT: 80050628

- Edition 1:** September 20, 2017; Project 70131735– Albuquerque
Issued by Michael Hoffnagle
 - Edition 2:** December 6, 2017; Project 70161436– Albuquerque
Issued by Michael Hoffnagle
 - Edition 3:** October 8, 2018; Project 70185553 - Irvine
Issued by Michael Hoffnagle
 - Edition 4:** May 15, 2019; Project 70218415 - Irvine
Issued by Uday Singh
 - Edition 5:** November 18, 2019; Project 80007667 - Irvine
Issued by Michael Hoffnagle
 - Edition 6:** January 28, 2020; Project 80030869 - Irvine
Issued by Michael Hoffnagle
 - Edition 7:** April 11, 2020; Project 80038806 - Irvine
Prepared By: Michael Hoffnagle
Authorized By: Sean Jiang
 - Edition 8:** September 29, 2020; Project 80050628 - Irvine
Prepared By: Michael Hoffnagle
Authorized By: Michael Hoffnagle
- Report pages reissued

- Contents:
- Certificate of Compliance - Pages 1 to 3
 - Supplement to Certificate of Compliance - Pages 1 to 2
 - Description and Tests - Pages 1 to 20
 - Att1 Installation Manual SM– Pages 1 to 31
 - Att2 Schematics SM– Pages 1 to 55
 - Att3 Installation Manual ULA– Pages 1 to 20

PRODUCTS

- CLASS - C531302 - POWER SUPPLIES - PHOTOVOLTAICS-PV Racking and clamping systems
- CLASS - C531382 - POWER SUPPLIES - PHOTOVOLTAICS-PV Racking and clamping systems - Certified to US Standards

This report shall not be reproduced, except in full, without the approval of CSA Group.

34 Bunsen, Irvine, CA, U.S.A. 92618
 Telephone: 949.733.4300 1.800.463.6727 Fax: 949.733.4320 www.csagroup.org

Table 2

Module Manufacturer	Model/Series		
	Below models can be used together with racking system in this report to be a Class A fire system, only when they are rated for Fire Type 1, 2, 3, or 10 for steep slope applications.		
AU Optronics (BenQ Solar)	PM Series		
Aleo	P18, P19, S18, S19, S59, S79		
Aptos Solar	DNA-144 & DNA 120 Series		
Astronergy	CHSM6612 M, M/HV CHSM72M-HC, CHSM6612P Series CHSM6612P/HV Series		
Auxin	AXN6M610Txxx, AXN6P610Txxx, AXN6M612Txxx, AXN6P612Txxx		
Axitec	AC-XXXM/60S, AC-XXXP/60S, AC-XXXM/72S, AC-XXXP/156-60S, AC-XXXP/72S		
Boviet	BVM6610P-XXX, BVM6610M-XXX, BVM6612M-XXX, BVM6612P-XXX		
BYD	P6K Series MHK-36		
Canadian Solar	<table border="0"> <tr> <td>CS6P-M, CS6P-P, CSX-P, CS6X-P CS5A-M, CS6U-P, CS6U-M, CS6K-MS, CS6K-M, CS6K-P, ELPS CS6A-MM, ELPS CS6P-MM</td> <td>CS3U-xxxPB-AG, CS3U-xxxMB-AG, CS3KxxxPB-AG, CS3KxxxMB-AG, CS3WxxxP-PB-AG, CS1HxxxMS, CS1UxxxMS, CS3UxxxP HighEfficiency, CS3KxxxP HighEfficiency, CS6UxxxP High Efficiency, CS6KxxxP HighEfficiency, CS6KxxxMS AllBlack, ELPS CS6P-MM, ELPS CS6A-MM</td> </tr> </table>	CS6P-M, CS6P-P, CSX-P, CS6X-P CS5A-M, CS6U-P, CS6U-M, CS6K-MS, CS6K-M, CS6K-P, ELPS CS6A-MM, ELPS CS6P-MM	CS3U-xxxPB-AG, CS3U-xxxMB-AG, CS3KxxxPB-AG, CS3KxxxMB-AG, CS3WxxxP-PB-AG, CS1HxxxMS, CS1UxxxMS, CS3UxxxP HighEfficiency, CS3KxxxP HighEfficiency, CS6UxxxP High Efficiency, CS6KxxxP HighEfficiency, CS6KxxxMS AllBlack, ELPS CS6P-MM, ELPS CS6A-MM
CS6P-M, CS6P-P, CSX-P, CS6X-P CS5A-M, CS6U-P, CS6U-M, CS6K-MS, CS6K-M, CS6K-P, ELPS CS6A-MM, ELPS CS6P-MM	CS3U-xxxPB-AG, CS3U-xxxMB-AG, CS3KxxxPB-AG, CS3KxxxMB-AG, CS3WxxxP-PB-AG, CS1HxxxMS, CS1UxxxMS, CS3UxxxP HighEfficiency, CS3KxxxP HighEfficiency, CS6UxxxP High Efficiency, CS6KxxxP HighEfficiency, CS6KxxxMS AllBlack, ELPS CS6P-MM, ELPS CS6A-MM		

REVISIONS		
DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
 190 KENT LANE,
 COATS, NC 27521 USA
 EMAIL ID# - ArKent81@icloud.com
 PHONE NO.# (919) 622-9514
 APN# 071600026001

SHEET NAME

EQUIPMENT
 SPECIFICATION

SHEET SIZE

ANSI B
 11" X 17"

SHEET NUMBER

PV-21

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-22



UNIRAC #008015S Wire Bonding Clip




Compliant With:

NEC 690.43(A) Photovoltaic Module Mounting Systems and Devices. Devices and systems used for mounting PV modules that are also used for bonding module frames shall be listed, labeled, and identified for bonding PV modules. Devices that mount adjacent PV modules shall be permitted to bond adjacent PV modules.

ILSCO SGB-4. Optional method for bonding module to EGC in the junction box using bare #6, completing the array bonding.




Webb Grounding Lug. Optional method for bonding a single rail to the EGC in the junction box using bare #6, completing the array bonding.

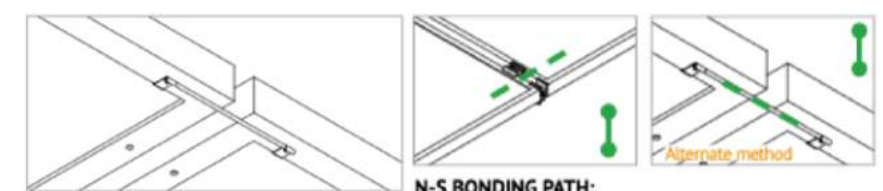

N/S Bonding Alternate Method:
Fully seat bonding clip on each module flange to provide bond across N/S module gap.

N-S BONDING PATH:
N-S module to module bonding is accomplished with bonding clamp with 2 integral bonding pins. (refer also to alternate method)

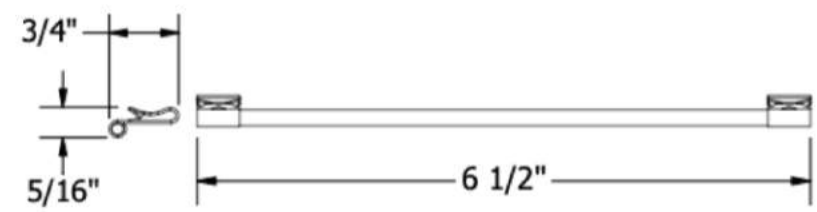



August 23, 2022

Dear customer,

Thank you for your inquiry regarding the Wire Bond Clip (Part Number 008015S, pictured below) and the electrical bonding capabilities.



This letter is to report that when properly installed along the outside edge of an array, connecting two rows of panels, the connection accomplishes the bonding required by UL2703. The part has been tested and meets the requirements stated in UL2703. The part is a UL2703-recognized part, meeting NEC 690.43(A) requirements.

For further information, please contact Unirac, Inc. We're looking forward to seeing you making solar happen with us!

Best regards,

Keegan Sutanto

Keegan Sutanto
Product Manager, Residential
Unirac, Inc.

Unirac, Inc. • www.unirac.com

1411 Broadway Blvd. NE • Albuquerque, NM • 87102-1545 • Ph: (505) 242-6411 • Fax: (505) 242-6412



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-23



October 3, 2019

UniRac
1411 Broadway Boulevard NE
Albuquerque, New Mexico 87102-1545
TEL: (505) 242-6411
FAX: (505) 242-6412

Attn.: Unirac Engineering Department,

Re: Engineering Certification for UniRac's SolarMount Design & Engineering Guide

PZSE, Inc.-Structural Engineers has reviewed UniRac's "SolarMount Design & Engineering Guide" and specifically the enhancements of the SolarMount Flush-to-Roof System, Pressure Lookup Tables, and Downward & Upward Span Length Tables.

This certification excludes connections to building structures and the effects on building structure components. All information, data and analysis contained within the Installation Manual are based on, and comply with the following:

1. 2018 North Carolina Building Code, by The North Carolina State Building Code Council
2. 2009, 2012, 2012, & 2015 International Building Code, by International Code Council, Inc.
3. ASCE/SEI 7-05 & 7-10: Minimum Design Loads for Buildings and other Structures
4. 2010 & 2015 Aluminum Design Manual, by The Aluminum Association, 2015

This letter certifies that the structural calculations contained within UniRac's "SolarMount Design & Engineering Guide" are in compliance with the above Codes.

If you have any questions on the above, do not hesitate to call.

Prepared By:
PZSE, Inc. – Structural Engineers
Roseville, CA



LGCY POWER
3333 DIGITAL DR #600, LEHI,
UT 84043, UNITED STATES
855-353-4899

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS

DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - Arkent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-24

Alex Nelson

LICENSE NUMBER: U33945

REVISIONS		
DESCRIPTION	DATE	REV
	09-30-2022	01

Signature with Seal

CUSTOMER INFORMATION

ALLEN KENT
190 KENT LANE,
COATS, NC 27521 USA
EMAIL ID# - ArKent81@icloud.com
PHONE NO.# (919) 622-9514
APN# 071600026001

SHEET NAME
EQUIPMENT SPECIFICATION

SHEET SIZE
**ANSI B
11" X 17"**

SHEET NUMBER
PV-26

CERTIFICATE OF COMPLIANCE

Certificate Number 20220223-E341165
Report Reference E341165-20210317
Issue Date 2022-02-23

Issued to: Enphase Energy Inc.
1420 N. McDowell Blvd. Petaluma, CA 94954-6515

This is to certify that representative samples of Grid Support, Utility Interactive Supporting Energy Storage, Multimode, Bi-directional Microinverters

Models IQ8-60, IQ8PLUS-72, IQ8M-72, IQ8A-72, IQ8H-208-72, IQ8H-240-72, may be f/b -2, -5, -E, or -M, may be f/b -ACM, f/b -US, may be f/b -NM, may be f/b -RMA, may be f/b -&, where "&" designates additional characters.

Has been investigated by UL in accordance with the Standard(s) indicated on this Certificate.

Standard(s) for Safety: See Page 2

Additional Information: See the UL Online Certifications Directory at www.ul.com/database for additional information

This *Certificate of Compliance* is provided as a courtesy to help our customers communicate product compliance information, as documented in our UL Follow-Up Services procedure. This Certificate of Compliance does not provide authorization to apply the UL Mark. Only the UL Follow-Up Services Procedure provides authorization to apply the UL Mark.

Only those products bearing the UL Mark shall be considered as being UL Certified and covered under UL's Follow-Up Services. Look for the UL Certification Mark on the product.

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL.

B. Mahrenholz
Bruce Mahrenholz, Director North American Certification Program
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/about/locations/>



CERTIFICATE OF COMPLIANCE

Certificate Number 20220223-E341165
Report Reference E341165-20210317
Issue Date 2022-02-23

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Standards for Safety:

UL 62109-1, STANDARD FOR SAFETY OF POWER CONVERTERS FOR USE IN PHOTOVOLTAIC POWER SYSTEMS - PART 1: GENERAL REQUIREMENTS, Edition 1, Revision Date 04/30/2019

IEC 62109-2, SAFETY OF POWER CONVERTERS FOR USE IN PHOTOVOLTAIC POWER SYSTEMS - PART 2: PARTICULAR REQUIREMENTS FOR INVERTERS, Edition 1, Issue Date 06/2011

UL 1741, Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources, Edition 2, Revision Date 06/10/2021, including the requirements in UL 1741 Supplement SA, sections as noted in the Technical considerations.

IEEE 1547, IEEE Standard for Interconnecting Distributed Resources with Electric Power Systems.

IEEE 1547.1, IEEE Standard for Conformance Test Procedures for Equipment Interconnecting Distributed Resources with Electric Power Systems.

CSA C22.2 No. 62109-1, Safety of Power Converters for Use in Photovoltaic Power Systems - Part 1: General Requirements, Edition 1, Issue Date 07/2016

CSA C22.2 No. 62109-2, Safety of Power Converters for Use in Photovoltaic Power Systems - Part 2: Particular Requirements for Inverters, Edition 1, Issue Date 07/2016

B. Mahrenholz
Bruce Mahrenholz, Director North American Certification Program
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/about/locations/>

