

Harris Structural Design, PA

3206 Heritage Trade Dr. Wake Forest, NC 27587 (919)556-6032 thomas-hsd@nc.rr.com

November 30, 2022


To: Inspection Department

Concerning: Martinez Commercial Properties, LLC
308 Jarco Dr.
Fuquay-Varina, NC

I have been asked by the contractor building the retaining walls shown on our plans if the drains that we show behind the retaining wall should penetrate the wall. With walls of this length, we recommend that the drain penetrates the wall at approximately 40' on center to ensure that water behind the wall properly drains and does not build up pressure.

If there are any further concerns or questions do not hesitate to call.

Thomas B. Harris, PE

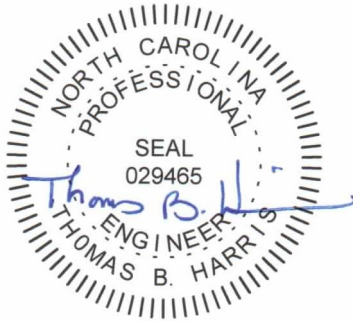

Sealed 11-30-2022