PLANS FOR:

PROVIDENCE CREEK AMENITY CENTER & POOL

INDEX	OF SHEETS	REVIS	ION LOG	3
SHEET	TITLE	DATE F	REVISED BY	REVISION
Т	TITLE SHEET: PROJECT INFORMATION AND NOTES	03/07/2023	NWS	REMOVED FIRE ALARM FROM APPENDIX B
GN1.0	GENERAL NOTES			
APP B1	APPENDIX "B"			
APP B2	APPENDIX "B"			
B1.0	FLOOR PLAN, ROOF PLAN, RCP, SCHEDULES			
B2.0	ELEVATIONS, RESTROOMS, WALL SECTION			
B2.1	LIFE SAFETY PLAN			
S1.0	FIRST FLOOR FRAMING PLAN			
M1.0	MECHANICAL PLANS			
E1.0	ELECTRICAL PLANS			
E1.1	ELECTRICAL SCHEDULES			
P1.0	PLUMBING PLANS			
P1.1	PLUMBING NOTES AND DETAILS			
SP1.1	POOL PIPING LAYOUT			
SP1.2	POOL LAYOUT			
SP.2	SECTIONS AND DETAILS			
SP.3	SECTIONS AND DETAILS			
SP.4	DETAILS			
SP.5	DETAILS			
SP.6	DETAILS			

ENGINEER'S SEAL APPLIES TO STRUCTURAL COMPONENTS ONLY. ENGINEER'S SEAL DOES NOT SERVICE PROPERTY DIMENSIONAL ASSURABLY OF A POLITICAL LAYOUT, INCLUDING POOR

- NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT, INCLUDING ROOF GEOMETRY. JDS CONSULTING ASSUMES NO LIABILITY FOR CHANGES MADE TO THESE PLANS BY OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR ANY DEVIATION FROM THE PLANS. ENGINEER TO BE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTED ON THE PLANS.
- 2. DIMENSIONS SHALL GOVERN OVER SCALE, AND CODE SHALL GOVERN OVER DIMENSIONS.

3. PLANS MUST HAVE SIGNED SEAL TO BE VALID AND ARE LIMITED TO THE FOLLOWING USES:

NOTES

- A. IF THESE PLANS ARE ISSUED AS A MASTER-PLAN SET, THE SET IS VALID FOR 18 MONTHS FROM THE DATE ON THE SEAL, UNLESS ANY CODE-REQUIRED UPDATES ARE PLACED IN EFFECT BY THE MUNICIPALITY.
- B. IF THESE PLANS ARE NOT ISSUED AS A MASTER-PLAN SET, THE SET IS VALID FOR A CONDITIONAL, ONE-TIME USE FOR THE LOT OR ADDRESS SPECIFIED ON THE TITLE BLOCK.

CODE

ALL CONSTRUCTION, WORKMANSHIP, AND MATERIAL QUALITY AND SELECTION SHALL BE PER:

2018 NORTH CAROLINA STATE BUILDING CODE: STATE BUILDING CODE

ENGINEER OF RECORD

JDS CONSULTING, PLLC
ENGINEERING · DESIGN · ENERGY


8600 'D' JERSEY COURT

RALEIGH, NC 27617


FIRM LIC. NO: P-0961

PROJECT REFERENCE: 23900139



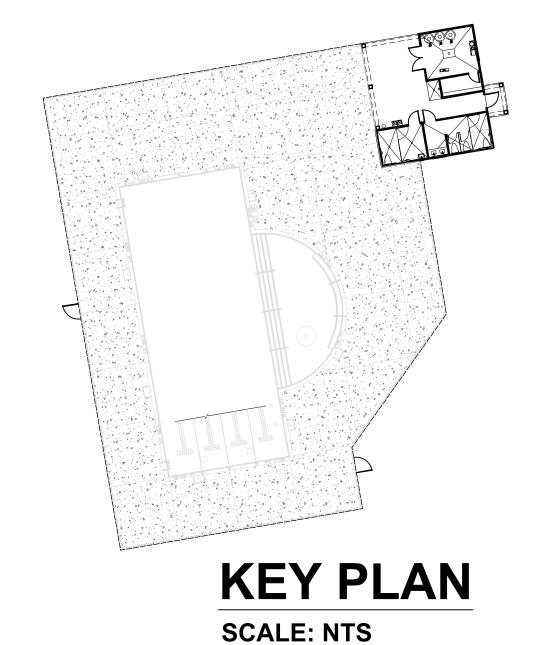



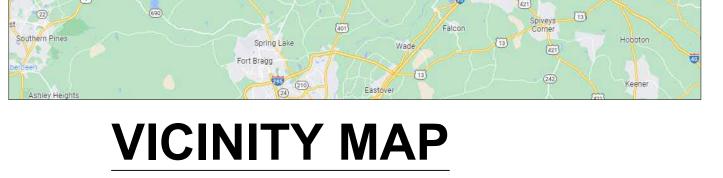

SCALE: NTS



ENGINEERING • DESIGN • ENERGY

Consulting PLLC; 8600 'D' JERSEY CT, RALEIGH, NC 27617 919.480.1075
INFO@JDSCONSULTING.NET; WWW.JDSCONSLTING.NET

sulting PLLC IS NOT LIABLE FOR CHANGES MADE TO PLANS DUE TO
RUCTION METHODS OR ANY CHANGES TO PLANS MADE IN THE FIELI
TRACTOR OR BY OTHERS. DRAWINGS ARE PROVIDED TO CLIENT FOI

E CREEK AMENITY CENTER & POOL

DENCE CREEK DRIVE, FUQUAY-VARINA, NC 27526

SCALE: 1/4" = 1'-0" FOR 24x36 PAPER, NOT TO SCALE FOR 11x17 PAPER, OR AS NOTED

OJECT NO.:
23900139

DATE: DRAWN BY: FAB

TITLE SHEET

T

ABBREVIATIONS

ABV	ABOVE	LVL	LAMINATED VENEER LUMBER
	ABOVE FINISHED FLOOR	MAX	MAXIMUM
	ALTERNATE	MECH	MECHANICAL
BRG	BEARING	MFTR	MANUFACTURER
BSMT	BASEMENT	MIN	MINIMUM
CANT	CANTILEVER	NTS	NOT TO SCALE
CJ	CEILING JOIST	OA	OVERALL
CLG	CEILING	ОС	ON CENTER
CMU	CONCRETE MASONRY UNIT	PT	PRESSURE TREATED
CO	CASED OPENING	R	RISER
COL	COLUMN	REF	REFRIGERATOR
CONC	CONCRETE	RFG	ROOFING
CONT	CONTINUOUS	RO	ROUGH OPENING
D	CLOTHES DRYER	RS	ROOF SUPPORT
DBL	DOUBLE	SC	STUD COLUMN
DIAM	DIAMETER	SF	SQUARE FOOT (FEET)
DJ	DOUBLE JOIST	SH	SHELF / SHELVES
DN	DOWN	SHTG	
DP	DEEP	SHW	SHOWER
DR	DOUBLE RAFTER	SIM	SIMILAR
DSP		SJ	SINGLE JOIST
EA	EACH	SP	
EE	EACH END		SPECIFIED
EQ	EQUAL	SQ	SQUARE
EX		T	TREAD
	FORCED-AIR UNIT	TEMP	TEMPERED GLASS
FDN		THK	THICK(NESS)
FF	FINISHED FLOOR	TJ	TRIPLE JOIST
FLR	, ,	TOC	TOP OF CURB / CONCRETE
FP	FIREPLACE	TR	TRIPLE RAFTER
FTG		TYP	TYPICAL
HB		UNO	UNLESS NOTED OTHERWISE
HDR		W	CLOTHES WASHER
HGR		WH	
JS			WELDED WIRE FABRIC
KS	KING STUD COLUMN	ΧJ	EXTRA JOIST

NOTE: ALL CHAPTERS, SECTIONS, TABLES, AND FIGURES CITED WITHOUT A PUBLICATION TITLE ARE FROM THE APPLICABLE BUILDING CODE (SEE TITLE SHEET).

GENERAL

- 1. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION. FURTHERMORE, CONTRACTOR IS ULTIMATELY RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, AND SAFETY ON SITE. NOTIFY JDS CONSULTING IMMEDIATELY IF DISCREPANCIES ON PLAN EXIST.
- 2. STRUCTURAL DRAWINGS ARE INTENDED TO BE USED WITH ARCHITECTURAL, PLUMBING, MECHANICAL, AND ELECTRICAL DRAWINGS. CONTRACTOR IS RESPONSIBLE FOR COORDINATING SUCH REQUIREMENTS INTO THEIR SHOP DRAWINGS AND WORK.
- 3. NO OPENING SHALL BE MADE IN ANY STRUCTURAL MEMBER WITHOUT WRITTEN APPROVAL OF THE ENGINEER-OF-RECORD.
- 4. NO CHANGE IN SIZE OR DIMENSION OF STRUCTURAL MEMBERS SHALL BE MADE WITHOUT WRITTEN APPROVAL OF THE
- 5. OPENINGS 1'-4" OR LESS ON A SIDE ARE GENERALLY NOT SHOWN ON THE STRUCTURAL DRAWINGS. REFER TO ARCHITECTURAL, PLUMBING, MECHANICAL, AND ELECTRICAL DRAWINGS FOR SUCH
- 6. THE CONTRACTOR IS RESPONSIBLE FOR LIMITING THE AMOUNT OF CONSTRUCTION LOADS APPLIED TO THE STRUCTURAL FRAMING. CONSTRUCTION LOADS SHALL NOT EXCEED THE DESIGN CAPACITY OF THE FRAMING AT THE TIME THE LOADS ARE
- 7. FIRE PROOFING METHODS AND MATERIALS FOR STRUCTURAL MEMBERS ARE NOT SHOWN ON STRUCTURAL DRAWINGS, UNLESS NOTED OTHERWISE. REFER TO ARCHITECTURAL DRAWINGS FOR FIRE PROOFING METHODS AND MATERIALS.
- 8. DO NOT SCALE THESE DRAWINGS; USE DIMENSIONS.

DESIGN CRITERIA

ENGINEER-OF-RECORD.

D	ESIGN CRITERIA
1.	BUILDING CODE: SEE TITLE SHEET
2.	ASSUMED SOIL BEARING-CAPACITY 2,000 PSF
3.	DESIGN LIVE LOADS 20 PSF a. ROOF:
4.	SNOW LOADS a. GROUND SNOW:
5.	WIND a. ULTIMATE DESIGN WIND SPEED:
6.	a. RISK CATEGORY:

FOUNDATION

- 1. MINIMUM ALLOWABLE SOIL BEARING CAPACITY IS ASSUMED TO BE 2,000 POUNDS PER SQUARE FOOT (PSF). IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY SOIL BEARING CAPACITY IF UNSATISFACTORY CONDITIONS EXIST.
- 2. WOOD SILL PLATES TO BE ANCHORED TO THE FOUNDATION WITH 1/2" DIAMETER ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT, SPACED A MAXIMUM OF 6'-0" OC AND WITHIN 12" FROM THE ENDS OF EACH PLATE SECTION. INSTALL MINIMUM (2) ANCHOR BOLTS PER SECTION. SEE DRAWINGS FOR SPECIAL CONDITIONS.
- 3. ALL FOOTINGS TO HAVE MINIMUM 2" PROJECTION ON EACH SIDE OF FOUNDATION WALLS (SEE DETAILS).

STRUCTURAL CONCRETE

- 1. POURED CONCRETE COMPRESSIVE STRENGTH TO BE A MINIMUM 3,000 PSI AT 28 DAYS, UNLESS NOTED OTHERWISE.
- 2. NORMAL-WEIGHT CONCRETE SHALL HAVE A MAXIMUM UNIT WEIGHT OF 145 POUNDS PER CUBIC FOOT (PCF), UNLESS NOTED OTHERWISE.
- 3. REINFORCING STEEL SHALL BE DEFORMED STEEL CONFORMING TO ASTM A615, GRADE 60, INCLUDING TIES AND STIRRUPS.
- 4. MINIMUM CONCRETE COVER SHALL BE AS FOLLOWS, UNLESS NOTED OTHERWISE:
 - A. Unformed surfaces in contact with ground:
 - B. Formed surfaces exposed to earth or weather:C. Formed surfaces not exposed to earth or weather
- 5. REFER TO ARCHITECTURAL DRAWINGS FOR CONCRETE FINISHES. WHERE THE FINISH IS NOT SPECIFIED, CONFORM TO REQUIREMENTS OF ACI 301.
- 6. PLUMBING, MECHANICAL, AND ELECTRICAL (PME) DRAWINGS SHALL BE REFERRED TO FOR DRAINS, SLEEVES, OUTLET BOXES, CONDUIT, ANCHORS, ETC. THE VARIOUS TRADES ARE RESPONSIBLE FOR PLACING THEIR RESPECTIVE ITEMS.
- 7. MATERIALS USED TO PRODUCE CONCRETE SHALL COMPLY WITH THE APPLICABLE STANDARDS LISTED IN AMERICAN CONCRETE INSTITUTE STANDARD ACI 318 OR ASTM C1157.
- 8. CONCRETE SUBJECT TO MODERATE OR SEVERE WEATHERING PROBABILITY SHALL BE AIR-ENTRAINED WHEN REQUIRED BY THE APPLICABLE CODE.
- 9. WITH CLASS 1 SOILS, VAPOR BARRIER AND CRUSHED STONE MAY BE OMITTED.

STRUCTURAL MASONRY

- 1. COMPRESSIVE STRENGTH OF CONCRETE MASONRY UNITS (CMU) SHALL BE 1,900 PSI ON NET AREA.
- 2. MORTAR SHALL BE TYPE S AND COMPLY WITH ASTM INTERNATIONAL STANDARD C270.
- 3. COMPRESSIVE STRENGTH OF MORTAR SHALL BE 1,800 PSI AT 28 DAYS.
- 4. COMPRESSIVE STRENGTH OF MASONRY ASSEMBLAGE SHALL BE
- 5. CONCRETE MASONRY UNITS (CMU) SHALL CONFORM TO AMERICAN CONCRETE INSTITUTE PUBLICATION 530: BUILDING CODE REQUIREMENTS AND SPECIFICATIONS FOR MASONRY STRUCTURES AND COMPANION COMMENTARIES AND THE MASONRY SOCIETY PUBLICATION TMS 402/602: BUILDING CODE REQUIREMENTS AND SPECIFICATIONS FOR MASONRY STRUCTURES.

STRUCTURAL STEEL

- 1. STRUCTURAL STEEL WIDE-FLANGE SHAPES SHALL CONFORM TO ASTM A992. Fy = 50 KSI, UNLESS NOTED OTHERWISE.
- 2. ALL STRUCTURAL STEEL TUBE SHAPES SHALL CONFORM TO ASTM A500, GRADE B, Fy = 46 KSI, UNLESS NOTED OTHERWISE.
- 3. ALL STRUCTURAL STEEL PIPE SHAPES SHALL CONFORM TO ASTM A53, TYPE E OR S, GRADE B, Fy = 36 KSI, UNLESS NOTED OTHERWISE.
- 4. ALL MISCELLANEOUS STRUCTURAL STEEL SHALL CONFORM TO ASTM A36, Fy = 36 KSI, UNLESS NOTED OTHERWISE.
- 5. ARCHITECTURALLY EXPOSED STRUCTURAL STEEL SHALL CONFORM TO AISC CODE OF STANDARD PRACTICE, SECTION 10.
- 6. BOLTS FOR BOLTED CONNECTIONS SHALL BE 3/4" DIAMETER, ASTM A325, TYPE N, SNUG TIGHT, UNLESS NOTED OTHERWISE.
- 7. FABRICATOR SHALL DESIGN BEAM CONNECTIONS PER LOADS PROVIDED IN AISC UNIFORM LOAD TABLES, UNLESS NOTED OTHERWISE.
- 8. ALL BEAMS AND GIRDERS SHALL HAVE THEIR ROLLING CAMBER PLACED UP.
- 9. NO CHANGE IN SIZE OR POSITION OF THE STRUCTURAL MEMBERS SHALL BE MADE WITHOUT THE WRITTEN APPROVAL OF THE ENGINEER-OF-RECORD. HOLES, SLOTS, CUTS, ETC. ARE NOT PERMITTED THROUGH ANY MEMBER UNLESS THEY ARE DETAILED ON THE APPROVED SHOP DRAWINGS.
- 10. SPLICING OF STRUCTURAL STEEL MEMBERS, WHERE NOT DETAILED, IS PROHIBITED WITHOUT WRITTEN APPROVAL OF THE ENGINEER-OF-RECORD.
- 11. ANCHOR BOLTS SHALL CONFORM TO ASTM F1554, UNLESS NOTED OTHERWISE.
- 12. NO FINAL BOLTING OR WELDING SHALL BE DONE UNTIL AS MUCH OF THE STRUCTURE AS WILL BE STIFFENED THEREBY HAS BEEN PROPERLY ALIGNED.
- 13. INDICATED MODEL NUMBERS FOR ALL METAL HANGERS, STRAPS, FRAMING CONNECTORS, AND HOLD-DOWNS ARE SIMPSON STRONG-TIE BRAND. EQUIVALENT USP BRAND PRODUCTS ARE ACCEPTABLE.
- 14. ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A MIN BEARING LENGTH OF 3 1/2" AND FULL FLANGE WIDTH. BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR TWO 1/2" x 4" LAG SCREWS, UNO.

STRUCTURAL WOOD

- 1. ALL STRUCTURAL WOOD SHALL HAVE A MAXIMUM MOISTURE CONTENT OF 19%, UNLESS NOTED OTHERWISE.
- 2. INTERIOR / TRIMMED FRAMING LUMBER SHALL BE #2
 SPRUCE-PINE-FIR (SPF) WITH THE FOLLOWING DESIGN
 PROPERTIES (#2 SOUTHERN YELLOW PINE MAY BE SUBSTITUTED):
- Fb = 875 PSI Fv = 70 PSI E = 1.4E6 PSI
- 3. FRAMING LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH THE GROUND, CONCRETE, OR MASONRY SHALL BE PRESSURE TREATED #2 SOUTHERN YELLOW PINE (SYP) WITH THE FOLLOWING DESIGN PROPERTIES:

Fb = 975 PSI Fv = 95 PSI E = 1.6E6 PSI

- 4. LVL STRUCTURAL MEMBERS TO BE LAMINATED VENEER LUMBER WITH THE FOLLOWING MINIMUM DESIGN PROPERTIES:
 - Fb = 2600 PSI Fv = 285 PSI E = 1.9E6 PSI
- 5. PSL STRUCTURAL MEMBERS TO BE PARALLEL STRAND LUMBER WITH THE FOLLOWING MINIMUM DESIGN PROPERTIES:

Fb = 2900 PSI Fv = 290 PSI E = 2.0E6 PSI

6. LSL STRUCTURAL MEMBERS TO BE LAMINATED STRAND LUMBER WITH THE FOLLOWING MINIMUM DESIGN PROPERTIES:

Fb = 2250 PSI Fv = 400 PSI E = 1.55E6 PSI

- 7. REFER TO I-JOIST EQUIVALENCE CHART ON I-JOIST DETAIL SHEET FOR SUBSTITUTION OF MANUFACTURER SERIES.
- 8. ALL BEARING HEADERS TO BE (2) 2x6 SUPPORTED W/ MIN (1) JACK STUD AND (1) KING STUD EACH END, UNO.
- 9. ALL NON-BEARING HEADERS TO BE (2) 2x4, UNO.
- 10. NON-BEARING INTERIOR WALLS NOT MORE THAN 10' NOMINAL HEIGHT AND NOT SHOWN AS BRACED WALLS MAY BE FRAMED WITH 2x4 STUDS @ 24" OC.
- 11. SOLID BLOCKING TO BE PROVIDED AT ALL POINT LOADS THROUGH FLOOR LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS.
- 12. ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY. LARGER MEMBERS MAY SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION.
- 13. FACE OF WALL FRAMING TO BE FLUSH WITH FACE OF FOUNDATION WALLS, UNLESS NOTED OTHERWISE.
- 14. ALL ENGINEERED WOOD PRODUCTS (LVL, PSL, LSL, ETC.) SHALL BE INSTALLED WITH CONNECTIONS PER MANUFACTURER SPECIFICATIONS.
- 15. ENGINEERED WOOD FLOOR SYSTEMS AND ROOF TRUSS SYSTEMS:

 A. SHOP DRAWINGS FOR THE SYSTEMS SHALL BE PROVIDED

 TO THE ENGINEER OF RECORD FOR REVIEW AND
 - COORDINATION BEFORE CONSTRUCTION.


 B. TRUSS PROFILES SHALL BE SEALED BY THE TRUSS
 - MANUFACTURER.
 C. INSTALLATION OF THE SYSTEMS SHALL BE PER
 - MANUFACTURER'S INSTRUCTIONS.

 D. TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN IN THESE DRAWINGS.
- 16. ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED, WITH A MINIMUM OF THREE STUDS, UNO.
- 17. WHEN A 4-PLY LVL BEAM IS USED, ATTACH WITH (1) 1/2" DIAMETER BOLT, 12" OC, STAGGERED TOP AND BOTTOM, 1 1/2" MIN FROM ENDS. ALTERNATE EQUIVALENT ATTACHMENT METHOD MAY BE USED, SUCH AS SDS, SDW, OR TRUSSLOK SCREWS (SEE MANUFACTURER SPECIFICATIONS).
- 18. FOR STUD COLUMNS OF 4-OR-MORE STUDS, INSTALL SIMPSON STRONG-TIE CS16 STRAPS ACROSS STUDS @ 30" OC, 6" MAX FROM PLATES, ON INSIDE FACE OF COLUMN (EXTERIOR WALL), ON BOTH FACES OF COLUMN (INTERIOR WALL).
- 19. FLOOR JOISTS ADJACENT AND PARALLEL TO THE EXTERIOR FOUNDATION WALL SHALL BE PROVIDED WITH FULL-DEPTH SOLID BLOCKING, NOT LESS THAN TWO (2) INCHES NOMINAL IN THICKNESS, PLACED PERPENDICULAR TO THE JOIST AT SPACING NOT MORE THAN FOUR (4) FEET. THE BLOCKING SHALL BE NAILED TO THE FLOOR SHEATHING, THE SILL PLATE, THE JOIST, AND THE EXTERIOR RIM JOIST / BOARD.
- 20. PER SECTION 1604 OF THE APPLICABLE CODE (SEE TITLE SHEET), ANCHORAGE OF THE ROOF TO WALLS AND COLUMNS, AND OF WALLS AND COLUMNS TO FOUNDATIONS TO RESIST UPLIFT AND SLIDING FORCES, SHALL BE PROVIDED. REQUIREMENTS OF THE STRUCTURAL DRAWINGS THAT EXCEED THE CODE MINIMUM SHALL BE MET.

ROOF SYSTEMS

TRUSSED ROOF - STRUCTURAL NOTES

- 1. FABRICATION AND ERECTION OF WOOD TRUSSES SHALL BE PER THE LATEST EDITION OF THE AMERICAN FOREST AND PAPER ASSOCIATION PUBLICATION NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION, AND ANSI/TPI 1.
- 2. PROVIDE CONTINUOUS BLOCKING THROUGH STRUCTURE FOR ALL POINT LOADS.



- 4. MINIMUM 7/16" OSB ROOF SHEATHING
- 5. TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS. INSTALLATION SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
- 6. TRUSS MANUFACTURER SHALL FURNISH SHOP DRAWINGS AND DESIGN CALCULATIONS PREPARED BY A PROFESSIONAL ENGINEER. SHOP DRAWINGS SHALL INDICATE TRUSS END REACTIONS FOR CONNECTION VERIFICATION BY ENGINEER-OF-RECORD.
- 7. MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTION.
- 8. PROVIDE H2.5A (MINIMUM) OR EQUIVALENT AT EACH TRUSS-TO-TOP PLATE CONNECTION AT OVER-FRAMED AREAS, UNLESS NOTED OTHERWISE.
- 9. UPLIFT CONNECTION TO BE CARRIED THROUGH TO FLOOR SYSTEM
- 10. WOOD MEMBERS SHALL NOT BE CUT FOR PLUMBING OR WIRING UNLESS DETAILED ON THE APPROVED SHOP DRAWINGS.

FASTENER SCHEDULE				
CONNECTION	3" x 0.131" NAIL	3" x 0.120" NAIL		
JOIST TO SILL PLATE	(4) TOE NAILS	(4) TOE NAILS		
SOLE PLATE TO JOIST / BLOCKING	NAILS @ 8" OC (typical) (4) PER 16" SPACE (at braced panels)	NAILS @ 8" OC (typical) (4) PER 16" SPACE (at braced panels)		
STUD TO SOLE PLATE	(4) TOE NAILS	(4) TOE NAILS		
TOP OR SOLE PLATE TO STUD	(3) FACE NAILS	(4) FACE NAILS		
RIM JOIST OR BAND JOIST TO TOP PLATE OR SILL PLATE	TOE NAILS @ 6" OC	TOE NAILS @ 4" OC		
BLOCKING BETWEEN JOISTS TO TOP PLATE OR SILL PLATE	(4) TOE NAILS	(4) TOE NAILS		
DOUBLE STUD	NAILS @ 8" OC	NAILS @ 8" OC		
DOUBLE TOP PLATES	NAILS @ 12" OC	NAILS @ 12" OC		
DOUBLE TOP PLATES LAP (24" MIN LAP LENGTH)	(12) NAILS IN LAPPED AREA, EA SIDE OF JOINT	(12) NAILS IN LAPPED AREA, EA SIDE OF JOINT		
TOP PLATE LAP AT CORNERS AND INTERSECTING WALLS	(3) FACE NAILS	(3) FACE NAILS		
OPEN-WEB TRUSS BOTTOM CHORD TO TOP PLATES OR SILL PLATE (PARALLEL TO WALL)	NAILS @ 6" OC	NAILS @ 4" OC		
BOTTOM CHORD OF TRUSS TO TOP PLATES OR SILL PLATE (PERPENDICULAR TO WALL)	(3) TOE NAILS	(3) TOE NAILS		

DETAILS AND NOTES ON DRAWINGS GOVERN.



-0961

CHANGES MADE TO PLANS DUE TO NGES TO PLANS MADE IN THE FIELD TINGS ARE PROVIDED TO CLIENT FOR TASTER PLAN AS SPECIFIED ON TITLE OVER SCALE, AND CODE SHALL

INFO@JDSCONSULTING.NET; WWW.JDSCONSLTING.N.

Ilting PLLC IS NOT LIABLE FOR CHANGES MADE TO P

ICTION METHODS OR ANY CHANGES TO PLANS MADE

RACTOR OR BY OTHERS. DRAWINGS ARE PROVIDED T

NUMBER, PROPERTY, OR AS A MASTER PLAN AS SPECI

9.40 NOTE OF STATE OF

CENTER & POOL VE, FUQUAY-VARINA, NC 27

CREEK AMENITY CI ENCE CREEK DRIVE

PROV LOCATION: 196 PR

23900139

FAB

03/07/2023

GENERAL NOTES

GN1.0

2018 APPENDIX B

BUILDING CODE SUMMARY FOR ALL COMMERCIAL PROJECTS

(EXCEPT 1 AND 2-FAMILY DWELLINGS AND TOWNHOUSES
(Reproduce the following data on the building plans sheet 1 or 2)

CONSTRUCTED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: [check all that apply) Sprinklers:	JDS Consulting JDS Consulting JDS Consulting JDS Consulting JDS Consulting Sand individua E: New B 1st Tim Shell/Coproced Phasecopossible DING CODE: te) te)	Building	LICENSE # 045403 045403 045403 045403 045403 recast, pre-engine ddition Rection local inspection juents hell/Core- Contace edures and require Prescriptive Level I Historic Proper NT OCCUPANC SED OCCUPANC SED OCCUPANC SED OCCUPANC	TELEPHONE # E-MAIL (919) 280-2023
Architectural Civil Electrical Fire Alarm Plumbing Mechanical Sprinkler-Standpipe Structural Retaining Walls >5' High Other "Other" should include firms 2018 NC BUILDING CODI 2018 NC BUILDING DATA Construction Type: Check all that apply) Sprinklers: Check all that apply Sprinklers: No Catandpipes:	JDS Consulting JDS Consulting JDS Consulting JDS Consulting JDS Consulting Sand individua E: New B 1st Tim Shell/C proced possible DING CODE: te) te) 1-A I-A I-B Partial Ye	CHARLES E. TEAL CHARLE	045403 045403 045403 045403 045403 045403 recast, pre-engine ddition Receion local inspection juents hell/Core- Contactedures and require Prescriptive Level I Historic Proper NT OCCUPANC SED OCCUPANC I II II II II III III III III	(919) 280-2023 CTEAL@JDSCONSULTING.NE (10) 100 100 100 100 100 100 100 100 100
Architectural Civil Electrical Fire Alarm Plumbing Mechanical Sprinkler-Standpipe Structural Retaining Walls >5' High Other "Other" should include firms CONSTRUCTED: (da RENOVATED: (da RENOVATED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: check all that apply) Sprinklers: No Standpipes: No	JDS Consulting JDS Consulting JDS Consulting JDS Consulting JDS Consulting Sand individua E: New B 1st Tim Shell/C proced possible DING CODE: te) te) 1-A I-A I-B Partial Ye	CHARLES E. TEAL CHARLE	045403 045403 045403 045403 045403 045403 recast, pre-engine ddition Receion local inspection juents hell/Core- Contactedures and require Prescriptive Level I Historic Proper NT OCCUPANC SED OCCUPANC I II II II II III III III III	(919) 280-2023 CTEAL@JDSCONSULTING.NE (10) 100 100 100 100 100 100 100 100 100
Civil Electrical Fire Alarm Plumbing Mechanical Sprinkler-Standpipe Structural Retaining Walls >5' High Other "Other" should include firms CONSTRUCTED: (da RENOVATED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: check all that apply) Sprinklers: Standpipes: No	JDS Consulting JDS Consulting JDS Consulting JDS Consulting JDS Consulting Sand individua E: New B 1st Tim Shell/C proced possible DING CODE: te) te) 1-A I-A I-B Partial Ye	CHARLES E. TEAL CHARLE	O45403 O45403 O45403 O45403 O45403 recast, pre-engine ddition	(
Electrical Fire Alarm Plumbing Mechanical Sprinkler-Standpipe Structural Retaining Walls >5' High Other "Other" should include firms E018 NC BUILDING CODE ENOVATED: (da RENOVATED: (da RENOVATED: (da RISK CATEGORY (Table) BASIC BUILDING DATA Construction Type: Check all that apply) Sprinklers: No Standpipes: No	JDS Consulting JDS Consulting JDS Consulting Sand individua E: New B 1st Tim Shell/C proced Phased possible DING CODE: te) te) 1-A I-B Partial Ye	CHARLES E. TEAL Als such as truss, proposed in the such as trust,	O45403 O45403 O45403 O45403 recast, pre-engine ddition	() (919) 280-2023 CTEAL@JDSCONSULTING.NE (919) 280-2023 CTEAL@JDSCONSULTING.NE () (919) 280-2023 (1910) 2
Plumbing Mechanical Sprinkler-Standpipe Structural Retaining Walls >5' High Other "Other" should include firms CONSTRUCTED: (da RENOVATED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: Check all that apply) Sprinklers: Construction Type: Check all that apply) Sprinklers: Construction Type: Check all that apply) Construction Type: Check all that apply	JDS Consulting JDS Consulting S and individua E: New B	CHARLES E. TEAL ALIEN COMPLETE CORPOSE CONTROL CURREN PROPOS CURREN PROPOS Current: Proposed: II-A II-A II-B	o45403 o45403 recast, pre-engine ddition	(919) 280-2023 CTEAL@JDSCONSULTING.NE (919) 280-2023 CTEAL@JDSCONSULTING.NE (1) CTEAL@JDSCONSULTING.NE (2) CTEAL@JDSCONSULTING.NE (2) CTEAL@JDSCONSULTING.NE (3) CTEAL@JDSCONSULTING.NE (3) CTEAL@JDSCONSULTING.NE (3) CTEAL@JDSCONSULTING.NE (4) CTEAL@JDSCONSULTING.NE (5) CTEAL@JDSCONSULTING.NE (6) CTEAL@JDSCONSULTING.NE (7) CTEA
Achanical Sprinkler-Standpipe Structural Retaining Walls >5' High Other "Other" should include firms CONSTRUCTED: (da RENOVATED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: Check all that apply) Sprinklers: Standpipes: No	JDS Consulting s and individua E: New B 1st Tim Shell/C proced Phased possible DING CODE: te) te) 1604.5):	CHARLES E. TEAL Building	odestate and required the little and representation of the little and required	(
Constructed: (da Renovated (Table Sasic Building Data Construction Type: check all that apply) Sprinklers: No constructed: No construction Type: check all that apply) Sprinklers: No construction Type: No construction T	E: New B 1st Tim Shell/C proced Phased possibl DING CODE: te) 1604.5):	Building	ddition Rection Rectio	enovation jurisdiction for possible additional et the local inspection jurisdiction for ements Repair Chapter 14 Level II Level III erty Change of Use EY(S) (Ch. 3): CY(S) (Ch. 3): II IV II IV
Constructed: (da Renovated (Table Sasic Building Data Construction Type: check all that apply) Sprinklers: No constructed: No construction Type: check all that apply) Sprinklers: No construction Type: No construction T	E: New B 1st Tim Shell/C proced Phased possibl DING CODE: te) 1604.5):	Building	ddition Rection Rectio	enovation jurisdiction for possible additional et the local inspection jurisdiction for ements Repair Chapter 14 Level II Level III erty Change of Use EY(S) (Ch. 3): CY(S) (Ch. 3): II IV II IV
Other" should include firms O18 NC BUILDING CODI O18 NC EXISTING BUILD CONSTRUCTED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: check all that apply) Sprinklers: No Standpipes: No	E: New B 1st Tim Shell/O proced Phased possible DING CODE: te) te) 1604.5):	Building	ddition	enovation jurisdiction for possible additional et the local inspection jurisdiction for ements Repair Chapter 14 Level II Level III erty Change of Use EY(S) (Ch. 3): CY(S) (Ch. 3): II IV II IV
CONSTRUCTED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: check all that apply) Sprinklers: No Standpipes: No	Ist Timeshell/Control Shell/Control Phase Control DING CODE: te) 1604.5): I-A I-B Partial Ye	ne Interior Complete Core - Contact the lures and requiremed Construction - State additional process EXISTING: Alteration: CURREN PROPOS Current: Proposed: II-A II-B	etion local inspection juents hell/Core- Contactedures and require Prescriptive Level I Historic Proper NT OCCUPANC SED OCCUPANC I	igurisdiction for possible additional to the local inspection jurisdiction for ements Repair Chapter 14 Level II Level III orty Change of Use CY(S) (Ch. 3): CY(S) (Ch. 3): II IV II IV
CONSTRUCTED: (da RENOVATED: (da RENOVATED: (da RISK CATEGORY (Table BASIC BUILDING DATA Construction Type: check all that apply) Sprinklers: Standpipes: No	te) te) 1604.5):] I-A] I-B] Partial \square Ye	Alteration: CURREN PROPOS Current: Proposed: II-A II-B	Level I Historic Proper NT OCCUPANC SED OCCUPANC I II II II I III III	Level II Level III crty Change of Use CY(S) (Ch. 3): CY(S) (Ch. 3): II IV II IV
BASIC BUILDING DATA Construction Type: check all that apply) Sprinklers: Standpipes:	1604.5):] I-A] I-B] Partial	Current: Proposed: II-A II-B	I	II
BASIC BUILDING DATA Construction Type: check all that apply) Sprinklers: Standpipes:] I-A] I-B] Partial [] Ye	Proposed:	I	II
Construction Type: check all that apply) sprinklers: tandpipes: No] I-B] Partial [] Ye	□ II-A □ II-B	□ III-A	
Construction Type: check all that apply) Sprinklers: Standpipes: No] I-B] Partial [] Ye	☐ II-B	<u> </u>	□ IV □ V-A
FLOOR EXIS	STING (SQ FT)	Gross Building	Area Table (SQ FT)	SUB-TOTAL
3 rd Floor	511NG (5QF1)	INEW	(5011)	SUB-TOTAL
2 nd Floor				
Mezzanine 1st Floor		931	SQ. FT.	
Basement				
TOTAL		931	SQ. FT.	
		ALLOWABI	LE AREA	
Primary Occupancy Class Assembly A-1 Business Educational Factory F-1 M	□ A-2 □ A	A-3 ⊠ A-4 □] A-5	
Hazardous	etonate 🔲 H		H-3 Combust 4 5] H-4 Health 🔲 H-5 HPM
Storage S-1 M	R-2 For the second of the seco		High-piled d □ Repair Gar	rage
Utility and Miscellaneo	ous \square			
Accessory Occupancy Classificated Ligas (Table 500				
Incidental Uses (Table 509 Special Uses (Chapter 4 –		N/A tions): N/A		
Special Provisions: (Chapter 4 –			N/A	
Mixed Occupancy:		es Separation	n: Hr.	Exception:
☐ Non-Separated		applying the height occupancies to the	ht and area limita e entire building.	for the building shall be determined by tions for each of the applicable The most restrictive type of apply to the entire building.
Separated Use			the ratios of the a	story, the area of the occupancy shall actual floor area of each use divided by ll not exceed 1.

_____ + ____ + = <u>_____</u> ≤ 1.00

STORY	DESCRIPTION AND	(A)	(B)	(C)	(D)
NO.	USE	BLDG AREA PER	TABLE 506.2^4	AREA FOR FRONTAGE	ALLOWABLE AREA PER
		STORY (ACTUAL)	AREA	INCREASE ^{1,5}	STORY OR UNLIMITED ^{2,3}
1ST	MECH/RR	931 SQ. FT.	UNLIMITED	N/A	UNLIMITED

¹ Frontage area increases from Section 506.3 are computed thus:

a. Perimeter which fronts a public way or open space having 20 feet minimum width = _____ (F)

b. Total Building Perimeter c. Ratio $(F/P) = ____(F/P)$

d. W = Minimum width of public way = _____ (W) e. Percent of frontage increase $I_f = 100[F/P - 0.25] \times W/30 =$ _____ (%)

² Unlimited area applicable under conditions of Section 507.

³ Maximum Building Area = total number of stories in the building x D (maximum3 stories) (506.2). ⁴ The maximum area of open parking garages must comply with Table 406.5.4.

⁵ Frontage increase is based on the unsprinklered area value in Table 506.2.

	ALLOWABLE	SHOWN ON PLANS	CODE REFERENCE ¹
Building Height in Feet (Table 504.3) ²	40	14	
Building Height in Stories (Table 504.4) ³	1	1	

ALLOWABLE HEIGHT

¹ Provide code reference if the "Shown on Plans" quantity is not based on Table 504.3 or 504.4.

² The maximum height of air traffic control towers must comply with Table 412.3.1.

³ The maximum height of open parking garages must comply with Table 406.5.4.

FIRE PROTECTION REQUIREMENTS							
BUILDING ELEMENT	FIRE		RATING	DETAIL#	DESIGN#	SHEET # FOR	SHEET#
	SEPARATION	REQ'D	PROVIDED	AND	FOR	RATED	FOR
	DISTANCE		(W/* REDUCTION)	SHEET #	RATED	PENETRATION	RATED
Ct 1 France	(FEET)		REDUCTION		ASSEMBLY		JOINTS
Structural Frame, including columns, girders,							
trusses	N/A	0 HR					
Bearing Walls							
Exterior							
North	>30	0 HR					
East	>30	0 HR					
West	>30	0 HR					
South	>30	0 HR					
Interior	>30	0 HR					
Nonbearing Walls and Partitions							
Exterior walls							
North	>30	0 HR					
East	>30	0 HR					
West	>30	0 HR					
South	>30	0 HR					
Interior walls and partitions	>30	O HR					
Floor Construction							
Including supporting beams		0 HR					
and joists							
Floor Ceiling Assembly		0 HR					
Columns Supporting Floors		0 HR					
Roof Construction, including supporting beams and joists		O HR					
Roof Ceiling Assembly		0 HR					
Columns Supporting Roof		O HR					
Shaft Enclosures - Exit		N/A					
Shaft Enclosures - Other		N/A					
Corridor Separation		N/A					
Occupancy/Fire Barrier Separation		N/A					
Party/Fire Wall Separation		N/A					
Smoke Barrier Separation		N/A					
Smoke Partition		N/A					
Tenant/Dwelling Unit/ Sleeping Unit Separation		N/A					
Incidental Use Separation		N/A					

* Indicate section number permitting reduction

PERCENTAGE OF WALL OPENING CALCULATIONS

FIRE SEPARATION DISTANCE (FEET) FROM PROPERTY LINES	Degree of openings Protection (Table 705.8)	Allowable area (%)	ACTUAL SHOWN ON PLANS (%)	
30				

		LIFE SAFETY SYSTEM REQUIREMENTS
	Emergency Lighting:	□ No ⊠ Yes
,	Exit Signs:	□ No ⊠ Yes
	Fire Alarm:	No □ Yes
>	Smoke Detection Systems:	☐ No ☐ Yes ☐ Partial
	Carbon Monoxide Detection:	No □ Yes
1		

LIFE SAFETY PLAN REQUIREMENTS

Life Safety Plan Sheet #:	B2.1
Fire and/or smoke r	ated wall locations (Chapter 7)

- Assumed and real property line locations (if not on the site plan)
- Exterior wall opening area with respect to distance to assumed property lines (705.8) Occupancy Use for each area as it relates to occupant load calculation (Table 1004.1.2)

- Occupant loads for each area
- Exit access travel distances (1017)
- Common path of travel distances (Tables 1006.2.1 & 1006.3.2(1))
- Dead end lengths (1020.4)
- ☐ Clear exit widths for each exit door
- Maximum calculated occupant load capacity each exit door can accommodate based on egress width (1005.3) Actual occupant load for each exit door
- A separate schematic plan indicating where fire rated floor/ceiling and/or roof structure is provided for
- purposes of occupancy separation
- Location of doors with panic hardware (1010.1.10)
- Location of doors with delayed egress locks and the amount of delay (1010.1.9.7)
- Location of doors with electromagnetic egress locks (1010.1.9.9)
- Location of doors equipped with hold-open devices
- Location of emergency escape windows (1030)
- ☐ The square footage of each fire area (202)
- ☐ The square footage of each smoke compartment for Occupancy Classification I-2 (407.5)
- ☐ Note any code exceptions or table notes that may have been utilized regarding the items above

ACCESSIBLE DWELLING UNITS

(SECTION 1107)

TOTAL	ACCESSIBLE	ACCESSIBLE	Түре А	Түре А	Түре В	Түре В	TOTAL
Units	Units	Units	Units	Units	Units	Units	ACCESSIBLE UNITS
	Required	Provided	Required	Provided	REQUIRED	PROVIDED	PROVIDED

ACCESSIBLE PARKING

(SECTION 1106)

LOT OR PARKING AREA	TOTAL # OF PA	RKING SPACES PROVIDED	# OF ACC	CESSIBLE SPACES PRO VAN SPAC	00.0000	TOTAL # ACCESSIBLE
AKLA	REQUIRED	FROVIDED	5' ACCESS AISLE	132" ACCESS AISLE	8' ACCESS AISLE	PROVIDED
PARKING LOT	10	20	0	2	2	2
TOTAL	10	20	0	2	2	2

PLUMBING FIXTURE REQUIREMENTS (TABLE 2902.1)

U	JSE	WATERCLOSETS			URINALS		LAVATORIE	S	SHOWERS	DRINKING FOUNTAIN	
		MALE	FEMALE	UNISEX		MALE	FEMALE	UNISEX	/TUBS	REGULAR	ACCESSIBLE
SPACE	EXIST'G	0	0	0	N/A	0	0	0	N/A	0	0
	NEW	1	3	0	1	1	2	0	1	1	1
	REQ'D	1	2	0	1	1	1	0	1	1	1

SPECIAL APPROVALS

Special approval: (Local Jurisdiction, Department of Insurance, OSC, DPI, DHHS, etc., describe below)

HARNETT COUNTY HEALTH DEPARTMENT APPROVAL



27526 ARINA, FUQU.

DRIV **AMENITY** CREEK PROVINCE

23900139

03/07/2023 **FAB**

CODE SUMMARY

APP.B1

2018 APPENDIX B **ENERGY SUMMARY ENERGY REQUIREMENTS: BUILDING CODE SUMMARY FOR ALL COMMERCIAL PROJECTS** The following data shall be considered minimum and any special attribute required to meet the energy code shall STRUCTURAL DESIGN also be provided. Each Designer shall furnish the required portions of the project information for the plan data sheet. (PROVIDE ON THE STRUCTURAL SHEETS IF APPLICABLE) If performance method, state the annual energy cost for the standard reference design vs annual energy cost for the **DESIGN LOADS:** proposed design. Snow (I_S) 1.0 Seismic (I_E) 1.0 **Importance Factors:** Existing building envelope complies with code: No Yes (The remainder of this section is not applicable) **Exempt Building:** No Yes (Provide code or statutory reference): ____ **Live Loads:** Climate Zone: \square 3A \boxtimes 4A \square 5A ______psf **Method of Compliance:** Energy Code Performance Prescriptive **Ground Snow Load:** ASHRAE 90.1 Performance ☐ Prescriptive (If "Other" specify source here)_ Wind Load: Ultimate Wind Speed $\underline{\hspace{1cm}}^{116}$ mph (ASCE-7) Exposure Category _____B THERMAL ENVELOPE (Prescriptive method only) Roof/ceiling Assembly (each assembly) FIBERGLASS SHINGLES OVER WOOD SHEATHING SEISMIC DESIGN CATEGORY: \square A \boxtimes B \square C \square D W/ R42 INSULATION AND 1/2" GWB. Description of assembly: Provide the following Seismic Design Parameters: U-Value of total assembly: ⊠ II □ III □ IV Risk Category (Table 1604.5) 🔲 I R-Value of insulation: **Spectral Response Acceleration** S_S 0.125 % g S_1 0.063 %g Skylights in each assembly: Site Classification (ASCE 7) A B C D E F U-Value of skylight: Data Source: Field Test Presumptive Historical Data total square footage of skylights in each assembly: ■ Bearing Wall ☐ Dual w/Special Moment Frame Basic structural system LAP SIDING, RIGID INSULATION, WOOD STUDS, Exterior Walls (each assembly) ☐ Building Frame ☐ Dual w/Intermediate R/C or Special Steel BATT INSULATION, 1/2" GWB. Description of assembly: ☐ Moment Frame ☐ Inverted Pendulum U-Value of total assembly: **Analysis Procedure:** R13+R7.5 R-Value of insulation: Openings (windows or doors with glazing) ENTRANCE DOOR, 0.77 U-Value of assembly: **LATERAL DESIGN CONTROL:** Earthquake ☐ Wind ⊠ <u>WINDOWS</u>, 0.32 Solar heat gain coefficient: projection factor: **SOIL BEARING CAPACITIES:** Door R-Values: Field Test (provide copy of test report) Presumptive Bearing capacity 2000 psf Walls below grade (each assembly) Pile size, type, and capacity Description of assembly: U-Value of total assembly: R-Value of insulation: Floors over unconditioned space (each assembly) 2018 APPENDIX B Description of assembly: BUILDING CODE SUMMARY FOR ALL COMMERCIAL PROJECTS U-Value of total assembly: MECHANICAL DESIGN R-Value of insulation: (PROVIDE ON THE MECHANICAL SHEETS IF APPLICABLE) 4" THICK CONCRETE SLAB OVER 6MIL VAPOR BARRIER OVER 4" Floors slab on grade MECHANICAL SUMMARY CRUSHED STONE BASE OVER COMPACTED EARTH FILL (ON GRADE) Description of assembly: 0.730 U-Value of total assembly: MECHANICAL SYSTEMS, SERVICE SYSTEMS AND EQUIPMENT ent: 24" MIN. CONT. @ PERIMETER N/A R-Value of insulation: Horizontal/vertical requirement: Thermal Zone winter dry bulb: summer dry bulb: **Interior design conditions** summer dry bulb: **Building heating load: Building cooling load: Mechanical Spacing Conditioning System** Unitary description of unit: heating efficiency: cooling efficiency: size category of unit: Size category. If oversized, state reason.: Chiller Size category. If oversized, state reason.:

List equipment efficiencies:

2018 APPENDIX B

BUILDING CODE SUMMARY FOR ALL COMMERCIAL PROJECTS ELECTRICAL DESIGN

(PROVIDE ON THE ELECTRICAL SHEETS IF APPLICABLE)

ELECTRICAL SUMMARY

ECT	RICAL SYSTEM AND EQUIPMENT
	Method of Compliance: Energy Code Performance Prescriptive
	ASHRAE 90.1 Performance Prescriptive
	Lighting schedule (each fixture type)
	lamp type required in fixture
	number of lamps in fixture
	ballast type used in the fixture
	number of ballasts in fixture
	total wattage per fixture
	total interior wattage specified vs. allowed (whole building or space by space)
	total exterior wattage specified vs. allowed
	Additional Efficiency Package Ontions
	Additional Efficiency Package Options (When using the 2018 NCECC; not required for ASHRAE 90.1)
	C406.2 More Efficient HVAC Equipment Performance C406.3 Reduced Lighting Power Density
	C406.4 Enhanced Digital Lighting Controls
	C400.4 Emilanced Digital Lighting Controls C406.5 On-Site Renewable Energy
	C406.6 Dedicated Outdoor Air System
	C406.7 Reduced Energy Use in Service Water Heating
	_ c room recurred Energy one in Solvice water recurring



27526 ARIN DRIV **AMENITY** CREEK **PROVIDENCE PROVINCE** 23900139

03/07/2023 **FAB**

CODE SUMMARY

APP.B2

ROOF PLAN

FINISH SCHEDULE

ROOM	WALLS	FLOOR	BASE	CEILING	CEILING HT.
MENS	CERAMIC TILE TO 48" A.F.F. PTD. GWB ABOYE.	CERAMIC TILE	CER. TILE COVE	PAINTED GYP BD	8'- <i>0</i> "
WOMENS	CERAMIC TILE TO 48" A.F.F. PTD. GWB ABOVE.	CERAMIC TILE	CER. TILE COVE	PAINTED GYP BD	8'- 0 "
PUMP ROOM	PAINTED M.R. GWB	SEALED CONCRETE	4: VINYL COVE	PAINTED M.R. BD	8'- 0 "
CHEM STORAGE	PAINTED M.R. GWB	SEALED CONCRETE	4: VINYL COVE	PAINTED M.R. BD	8'-0"
SHOWER	VINYL SIDING	SEALED CONCRETE	VINYL TRIM	VINYL SLAT	8'-0"

GENERAL NOTES


- 24" DEEP CONCRETE SUMP WITH 4" THICK WALLS AND FLOOR. COVER WITH 2"
 THICK FIBERGLASS GRATE. GRATE OPENINS IN ON DIRECTION ARE NOT TO
 BE LESS THAN 1/2". SUPPORT GRATE WITH GALV. .2×2×1/4 ANCHORED TO
 WALLS WITH 1/2" DIA. × 2" LONG CONRETE ANCHORS.
- DOORS TO THE CHEMICAL STORAGE ROOM AND EQUIPMENT ROOM
 SHALL HAVE PLACARDS PER NFPA 104 ACCORDING TO THE HAZARDS
 PRESENT
- 03 NON-CORROSIVE SHELF, SUPPORTED 16" ABOVE FLOOR ON 8" CMU'S
- 104 IN AREAS WITH FLOOR DRAINS, SLOPE FLOOR TO DRAIN


DOOR AND WINDOW SCHEDULE


DOOR #	SIZE	TYPE	FRAME TYPE	HARDWARE	COMMENTS
<i>0</i> 1	3'-6"×1'-0"	6 PANEL WOOD	нм	<i>Θ</i> 2	-
0 2	2'-6"×1'-@"	6 PANEL WOOD	нм	<i>Θ</i> 1	BOTTOM PANEL TO BE LOUVERED
<i>0</i> 3	3'-0"×1'-0"	6 PANEL WOOD	нм	01	BOTTOM PANEL TO BE LOUVERED
<u>03</u> 04	PAIR 3'-0"×1'-0"	6 PANEL WOOD	нм	<i>0</i> 5	FULL LOUVERED DOOR
<i>0</i> 5	3'-@"×1'-@"	6 PANEL WOOD	НМ	<i>0</i> 4	BOTTOM PANEL TO BE LOUVERED
WINDOW A	34"×54"	DOUBLE HUNG	WOOD		ADD OBSCURE GLAZING FILM
WINDOW B	34"×16"	TRANSOM	WOOD		ADD OBSCURE GLAZING FILM

HARDWARE SETS

- 01 1 1/2 PR 4 1/2 X 4 1/2 55 BB BUTTS, PUSH PLATE, HC PULL, DEAD BOLT WITH HC LATCH ON INSIDE, CLOSER, THREASHOLD, MUTES AND WEATHERSTRIPPING, FLOOR STOP
- 92 1 1/2 PR 4 1/2 × 4 1/2 95 BB BUTTS, ENTRY DOOR LOCKSET WITH COMBINATION OR CARD READER, PANIC HARDWARE, THRESHOLD, MUTES AND WEATHERSTRIPPING
 - 1 1/2 PR 4 1/2 \times 4 1/2 99 BB BUTT9, PASSAGE DOOR LOCKSET, CLOSER, MUTES, WALL STOP
- 3 PR 4 1/2 X 4 1/2 99 BB BUTTS, PANIC BAR ON ACTIVE LEAF ON PUSH SIDE, ENTRY LOCKSET, TOP AND BOTTOM FLUSH BOLTS WITH SCREWS TO FIX INACTIVE LEAF IN CLOSED POSITION, CLOSERS, THRESHOLD, MUTES AND WEATHERSTRIPPING, FLOOR STOP

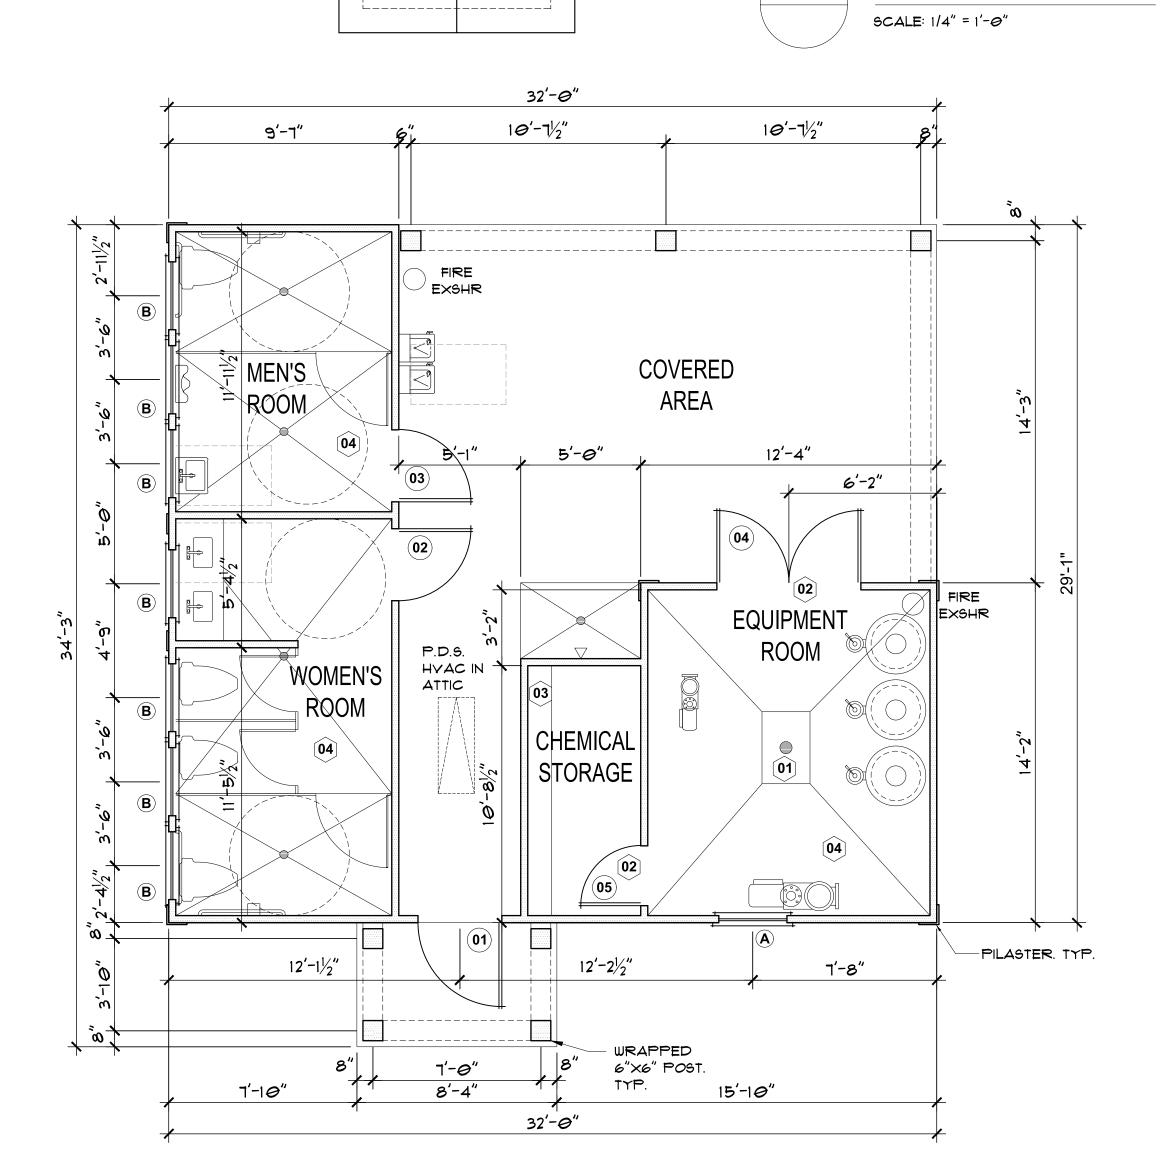

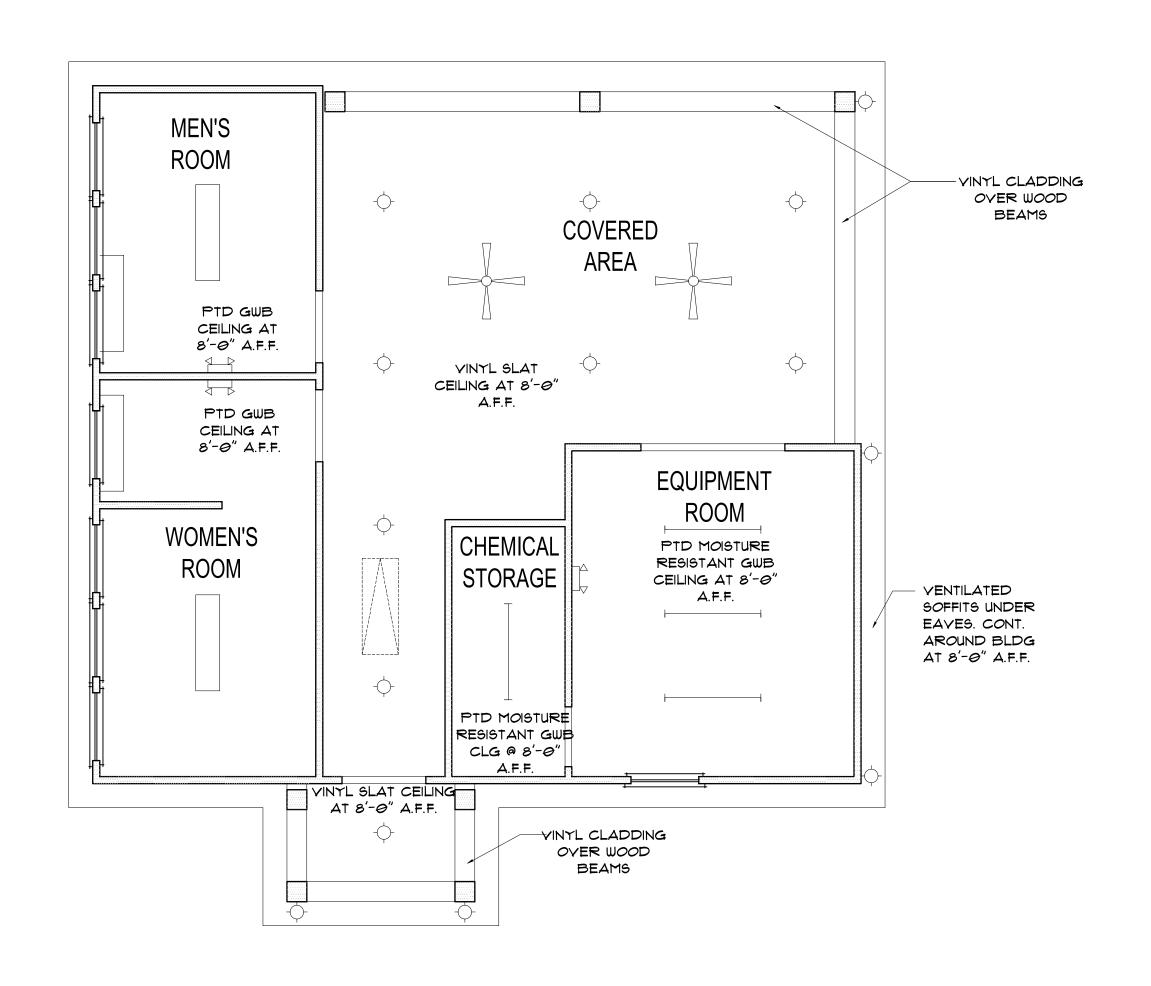

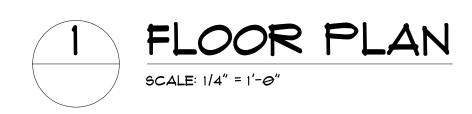







NEERING • DESIGN • ENERGY
8600 'D' JERSEY CT, RALEIGH, NC 27617 919.480.1075
ISULTING.NET; WWW.JDSCONSLTING.NET

OT LIABLE FOR CHANGES MADE TO PLANS DUE TO
SS OR ANY CHANGES TO PLANS MADE IN THE FIELD
OTHERS. DRAWINGS ARE PROVIDED TO CLIENT FOR

JDS Consulting PLLC; 8600 'D' JERSEY CT, RA.
INFO@JDSCONSULTING.NET; WWW.
JDS Consulting PLLC IS NOT LIABLE FOR CHANCONSTRUCTION METHODS OR ANY CHANGES BY CONTRACTOR OR BY OTHERS. DRAWINGS THE LOT NUMBER, PROPERTY, OR AS A MASTE SHEET. DIMENSIONS SHALL GOVERN OVER

PROVINCE CREEK AMENITY CENTER & POOL

OCATION:

196 PROVIDENCE CREEK DRIVE, FUQUAY-VARINA, NC 27526


SCALE: 1/4" = 1'-0" FOR 24x36 PAPER, NOT TO SCALE FOR 11x17 PAPER, OR AS NOTED


23900139

DATE: DRAWN BY: **63/07/2023 FAB**


FLOOR PLAN, ROOF PLAN RCP, SCHEDULES

B1.0

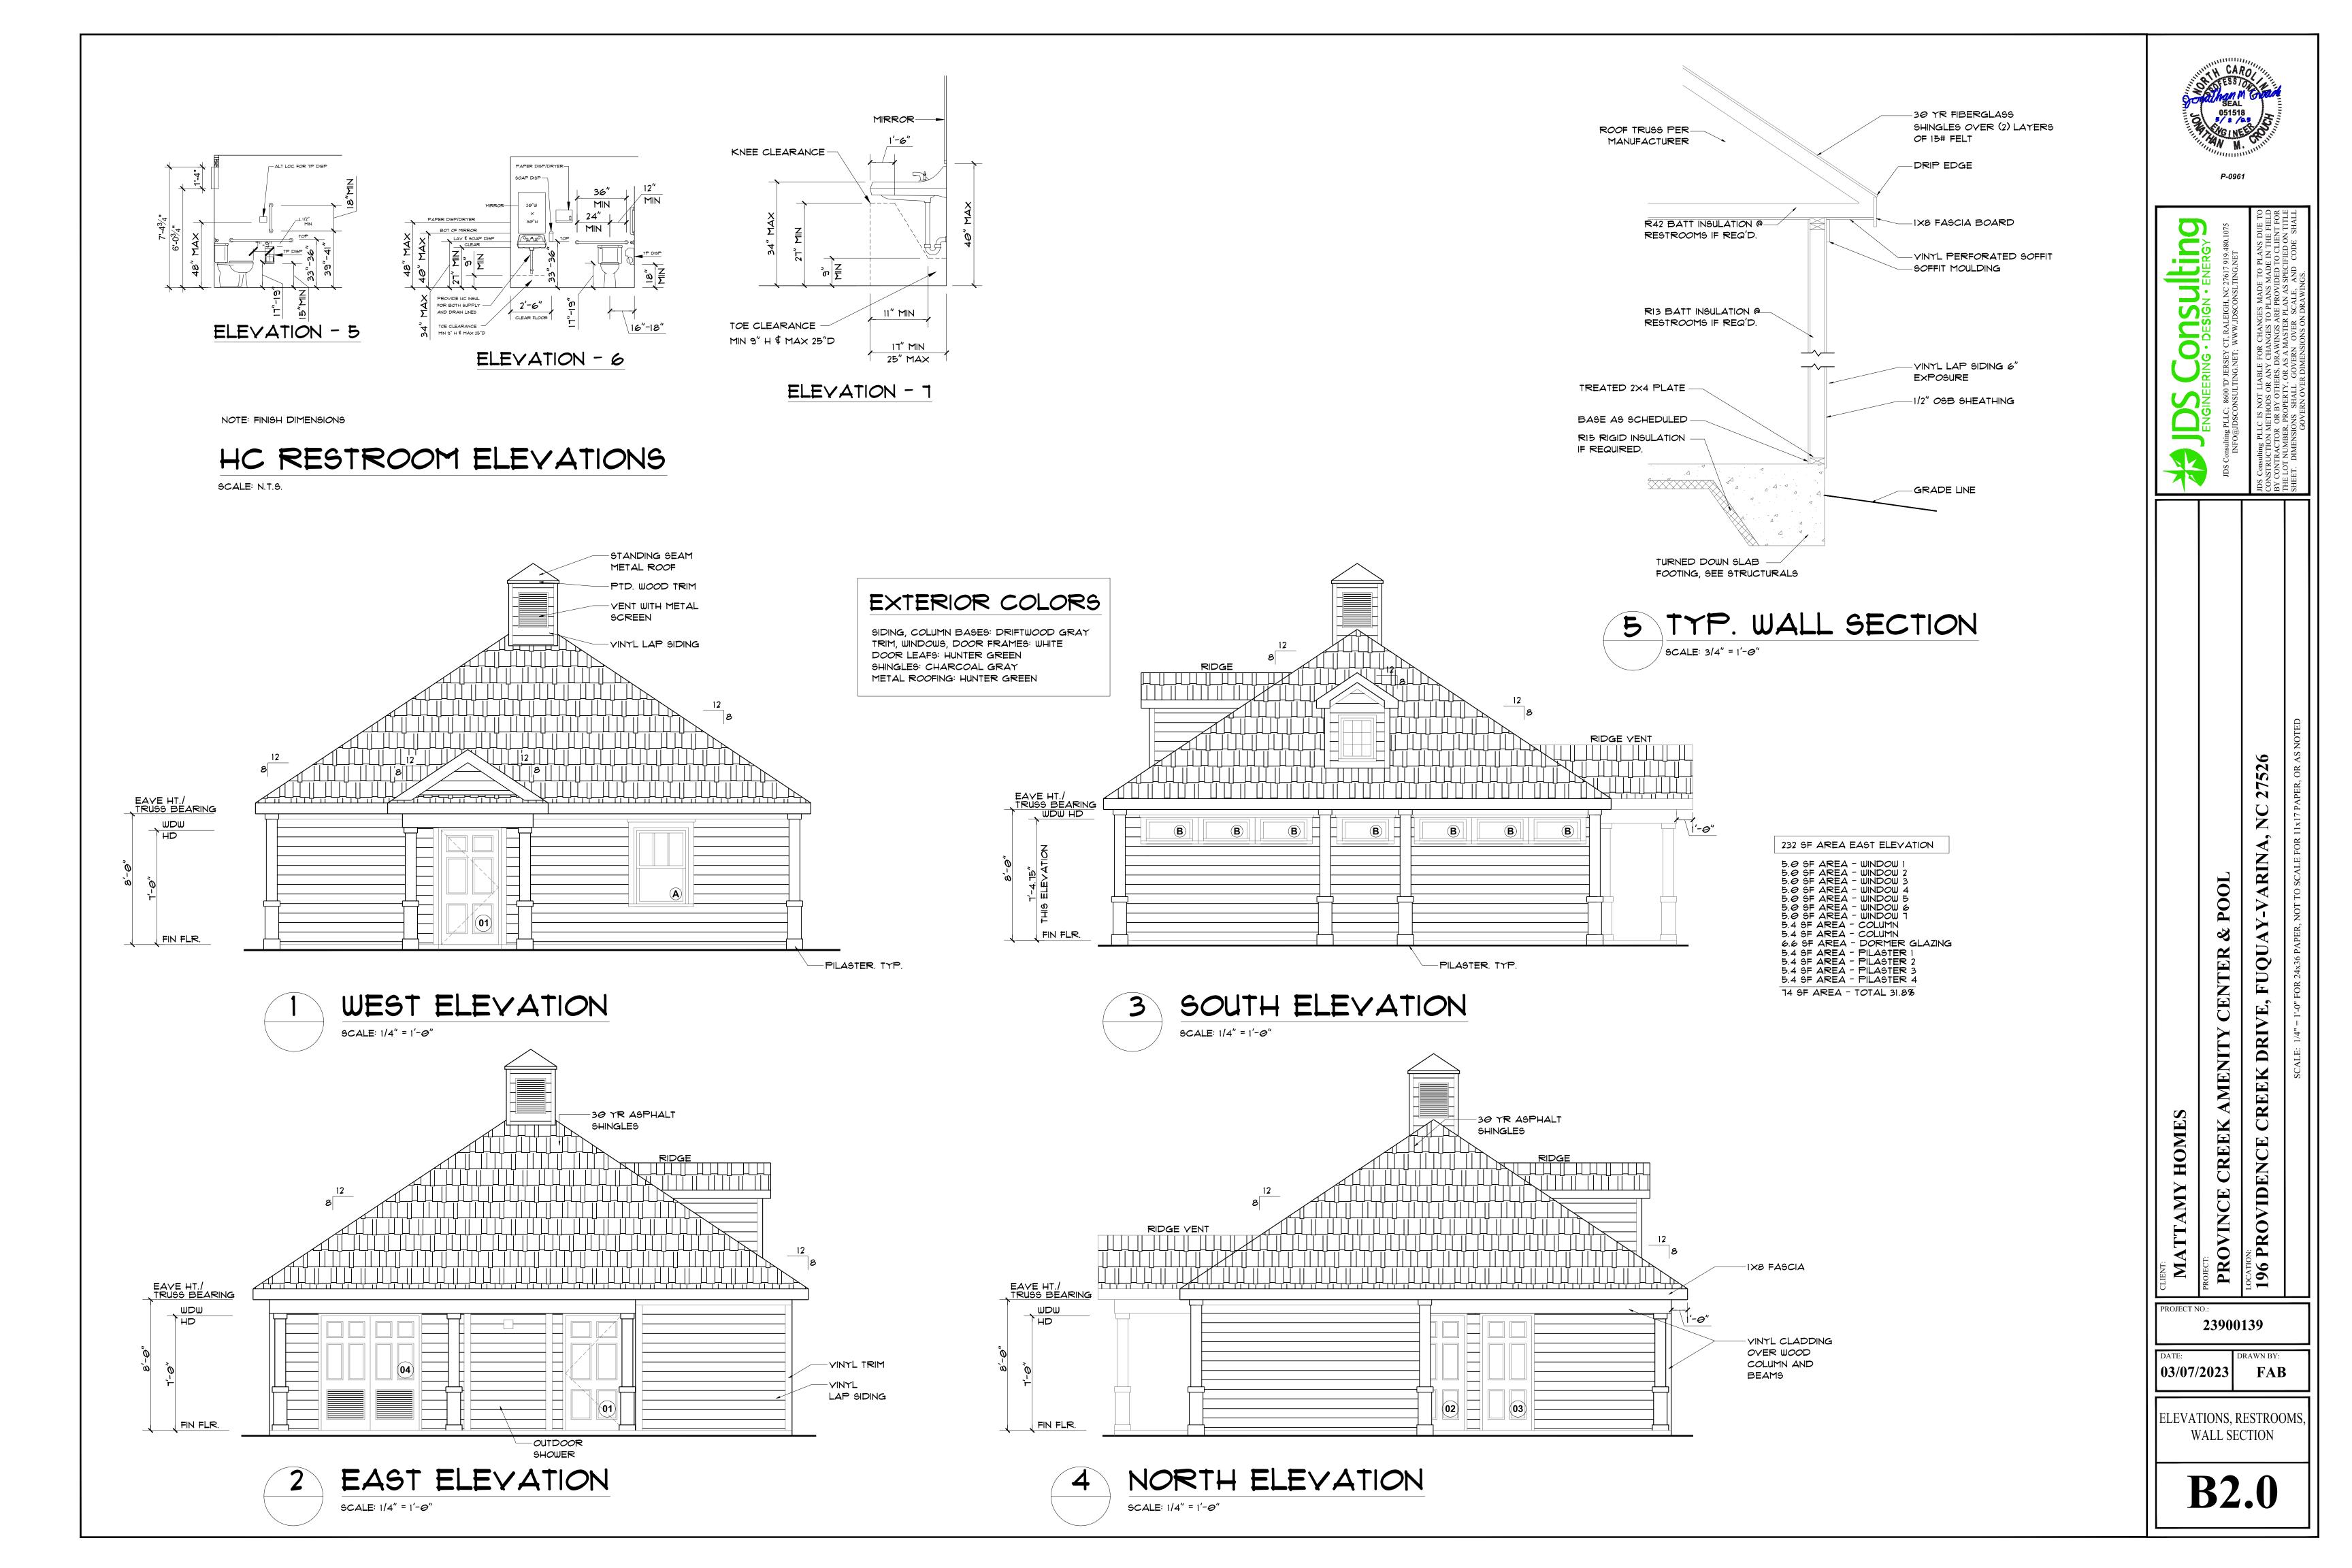


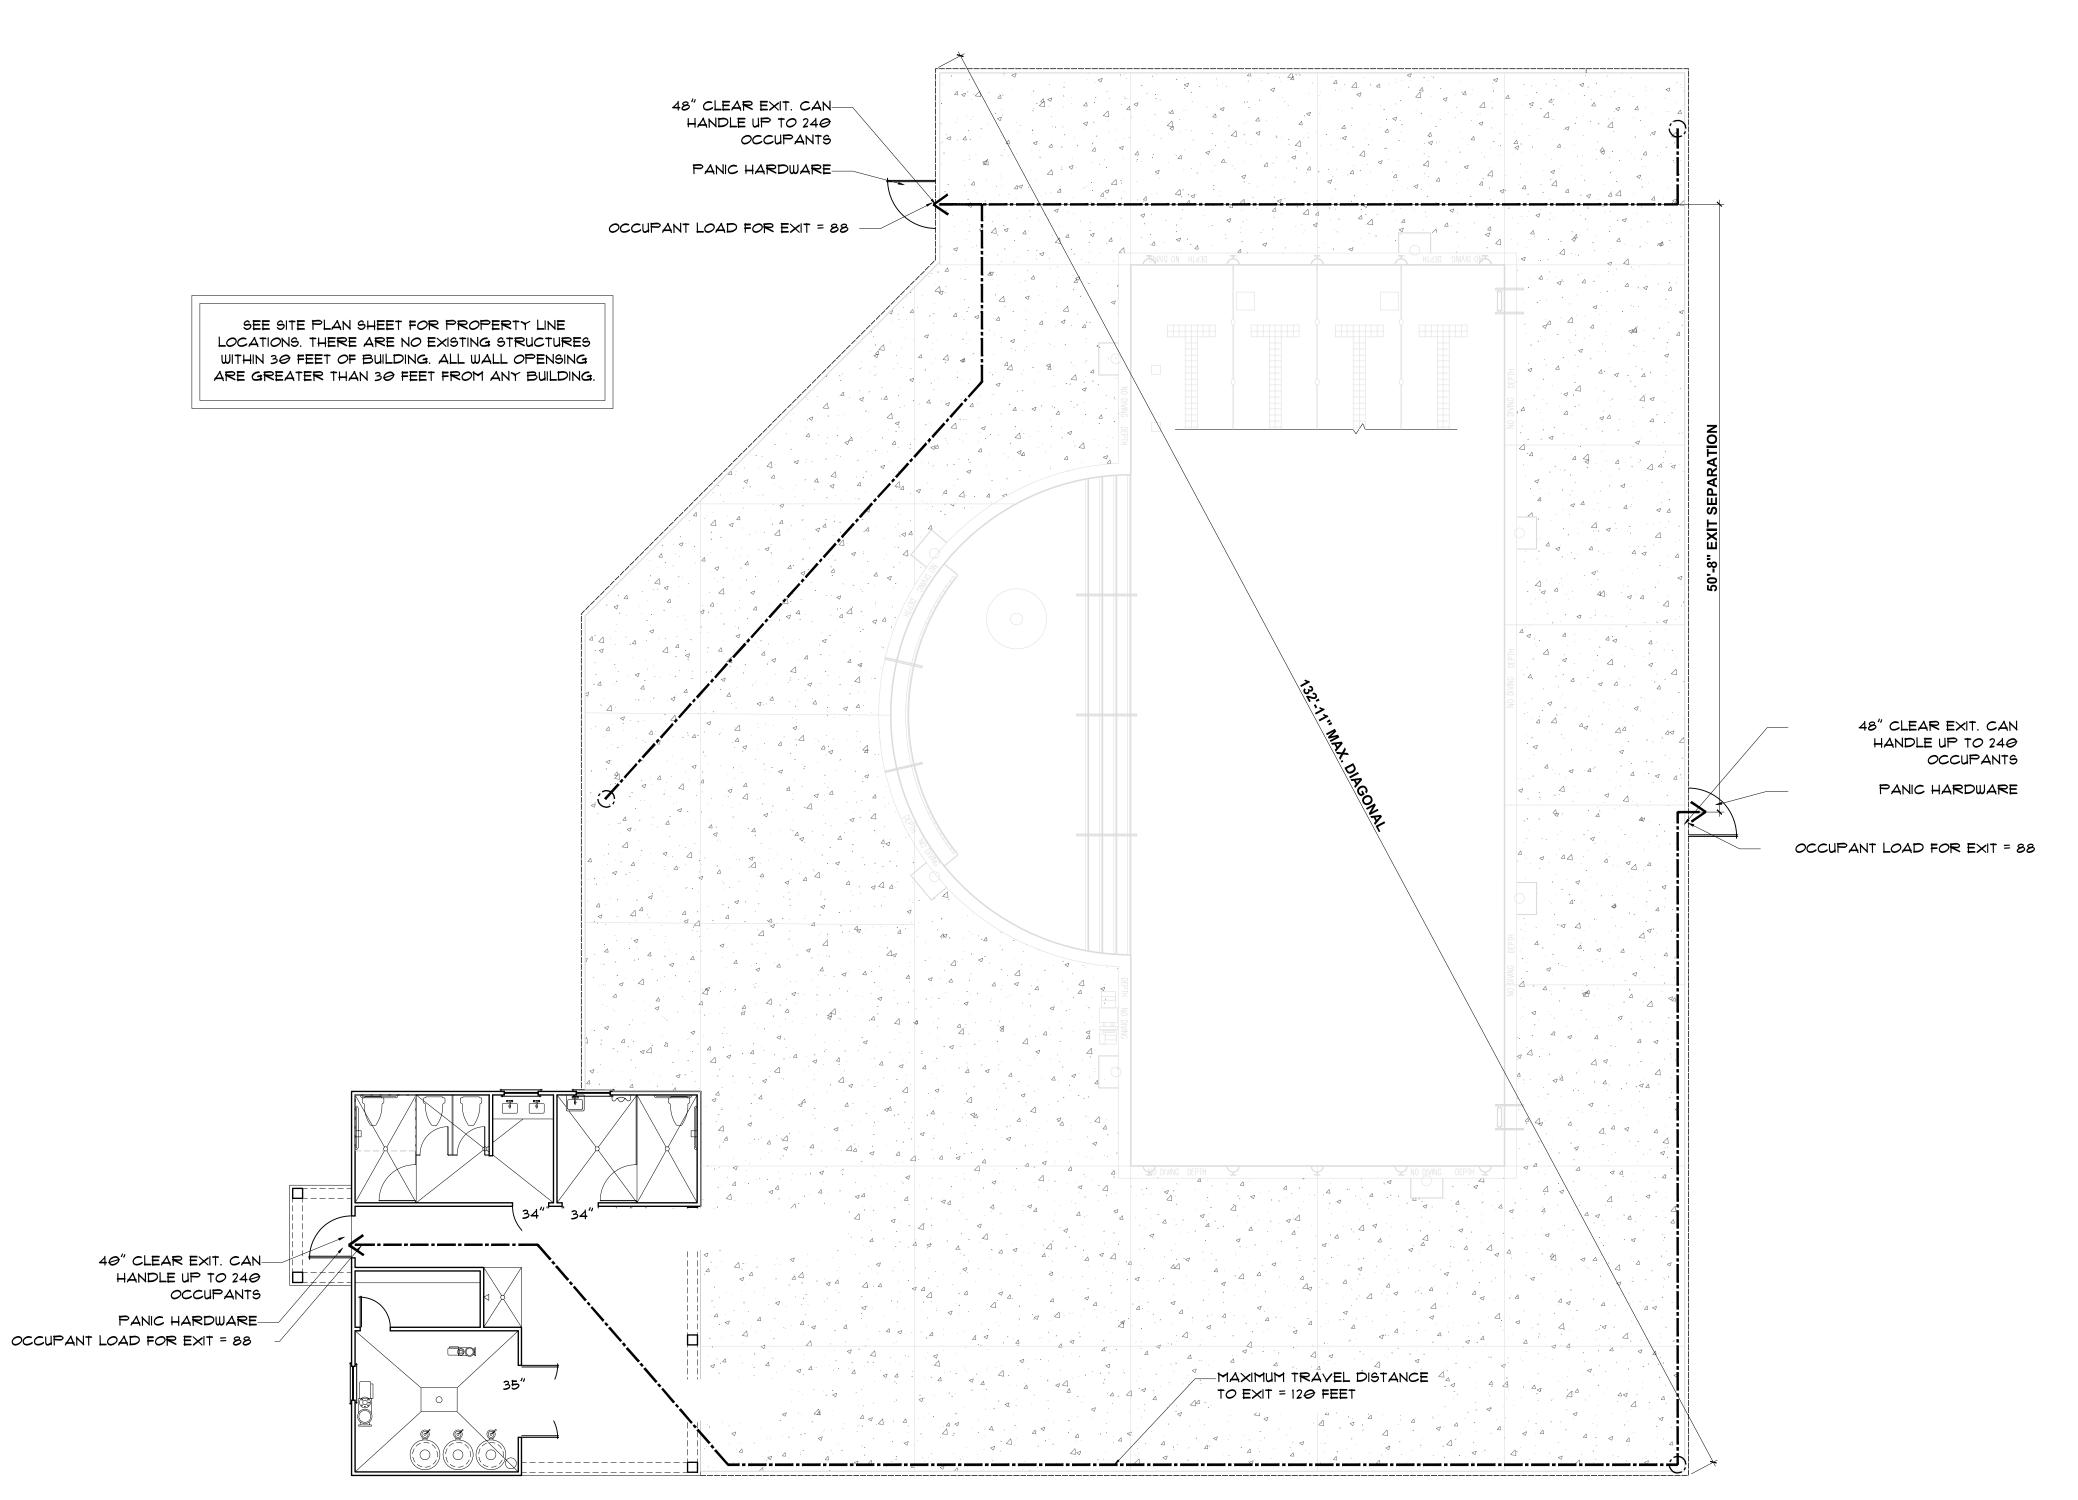



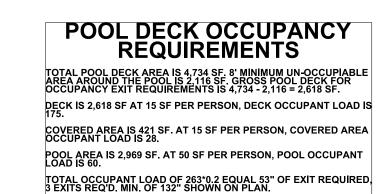

REQ'D EXIT SEPARATION EQUALS $\frac{1}{2}$ THE 133' DIAGONAL, OR 66'. 50'-8" SHOWN ON PLANS.



ENGINEERING • DESIGN • ENERGY

ting PLLC; 8600 'D' JERSEY CT, RALEIGH, NC 27617 919-480.1075

O@JDSCONSULTING.NET; WWW.JDSCONSLTING.NET

PLLC IS NOT LIABLE FOR CHANGES MADE TO PLANS DUE TO
NON METHODS OR ANY CHANGES TO PLANS MADE IN THE FIELD
FOR OR BY OTHERS DRAWINGS ARE PROVIDED TO CHENTED

JDS Consulting PLLC; 8600 'D' JERSEY CT, RALE INFO@JDSCONSULTING.NET; WWW.JD JDS Consulting PLLC IS NOT LIABLE FOR CHANG CONSTRUCTION METHODS OR ANY CHANGES TO BY CONTRACTOR OR BY OTHERS. DRAWINGS AFTHE LOT NUMBER, PROPERTY, OR AS A MASTER SHEET. DIMENSIONS SHALL GOVERN OVER

PROVINCE CREEK AMENITY CENTER & POOL

OCATION:

196 PROVIDENCE CREEK DRIVE, FUQUAY-VARINA, NC 27526


SCALE: 1/4" = 1'-0" FOR 24x36 PAPER, NOT TO SCALE FOR 11x17 PAPER, OR AS NOTED

23900139

DATE: DRAWN BY: **FAB**


UL DETAILS

B2.1

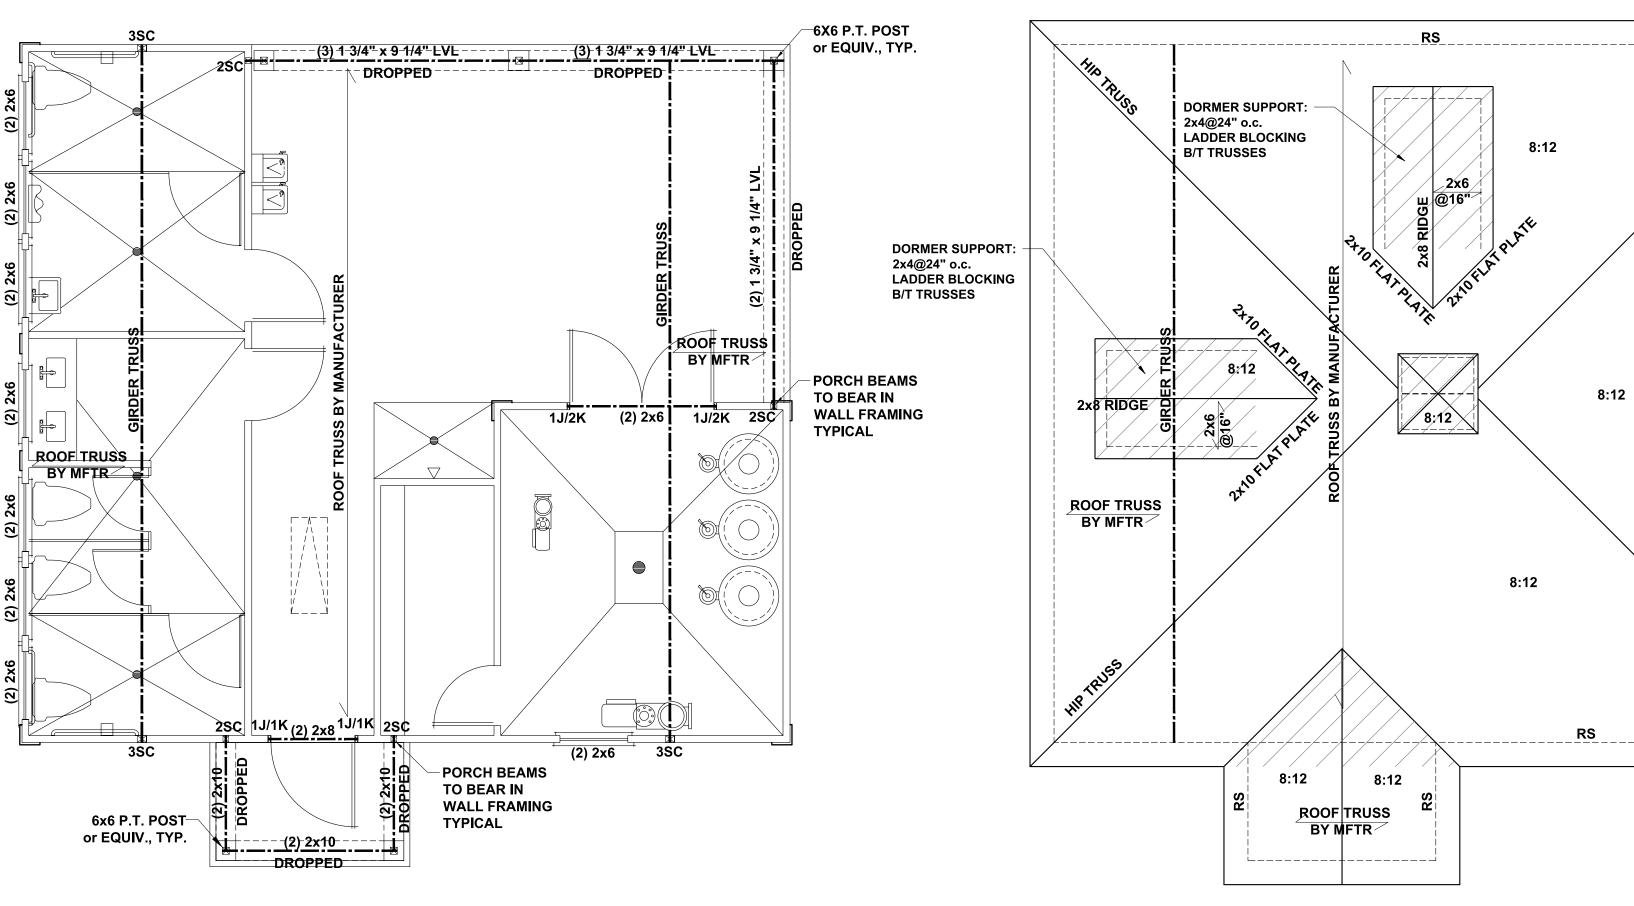

CEILING FRAMING PLAN

SCALE: 1/4" = 1'-0"

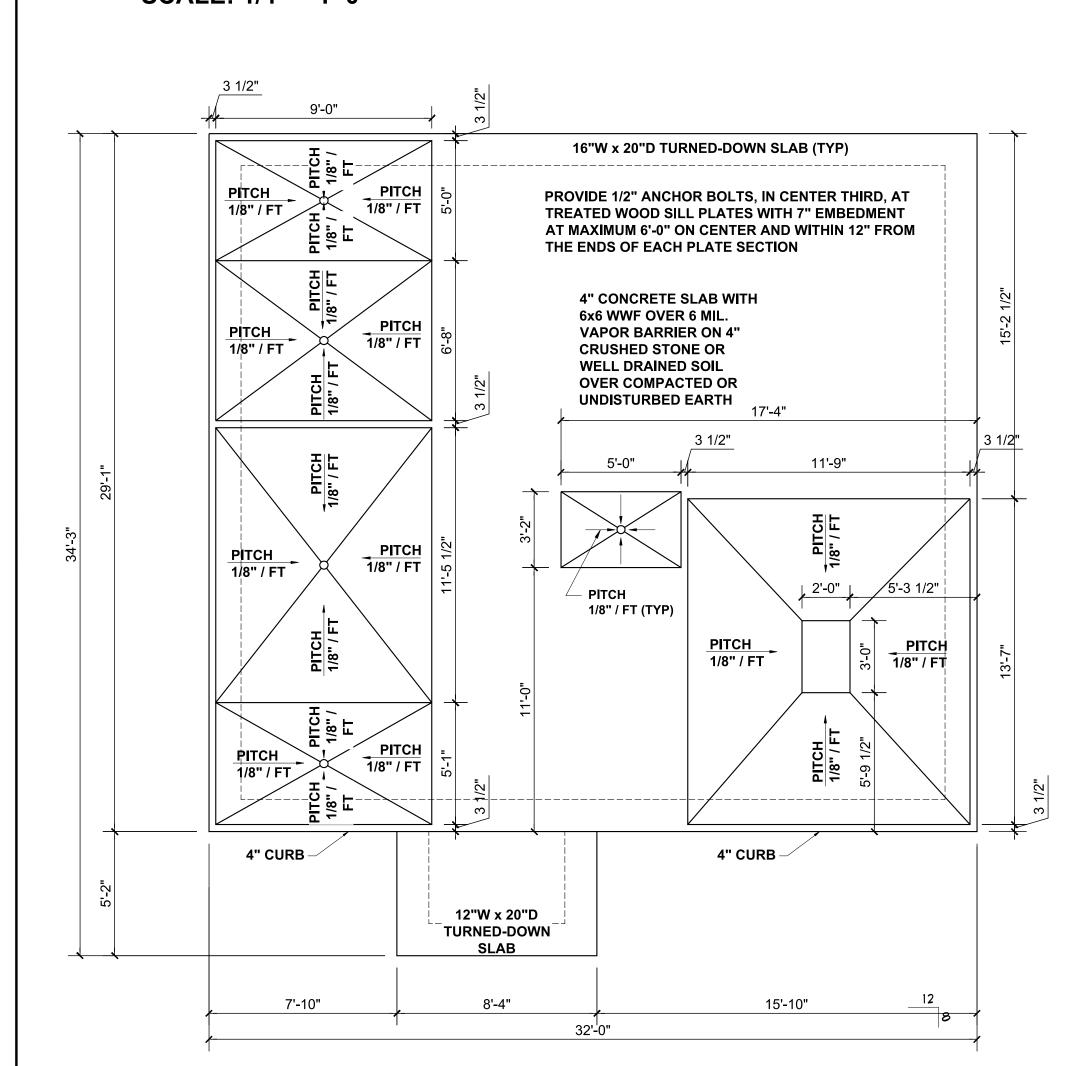


SLAB FOUNDATION PLAN

SCALE: 1/4" = 1'-0"

ROOF FRAMING PLAN

SCALE: 1/4" = 1'-0"

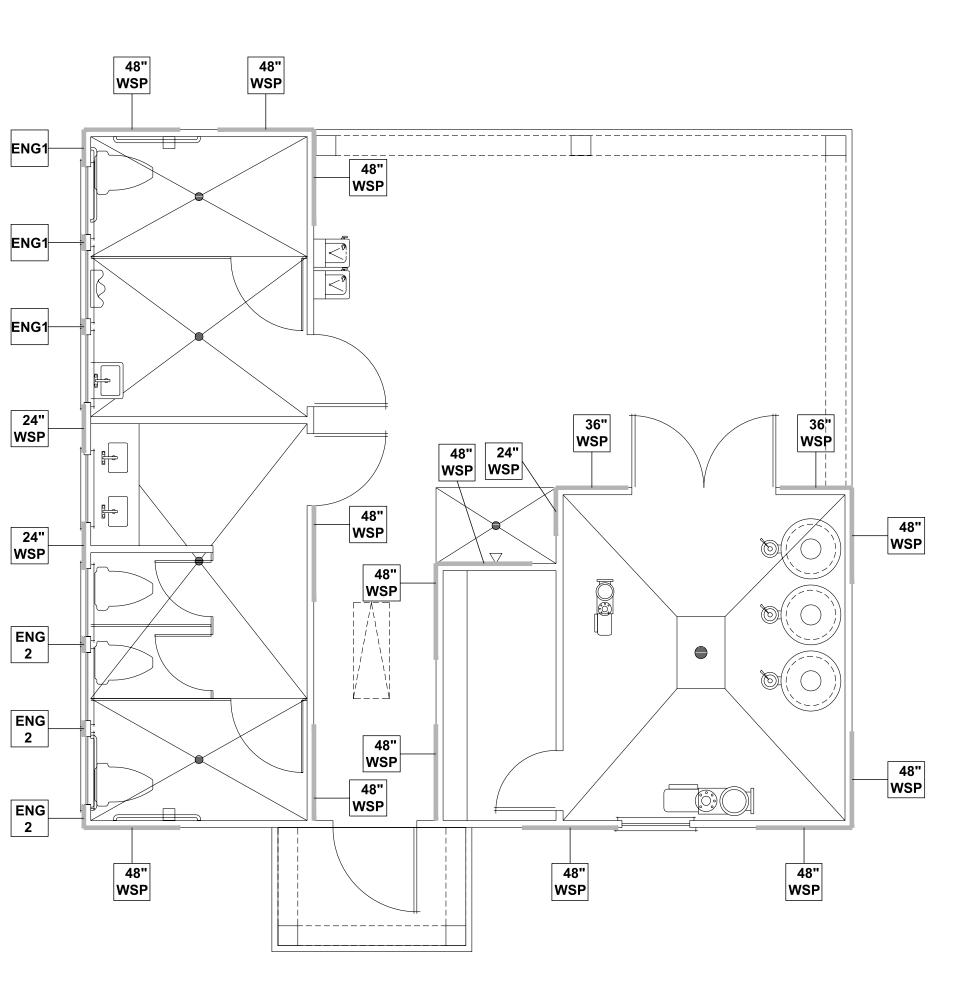

WALL BRACING PLAN


SCALE: 1/4" = 1'-0"

WALL BRACING REQUIREMENTS

MINIMUM PANEL WIDTH IS 24" - FIGURES BASED ON THE CONTINUOUS SHEATHING METHOD USING THE RECTANGLE CIRCUMSCRIBED AROUND THE FLOOR PLAN OR PORTION OF THE FLOOR PLAN. IF NO RECTANGLE IS NOTED, THE STRUCTURE HAS BEEN FIGURED ALL WITHIN ONE

RECTANGLE. - PANELS MAY SHIFT UP TO 36" EITHER DIRECTION FOR EASE OF CONSTRUCTION (NAILING & BLOCK REQUIREMENTS STILL APPLY).

 FOR ADDITIONAL WALL BRACING INFORMATION, REFER TO WALL BRACING DETAIL SHEET(S). - SCHEMATIC BELOW INDICATES HOW SIDES OF RECTANGLE ARE TO BE INTERPRETED IN BRACING CHART WHEN APPLIED TO STRUCTURE:



CS16 STRAP FROM STUD, CROSS HEADER, TO WALL TOP PLATE, 36" LONG MINIMUM

SIMPSON MSTA15 HOLD DOWN CAPACITY OF 970 POUNDS PER ANCHOR WITH (12) 10d NAILS. STRAP TO BE LOCATED AT EDGE OF BRACED WALL PANEL. (CS16 STRAPPING MAY BE SUBSTITUTED w/ SIMILAR LENGTH AND NAILING PATTERN.) USE HTT4 FOR ATTACHMENT TO CONCRETE.

SCALED LENGTH OF WALL PANEL AT LOCATION —

ROOF TRUSS

BY MFTR

NUMERICAL LENGTH

OF PANEL PANEL TYPE

ENGINEERED WALL SCHEDULE

ENG1: CONTINUOUSLY SHEATH WITH 7/16" OSB ATTACHED WITH 8d NAILS @ 6" OC EDGE AND 12" OC FIELD. FULLY BLOCKED AT ALL PANEL

ENG2: CONTINUOUSLY SHEATH WITH 7/16" OSB WITH 10d NAILS @ 3" OC EDGE AND 3" OC FIELD. FULLY BLOCKED AT ALL PANEL EDGES.

ENG3: CONTINUOUSLY SHEATH 7/16" OSB ATTACHED BOTH SIDES WITH 8d NAILS @ 4" OC EDGE AND 8" OC FIELD. FULLY BLOCKED AT ALL PANEL EDGES.

ENG4: CONTINUOUSLY SHEATH 7/16" OSB ATTACHED WITH 8d NAILS @ 4" OC EDGE AND 8" OC FIELD. FULLY BLOCKED AT ALL PANEL EDGES.

BEAM & POINT LOAD LEGEND

INTERIOR LOAD BEARING WALL —·—· ROOF RAFTER / TRUSS SUPPORT

----- DOUBLE RAFTER / DOUBLE JOIST —·—·— STRUCTURAL BEAM / GIRDER WINDOW / DOOR HEADER

> POINT LOAD FROM ABOVE **BEARING ON BEAM / GIRDER**

POINT LOAD TRANSFER

STRUCTURAL FRAMING NOTES - (SEE GENERAL NOTES SHEET FOR ADDITIONAL REQUIREMENTS.)

- ALL FRAMING TO BE #2 SPF MINIMUM.
- ALL BEARING HEADERS TO BE (2) 2x6 SUPPORTED w/ MIN (1) JACK AND (1) KING EACH END, UNO.
- **EXTERIOR WALL OPENINGS OVER 3' TO HAVE** MULTIPLE KING STUDS AS NOTED ON PLAN.
- ALL NON-BEARING HEADERS TO BE (2) 2x4 (1) J /
- PROVIDE CONTINUOUS BLOCKING THROUGH
- STRUCTURE FOR ALL POINT LOADS.
- TO BE SIMPSON STRONG-TIE OR EQUIVALENT. ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY LARGER MEMBERS MAY SUBSTITUTED AS

NEEDED FOR EASE OF CONSTRUCTION. MINIMUM

ALL HANGERS AND CONNECTORS SPECIFIED ARE

ALL EXTERIOR WALLS TO BE FULLY SHEATHED WITH 7/16" OSB.

BEAM SUPPORT IS (1) 2x4 STUD.

- FRONT PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT TOP AND BOTTOM USING SIMPSON (OR EQUIV) COLUMN BASE OR SST A24 BRACKETS. TRIM OUT PER BUILDER.
- 10. PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT BOTTOM USING SIMPSON (OR EQUIV) ABA44 AND AT TOP USING CS 16 STRAPPING (12" MIN) TO PORCH HEADER / BAND.
- WHEN A 4-PLY LVL IS USED, ATTACH WITH (1) 1/2" Ø BOLT 12" OC STAGGERED, TOP AND BOTTOM, 1-1/2" MIN FROM ENDS. ALTERNATE ATTACHMENT **EQUIVALENT METHOD MAY BE USED, SUCH AS** SDW OR TRUSSLOK SCREWS (SEE MANUFACTURER'S SPECIFICATIONS).
- 12. FOR STUD COLUMNS OF 4 OR MORE, INSTALL SST CS16 STRAPS @ 30" OC, 6" MAX FROM PLATES, ON INSIDE FACE OF COLUMN (EXTERIOR WALL), ON **BOTH FACES OF COLUMN (INTERIOR WALL).**

TRUSSED ROOF - STRUCTURAL NOTES

PROVIDE CONTINUOUS BLOCKING THROUGH

DENOTES OVER-FRAMED AREA

MINIMUM 7/16" OSB ROOF SHEATHING

STRUCTURE FOR ALL POINT LOADS.

- TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN. TRUSS PROFILES SHALL BE SEALED BY THE TRUSS MANUFACTURER. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS. INSTALLATION SHALL BE IN **ACCORDANCE WITH THE MANUFACTURER'S** INSTRUCTIONS.
- MANUFACTURER TO PROVIDE REQUIRED UPLIFT
- PROVIDE H2.5A (MINIMUM) OR EQUIVALENT AT **EACH TRUSS-TO-TOP PLATE CONNECTION AT OVER-FRAMED AREAS, UNLESS NOTED**
- **UPLIFT CONNECTION TO BE CARRIED THROUGH** TO FLOOR SYSTEM.

WALL BRACING NOTE:

WALLS WITH PROVIDED LENGTH LISTED AS "N/A" DO NOT MEET THE REQUIREMENTS OF PRESCRIPTIVE WALL BRACING FOUND IN THE NCRC. THESE WALLS HAVE BEEN ENGINEERED BASED ON DESIGN **GUIDELINES ESTABLISHED IN ASCE-07 AND THE NDS:** WIND & SEISMIC PROVISIONS SUPPLEMENT.

WALL BRACING: RECTANGLE 1									
REQUIRED LENGTH	PROVIDED LENGTH								
5.0 FT.	12.0 FT.								
5.0 FT.	12.0 FT.								
5.0 FT.	14.0 FT.								
5.0 FT.	N/A								
	REQUIRED LENGTH 5.0 FT. 5.0 FT. 5.0 FT.								



27526 FUQU

DRIV

PROVI

23900139

03/07/2023 **FAB**

FIRST FLOOR FRAMING PLAN



					EXHA	UST FAN SCHEDULE					
UNIT NO.	SERVICE	CFM	STATIC	RPM	TYPE	MIN. MOTOR HP & VOLTAGE	MAKE	MODEL#	DRIVE	CONTROL SCHEME	REMARKS
EF-1	RESTROOMS	225	0.1	1000	CEILING	813 WATTS/0.77A 120/1	GREENHECK	SP-A250	DIRECT	A	1-5
EF-2	PUMP ROOM	284	0.25	1577	IN-LINE	1/4 HP 120/1	GREENHECK	BSQ-70-4	BELT	В	1-6
EF-3	CHEM ROOM	129	0.25	1050	IN-LINE	1/4 HP 120/1	GREENHECK	BSQ-70-4	BELT	В	1-6

1. SCREEN 2. BACKDRAFT DAMPER

3. COLOR BY OWNER

4. INTEGRAL DISCONNECT SWITCH

5. SPEED CONTROLLER

6. CORROSION RESISTANT

CONTROL OPTIONS

CONTROL W/ ROOM LIGHTS CONTINUOUS OPERATION


	DIFFUSER SCHEDULE											
SYMBOL	CFM	NECK SIZE	MODULE SIZE	FRAME TYPE	PATTERN	DAMPER	MATERIAL	SERVICE	FINISH	MANUFACTURER & MODEL NO.	NOTES	
Α	AS NOTED	AS NOTED	12X12	SURFACE	EGGCRATE	NO	ALUM	RETURN	NOTE 2	TITUS 50F	1-3	

1. DIFFUSER DESIGNATIONS ON PLANS AS FOLLOWS:

DIFFUSER OR **NECK SIZE** - 8X4 DIFFUSER TYPE **AS NOTED ABOVE**


AIR QUANTITY 75

				UNIT HEA	TER SCHEDU	LE			
TAG	LOCATION	TYPE	ВТИН		ELECTRIC	CAL DATA	I	MANUFACTUER &	NOTES
				W	V PH	HZ	MODEL NO.		
UH-1	BATHROOMS	ELEC	2,560	750	120	1	60	MARKEL E3321TTD-RP	ALL

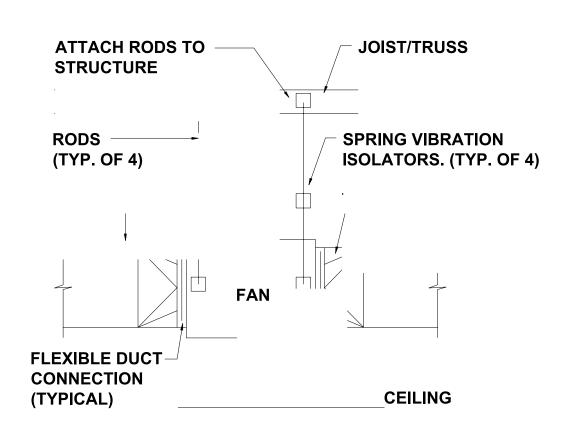


IN-LINE FAN DETAIL

NTS

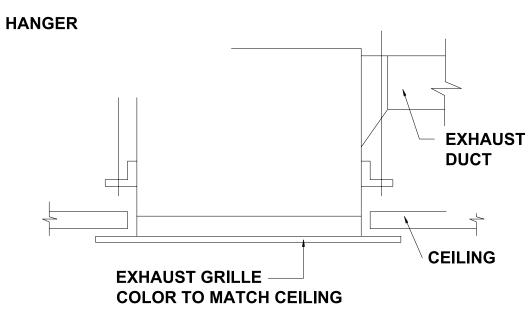

EXHAUST FAN DETAIL

NTS

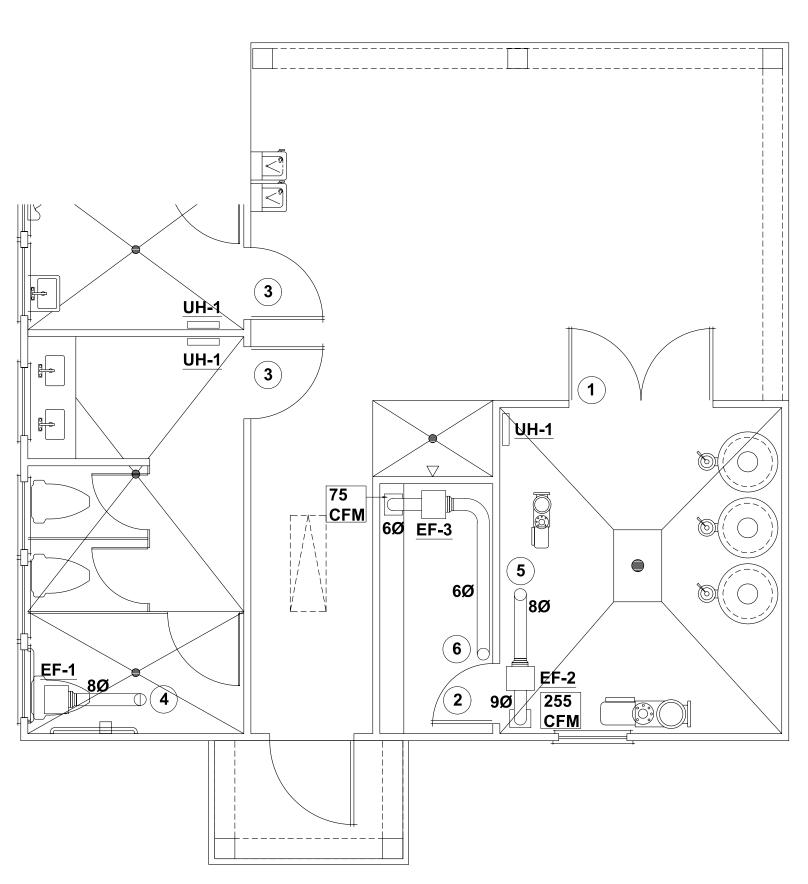

MECHANICAL FLOOR PLAN

SCALE: 1/4" = 1'-0"

MECHANICAL ABBREVIATIONS

ABOVE

AFF ABOVE FINISHED FLOOR AIR HANDLING UNIT **CUBIC FEET PER MINUTE**

ELECTRIC FAN FA **FRESH AIR HEAT PUMP**

INLINE WATER HEATER

MECHANICAL GENERAL NOTES

SCALE DRAWINGS. SEE ARCHITECTURAL **IGS AND REFLECTED CEILING PLANS FOR EXACT** ON OF DOORS, WINDOWS, CEILING DIFFUSER. CTWORK SHALL BE GALVANIZED SHEET METAL RUCTED IN ACCORDANCE WITH THE LATEST A STANDARDS. ALL RECTANGULAR SUPPLY AND **N DUCTWORK AND ALL ROUND DUCT SHALL MEET** QUIREMENTS OF INTERNATIONAL ENERGY CODE

NSATE DRAIN PIPING SHALL BE HARD DRAWN R (TYPE 'L'), PVC ACCEPTED. ING, DUCTS, VENTS, ETC. EXTENDING THROUGH AND ROOF SHALL BE FLASHED **ER-FLASHED IN A WATERPROOF MANNER. ALL** RATIONS IN WALLS OR CEILINGS THAT ARE FIRE SHALL BE SEALED TO THE FIRE RATING OF WALL

LING EVEN IF NOT SHOWN ON PLANS IN A UL Lוסובט METHOD.

5. ALL PIPING AND DUCTWORK LOCATIONS SHALL BE COORDINATED WITH THE WORK UNDER OTHER DIVISIONS OF THE SPECIFICATIONS TO AVOID INTERFERENCE.

6. ANY DEVICE REQUIRING A THERMOSTAT FOR CONTROL SHALL BE FURNISHED WITH A THERMOSTAT WHETHER INDICATED ON THE DRAWINGS OR NOT.

7. LOCATE ALL THERMOSTATS AND SWITCHES 48" AFF TO MEET ACCESSIBILITY CODE LATEST ADDITION.

8. MECHANICAL CONTRACTOR SHALL BALANCE SYSTEM TO AIR QUANTITIES INDICATED ON PLANS.

9. CONTRACTOR SHALL COORDINATE DESIGN DRAWINGS WITH ARCHITECTURAL DRAWINGS.

ADDITIONAL MECHANICAL NOTES

- 1. CLEAR AREA DIMENSION. INTERIOR DUCT INSULATION MUST HAVE AN R-VALUE OF 5.0. ANY FLEX DUCT THAT RUNS OVER 10 FEET SHALL HAVE AN R-VALUE OF 6.0. ANY FLEX DUCT WHICH RUNS IN THE ATTIC SPACE SHALL HAVE AN R-VALUE OF 8.0. ALL DUCTWORK OUTSIDE BUILDING SHALL HAVE A MIN. R-8 VALUE.
- 2. COORDINATE ELECTRICAL REQUIREMENTS OF THE UNITS WITH ELECTRICAL CONTRACTOR.
- 3. PROVIDE RETURN AIR GRILL WITH FILTER.
- 4. ALL EQUIPMENT AND DUCTWORK SHALL BE INSTALLED PER MANUFACTURER AND IN ACCORDANCE WITH STATE AND LOCAL CODES AS WELL AS SMACNA STANDARDS.
- 5. ALL UNITS TO BE WIRED FOR SINGLE SOURCE POWER. ALL AHU SHALL HAVE AN AUTOMATIC SHUT DOWN **SWITCH INSTALLED.**
- 6. BATHROOM TO BE EQUIPPED WITH EXHAUST FANS PROVIDED BY THE MECHANICAL CONTRACTOR. MECHANICAL CONTRACTOR TO PROVIDE AND INSTALL DUCT TO OUTSIDE. FANS SHALL BE WIRED BY **ELECTRICAL CONTRACTOR.**
- MECHANICAL CONTRACTOR TO COORDINATE DUCTWORK LAYOUT WITH ALL TRADES.
- 8. REFRIGERANT LINES TO BE SIZED BY MANUFACTURER
- FOR LENGTH OF RUN BETWEEN COIL AND CONDENSER. 9. VERIFY THERMOSTAT LOCATIONS WITH OWNER.
- 10. MECHANICAL SYSTEM TO BE BALANCED AND TESTED AFTER INSTALLATION TO ASSURE PROPER OPERATION.

POOL EXHAUST CALCULATIONS

PUMP ROOM

= 152 SQ FT X 10 FT = 1520 CU FT 10 AIR CHANGES/HOUR = 1520 X (10/60) = 254 CFM (EF-2 PROVIDES 284 CFM)

CHEMICAL STORAGE ROOM = 45 SQ FT X 10 FT = 450 CU FT 10 AIR CHANGES/HOUR = 450 X (10/60) = 75 CFM (EF-3 PROVIDES 129 CFM)

TAGGED PLAN NOTES

- (1.) PUMP ROOM DOOR REQUIRES A MIN. FREE AREA OF 0.83 SQFT. FULL HEIGHT LOUVERED DOOR, SEE ARCH. PLANS FOR DOOR DETAILS.
- (2.) CHEMICAL STORAGE ROOM DOOR REQUIRES A MIN. FREE AREA OF 0.26 SQFT. DOOR LOUVER GRILLE, SEE ARCH. PLANS FOR DOOR DETAILS.
- 3.) BATHROOM DOOR REQUIRES A MIN. FREE AREA OF 0.45 SQFT. DOOR LOUVER GRILLE, SEE ARCH. PLANS FOR DOOR DETAILS.
- 4. 8Ø EXH. DUCT TO EXHAUST THROUGH ROOF. 5.) 8Ø EXH. DUCT TO EXHAUST THROUGH ROOF. PROVIDE AIR TIGHT CONNECTION BETWEEN DUCT AND ROOF.
- 6.) 6Ø EXH. DUCT TO EXHAUST THROUGH ROOF. PROVIDE AIR TIGHT CONNECTION BETWEEN DUCT AND ROOF.

27520 ARINA, FUQU,

DRIV **AMENITY** CREEK **PROVINCE**

23900139

03/07/2023 **FAB**

MECHANICAL PLAN

M1.0

POOL NOTES

- 1. ALL ELECTRICAL EQUIPMENT IN POOL AREA SHALL BE BONDED TOGETHER WITH #8 CU. GND. PER N.E.C. #680-26.
- 2. ALL RECEPTACLES IN POOL AREA WITHIN 20' OF POOL AND IN POOL EQUIPMENT ROOM SHALL BE WEATHERPROOF G.F.C.I. TYPE.
- ELECTRICAL INSTALLATION IS TO BE IN COMPLIANCE WITH ARTICLE 680 OF THE N.E.C
- THE FOLLOWING ITEMS ARE REQUIRED TO BE BONDED WITH INSULATED #8 COPPER WIRE, OR AS OTHERWISE REQUIRED BY THE N.E.C. OR EQUIPMENT MANUFACTURERS: A. ALL METALLIC PARTS OF THE POOL STRUCTURE. INCLUDING REINFORCING STEEL WITHIN 5' HORIZONTALLY OF THE POOL WALL IN ALL CONCRETE SLABS.

B. UNDERWATER LIGHT FIXTURES. INCLUDING FORMING SHELLS. MOUNTING BRACKETS AND JUNCTION BOXES AS REQUIRED.

- C. HANDRAILS.
- D. LADDERS.
- E. PUMP MOTORS, FOR ALL POOLS.
- F. WINDOW FRAMES, WHERE NOTED. G. LIGHT FIXTURES ABOVE THE POOL AND WITHIN 5 FEET HORIZONTALLY OF THE POOL
- H. ANY OTHER METALLIC PARTS REQUIRED BY THE N.E.C. 5. THE FOLLOWING ITEMS ARE REQUIRED TO BE GROUNDED WITH INSULATED #12 COPPER WIRE, OR AS OTHERWISE REQUIRED BY THE N.E.C. OR EQUIPMENT MANUFACTURERS: A. UNDERWATER LIGHTING FIXTURES.
 - B. ALL ELECTRICAL EQUIPMENT ASSOCIATED WITH THE CIRCULATION SYSTEM OF THE POOL.
 - C. ALL ELECTRICAL EQUIPMENT WITHIN 5 FEET OF THE POOL.
 - D. JUNCTION BOXES.
 - E. TRANSFORMER ENCLOSURES.
 - F. PANELBOARDS SUPPLYING POWER TO ANY EQUIPMENT ASSOCIATED WITH THE POOL OR SPRAY AREA.
- G. GROUND FAULT INTERRUPT CIRCUITS.
- GROUNDING FOR POOL LIGHTS AND FOR PUMP MOTORS IS TO BE IN CONDUIT.
- ALL UNDERWATER LIGHT FIXTURES MUST BE SUBMERGED BEFORE BEING OPERATED.
- UNDERWATER LIGHT FIXTURES MUST BE REMOVABLE FROM THE WATER FOR RELAMPING OR NORMAL MAINTENANCE WITHOUT REQUIRING DRAINAGE OF THE POOL
- 9. NICHE LIGHT FIXTURES SHALL BE SUPPLIED WITH CORDS WHICH ARE LONG ENOUGH TO REACH THE DECK JUNCTION BOX WITHOUT INTERMEDIATE SPLICING. CONDUIT RUNS FROM EACH NICHE TO THE APPROPRIATE CONNECTION POINT (DECK BOX, SUBMERSIBLE JUNCTION BOX, ETC.) MUST BE AS DIRECT AS POSSIBLE AND A TOTAL LENGTH SHORTER THAN THE CORD WHEN PROPERLY INSTALLED. TO PROPERLY INSTALL FIXTURE AND CORD, LEAVE ENOUGH CORD IN THE NICHE SO THAT WHEN SERVICING IS REQUIRED THE FIXTURE CAN BE LIFTED ABOVE WATER LEVEL WITHOUT DRAINING THE POOL (WRAP EXTRA CORD LENGTH AROUND THE FIXTURE WHEN PLACING IN NICHE).
- 10. WHEN RESEALING A FIXTURE (SUCH AS AFTER RELAMPING, ETC.) CARE MUST BE TAKEN TO TIGHTEN THE SCREWS OR BOLTS IN SUCH A FASHION AS TO CREATE EQUAL PRESSURE ON THE GASKET ALL THE WAY AROUND THE FIXTURE (FOLLOW MANUFACTURERS INSTRUCTIONS).
- 11. ALL THREADED CONNECTIONS MUST BE MADE WITH NATIONAL TAPERED PIPE THREADS (N.P.T.) AND APPROVED THREAD SEALANT.

- 12. AN APPROVED POTTING COMPOUND (LOW MELTING PARAFFIN OR RTV SILASTIC) MUST BE USED TO FILL THE ENTRY OF THE JUNCTION BOX TO PREVENT MOISTURE MIGRATION INTO THE CONDUIT. AFTER POTTING THE JUNCTION BOX, ATTACH THE COVER PLATE SO THAT IT IS WATERTIGHT.
- 13. ALL METALLIC PIPING SYSTEMS ASSOCIATED WITH THE POOL MUST BE BONDED TO THE **EQUIPMENT GROUNDING CONDUCTOR OF THE BRANCH CIRCUIT SUPPLYING THE POOL.**
- 14. UNDERWATER TYPE SO AND ST CORD CANNOT BE SPLICED EXCEPT IN AN APPROVED UNDERWATER JUNCTION BOX OR UL LISTED UNDERWATER SPLICE KIT.
- 15. MAXIMUM EXPOSED CORD LENGTH IS 10 FEET, ANY LENGTH BEYOND 10 FEET MUST BE PROTECTED BY CONDUIT.
- 16. THE CONDUIT SYSTEM MUST BE WATERTIGHT FROM THE PANEL TO THE POOL.
- 17. ALL CONDUITS EXPOSED TO MOISTURE (BELOW GROUND, IN THE POOL, ETC.) MUST BE OF A NON-CORROSIBLE MATERIAL.
- 18. ALL POOL EQUIPMENT MOTORS SHALL BE PROVIDED WITH MOTOR STARTERS AS REQUIRED AND ALL CONTROL WIRING SHALL BE FURNISHED TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.

ELECTRICAL ABBREVIATIONS

ABV **ABOVE ABOVE FINISHED FLOOR COPPER WIRE ELECTRIC FAN EMERGENCY LIGHTING EMERGENCY EXIT SIGN** GFI **GROUND FAULT INTERRUPTER**

GROUND

GRD

HEAT PUMP JUNCTION BOX MINIATURE CIRCUIT BREAKER

PH PHASE os MOTION SENSOR **INLINE WATER HEATER**

ELECTRICAL NOTES

CAL CONTRACTOR IS TO REVIEW COMPLETE DRAWING SET BEFORE ANY WORK INSTALLATION IS STARTED. CAL CONTRACTOR IS TO REPORT ON ANY DISCREPANCY(S) TO ENGINEER PRIOR

K/INSTALLATION FOR CLARIFICATION AND/OR SOLUTION. CAL CONTRACTOR IS RESPONSIBLE FOR ALL WORK EXPLICITLY SHOWN AND IPLIED UNLESS OTHERWISE NOTED.

RAWINGS ARE DIAGRAMMATIC AND SHOW GENERAL LOCATION AND **JEMENT OF ALL MATERIALS AND EQUIPMENT. THE DRAWINGS SHALL BE** /ED AS CLOSELY AS BUILDING CONSTRUCTION AND ALL OTHER WORK WILL

CAL CONTRACTOR SHALL COORDINATE CLOSELY WITH ALL OTHER TRADES TO ONFLICTS AND MISTAKES, AND TO ENSURE OTHER TRADES PROVIDE MEASURES)MMODATE ELECTRICAL WORK (I.E. ACCESS DOORS, SLAB/WALL/ROOF 3S, ETC.)

CAL CONTRACTOR TO VERIFY ALL REQUIREMENTS AND COORDINATE EXACT ON OF INCOMING ELECTRICAL SERVICE WITH LOCAL POWER COMPANY PRIOR TO T START-UP, NOTIFY ENGINEER OF ANY CHANGES AS MAY BE REQUIRED.


- 1. FINAL ELECTRICAL CONNECTION(S) TO ALL EQUIPMENT, AND/OR FURNITURE (I.E. CUBICLES, WORKSTATIONS, ETC.) IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR.
- 8. ALL CONDUCTORS SHALL BE COPPER AND TYPE NM #12AWG MINIMUM WIRE SIZES SHALL BE BASED ON 75 DEGREE WIRE & TERMINALS.
- ALL WIRING DEVICES SHALL BE SPECIFICATION GRADE.
- 10. ELECTRICAL CONTRACTOR SHALL VERIFY AVAILABLE FAULT CURRENT WITH ELECTRICAL
- UTILITY PRIOR TO PURCHASING DISTRIBUTION EQUIPMENT. 11. ALL EQUIPMENT AND COMPONENTS INSTALLED AS PART OF THIS FACILITY SHALL BE NEW U.L. LISTED AND LABELED, AND INSTALLED PER THE 2008 NEC, ANY
- JURISDICTIONAL REQUIREMENTS AND PER THE MANUFACTURERS REQUIREMENTS. 12. ELECTRICAL CONTRACTOR SHALL COORDINATE WITH ALL OTHER TRADE DISCIPLINE TO AVOID INTERFERENCE AND RE-WORK.
- 13. ALL CONDUCTORS TO BE INSTALLED UNDERGROUND SHALL BE INSTALLED 24" B.F.G AND IN SCHEDULE 40 PVC CONDUIT.
- 14. ALL FLUORESCENT LAMPS SHALL BE T-8 SP 41 OR APPROVED EQUAL LAMPS SHALL BE ENVIRONMENTALLY SAFE.
- 15. ELECTRICAL CONTRACTOR SHALL CHECK FOR ELIMINATE SHORTS PRIOR TO CIRCUITS. FAILURE TO DO SO WILL RESULT IN REPAIRS TO BE MADE AT NO EXPENSE
- TO OWNERS OR REPRESENTATIVES. 16. ELECTRICAL CONTRACTORS OR DESIGNATED TELECOMMUNICATIONS SUBCONTRACTOR

SHALL COORDINATE LOCATION AND REQUIREMENTS FOR TELEPHONE SERVICE WITH THE

- **TELEPHONE COMPANY.** 17. FIRESTOP ALL PENETRATIONS, BY PIPING OR CONDUITS, OF FIRE RATED WALLS, FLOORS, AND PARTITIONS. PROVIDE A DEVICE(S) OR SYSTEM(S) WHICH HAS BEEN TESTED AND LISTED. INSTALL THE DEVICE(S) OR SYSTEM(S) IN ACCORDANCE WITH THE
- CONDITIONS OF THEIR LISTING, PROVIDE A DEVICE(S) OR SYSTEM(S) WITH AN "F" RATING EQUAL TO THE RATING OF THE ASSEMBLY BEING PENETRATED. 18. ELECTRICAL CONTRACTOR SHALL PROVIDE AND INSTALL BATHROOM EXHAUST FAN MECHANICAL CONTRACTOR SHALL PROVIDE AND INSTALL BATHROOM EXHAUST
- 19. ELECTRICAL CONTRACTOR SHALL PROVIDE RACEWAY SEALS TO MAIN DISTRIBUTION
- PANELS PER NEC 225.27.
- 20. ALL DEVICES TO BE INSTALLED FOR ADA ACCESSIBILITY PER ANSI A117.1
- 21. CONDUIT ENTERING COOLER AND FREEZER TO BE SEALED PER NEC 300.7 22. ELECTRICAL CONTRACTOR TO PROVIDE AIC PLAQUES PER NEC 110.24. WHERE
- SERVICES IF TWO, OR MORE EXIST FOR THE BUILDING. 23. ALL EMERGENCY LIGHTS TO BE CONNECTED TO UNSWITCHED SIDE OF NEAREST LIGHT
- 24. ALL EXTERNAL LIGHTING TO BE CONNECTED TO TIMER AND PHOTO -CELL IF NOT
- 25. WHENEVER AND WHEREVER APPLICABLE ALL OUTLETS/RECEPTICLES INSIDE OF ALL **AMENITY STRUCTURES SHALL BE TAMPER RESISTANT**


S	\$	SWITCH, SINGLE POLE, 120/277V, 20A, 48" AFF, LEVITON 1221-2
S _M	\$ _M	120 V, 20A, MOTOR RATED TOGGLE SWITCH
0:	S	OCCUPANCY SENSOR SWITCH, 120/277V, 20A, 48" AFF
\in	+	RECEPTACLE, DUPLEX, 120V, 20A, 18" AFF LEVITON TBR20 (TAMPER-RESISTANCE RECEPTACLE)
(5FI	RECEPTACLE, DUPLEX GFI, 120V, 20A, ABOVE CABINET COUNTER TOI GROUND FAULT INTERRUPTOR LEVITON 6898 (EXTERIOR IN NEMA 3R ENCLOSURE)
Ç	5)	EXHAUST FAN
4	}	CEILING MOUNTED FAN
		ELECTRICAL PANEL
]	PROPOSED METER
7		HEAVY DUTY DISCONNECT SWITCH
8	•	LIGHTED EMERGENCY EXIT SIGN WITH BATTERY BACKUP
A _{EI}	3	EMERGENCY LIGHTS WITH BATTERY BACKUP
\subseteq		WALL MOUNTED LIGHT
€)	RECESSED LIGHT
		RECESSED MOUNTED 2X4 FLUORESCENT STRIP

SURFACE MOUNTED FLUORESCENT STRIP

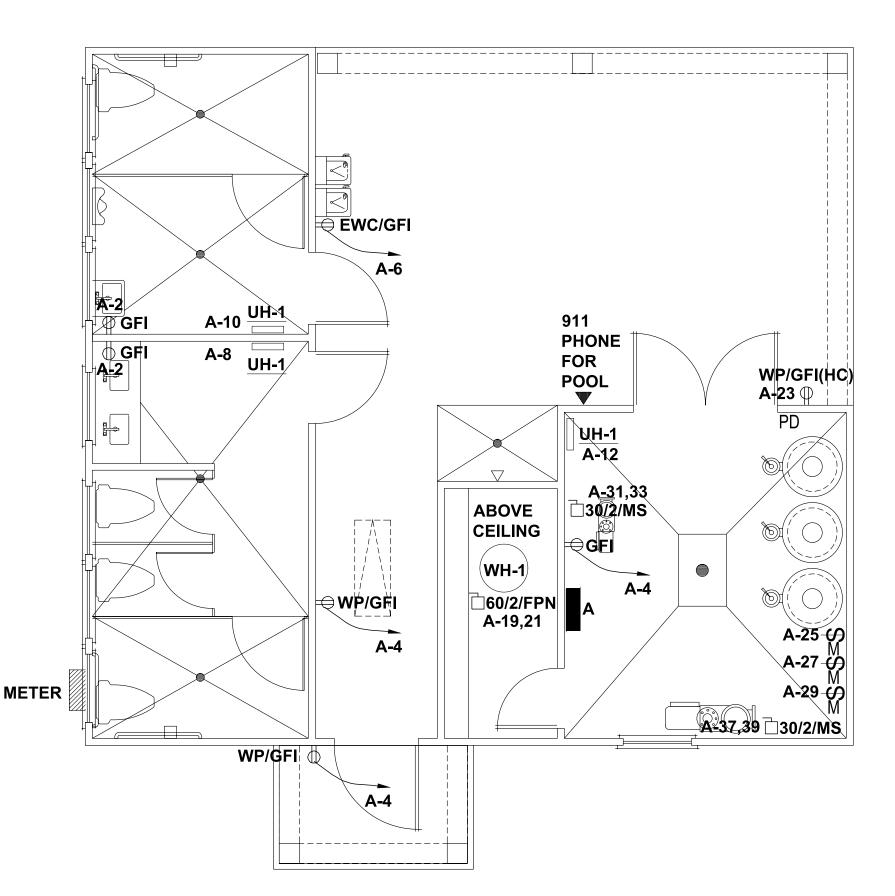

ELECTRICAL FLOOR PLAN - POWER

SCALE: 1/4" = 1'-0"

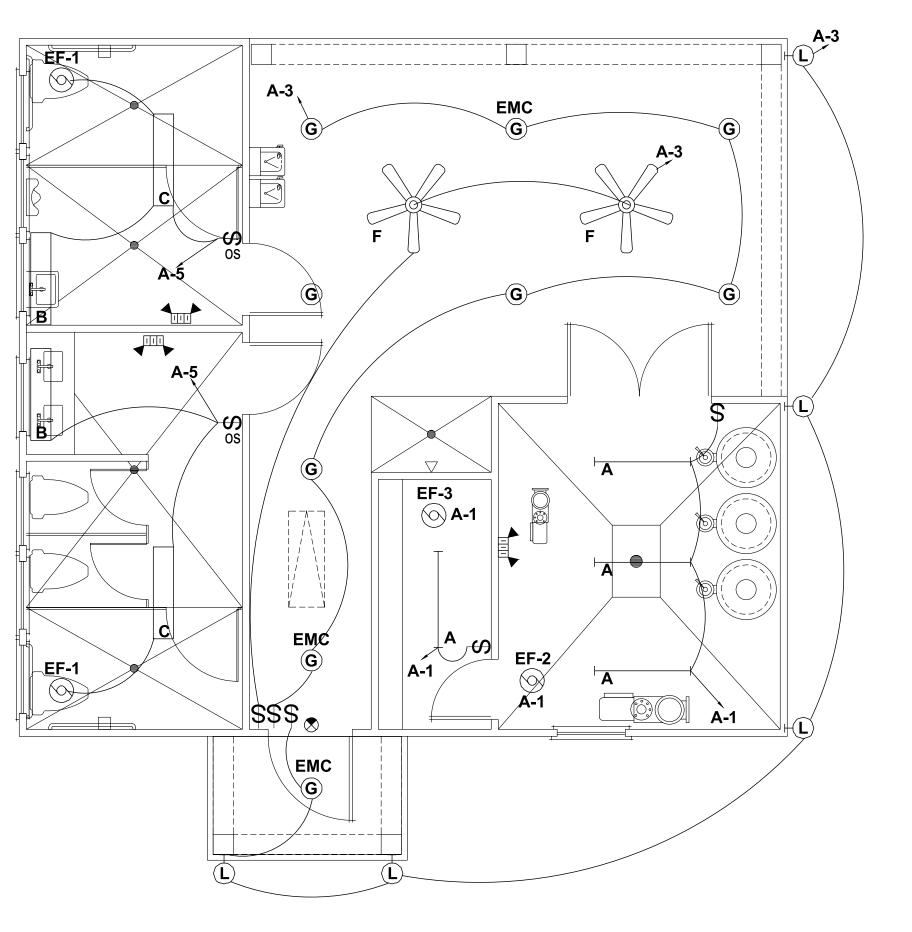

ELECTRICAL FLOOR PLAN - LIGHTING

SCALE: 1/4" = 1'-0"




2752 ARINA,

03/07/2023 **FAB**

ELECTRICAL PLANS

PANEL:	A												
VOLTAG	E (L-N):	120					ENCLOSURE	TYPE:	NEMA 3R				
VOLTAG	E (L-L):	240					MOUNTING:		SURF	ACE			
PHASES	, WIRES:	1 ф. 3 V	V				AIC RATING:		22000				
MINIMUM	I BUS CAPACITY (A): 20	00 A					NOTES						
MAIN O.	C. DEVICE (A):	200 A					NOTES:						
CKT NO	DESCRIPTION	TRIP AMPS	POLE	,		OADS (VA)	В	POLE	TRIP AMPS	DESCRIPTION	CKT NO.		
1	LIGHITNG GENERAL	20	1	600	400			1	20	REC: MEN,WOMEN	2		
3	LIGHTING EXTERIOR	20	1			400	600	1	20	REC: EXTERIOR, PUMP	4		
5	LIGHTING RESTROOM	20	1	500	800			1	20	REC: EWC	6		
7	POOL LIGHTS	20	1			700	800	1	20	HVAC: UH-1	8		
9	POOL LIGHTS	20	1	700	800			1	20	HVAC: UH-1	10		
11	POOL LIGHTS (FUTURE)	20	1			700	800	1	20	HVAC: UH-1	12		
13	POLE LIGHTS	20	1	700	360			2	20	POWER CENTER	14		
15	SPACE	-	1			0	360	2	20	POWER CENTER	16		
17	SPACE	=	1	0	360			1	20	EASY TOUCH	18		
19			2			3000	0	1	-	SPACE	20		
21	WH-1	35	2	3000	0			1	-	SPACE	22		
23	H.C. LIFT CHARGER	20	1			200	0	1	-	SPACE	24		
25	CHEMICAL FEED PUMP	20	1	400	0			1	-	SPACE	26		
27	CHEMICAL CONTROLLER	20	1		-	200	0	1	-	SPACE	28		
29	CHEMICAL CONTROLLER	20	1	200	0			1	-	SPACE	30		
31			2			3200	0	1	_	SPACE	32		
33	FOUNTAIN PUMP	30	30	30	2	3200	0	0200		1	_	SPACE	34
35	SHUNT TRIP		_	0200	,	0	0	1	_	SPACE	36		
37			2	3100	0			1	_	SPACE	38		
39	POOL PUMP	40	2	0100	· ·	3100	0	1	_	SPACE	40		
41	SHUNT TRIP			0	0	0100	Ū	1	_	SPACE	42		
	OHORT TRI					PHASE TOTAL	S (VA)	•		OI AGE	72		
				15′			060			DEMAND LOAD	31.88 KVA		
				10						SPARE CAPACITY	16.12 KVA		
				CONNI	CTED	DEMAND	DEMAND			SPARE CAPACITY	67.0 AMPS		
				LOAD		DEMAND FACTOR	LOAD (KVA)			SPARE CAPACITY	33%		
	LIGHTS			4		1.25	5.375			OI AILE OAI AOII I	0070		
	RECEPTACLES FIRST												
	10KVA			1.	8	1	1.8						
	RECEPTACLES REMAINING				•	0.5	-						
	HVAC UNIT HEATER			0	.8	1.25	1						
	HVAC REMAINING			1.	6	1	1.6						
	WATER HEATER			(<u> </u>	1.25	7.5						
	POOL EQUIP.			14	.6	1	14.6						
	TOTAL:			29).1		31.88						
	LOAD (AMPS)			12			133						

				LIGHTING FI	XTURE SCHEDUL	E		
MARK	MANUFACTURER	MODEL NUMBER	MOUNTING	# OF LAMPS	LAMP TYPE	TOTAL WATTS	VOLTS	REMARKS
Α	LITHONIA	DMW 1 32 120 ES	SURFACE	1	F32W T8	36	120	48" T8 FLUORESCENT STRIP LIGHTING FIXTURE W/ ENCLOSED FIBERGLASS HOUSING
В	LITHONIA	WC 2 32 120	SURFACE	2	F32W T8	64	120	48" GENERAL PURPOSE T8 FLUORESCENT WALL BRACKET LIGHTING FIXTURE
С	LITHONIA	LB 232 120	SURFACE	2	F32W T8	64	120	4' LOW PROFILE WRAPAROUND FLUORESCENT LIGHTING FIXTURE WITH PRISMATIC ACRYLIC LENS
F	HUNTER FANS	21955 FAN	CEILING	-	-	-	120	52" MARINER SERIES OUTDOOR WHITE CEILING FAN WITH PENDANT MOUNT WHERE REQ. COORD. MOUNTING HEIGHT WITH OWNER
G	LITHONIA	AF 2 18TRT 6AR 120	RECESSED	2	CF 18W TRT	36	120	6" NOMINAL APERTURE RECEESED DOWNLIGHT WITH CLEAR ALZAC REFLECTOR, DAMP LABEL WHERE APPLICABLE
L	SEAGULL	8920-12	SURFACE	1	CF 22W QUAD	26	120	EXTERIOR CARRIAGE STYLE WALL LANTERN WITH ACRYLIC PANELS, RATED FOR OUTDOOR USE. COORDINATE MOUNTING HEIGHT.
EMC	LITHONIA	PS DL3 ELR	EXTERNAL	-	-	3	120/277	COMPACT FLUORESCENT EMERGENCY BATTERY PACK. PROVIDES ONE LAMP 90 MINUTE BATTERY BACKUP AT PARTIAL LUMEN OUTPUT
EX	LITHONIA	LQM SW - R 120/277 EL N	UNIVERSAL	-	LED	< 1	120/277	THEROPLASTIC LED EXIT SIGN WITH RED LETTERS AND WHITE HOUSING. PROVIDE 90 MINUTE BATTERY BACKUP.
EL	LITHONIA	ELM654 H1212	UNIVERSAL	2	H1212	54	120/277	SURFACE MOUNTED EMERGENCY LIGHT. MOUNT AT 80" AFF TO BOTTOM. PROVIDE WITH 90 MINUTE BATTERY BACKUP.

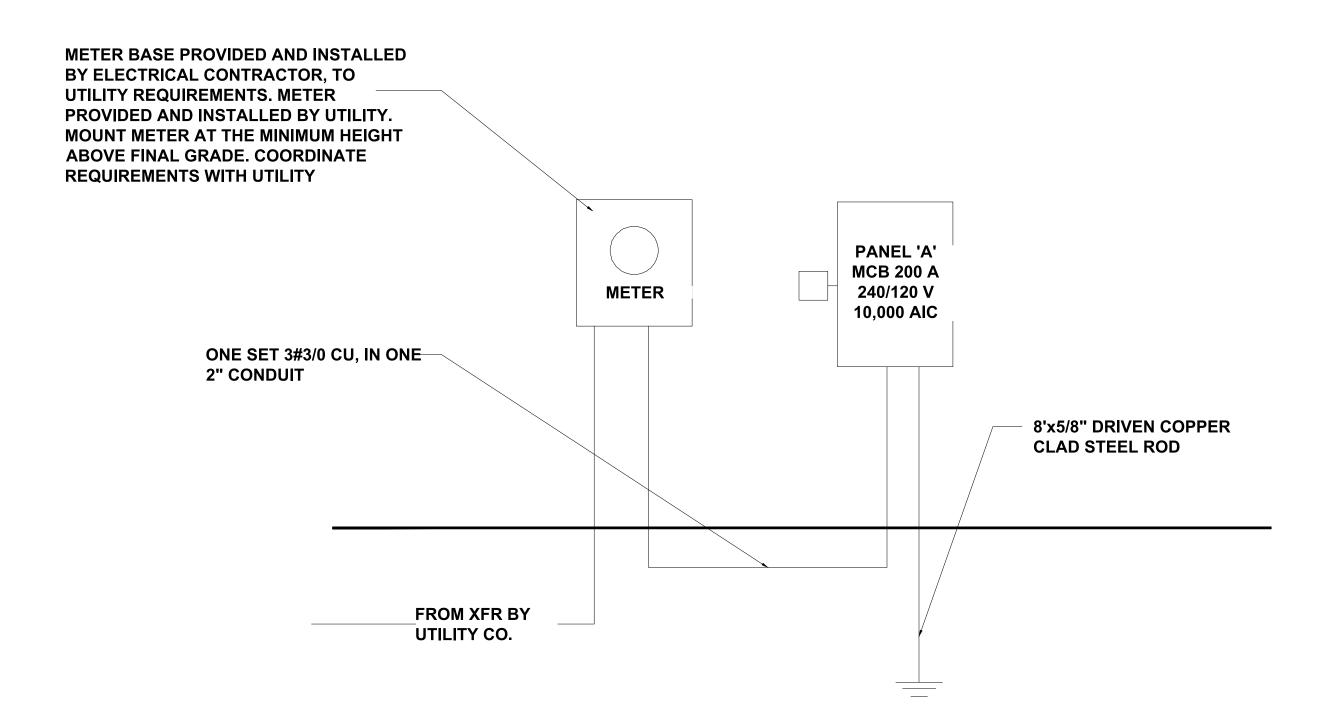

ELECTRICAL RISER

NTS



P-0961

ENGINEERING • DESIGN • ENERGY

and PLLC; 8600 'D' JERSEY CT, RALEIGH, NC 27617 919-480.1075

and JDSCONSULTING.NET; WWW.JDSCONSLTING.NET

PLC IS NOT LIABLE FOR CHANGES MADE TO PLANS DUE TO METHODS OR ANY CHANGES TO PLANS MADE IN THE FIEL

JDS CONSULTING FLLC; 8000 D JERSET CT INFO@JDSCONSULTING.NET; W JDS Consulting PLLC IS NOT LIABLE FOR C CONSTRUCTION METHODS OR ANY CHANBY CONTRACTOR OR BY OTHERS. DRAWII THE LOT NUMBER, PROPERTY, OR AS A MASSIBLE TO DIMENSIONS SHALL GOVERN OF STREET.

PROVINCE CREEK AMENITY CENTER & POOL

LOCATION:
196 PROVIDENCE CREEK DRIVE, FUQUAY-VARINA, NC 27526

CT NO.: **23900139**

DATE: DRAWN BY: FAB

ELECTRICAL SCHEDULES

E1.1

PLUMBING ABBREVIATIONS

ABOVE ABOVE FINISHED FLOOR **HOSE BIBB**

REFRIGERATOR **BACK FLOW PREVENTER** INLINE WATER HEATER

----- DOMESTIC COLD WATER —··—··— DOMESTIC HOT WATER CHECK VALVE (RPZ)

BALL VALVE (RPZ)

	P-0
Ling Version	617 919.480.1075

JDS Consulting PLLC IS NOT LIABLE FOR C CONSTRUCTION METHODS OR ANY CHAN BY CONTRACTOR OR BY OTHERS. DRAWI THE LOT NUMBER, PROPERTY, OR AS A MASHET. DIMENSIONS SHALL GOVERN GOVERN OVER DIMENSION
--

2752 ARINA, N

FUQU, DRIV **AMENITY** CREEK

PROVINCE 196 23900139

03/07/2023 **FAB**

PLUMBING PLANS


P1.0

VENT THRU ROOF PIPE SIZES SUPPLIES AND NOTES MOUNTING STOPS | WASTE | VENT MCGUIRE 185 PROVIDE WITH OPEN FRONT SEAT WITH NO LID PROVIDE WITH OPEN FRONT SEAT WITH NO LID AT **FLOOR** MCGUIRE 185 **ADA HEIGHT** 1-1/2" **MOUNT AT REQUIRED ADA HEIGHT** MOUNT AT ADA HEIGHT METERING FAUCET 1-1/2" MCGUIRE 175 1-1/2" WALL HUNG PROVIDE SHOCK ARRESTOR MOUNT AT ADA HEIGHT METERING FAUCET COUNTER 1-1/2" 1/2" MCGUIRE 175 1/2" TOP PROVIDE SHOCK ARRESTOR PRESSURE BALANCE VALVE, SHOWER HEAD, ARM, **FLOOR** 1-1/2" 1/2" 1/2" FLANGE, & DRAIN MOUNT AT ADA HEIGHT FROST RESISTANT 1-1/2" MCGUIRE 165 1/2" 1/2" VANDAL RESISTANT 38 GALLONS, 6.0 KW, 240V, 1 28 GPM REC AT 90F PLATFORM 3/4" 3/4" RISE. DRAIN PAN. SET TO 105F **FLOOR**

W/ PERMANENT VACUUM BREAKER

COORD. W/ WALL THICKNESS W/ PERMANENT

VACUUM BREAKER

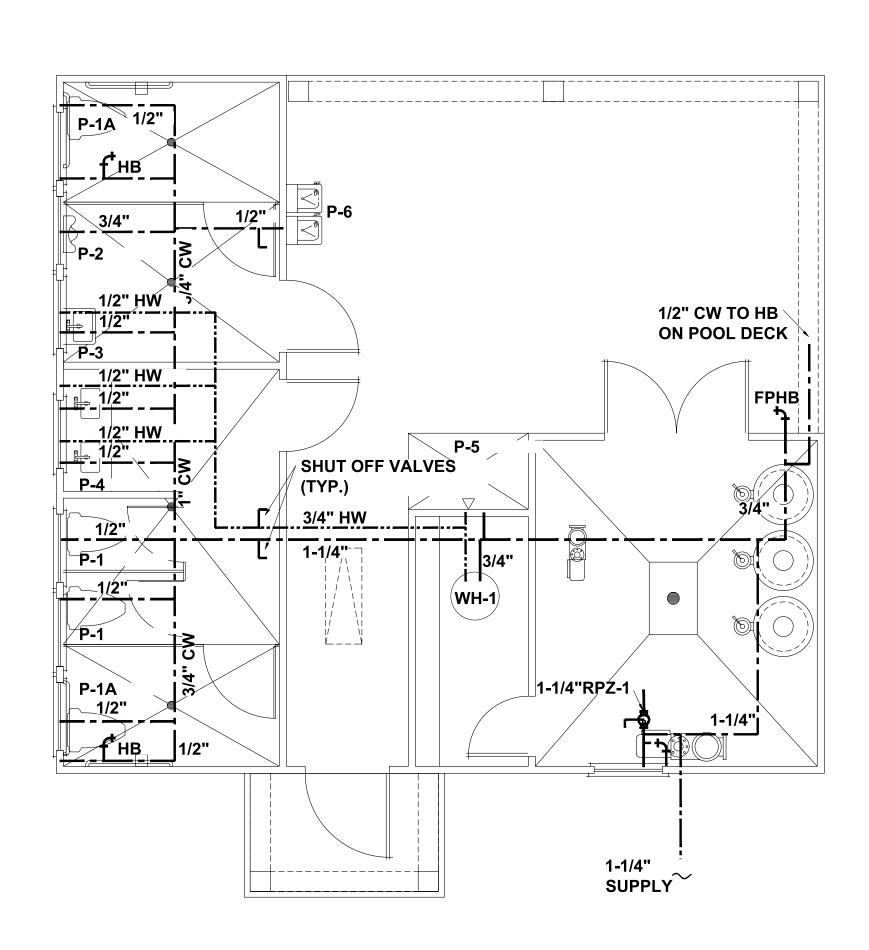

PLUMBING FIXTURE SCHEDULE

1-1/2"

1-1/2"

INTEGRAL

HANDLES CENTERS

LEVER

LEVER

LEVER

LOOSE

KEY


LOOSE

KEY

FAUCET/VALVE

CENTERSET

CENTERSET

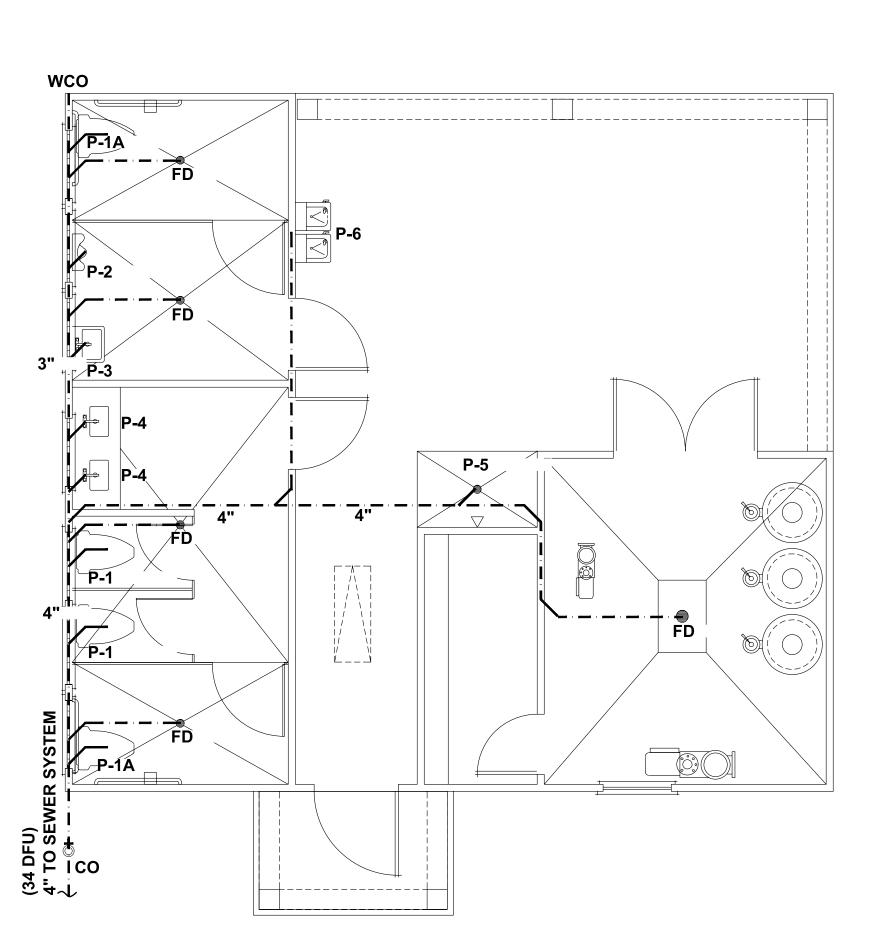

1/2"

SUPPLY PLAN

SCALE: 1/4" = 1'-0"

SYMBOL

P-3

FIXTURE

WATER CLOSET

WATER CLOSET

LAVATORY

LAVATORY

SHOWER

WATER COOLER

WATER HEATER

MANUFACT.

STANDARD

STANDARD

STANDARD

STANDARD

STANDARD

ELKAY

RHEEM

J.R.SMITH

WOODFORD

TYPE

FLUSH TANK

FLUSH TANK

FLUSH VALVE

WALL HUNG

SINGLE COMP'T

STATION

ELECTRIC

SQAURE TOP

STANDARD

FREEZE PROOF | WOODFORD

WALL CLEAN-OUT | ROUND COVER | J.R.SMITH

MODEL

2435.012

2437.012

6541.132

355.012

476.028

VRCTLFR8SC

MATERIAL

CHINA

VITREOUS

CHINA

VITREOUS

CHINA

VITREOUS

CHINA

VITREOUS

CHINA

STAINLESS

STEEL

CAST BRASS

CAST BRASS

PROE38 S2 RH95 | GLASS LINED | LOWBOY

STYLE

ELONGATED

ADA

ELONGATED

ADA

ELONGATED

ADA

COMPLIANT

ADA OVAL

COMPLIANT

S.S. COVER

FAUCET

FAUCET

VITREOUS | STANDARD

MANUFACT.

MODEL NO.

8894

8894

| ADA 58"X38" | WM-442-ADA |



THE PLUMBING CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIAL, AND **EQUIPMENT REQUIRED FOR THE COMPLETION AND OPERATION OF ALL SYSTEMS IN** THIS SECTION OF WORK IN ACCORDANCE WITH THE APPROVED EDITIONS OF THE PLUMBING CODE, THE LOCAL ADMINISTRATIVE AUTHORITY AND APPLICABLE NFPA CODES. INSULATE DOMESTIC COLD & HOT WATER PIPING. PATCH EXISTING INSULATION WHERE DAMAGED UNDER CONSTRUCTION AND WHERE NEW CONNECTIONS ARE MADE.

PLUMBING NOTES

2. THE CONTRACTOR SHALL APPLY AND PAY FOR ALL NECESSARY PERMITS, FEES, AND INSPECTIONS REQUIRED BY ANY PUBLIC AUTHORITY HAVING JURISDICTION. ACREAGE CHARGES, BONDS, PROPERTY ASSESSMENTS AND FACILITIES CHARGE SHALL NOT BE CONSTRUED TO BE A PART OF THIS CONTRACT.

ALL MATERIALS AND EQUIPMENT PROVIDED AND/OR INSTALLED UNDER THIS SECTION OF THE SPECIFICATIONS SHALL BE GUARANTEED FOR A PERIOD OF 1 YEAR FROM THE DATE OF TURNOVER OF THE WORK TO THE OWNER.

4. THE PLUMBING CONTRACTOR SHALL COORDINATE WORK WITH THE CONTRACTORS OF OTHER TRADES, AND COMPLETE THE ENTIRE INSTALLATION AS SOON AS THE CONDITIONS OF THE BUILDING PERMITS.

INSTALL ANY GAS PIPING IN ACCORDANCE WITH CURRENT GAS CODES,

REQUIREMENTS OF LOCAL GAS SUPPLIER AND N.B.F.U.

DOMESTIC WATER PIPE AND FITTINGS INSIDE BUILDINGS SHALL BE TYPE L COPPER BELOW AND ABOVE GRADE, JOINTS SHALL BE 95/5 SOLDER.

FIRE STOP ALL PENETRATIONS, BY PIPING OR CONDUITS, OF FIRE RATED WALLS, FLOORS AND PARTITIONS. PROVIDE A DEVICE(S) OR SYSTEM(S) WHICH HAS BEEN TESTED AND LISTED AS COMPLYING WITH ASTM E-814. INSTALL THE DEVICE(S) OR SYSTEM(S) IN ACCORDANCE WITH THE CONDITIONS OF THEIR LISTING, PROVIDE A **DEVICE(S) OR SYSTEM(S) PENETRATED.**

8. ALL PLUMBING FIXTURES ARE THE BE EQUIPPED WITH WATER HAMMER ARRESTORS AS PER PLUMBING CODE 604.9. ARRESTORS ARE EXEMPT IF PLASTIC PIPE USED, PC 604.9 PLUMBING CONTRACTOR AND GENERAL CONTRACTOR TO VERIFY.


ALL PLUMBING MATERIALS USED WILL COMPLY WITH THE LATEST PLUMBING CODE. A. ANY ABOVE-GROUND DRAINAGE AND VENT PIPING SHALL COMPLY WITH SECTION

B. ANY UNDERGROUND SANITARY DRAINAGE AND VENT PIPING SHALL COMPLY WITH


C. ANY WATER SERVICE PIPE SHALL COMPLY WITH SECTION 605.3. D. ANY WATER DISTRIBUTION PIPE SHALL COMPLY WITH SECTION 605.4.

MATERIAL SPECIFICATIONS


- 1. PIPE INSULATION: DG TURBOLIT FOAM PIPE INSULATION
- **VENT: SCHEDULE 40 PVC**
- DOMESTIC WATER: COPPER / PEX / CPVC

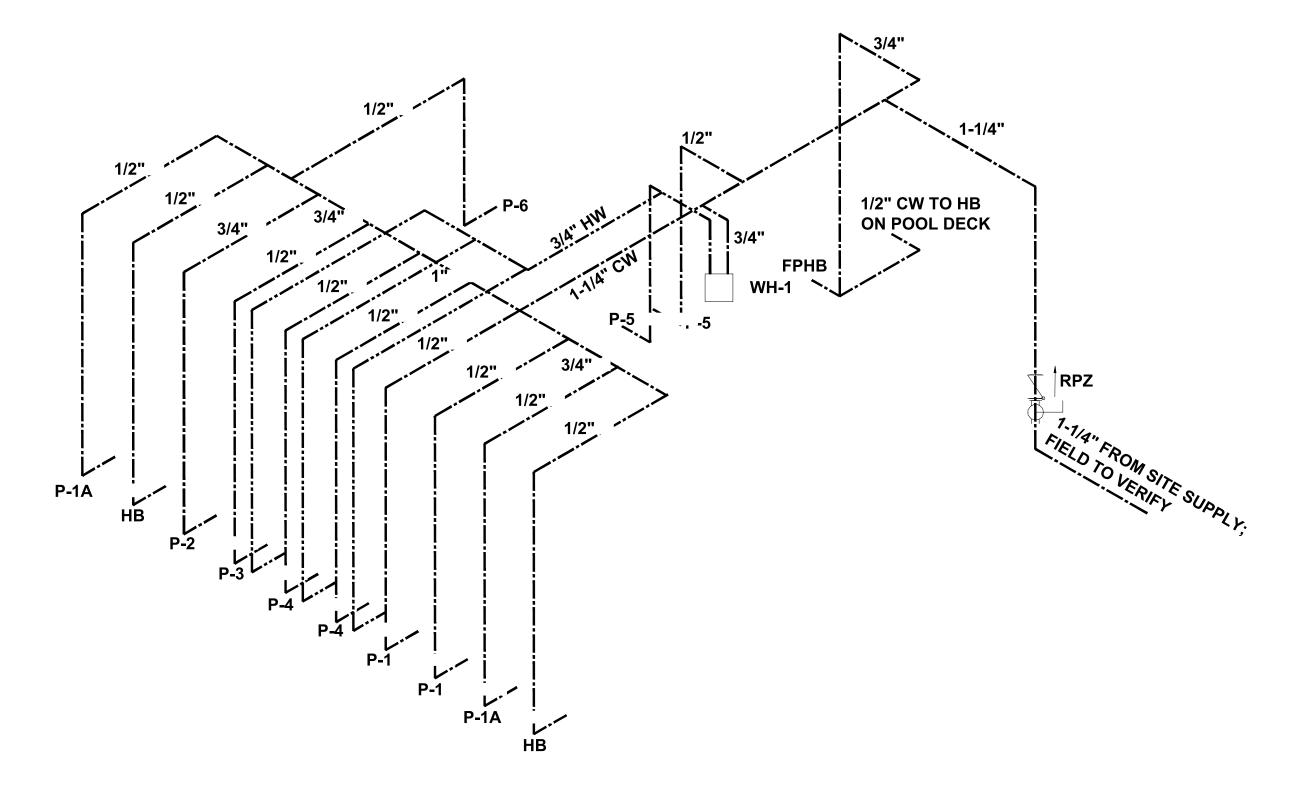


DOMESTIC WATER SUPPLY RISER

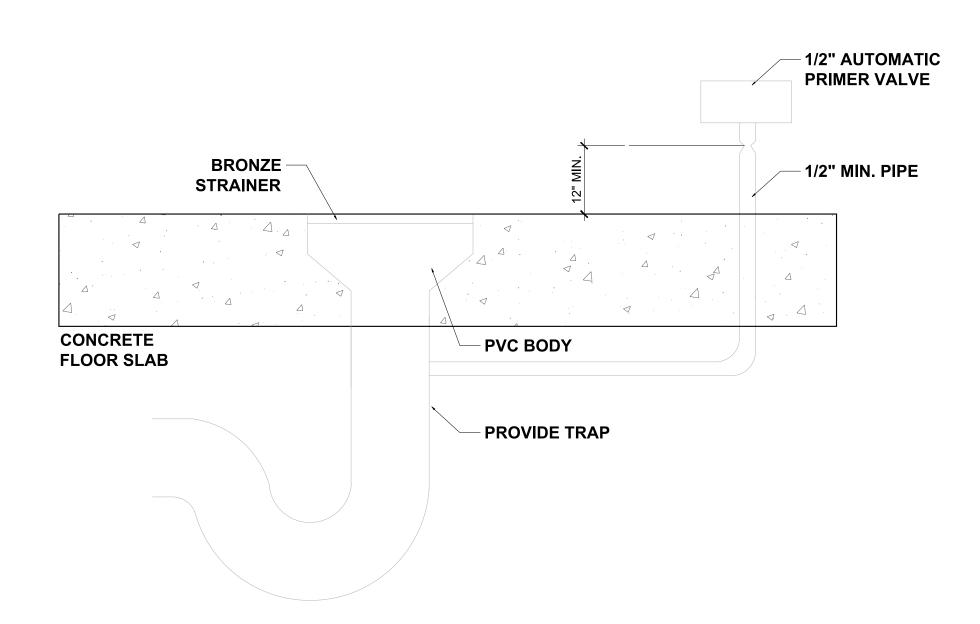


FLOOR DRAIN DETAIL

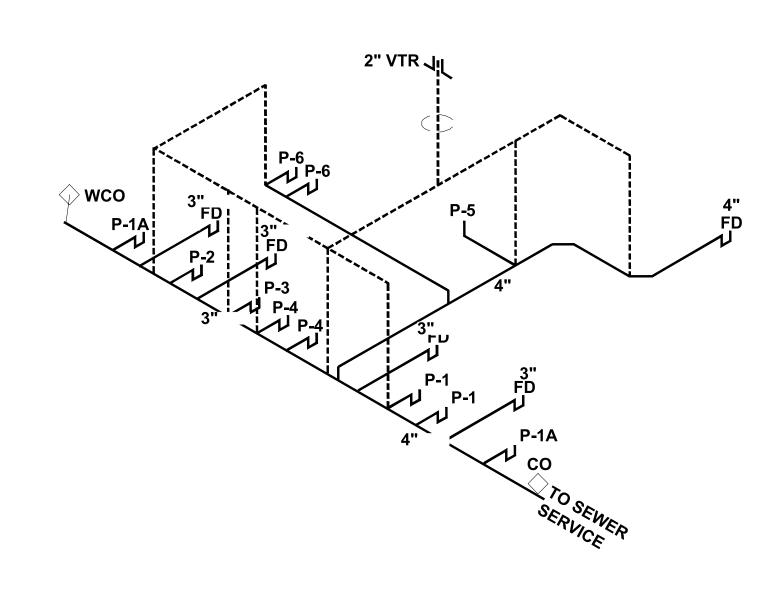

SS RISER

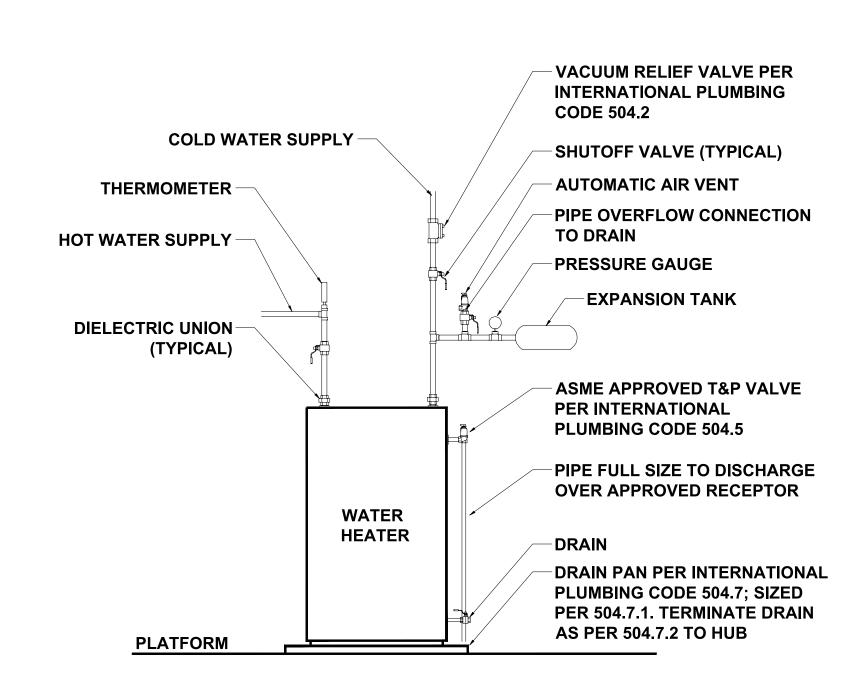

TYPICAL WATER TANK HEATER DETAIL

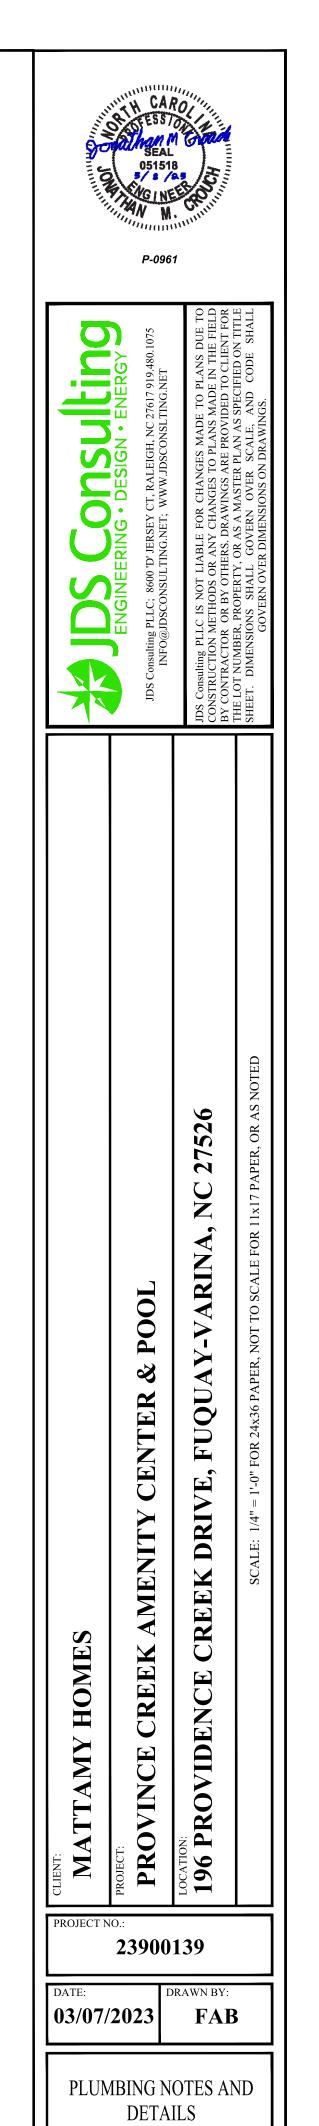

POOL PIPING NOTES

- WHERE PIPE IS RUN UNDER FOOTINGS PROVIDE SCHEDULE 40 PVC SLEEVE A MIN. OF 2'-0" BELOW THE BOTTOM OF THE FOOTER. SUBGRADE ABOVE SLEEVE TO BE COMPACTED TO MIN. REQUIREMENTS FOR FOUNDATION SYSTEM. ALL POOL PIPE TO BE PRESSURE RATED SCHEDULE 40 PVC. PIPE CONNECTIONS TO SKIMMERS, VACUUM LINES AND INLETS TO BE 2" PIPE. PROVIDE TILE LINE OVERFLOW PIPE TO RUN TO DAYLIGHT OUTSIDE OF POOL DECK ENCLOSURE. ALL PIPE RUNS ARE SCHEMATIC. RUN PIPE TO MINIMIZE TRENCHING/EXCAVATION. ALL PIPE SHALL BE MARKED DESIGNATING FLOW DIRECTION AND IDENTITY.

GENERAL NOTES - ELECTRICAL

- SEE ELECTRICAL PLANS BY OTHERS FOR ALL ELECTRICAL DESIGN, INCLUDING ELECTRICAL SPECIFICATIONS,
- DESIGN, INCLUDING ELECTRICAL SPECIFICATIONS, CIRCUITING, AND CONNECTION OF ELECTRICAL DEVICES SCHEDULED ON THE POOL PLANS.
 THE SWIMMING POOL DESIGN INCLUDES, FOR INFORMATION ONLY, CUT SHEETS OF THE UNDERWATER LIGHT FIXTURES, POOL PUMPS AND OTHER POOL EQUIPMENT THAT REQUIRES AN ELECTRICAL CONNECTION, AND THE LOCATION OF THESE ITEMS OF EQUIPMENT.
 BOND ALL NON CURRENT CARRYING METALLIC PARTS RELATING TO POOL. SEE THE BONDING DETAIL ON THIS SHEET.
- AREA LIGHTING NOTE: AREA LIGHTING OF THE POOL DECK IS
- AREA LIGHTING NOTE. AREA LIGHTING BY OTHERS.


 1. AREA LIGHTING IS TO ILLUMINATE ALL PARTS OF THE POOL, THE WATER, THE DEPTH MARKERS, SIGNS, ENTRANCES, RESTROOMS, SAFETY EQUIPMENT AND THE REQUIRED DECK AREA AND WALKWAYS.

 4.2. NIGHT SWIMMING IS NOT ALLOWED UNTIL AREA
- 4.2.
- LIGHTING IS PROVIDED. REQUIRED TO PROVIDE SUFFICIENT ILLUMINATION OF THE MAIN DRAINS OF THE POOL.
 REQUIRED TO PROVIDE SUFFICIENT ILLUMINATION OF 4.3.
- 4.4. THE REQUIRED DECK AREA OF THE POOL SO THAT IT IS VISIBLE AT ALL TIMES THE POOL IS IN USE.
 COORDINATE WITH LOCAL INSPECTOR FOR APPROVAL OF PROPOSED LIGHTING.

PUMP FLOW PIPE SIZE BASIS "DESIGN FLOW RATE"

OUTDOOR POOL: EQ500 PUMP FLOW AT 65 FEET OF WATER IS 220 GPM. WITH SPECIFIED 4" MAIN DRAIN, SKIMMER LINES, AND RETURN PIPING VELOCITIES ARE AT 5.9

FEATURE PUMP: WFE-12 PUMP FLOW AT 65 FEET OF WATER IS 130 GPM. WITH SPECIFIED 4" MAIN DRAIN VELOCITY IS AT 3.8 FOATOR

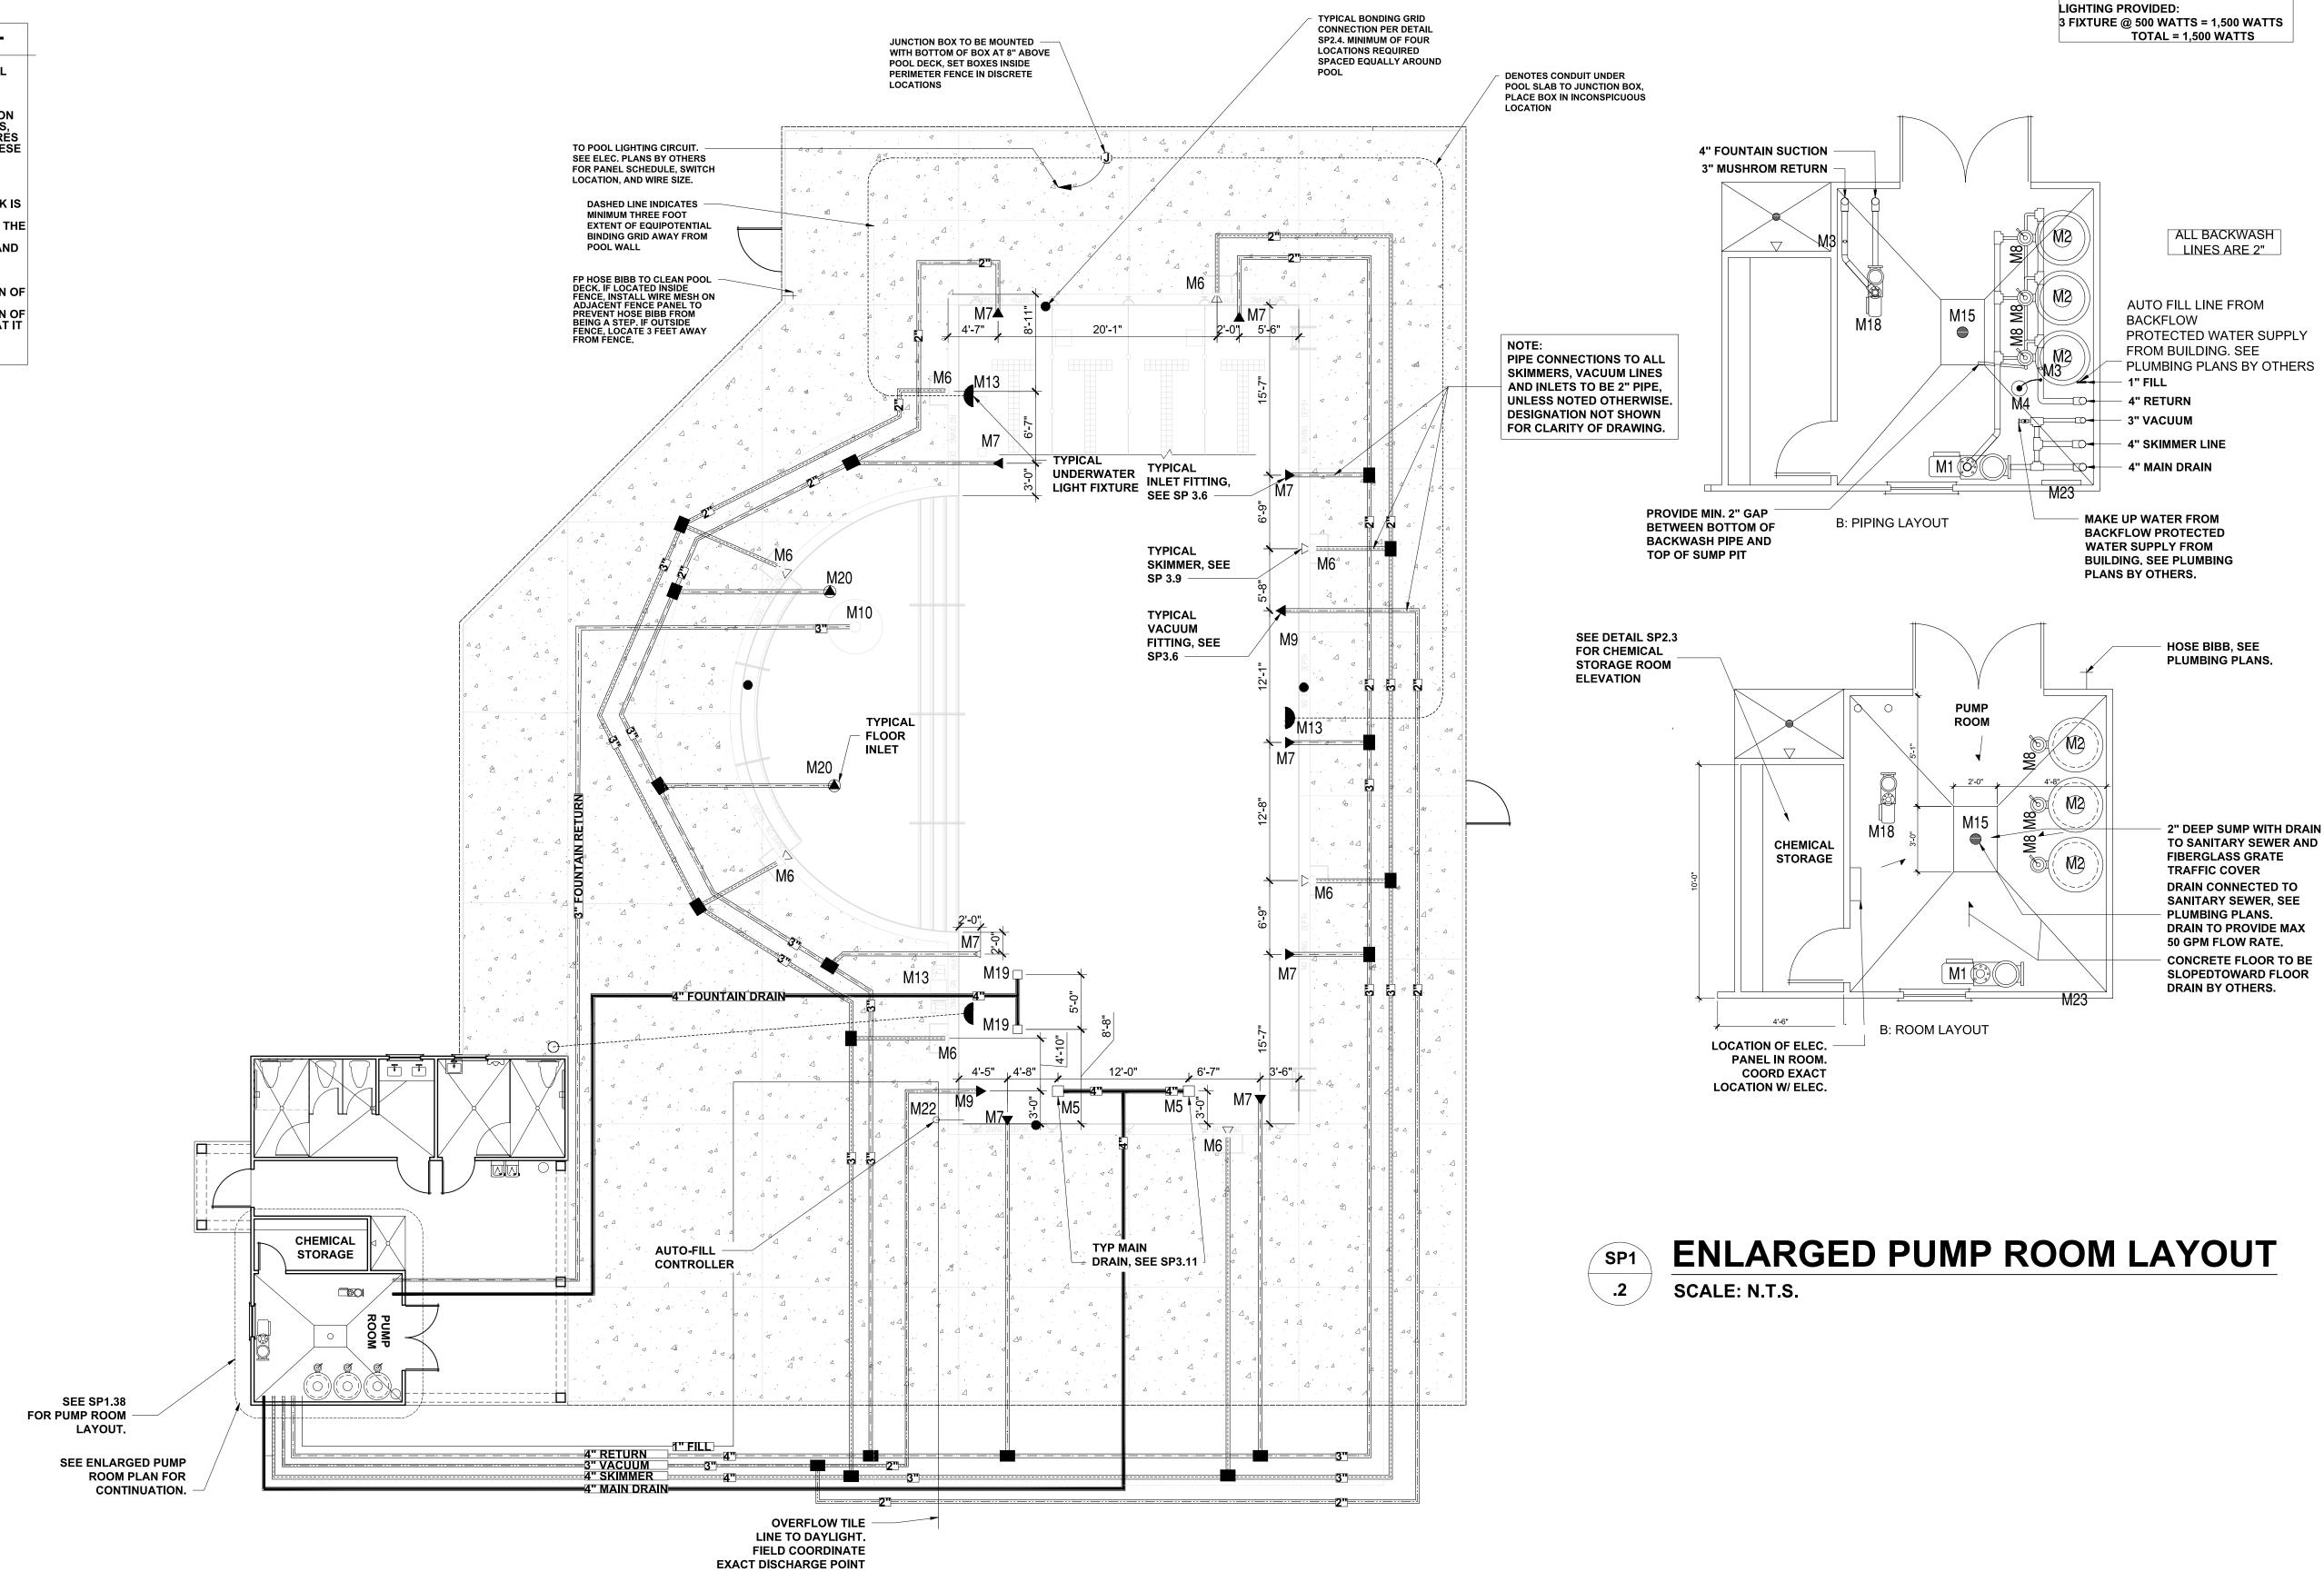



PIPING AND LIGHTING LAYOUT

SCALE: 1/4" = 1'-0"





PIPE LEGEND

REQUIRED UNDERWATER LIGHTING FOR:

1698 SQ. FT. x 0.5 WATTS = 849 WATTS

MAIN POOL AREA:

==== INLET LINE SKIMMER LINE

VACUUM LINE ——— DRAIN LINE

FILL LINE

27526 ARIN DRIV AMENITY CREEK

23900139

03/07/2023 **FAB**

POOL PIPING LAYOUT

SP1.0

CHEMICAL STORAGE NOTES

CHEMICAL STORAGE REQUIREMENTS FOR THE POOL AS IS FOLLOWS:

5 SQ FT FOR FIRST 10,000 GALLONS OF POOL PLUS 1 SQ FT FOR EACH ADDITIONAL 3,000 GALLONS OF POOL UP TO 100 SQ FT OF STORAGE

5 SQ FT (FOR FIRST 10,000)

+21.09.40 SQ (1 SQ FT PER 63,261/3000)

=26.09 SQ FT REQUIRED

CLUBHOUSE PROVIDES 45.0 SQ FT FOR CHEMICAL STORAGE.

POOL DECK OCCUPANCY REQUIREMENTS TOTAL POOL DECK AREA IS 4,734 SF. 8' MINIMUM UN-OCCUPIABLE AREA AROUND THE POOL IS 2,116 SF. GROSS POOL DECK FOR OCCUPANCY EXIT REQUIREMENTS IS 4,734 - 2,116 = 2,618 SF. DECK IS 2,618 SF AT 15 SF PER PERSON, DECK OCCUPANT LOAD IS 175.

COVERED AREA IS 421 SF. AT 15 SF PER PERSON, COVERED AREA OCCUPANT LOAD IS 28.

POOL AREA IS 2,969 SF. AT 50 SF PER PERSON, POOL OCCUPANT LOAD IS 60.

TOTAL OCCUPANT LOAD OF 263*0.2 EQUAL 53" OF EXIT REQUIRED, 3 EXITS REQ'D. MIN. OF 132" SHOWN ON PLAN.

REQ'D EXIT SEPARATION EQUALS ½ THE 133' DIAGONAL, OR 66'. 50'-8" SHOWN ON PLANS.

GENERAL VENTILATION NOTES

PUMP ROOM - VERIFY VENTILATION OF THIS ROOM IS EITHER NATURAL CROSS DRAFT OR CONTINUOUS FORCED VENTILATION WHICH DIRECTS VENTED AIR AWAY FROM THE POOL AREA. IF FORCED VENTILATION EQUIPMENT IS USED, IT SHALL RUN CONTINUOUS AND NOT BE CONNECTED TO THE PUMP ROOM LIGHT SWITCH CHEMICAL ROOM - VERIFY VENTILATION OF THIS ROOM EITHER NATURAL CROSS DRAFT OR CONTINUOUS FORCED VENTILATION EQUIPMENT IS USED, IT SHALL RUN CONTINUOUS AND NOT BE CONNECTED TO THE

BATH HOUSE DATA

TOTAL BATHER LOAD = 198 (50%-50% SPLIT) - OUTDOOR POOL = 2968 / 15 = 198

BATHHOUSE REQUIREMENTS: 99 MEN, MIN FIXTURES REQUIRED ARE: -ONE LAVATORY -ONE URINAL -ONE WATER CLOSET

99 WOMEN, MIN FIXTURES ARE -TWO LAVATORIES -TWO WATER CLOSETS.

2 SHOWERS ARE REQUIRED.

MAIN PO	OL DATA
POOL DIMENSIONS:	31'-2"x75'-1" w/ 20' RADIUS SEMI-CIRCLE
POOL DEPTHS:	9"-5'-0"
POOL VOLUME:	73,261 GALLONS
SURFACE AREA:	2,968 SF
PERIMETER:	235 LF
COPING:	CAST-IN-PLACE W/ BULLNOSE
MIN. FLOW RATE:	204 GPM
DESIGN FLOW RATE:	220 GPM
CONSTRUCTION:	GUNITE
FINISH:	NON-SLIP PLASTER
BATHER LOAD:	198 BATHERS
MAIN DRAINS:	(2), 4" MAIN DRAIN LINE
INLETS:	11 REQ'D 4" MAIN RETURN LINE
SKIMMERS:	8, 4" MAIN SKIMMER LINE
FILTER, TYPE: FILTER SIZE, PROV: FILTER SIZE, REQD: MEDIA CIRC. RATE: BACKWASH RATE: TURNOVER RATE:	HIGH RATE SAND (3) @4.91 SF, 14.73 SF TOTAL 13.57 SF TOTAL 15 GPM/SF 15 GPM/SF 6 HOURS.
BACKWASH TO:	SANITARY SEWER

IN-LINE, MANUAL FILL

SEE PLUMING PLANS

FOR FLOOR DRAINS

LOCATION.

HOSE BIBB IN THIS LOCATION PROVIDES PARTIAL DECK COVERAGE WITH A 100'

HOSE. SEE PLUMBING PLANS.

PROVIDE SIGN STATING
"WARNING NO LIFEGUARD
ON DUTY" SEE POOL SIGN
REQ'TS, SIGN "A"

FRESHWATER SOURCE:

PROVIDE SIGN STATING THAT NO DIVING IS ALLOWED IN POOL AREA. SEE POOL SIGN REQ'TS, SIGN "B"

PROVIDE SIGN FOR SHOWERING REQ'TS. SEE POOL SIGN REQ'TS, SIGN "C"

CONCRETE DECK NOTES

POOL DECK AREA IS 3,036 SF AND INCLUDES ONLY THE STIPPLED AREA ON THE PLAN.


DECK ELEVATIONS ARE RELATIVE TO THE TOP OF DECK AT THE POOL EDGE.

COORDINATION WITH THE SITE/CIVIL DRAWING MAY REQUIRE ADJUSTMENT OF THE
ELEVATIONS.

CONCRETE DECK TO HAVE LIGHT BROOM FINISH. KEEP CONCRETE SLABS DAMP FOR SEVEN (7) DAYS AFTER PLACEME

KEEP CONCRETE SLABS DAMP FOR SEVEN (7) DAYS AFTER PLACEMENT.

CONTROL JOINS TO BE LET INTO CONCRETE AT A DEPTH OF \$\frac{1}{3}\$"THE THICKNESS OF THE CONCRETE SLAB.

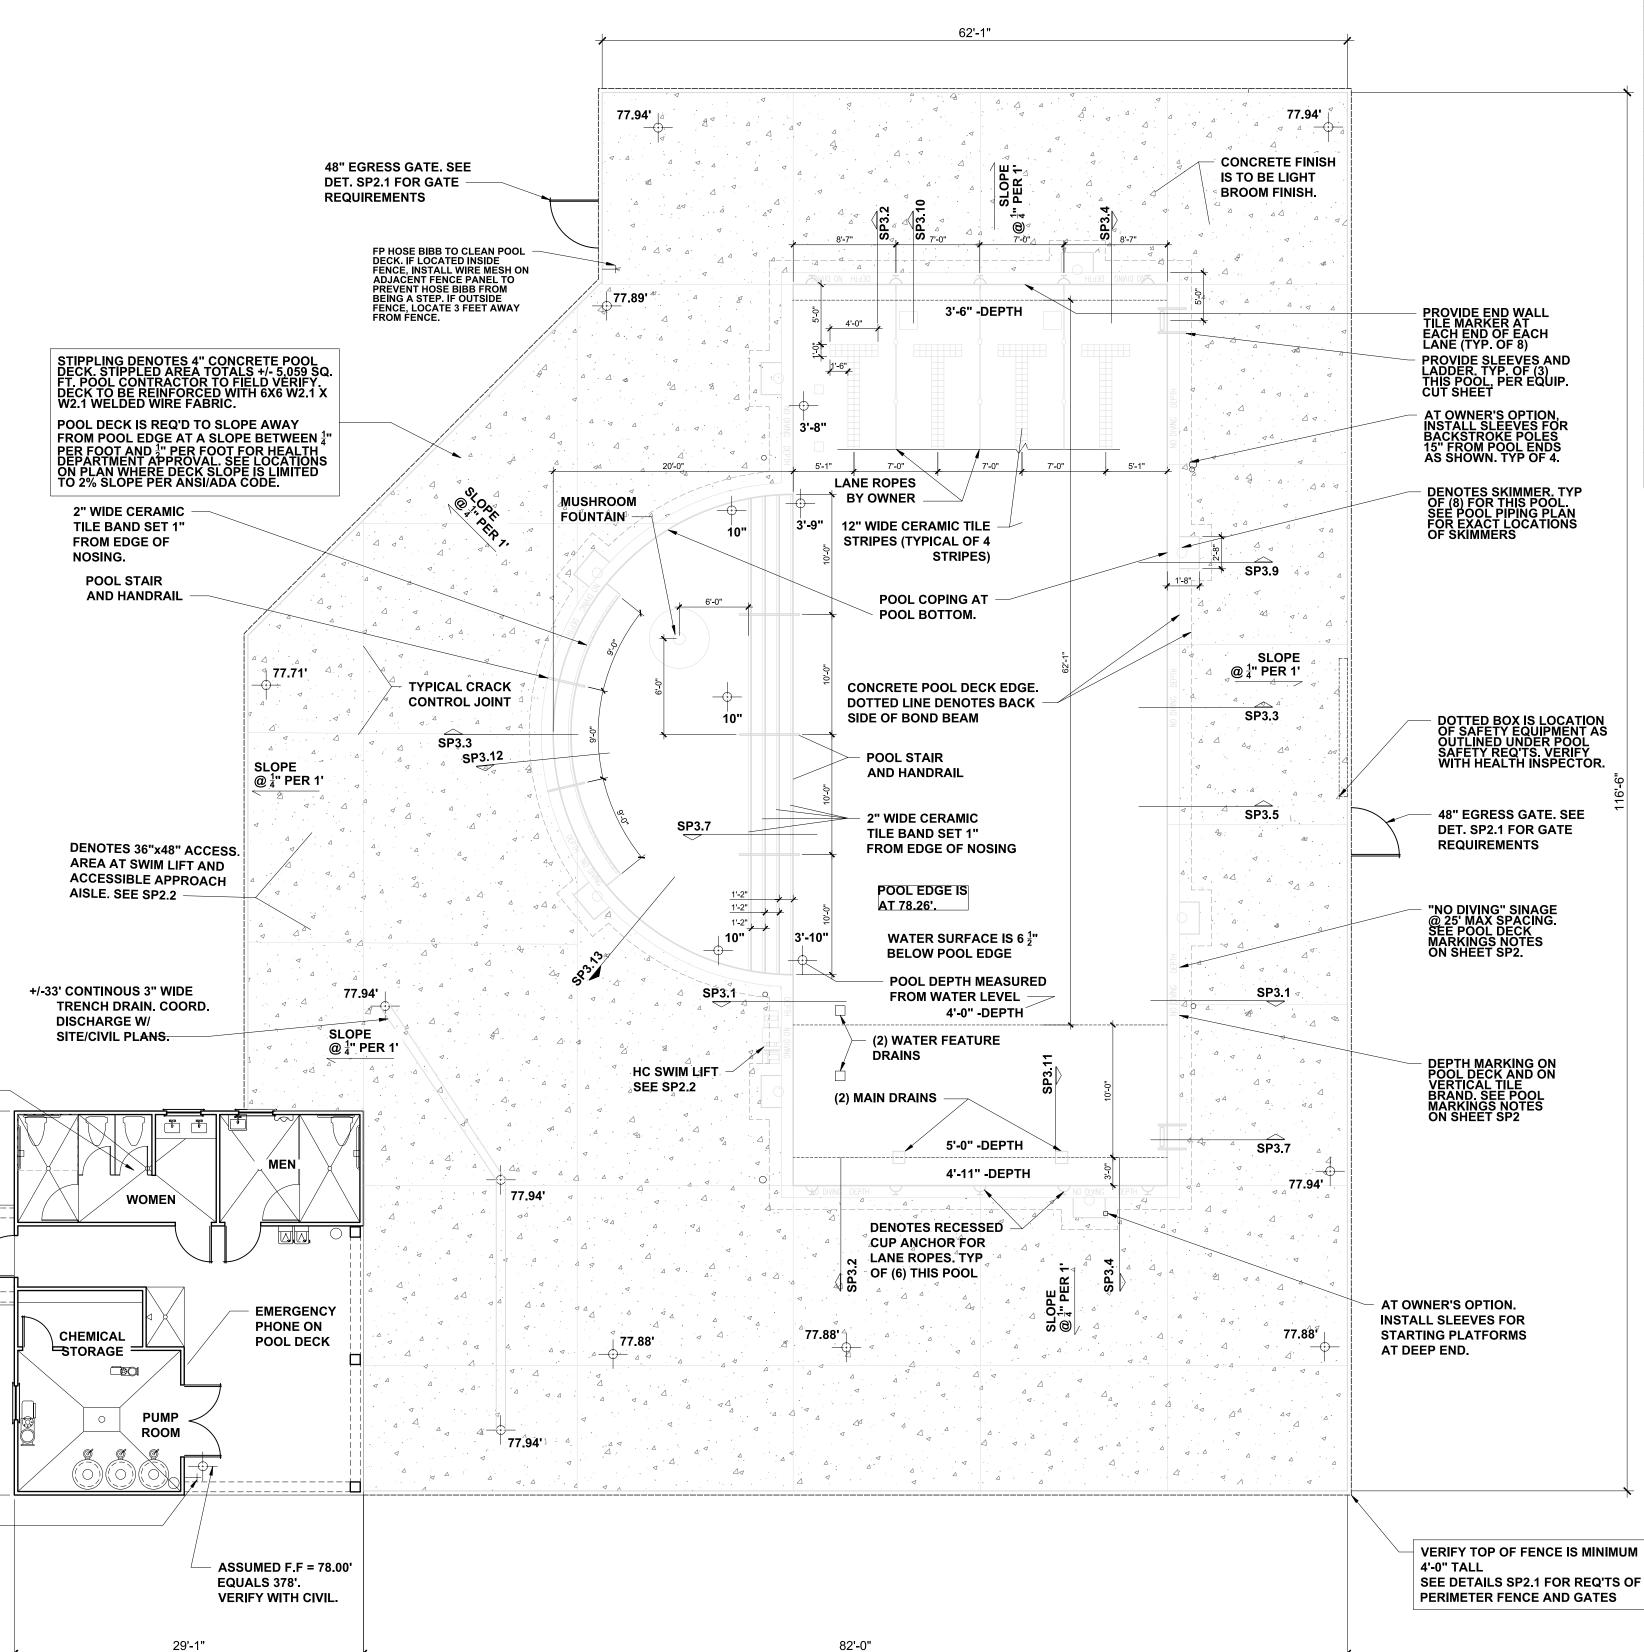

		MAIN POOL EQUIPMENT SCHE	EDULE
	ITEM	DESCRIPTION	PRODUCT
	M1	5 HP, SELF-PRIMING PUMP W/ MATCHING STRAINER, 220 GPM @ 65F. OF HEAD - PROVIDE A SPARE BASKET FOR STRAINER.	PENTAIR — WQ500
	M2	30" DIA., HIGH RATE SAND FILTER WITH 4.91 S.F. MEDIA	PENTAIR – TRITON II TR100
	М3	FLOW RATE INDICATOR	BLUE-WHITE F/D/U-300
	M4	EROSION CHLORINATOR	PENTAIR HC 3315
	M5	MAIN DRAIN $-$ 14"x14" SUMP AND COVER/GRATE AND $1\frac{1}{2}$ " HYDROSTATIC RELIEF VALVE.	AQUASTAR 914xxx [SUMP P/N 9-4 SB]
	M6	IN-GROUND SKIMMER	PENTAIR U3
	М7	IN-WALL INLET W/ DIRECTIONAL FITTINGS	PENTAIR-542002
	M8	MULTIPORT VALVE	PENTAIR 261055
	М9	IN-WALL VACUUM FITTING, W/ PLUG	HAYWARD W400AWHP
~ \	M10	5' MUSHROOM FOUNTAIN	NATURAL STRUCTURES 1800-18
	M11	POOL HANDRAIL, 4' LONG	SRSMITH DMS101-MG
	M12	POOL LADDER, 3 RUNG	SRSMITH-LF24-3B-MG
	M13	500 WATT WHITE LIGHT WITH NICHE	PENTAIR-78456300
	M14	IN-WALL CUP ANCHOR	PENTAIR-542044
	M15	FLOOR DRAIN, CAST BODY, PVC COVER BY OTHERS - MAX. 50 GPM FLOW	
	M16	BACKSTROKE FLAG ANCHOR	SELECTED BY OWNER
	M17	HANDICAPPED LIFT	SR SMITH MULTI-LIFT
	M18	3HP FOUNTAIN PUMP w/ MATCHING STRAINER, 130 GPM @ 65 F. OF HEAD - PROVIDE A SPARE BASKET FOR STRAINER	PENTAIR-WFE-12
	M19	12"x12" FOUNTAIN SUMP AND COVER	ASA FPK 50-812-4 AQUASTAR WAVE12
	M20	POOL FLOOR INLET	PENTAIR 08417
	M21	POOL HANDRAIL, 4' LONG, TWO BEND	SRSMITH 2HR-4-MG
	M22	AUTOMATIC WATER LEVEL CONTROLLER	PENTAIR T40-FW
	M23	POOL CONTROL PANEL	PENTAIR EASYTOUCH8

POOL CONTRACTOR SHALL VERIFY THAT POOL EQUIPMENT SCHEDULE AND CUT SHEETS
MATCH BEFORE ORDERING ANY ITEMS OR EQUIPMENT

CARO
SESSTON
SEAL
051518
P-0961

PROJECT NO.: 23900139

27526

RIN

DRIV

196

AMENIT

CREEK


PROVINCE


DATE: DRAWN BY: FAB


POOL LAYOUT

SP1.1



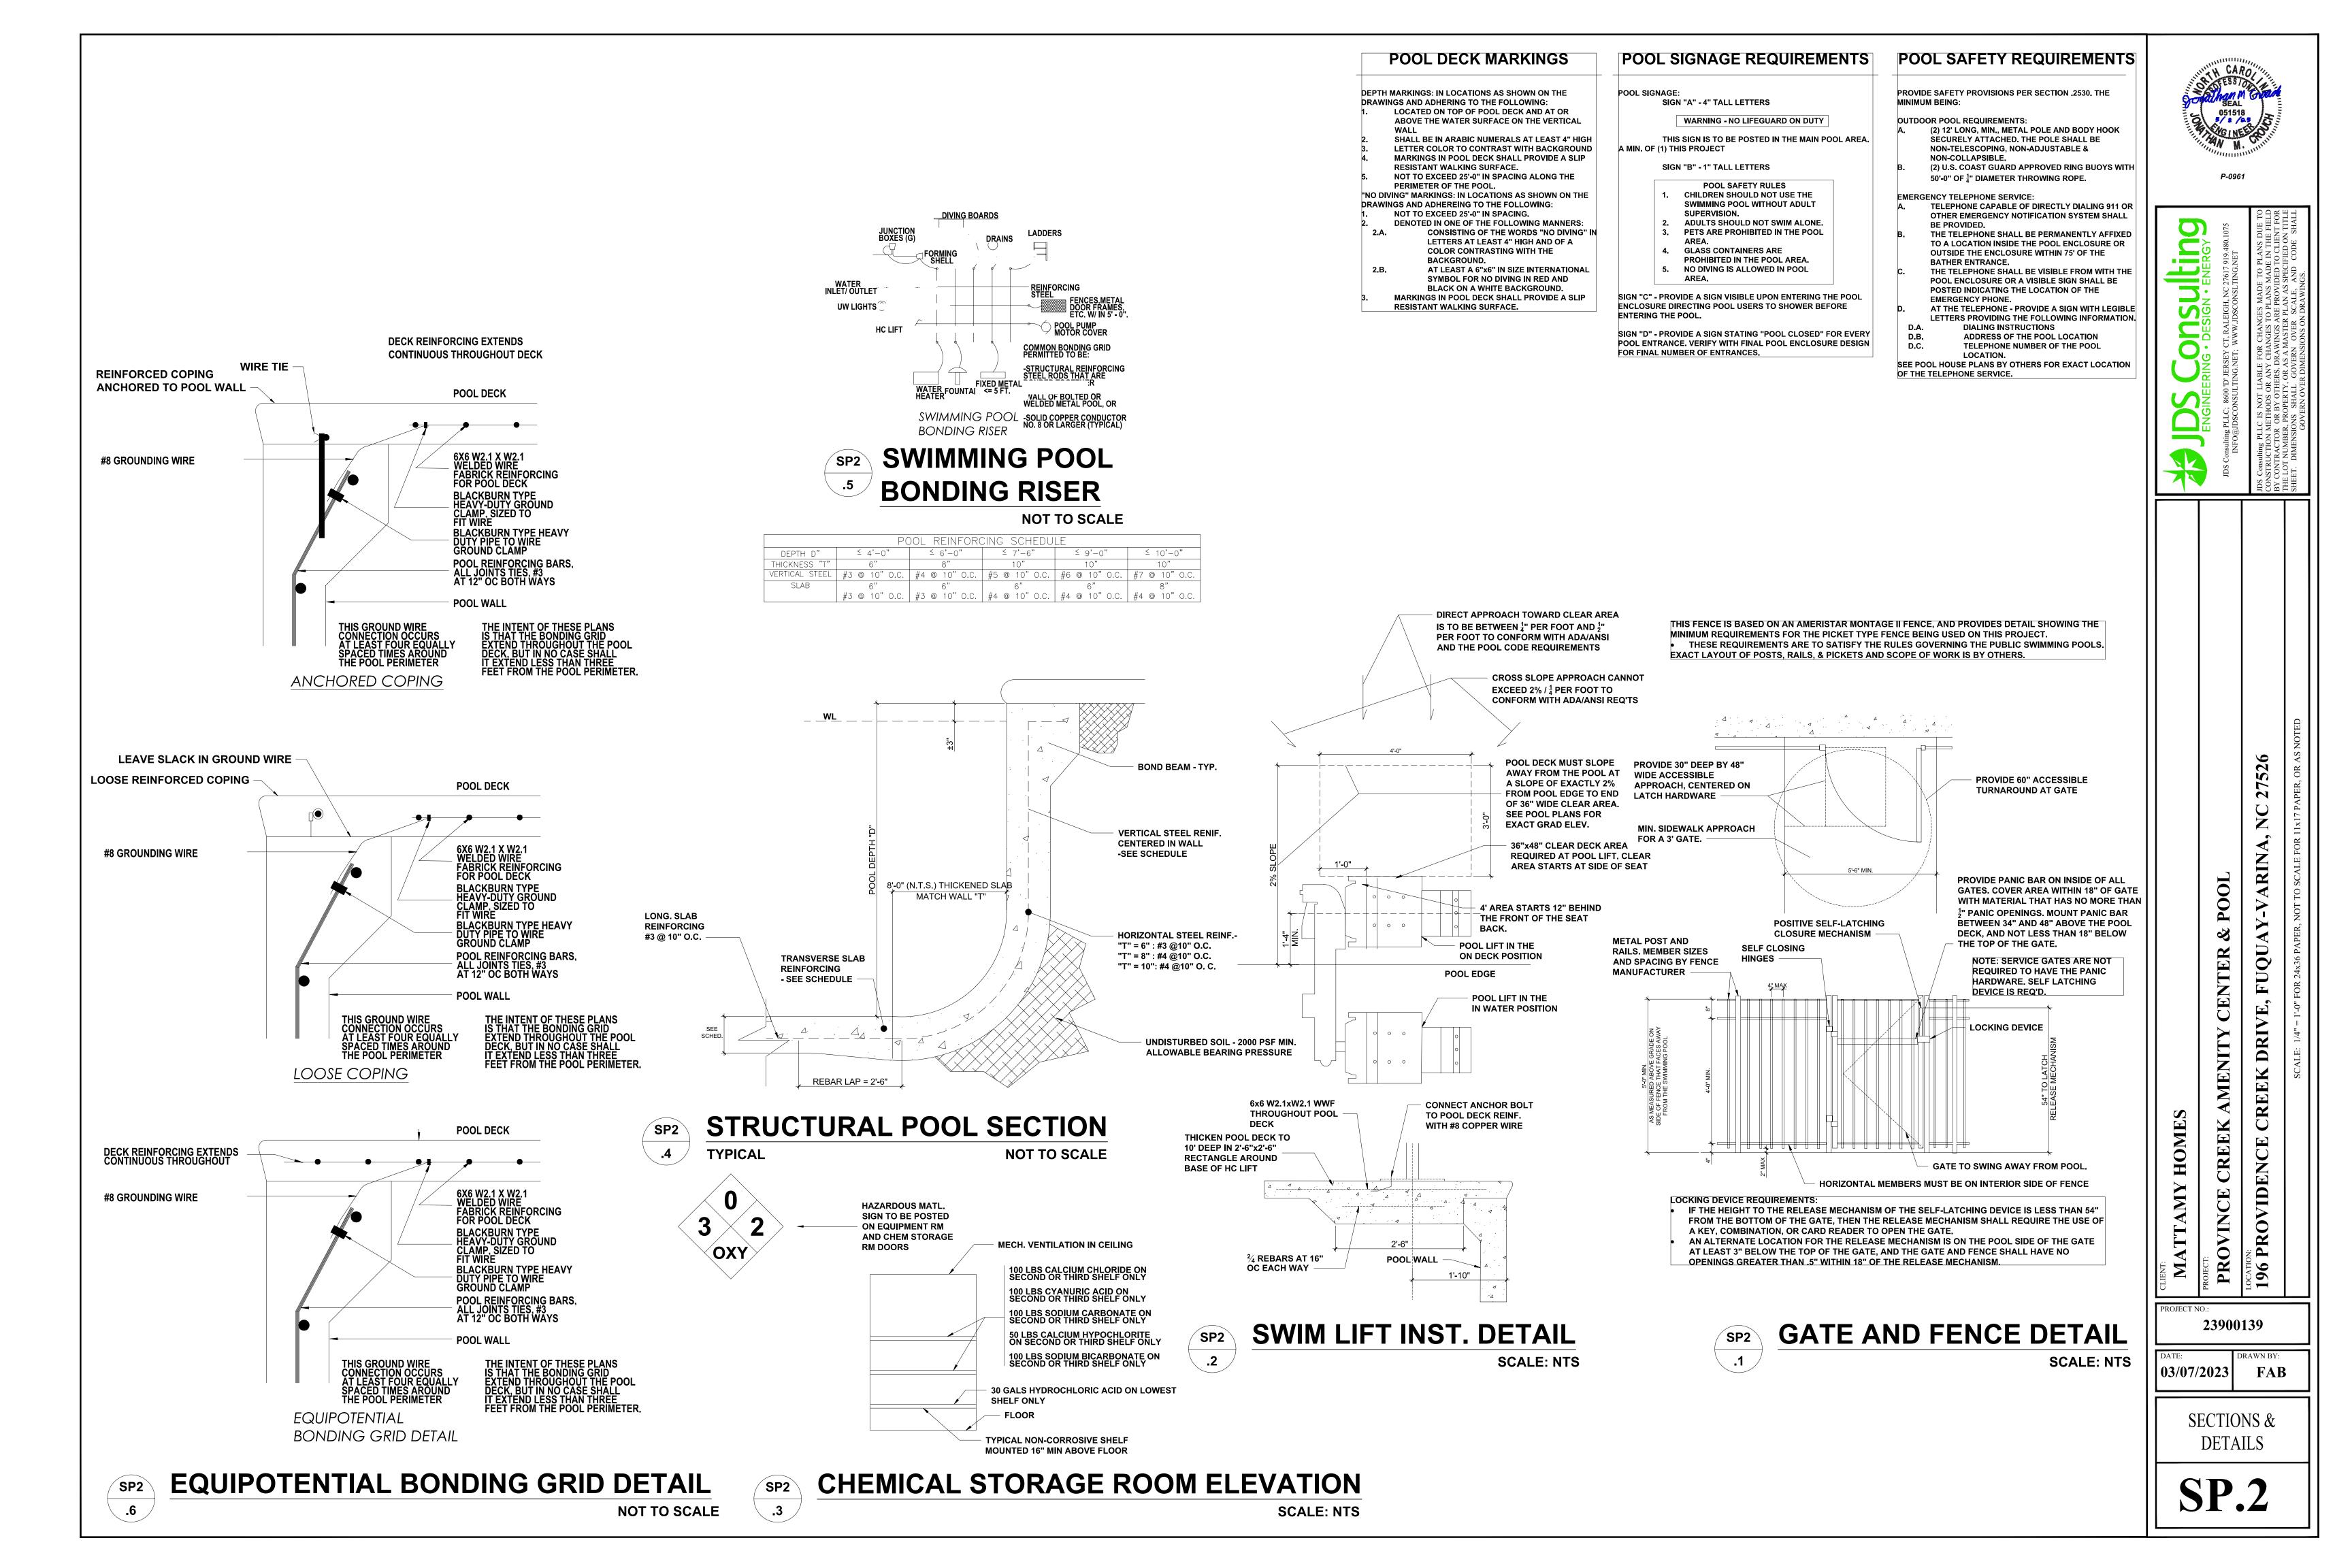

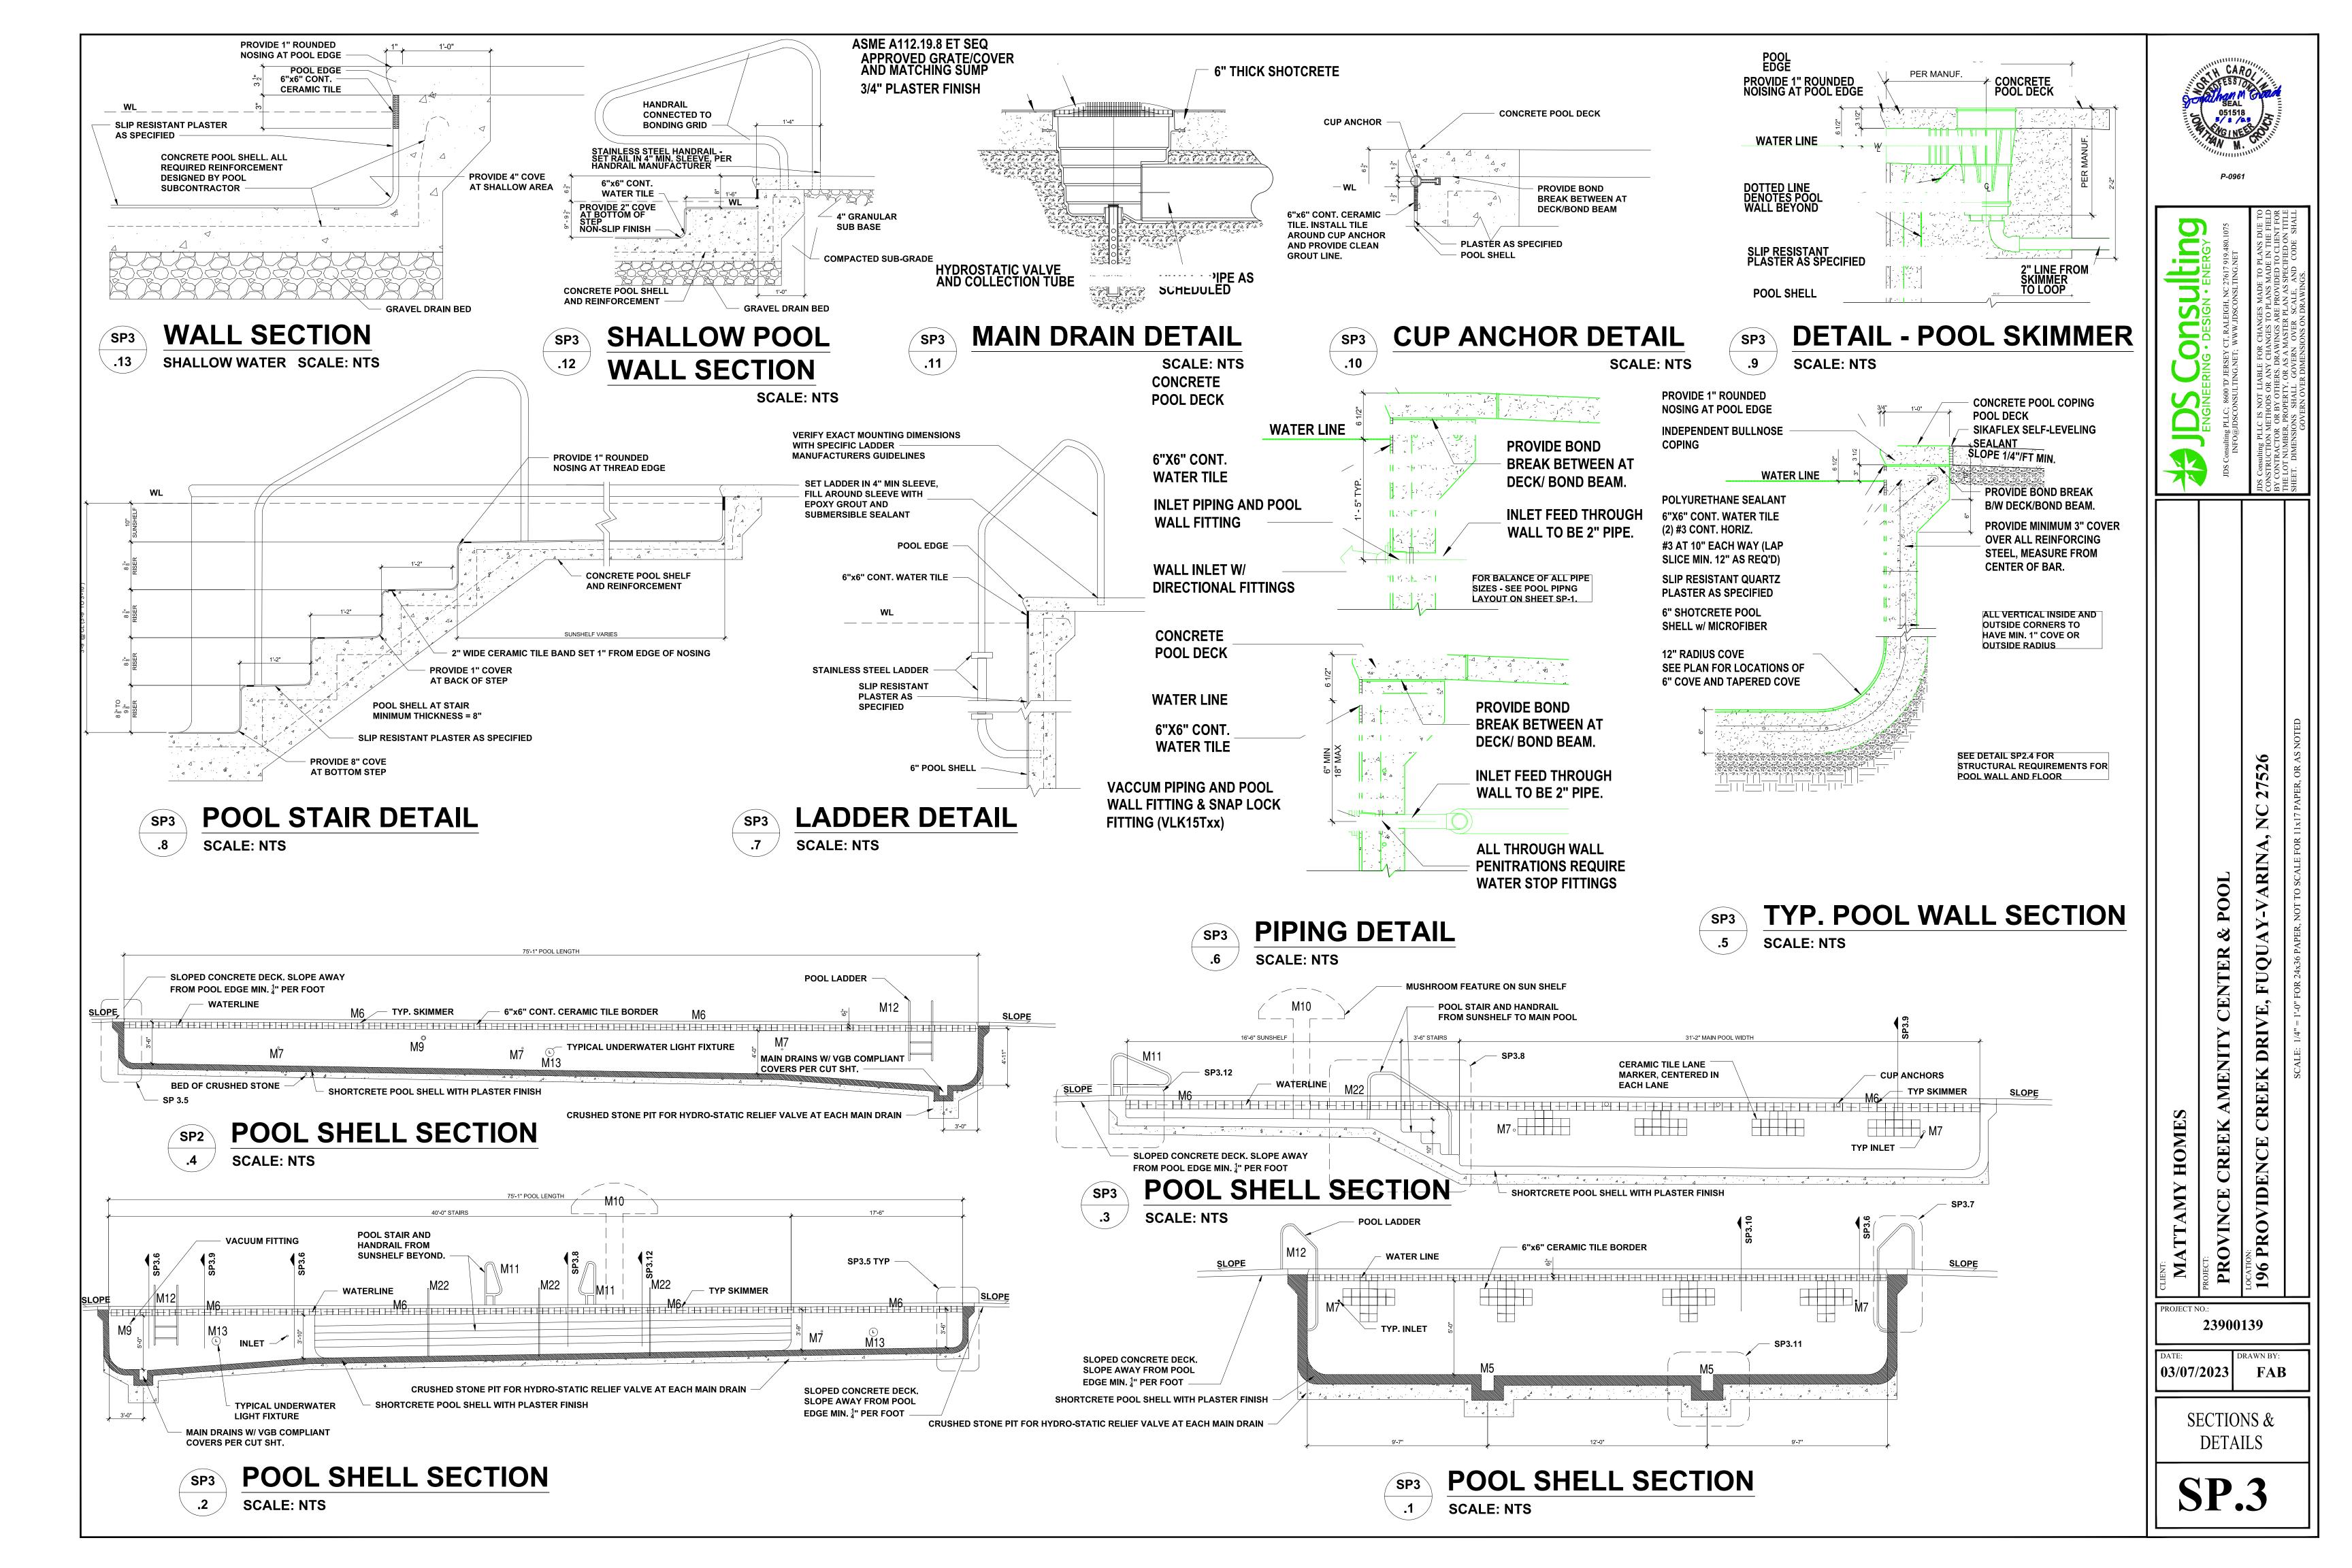

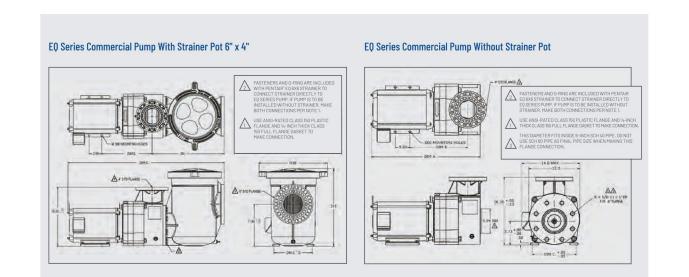

EQ Series Commercial Pump With Strainer Pot (6 Inch x 4 Inch)

ODP Motor	TEFC Motor							A-ODP	A-TEFC	В	С	D-ODP	D-TEFC
340026		EQW 300 WaterFall	208/230	38/19	1	3	126	26.62	N/A	10.03	7.5	43.590	N/A
340027		EQWK 300 WaterFall	208 - 230/460	8.4 - 7.9/3.9	3	3	106	23.12	N/A	10.16	7.5	40.094	N/A
340028		EQW 500 WaterFall	230	23.4	1	5	126	26.62	N/A	13.18	9.7	43.590	N/A
340029		EQWK 500 WaterFall	208 - 230/460	13.6 - 12.7/6.4	3	5	106	23.12	24.68	13.31	9.7	40.094	41.65
340030		EQ500	230	19.6	1	5	126	26.62	N/A	10.03	7.5	43.590	N/A
340031	340604	EQK500	208 - 230/460	13.5 - 12.3/6.2	3	5	106	23.12	24.68	10.16	7.5	40.094	41.65
340032		EQ750	230	30.4	1	7.5	161	27.53	N/A	10.78	8.5	44.590	N/A
340033	340605	EQK750	208 - 230/460	20.1 - 18.3/9.1	3	7.5	116	24.50	28.06	10.16	7.5	41.560	45.12
340034	340606	EQK1000	208 - 230/460	27.1 - 24.3/12.2	3	10	146	26.31	29.81	10.78	8.5	43.290	46.79
340035	340607	EQK1500	208 - 230/460	40.0 - 36.0/17.8	3	15	161	26.31	28.31	10.78	8.5	43.290	45.29
340238		EQ1000	230	40.0	1	10	179	29.0	N/A	11.50	8.5	46.29	N/A


Part# Part# Description Voltage Amps Phase HP Wt Dim. Dim. Dim. Dim. Dim. Dim.

340013 Strainer Pot Assembly, Including Strainer, Lid, Basket and Hardware

EQ Series Commercial Pump Without Strainer Pot (6 Inch x 6 Inch)

Part # ODP Motor	Part # TEFC Motor	Description	Voltage	Amps	Phase	HP	Wt
340014		EQW 300 WaterFall	115/230	38/19	1	3	97
340016		EQWK 300 WaterFall	208 - 230/460	8.4 - 7.9/3.9	3	3	77
340017		EQW 500 WaterFall	230	23.4	1	5	97
340018		EQWK 500 WaterFall	208 - 230/460	13.6 - 12.7/6.4	3	5	77
340019		EQ500	230	19.6	1	5	97
340020	340608	EQK500	208 - 230/460	13.5 - 12.3/6.2	3	5	77
340021		EQ750	230	30.4	1	7.5	132
340022	340609	EQK750	208 - 230/460	20.1 - 18.3/9.1	3	7.5	87
340237		EQ1000	230	40.0	1	10	125
340023	340610	EQK1000	208 - 230/460	27.1 - 24.3/12.2	3	10	117
340024	340611	EQK1500	208 - 230/460	40.0 - 36.0/17.8	3	15	132

EQ Series Pumps are available in 575-V and 50-Hz models. Please contact your local sales representative or Pentair office for details.

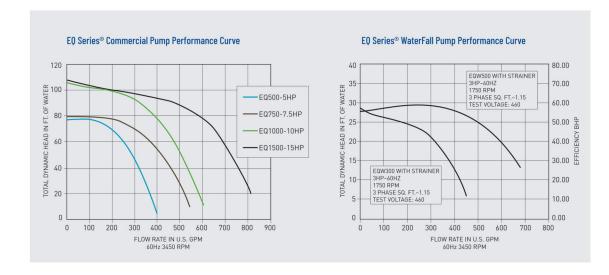

MATERIALS AND DESIGN

PUMP BODY
Volute type, back pull-out design.
Port Size Sipply ANSI rated 125 holted flanger

- 6-inch, ANSI-rated 125 bolted flange suction port. - 4-inch, ANSI-rated 125 bolted flange discharge port Material — Volute and Motor Adapter - PPO resin.
- ImpellerPP0 resin.
- 6061 aluminum design, slotted for mounting ease. Corrosion Prevention - All-plastic pump for maximum hydraulic performance and corrosion prevention.
- HAIR AND LINT STRAINER
- Separate bolt-on PPO resin body with plastic basket, polycarbonate resin thermoplastic lid, and stainless steel bolts.
- 6-inch, ANSI-rated 125 bolted flange suction and discharge ports. **ELECTRICAL**

Thermal Overload Protection

lubricated.

PUMP MAXIMUM THERMAL LIMITS

- Liquid temperature: 104° F.

- NEMA-rated "C" flange.

- Ambient air temperature: 104° F.

- 303 stainless steel construction.

Standard JM type. Premium efficient ODP class F insulated.

On TEFC options, JMZ type, premium efficient, class F insulated.

- 3-15 HP, 3,500 RPM, JM open drip-proof, continuous duty,

RPM JMZ TEFC, continuous duty, three-phase.


three-phase and single-phase (5, 7½, 10 HP). 5-15 HP, 3,500


- Double-shielded, single row, deep-groove type, permanently

- All models require external thermal overload protector.

- Three-phase pumps are 208-230/460. Single-phase models are available in ODP 230V, 60 Hz only.

 $^1\!\text{Use}$ ANSI-rated class 125 plastic flange and $^1\!/_8\text{-inch}$ thick class 125 full flange gasket to make connection.

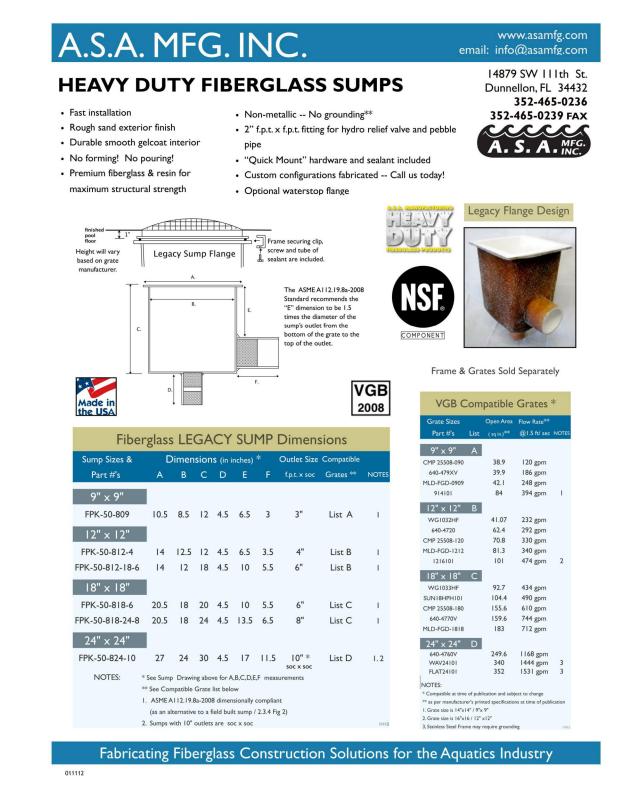

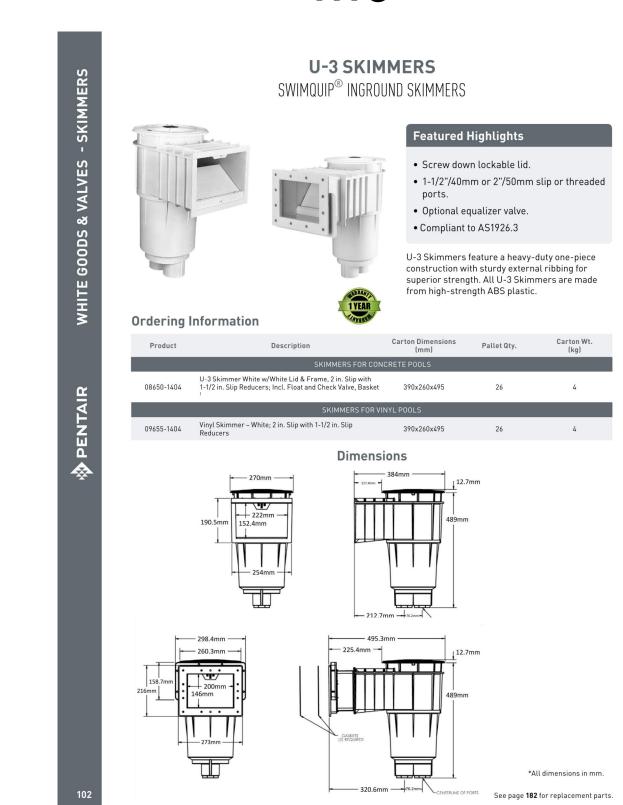



Model	Filter	Vertical	Filter	Required Flow Rate		Flow Rate LPM		Turnover Capacity-Res. (Litres	
Number	Area Sq. Mt.	Clearance	Diameter	Sand† (kgs)	Res.	Com.	8hrs.	10hrs.	12hrs.
TR 40	0.178	826mm	483mm	80	144	144	69,045	86,307	103,568
TR 50	0.228	934mm	533mm	103	186	186	89,032	111,291	133,549
TR 60	0.291	953mm	609mm	148	239	239	114,470	143,088	171,706
TR 100	0.456	1061mm	762mm	273	371	281	178,065	222,582	267,098
TR 140	0.655	1200mm	914mm	420	534	402	256,196	320,245	384,295
			,	for all the	0	reasons	Required ** Maximur 287 Its p flow will	dard 16/30 silica s I clearance to rem n flow rate. Flow i er sq.mt. of filter a depend on plumb omponents.	ove the closur rate is based or area. Actual sy:

dependability and ease of operation and maintenance for a track record the industry standard. Additional features include :

 Combination sand and water drain speeds servicing and winterizing. **AVAILABLE FROM:** All internal parts are threaded for ease of maintenance. Swing-away water diffuser allows instant access to sand and

Ten-year limited warranty. See warranty for details.


Australia

National Customer Service: Phone: 1300 137 344
Fax: 1800 006 688
National Dealer Locator: Phone: 1800 664 266 Email: au.sales@pentair.com Web: www.pentair.com.au w Zealand
National Customer Service: Phone: 0800 654 112
Fax: 0800 806 642
National Dealer Locator: Phone: 0800 664 269 nz.sales@pentair.com www.pentair.co.nz Display, publication, modification or distribution is strictly prohibited without the prior written permission of Pentair Water Pty Ltd.

914-8f_A-2s_B1.6_C0.4_D0.5_E2.4_F16 914-9f_A-2b_B3_C1.6_D0.5_E2.8_F16 914-9f_A-2.5b_B3_C1.6_D0.5_E2.6_F16

914-9t_A-4b_B9.8_C1.6_D0.5_E1.8_F16 [S 914-9w_A-1.5b_B3_C1.6_D0.5_E1.6_F16

Disclaimer: Every endeavour has been made to publish the correct details in this publication. No responsibility will be taken for errors, omissions or changes in product specifications. Pentair reserves the right to change specifications. pumps / filters / heaters / heat pumps / automation / lighting / cleaners / sanitizers / water features / maintenance products ©2012 Pentair Aquatic Systems. All rights reserved.

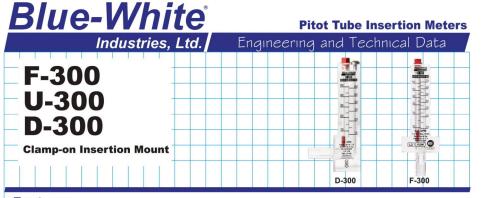

Features: Mounts to existing pipe. No unions or adapters required. 1" through 8" pipe sizes. Flow rates from 4 to 1900 GPM. Models for mounting on horizontal or vertical pipe. Resistant PVDF internal float materials. Mounting clamps and gasket included. One piece machined acrylic body. NSF Listed **Specifications:** 1", 1.25", 1.5" and 2" pipe size: 5% of rate Pipe Requirements IPS inch pipe size (ASTM-D-1785) Accuracy 2.5", 3", 4", 6", and 8" pipe size: 10% of rate

Max PSI (bar) 75 PSI (5.2 bar) at 70°F (21°C) Power Requirement No Power Required Fluid Temp Range 0° to 190°F / -18 to 88°C @ 0 PSI Ambient Temp Range 0° TO 110°F / -18 TO 43°C

U-series meters measure upward flows only.
 D-series meters measure downward flows only.

Note: Temperature and Pressure ratings for meter only. Actual pipe rating

Approximate Ship Wt 1" - 4" units: 1lb (.45kg) 6" - 8" units: 2lb (.91kg) **Materials of Construction:** Neoprene Cast Acrylic

Meter Body Pipe Clamp 316 Series Stainless Steel Installation Requirements: Minimum Straight Pipe Length Requirements The meter's accuracy is affected by disturbances such as pumps, elbows, tees, valves, etc., in the flow stream. Install the meter in a straight run of pipe as far as EXAMPLE OF MINIMUM STRAIGHT PIPE LENGTH F-300 SERIES 4 inch 20 inch (5" x 4") 8 inch (2" x 4") 6 inch 30 inch (5" x 6") 12 inch (2" x 6") U-300 & D-300 SERIES Mounting location The meter is designed to withstand outdoor conditions.

F series meters must be mounted at the vertical (twelve o'clock) position on hori-FLOW 10.

FLOW OUT OF THE PROPERTY OF THE PROP only.

U & D series meters must be mounted on vertical pipe only.

The pipe must be completely full of water at all times.

See the minimum straight length of pipe requirement chart above.

The meter can accurately measure flow from one direction only.




THE PERFORMANCE LEADER IN AUTOMATIC SANITIZATION MODELS & SPECIFICATIONS FOR LARGE RESIDENTIAL AND COMMERCIAL POOLS The INLET control valve side of the feeder connects to the plumbing on the discharge side of the pump, before the filter. The OUTLET side of the feeder connects to the pool return line after the filter and/or heater, pool cleaner, diverter valves, or any other installed equipment. Installation of a corrosion-

resistant check valve such as #R172288 by Pentair between the feeder inlet and outlet and the equipment is strongly recommended to check backflow of chemicals. This helps ensure equipment longevity.

AVAILABLE FROM:

DENTAID

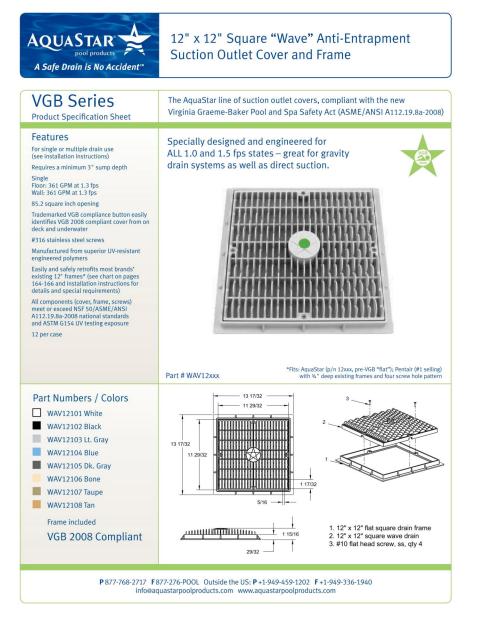

8" 8" 8"

22.75" 40.375" 51"

2.8 4.6 3.0

17.8 17.8 9.2

1.0 2.0 1.5

224,000 369,000 658,500

99,200 164,000 292,600

Maximum Output Rate, Chlorine* (lbs./hr.)-Pool at listed flowrate

Maximum Output Rate, Bromine* (lbs./hr.)-Pool at listed flowrate

Output Rate, Chlorine* (lbs./hr.)-Pool at listed flowrate

Output Rate, Chlorine* (lbs./hr.)-Spa at listed flowrate

Output Rate, Bromine (lbs./hr.)-at listed flowrate

Maximum Pool Size @ 34 GPM (Chlorine-Gals)

Maximum Pool Size @ 34 GPM (Bromine-Gals)

Maximum working pressure – 50 psi

Flow rate (GPM)




	MAIN POOL EQUIPMENT SCHEDU	JLE
M 1	5 HP, SELF-PRIMING PUMP W/ MATCHING STRAINER, 220 GPM @65 F. OF HEAD - PROVIDE A SPARE BASKET FOR STRAINER.	PENTAIR — EQ500
M2	30" DIA., HIGH RATE SAND FILTER WITH 4.91 S.F. MEDIA	PENTAIR – TRITON II TR100
М3	FLOW RATE INDICATOR	BLUE-WHITE F/D/U-300
M4	EROSION CHLORINATOR	PENTAIR HC 3315
M5	MAIN DRAIN — 14"×14" SUMP AND COVER/GRATE AND 1 $\frac{1}{2}$ " HYDROSTATIC RELIEF VALVE	AQUASTAR 914xxx [SUMP P/N 9-4 SB]
M6	IN-GROUND SKIMMER	PENTAIR U3
M7	IN-WALL INLET W/ DIRECTIONAL FITTINGS	PENTAIR - 542002
M8	MULTIPORT VALVE	PENTAIR 261055
M9	IN-WALL VACUUM FITTING, W/ PLUG	HAYWARD W400AWHP
M10	5' MUSHROOM FOUNTAIN	NATURAL STRUCTURES 1800-18
M11	POOL HANDRAIL, 4' LONG	SRSMITH DMS101-MG
M12	POOL LADDER, 3 RUNG	SRSMITH LF24-38-MG
M13	500 WATT WHITE LIGHT WITH NICHE	PENTAIR-78456300
M14		PENTAIR-542044
M15	FLOOR DRAIN, CAST BODY, PVC COVER BY OTHERS — MAX. 50 GPM FLOW	
M16	BACKSTROKE FLAG ANCHOR	SELECTED BY OWNER
M17		SR SMITH MULTI-LIFT
M18	3HP FOUNTAIN PUMP w/ MATCHING STRAINER, 130 GPM @ 65 F. OF HEAD — PROVIDE A SPARE BASKET FOR STRAINER	PENTAIR-WFE-12
M19	12"x12" FOUNTAIN SUMP AND COVER	ASA FPK 50-812-4 AQUASTAR WAV12
M20	POOL FLOOR INLET	PENTAIR 08417
M21	POOL HANDRAIL, 4" LONG, TWO BEND	SRSMITH 2HR-4-MG
M22		PENTAIR T40-FW
M23		PENTAIR EASYTOUCH 8
P 	OOL CONTRACTOR SHALL VERIFY THAT POOL EQUIPMENT SHEETS MATCH BEFORE ORDERING ANY ITEMS OF	


27526 Z RIN

ME CREE PROV 196

23900139 DRAWN BY: 03/07/2023 **FAB**

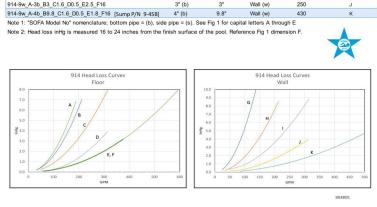

M13

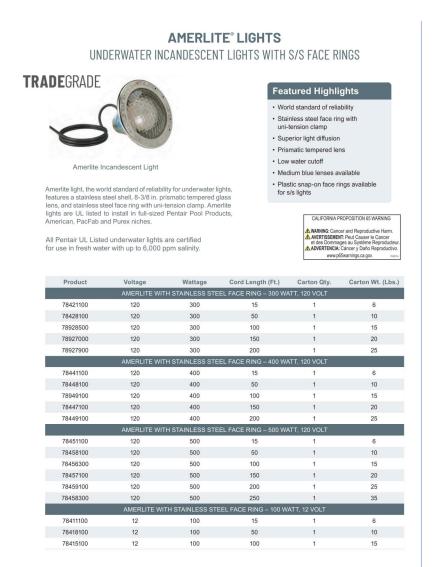

Ordering Information

Carton Oty. Carton Wt. (Lbs.)

POOL SPECIALTY FITTINGS (CONT'D)

08417-0000 2 in. Slip with 1-1/2 in. slip bushing, white 3

08417-0100 2 in. Slip with 1-1/2 in. slip bushing, gray ³

08417-0200 $\,$ 2 in. Slip with 1-1/2 in. slip bushing, black $^{\rm 3}$

46550000 Aerator Cap, 1-1/2 in. for air channel, white 46550015 Aerator Cap, 1-1/2 in. for air channel, dark gray

46550065 Aerator Cap, 1-1/2 in. for air channel, gray 510166 Hose adapter, straight, white 4

86201500 Aerator inlet (used as a return spray nozzle)

GW9530 Vac-port fitting, NSF listed

86300100 Valve Lid & Ring, ABS, 6 in., white

86300130 Valve Lid & Ring, ABS, 6 in., beige

540056 Grate insert, 1-1/2 in. MIP, white 2

542044 Anchor Cup with SS bar, white 1 542045 Anchor Cup with SS bar, black ¹

86201200 Anchor Cup, ABS, white

86201215 Anchor Cup, ABS dark gray

86201400 Rope Hook, 3/4 in., ABS

ABS Steps, set of three, white

82400800 ABS Steps, set of three, gray

Not for use with saltwater pools.

Not for use as a suction fitting.

3 Use only as a floor inlet fitting.

4 Hose to NPT fittings.

86201300 Anchor Cup, ABS with SS cross bar, white ¹

Rope Hook for 3/4 in. rope with two SS screws

86201500

PRE-PLUMBED VALVES BACKWASH VALVES FOR 1-1/2 & 2 IN. D.E. AND SAND FILTERS

Side mounted HiFlow™ and Multiport Valves are designed for maximum performance and working pressures. Available in 1-1/2 and 2 in. threaded or slip • The right valve for easy operation

PVC body Six-position, positive-lock operation Special winterizing position

	Description	Carton Qty.	Carton W (Lbs.)
	MULTIPORT VALVE KIT FOR FILTERS, SLIP		
261055	2 in. MPV, for Triton & Quad D.E. filters [SM 20-3] 7-1/2 in. Centerline	1	9
261152	2 in. MPV, for FNS, FNS Plus & NSP filters [SM 20-2] 7-1/2 in. Centerline	1	9
261173	1-1/2 in. MPV, for Triton & Quad D.E. filters [SM 10-3] 7-1/2 in. Centerline	1	8
261177	1-1/2 in. MPV, for FNS, FNS Plus & NSP filters [SM 10-2] 7-1/2 in. Centerline	1	8
	HIFLOW VALVE KIT FOR FILTERS, SLIP		
261050	2 in., w/ bulkhead fittings, for Triton & Quad D.E. filters, 7-1/2 in. Centerline	1	9
261142	2 in., w/ bulkhead fittings, for FNS, FNS Plus & NSP filters, 7-1/2 in. Centerline	1	9
	PVC SLIDE VALVE, SLIP		
263064	Push Pull Valve, 7-1/2 in. Center, PVC, Almond	1	4.5
263079	2 in. w/o bulkhead fittings for D.E. and sand filters, 7-1/2 in. Centerline	1	
	FULLFLOXF BACKWASH VALVES		
262507	Sta-Rite version for System 3 Mod D.E., inlet on top, with Sta-Rite offset adapters glued on		
262508	Sta-Rite version for System 3 D.E. and Sand, inlet on bottom, with Sta-Rite offset adapters glued on		
262509	Valve with filter inlet port on top, no fittings, only valve		
262511	Valve with filter inlet port on bottom, no fittings, only valve		
263080	Valve for Sand and Quad D.E., inlet port on top, Pentair 2 in. unions glued on		
263081	Valve for D.E., inlet port on bottom, Pentair 2 in. unions glued on		



Kit

261050


CALIFORNIA PROPOSITION 65 WARNING

MARNING: Cancer and Reproductive Harm.

▲ WERTISSEMENT: Peut Causer le Cancer et des Dommages au Système Reproducteur.

ADVERTENCIA: Cáncer y Daño Reproductivo.

www.p65warnings.ca.gov.









Hand & Stair Rails

DMS-101

32.00

- Tubing: 1.90" OD Wall Thickness*: .049" or .065"
- Stainless Steel: 304 or 316L Marine Grade** (add –MG to part number)
- Bends: 6" Radius
- Options: Powder-coating and SealedSteel Salt Friendly
- Recommended Anchors: AS-100P or AS-100B (order separately)
- Recommended Escutcheon: EP-100F (order separately) Sold as a single rail
- * Minimum rail thickness is .065 for Commercial ** Minimum requirement for salt pools is 316L Marine Grade

DMS-101

		Shipping			
Model No.	Description	Weight	Length	Width	Height
DMS-101A	48" Center Grab Rail, .049	13 lbs — 16 lbs 6 — 7kg	59" 150cm	39" 99cm	2" 5cm
DMS-101B	48" Center Grab Rail, .065	13 lbs — 16 lbs 6 — 7kg	59" 150cm	39" 99cm	2" 5cm





multiLift™

M17



New Construction Guidelines

Order pool lift and 575-3000 500-5000 (no anchors) new construction jig at same time

Order new construction 575-3000N 500-5000A (comes with anchors) jig ahead of pool lift

Commercial Ladder



MAIN POOL EQUIPMENT SCHEDULE		
	5 HP, SELF-PRIMING PUMP W/ MATCHING STRAINER, 220 GPM @65	
M 1	F. OF HEAD — PROVIDE A SPARE BASKET FOR STRAINER.	PENTAIR — EQ500
M2	30" DIA., HIGH RATE SAND FILTER WITH 4.91 S.F. MEDIA	PENTAIR — TRITON II TR100
M3	FLOW RATE INDICATOR	BLUE-WHITE
		F/D/U-300
M4	EROSION CHLORINATOR	PENTAIR HC 3315
M5	MAIN DRAIN - 14"x14" SUMP AND COVER/GRATE AND 1	AQUASTAR 914xxx
	1" HYDROSTATIC RELIEF VALVE	
M6	IN-GROUND SKIMMER	PENTAIR U3
M7	IN-WALL INLET W/ DIRECTIONAL FITTINGS	PENTAIR - 542002
M8	MULTIPORT VALVE	PENTAIR 261055
M9	IN-WALL VACUUM FITTING, W/ PLUG	HAYWARD W400AWHP
M10	5' MUSHROOM FOUNTAIN	NATURAL STRUCTURES 1800-18
M11	POOL HANDRAIL, 4' LONG	SRSMITH DMS101-MG
M12	POOL LADDER, 3 RUNG	SRSMITH LF24-38-MG
M13	500 WATT WHITE LIGHT WITH NICHE	PENTAIR-78456300
M14	IN-WALL CUP ANCHOR	PENTAIR-542044
M15	MAX. 50 GPM FLOW	
M16	BACKSTROKE FLAG ANCHOR	SELECTED BY OWNER
M17	HANDICAPPED LIFT	SR SMITH MULTI-LIFT
M18	3HP FOUNTAIN PUMP w/ MATCHING STRAINER, 130 GPM @ 65 F. OF HEAD — PROVIDE A SPARE BASKET FOR STRAINER	PENTAIR-WFE-12
M19	12"x12" FOUNTAIN SUMP AND COVER	ASA FPK 50-812-4 AQUASTAR WAV12
M20	POOL FLOOR INLET	PENTAIR 08417
M21	POOL HANDRAIL, 4" LONG, TWO BEND	SRSMITH 2HR-4-MG
M22	AUTOMATIC WATER LEVEL CONTROLLER	PENTAIR T40-FW
M23	POOL CONTROL PANEL	PENTAIR EASYTOUCH 8
POOL CONTRACTOR SHALL VERIFY THAT POOL EQUIPMENT SCHEDULE AND CUT SHEETS MATCH BEFORE ORDERING ANY ITEMS OF EQUIPMENT		

27526 ARIN, ॐ FUQU CENTER DRIV MENITY CREEK

PROVINCE 196

23900139 03/07/2023 **FAB**

DETAILS