




## 6160CR-2

### Commercial Fire Alpha Keypad UL864 Rev 9 Listed

The 6160CR-2 is an addressable remote keypad intended for use in commercial fire applications with Honeywell Home commercial fire control panels.

The keys are continuously backlit for convenience and easy visibility. The LCD display is backlit only when a key is depressed\*, or when the system is in alarm or trouble condition.

\*Note: The LCD may be programmed to remain on at all times (see panel instructions for details).

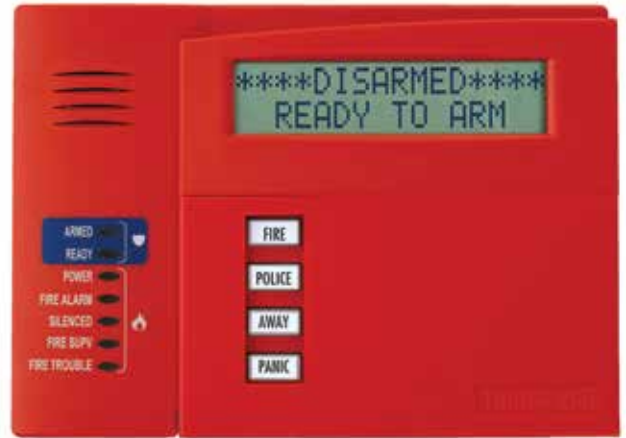

## FEATURES

- Four programmable function keys
- Built-in sounder
- Seven Status LEDs
  - Armed (Red)
  - Ready (Green)
  - Power (Green)
  - Fire Alarm (Red)
  - Silenced (Yellow)
  - Supervisory (Yellow)
  - Trouble (Yellow)
- Large easy-to-read display
- Red removable door
- Physical  
5.250" W x 7.437" H x 1.312" D

## SPECIFICATIONS

### Sounder:

High-quality speaker

### Electrical:

45mA standby 160mA in alarm  
(sounder, back light and LED on)

### Compatibility:

Supports Control Panels

- VISTA-32FB Rev 5 and higher
- VISTA-128FBP Rev 4 and higher
- VISTA-250FBP Rev 4 and higher

UL/CUL and residential listed for commercial fire and burglary installations. To be employed with manufacturer's listed control units as indicated in the installation instructions.

Product specifications subject to change.

### For more information

[security.honeywellhome.com](http://security.honeywellhome.com)



### Resideo Technologies, Inc.

2 Corporate Center Drive, Suite 100  
P.O. Box 9040  
Melville, NY 11747  
1-800-645-7492  
[resideo.com](http://resideo.com)

All trademarks are property of their respective owners.

L/6160CR2D/D | 07/19  
© 2019 Resideo Technologies, Inc.  
This product is manufactured by Resideo and its affiliates. The Honeywell Home trademark is used under license from Honeywell International Inc. All rights reserved.

## ORDERING

6160CR-2

Commercial Fire Alpha Keypad