



J&D SPRINKLER CO., INC.  
Fire Protection - Est. 1986

315 W Main St,  
Clayton, NC 27520

(919) 553-2356

[WWW.JDSPRINKLER.COM](http://WWW.JDSPRINKLER.COM)

**PIZZA HUT**

**185 MITTIE HADDOCK DR**

**CAMERON, NC**

**SUBMITTAL DATA**



# **PIPE & FITTINGS**

# SCHEDULE 10 & 40



## Always ready to protect your most valuable assets.

As the leading supplier of steel sprinkler pipe, we understand that there are no second chances in fire suppression. You need products of enduring quality and exceptional strength—plus reliable service. You need Bull Moose.

### Bull Moose Fire Sprinkler Pipe Product Information

Nominal Pipe Size (Inches)		1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"	8"	NPS (In.)		1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
SCHEDULE 10	O.D. (in)	1.315	1.660	1.900	2.375	2.875	3.500	4.500	6.625	8.625	SCHEDULE 40		1.315	1.660	1.900	2.375	2.875	3.500	4.500
	I.D. (in)	1.097	1.442	1.682	2.157	2.635	3.260	4.260	6.357	8.249			1.049	1.380	1.610	2.067	2.469	3.068	4.026
	Empty Weight (lb/ft)	1.410	1.810	2.090	2.640	3.530	4.340	5.620	9.290	16.940			1.680	2.270	2.720	3.660	5.800	7.580	10.800
	Water Filled Weight (lb/ft)	1.820	2.518	3.053	4.223	5.893	7.957	11.796	23.038	40.086			2.055	2.918	3.602	5.114	7.875	10.783	16.316
	C.R.R.	15.27	9.91	7.76	6.27	4.92	3.54	2.50	1.158	1.805			1.00	1.00	1.00	1.00	1.00	1.00	1.00
	Pieces per Lift	91	61	61	37	30	19	19	10	7			70	51	44	30	30	19	19
	Lift Weight (lbs) 21' lengths	2,695	2,319	2,677	2,051	2,224	1,732	2,242	1,951	2,490			2,470	2,431	2,513	2,306	3,654	3,024	4,309
	Lift Weight (lbs) 24' lengths	3,079	2,650	3,060	2,344	2,542	1,979	2,563	2,230	2,848			2,822	2,778	2,872	2,635	4,176	3,456	4,925
	Lift Weight (lbs) 25' lengths	3,208	2,760	3,187	2,442	2,648	2,062	2,670					2,940	2,894	2,992	2,745	4,350	3,601	5,130

### SCHEDULE 10 & 40 ADVANTAGES:

- UL listed (US & Canada) and FM approved
- ASTM A135 and A795 Type E, Grade A Certified
- Complies with NFPA-13, 13R and 14
- Industry-leading hydraulic characteristics
- CRR of 1.0 and greater
- All pipe NDT weld tested

### OTHER BENEFITS/SERVICES:

- We have the most stocking locations in the industry, for best delivery and availability
- Plain end or roll groove
- Eddy Guard II™ bacterial-resistant internal coating
- Custom length options
- Hot dipped galvanization
- Reddi-Pipe® red or black pipe eliminates field painting
- Compatible for use in wet, dry, preaction and deluge sprinkler systems
- The only maker with EPDs (to help earn LEED points).

**Exclusive maker of Reddi-Pipe®**  
RED OR BLACK PAINTED PIPE.




cULus LISTED



800.325.4467  
sales@BullMooseIndustries.com  
BullMooseTube.com

## FIG. 3205

### Straight Tee



For Listings/Approval Details and Limitations, visit our website at [www.anvilintl.com](http://www.anvilintl.com) or contact an Anvil® Sales Representative.

#### FIGURE 3205 - STRAIGHT TEE

Nominal Size	Maximum Working Pressure▲	Dimension A	Approx. Wt. Each
<i>In. (mm)</i>	<i>PSI (kPa)</i>	<i>In. (mm)</i>	<i>Lbs. (kg)</i>
1	500	1.50	0.85
25	3450	38.10	0.39
1¼	500	1.75	1.22
32	3450	44.45	0.55
1½	500	1.94	1.55
40	3450	49.27	0.70
2	500	2.25	2.45
50	3450	57.15	1.11

▲ – Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/ULC, and FM pressure ratings versus pipe schedule, please visit [anvilintl.com](http://anvilintl.com) or contact your local Anvil Representative.

#### MATERIAL SPECIFICATIONS

Dimensions: ASME B16.3

Material: ASTM A536 Grade 65-45-12

Finish: Black

Threads: NPT per ASME B1.20.1

Agency Approvals: All ductile iron threaded fittings are UL/ULC Listed and FM Approved.

**NOTICE:** Ductile iron fittings have higher tensile strength than that of steel pipe. Therefore, over tightening can cause damage to pipe threads which may cause leakage. Ductile iron fittings should be tightened approximately three turns beyond hand tight, but no more than four turns.


#### PROJECT INFORMATION

#### APPROVAL STAMP

Project:	<input type="checkbox"/> Approved
Address:	<input type="checkbox"/> Approved as noted
Contractor:	<input type="checkbox"/> Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	

## FIG. 3221R

### Reducing Coupling

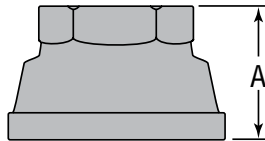

For Listings/Approval Details and Limitations, visit our website at [www.anvilintl.com](http://www.anvilintl.com) or contact an Anvil® Sales Representative.

#### FIGURE 3221R - REDUCING COUPLING

Nominal Size	Maximum Working Pressure▲	Dimension A	Approx. Wt. Each
<i>In. (mm)</i>	<i>PSI (kPa)</i>	<i>In. (mm)</i>	<i>Lbs. (kg)</i>
1 x 1/2	500	1.69	0.39
25 x 15	3450	42.92	0.18
1 x 3/4	500	1.69	0.53
25 x 20	3450	42.92	0.24

▲ – Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/ULC, and FM pressure ratings versus pipe schedule, please visit [anvilintl.com](http://anvilintl.com) or contact your local Anvil Representative.

#### MATERIAL SPECIFICATIONS

Dimensions: ASME B16.3

Material: ASTM A536 Grade 65-45-12

Finish: Black

Threads: NPT per ASME B1.20.1

Agency Approvals: All ductile iron threaded fittings are UL/ULC Listed and FM Approved.

**NOTICE:** Ductile iron fittings have higher tensile strength than that of steel pipe. Therefore, over tightening can cause damage to pipe threads which may cause leakage. Ductile iron fittings should be tightened approximately three turns beyond hand tight, but no more than four turns.


#### PROJECT INFORMATION

#### APPROVAL STAMP

Project:	<input type="checkbox"/> Approved
Address:	<input type="checkbox"/> Approved as noted
Contractor:	<input type="checkbox"/> Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	

## FIG. 3201

### 90° Elbow



For Listings/Approval Details and Limitations, visit our website at [www.anvilintl.com](http://www.anvilintl.com) or contact an Anvil® Sales Representative.

**FIGURE 3201 - 90° ELBOW**

Nominal Size	Maximum Working Pressure▲	Dimension A	Approx. Wt. Each
<i>In. (mm)</i>	<i>PSI (kPa)</i>	<i>In. (mm)</i>	<i>Lbs. (kg)</i>
1	500	1.50	0.62
20	3450	38.10	0.28
1¼	500	1.75	0.90
32	3450	44.45	0.41
1½	500	1.94	1.20
40	3450	49.276	0.54
2	500	2.25	1.85
50	3450	57.15	0.84

▲ – Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/ULC, and FM pressure ratings versus pipe schedule, please visit [anvilintl.com](http://anvilintl.com) or contact your local Anvil Representative.

### MATERIAL SPECIFICATIONS

Dimensions: ASME B16.3

Material: ASTM A536 Grade 65-45-12

Finish: Black

Threads: NPT per ASME B1.20.1

Agency Approvals: All ductile iron threaded fittings are UL/ULC Listed and FM Approved.

**NOTICE:** Ductile iron fittings have higher tensile strength than that of steel pipe. Therefore, over tightening can cause damage to pipe threads which may cause leakage. Ductile iron fittings should be tightened approximately three turns beyond hand tight, but no more than four turns.

### PROJECT INFORMATION

### APPROVAL STAMP

Project:	<input type="checkbox"/> Approved
Address:	<input type="checkbox"/> Approved as noted
Contractor:	<input type="checkbox"/> Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	



## TECHNICAL DATA

### HOLE CUT SYSTEM MODEL V-723 SADDLE LET MECHANICAL TEE

The Viking Corporation, 210 N Industrial Park Drive, Hastings MI 49058

Telephone: 269-945-9501 Technical Services: 877-384-5464 Fax: 269-818-1680 Email: techsvcs@vikingcorp.com

#### 1. DESCRIPTION

VGS® Model V-723 Saddle Let small mechanical tees are available in sizes 1-1/4" through 2-1/2". The Models V-723 mechanical tees provide an easy take-out of a branch outlet without the need for welding. VGS® Mechanical Tees are manufactured at ISO9001 certified facilities and are designed to conform to ASTM and other standards where applicable. Threads are NPT per ANSI B1.20.1.

#### 2. LISTINGS AND APPROVALS

US Guide No. VIZM

Class 1920

#### 3. TECHNICAL DATA

Specifications:

Maximum working pressure: 300 psi (21 bar)

Ductile iron conforming to ASTM A536

Grade 65-45-12

Standard black finish

Hot dipped Zinc galvanized versions are available (conforming to ASTM A153); when ordering, add a "G" suffix to the Model number.

Rubber compound EPDM Grade E conforming to ASTM D2000, AWWA C606, NSF 61 and IAPMO.

Nuts and Bolts: Zinc plated, Carbon Steel conforming to ASTM A183 Grade 2 (UNC nuts and bolts are a silver chromate color and ISO are a gold chromate color)

The latest VGS® Technical Data can be accessed at

<http://www.vikinggroupinc.com>.

Scan to visit our Mobile website:



<http://vikinggroup.mobi/p/46374>

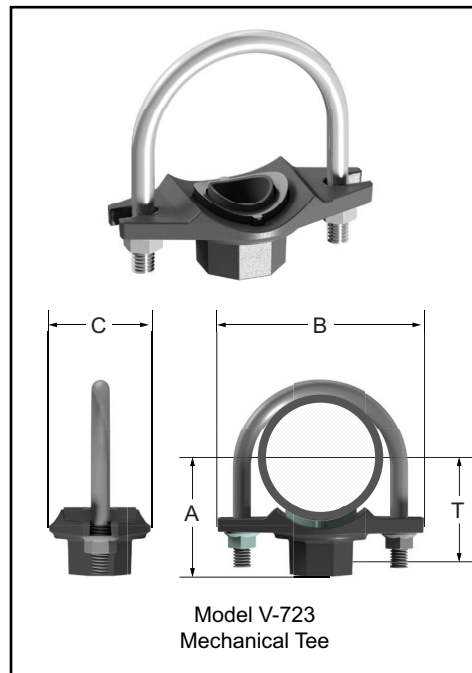


Table 1: V-723

Nominal Size in (mm)	Hole Diameter* +1.6, -0 (+0.063, -0) in (mm)	Dimensions			T** in (mm)	Bolt Size in (mm)	Bolt Torque Lb-Ft (Nm)	Weight Lbs (Kgs)
		A in (mm)	B in (mm)	C in (mm)				
1.25 x 0.5 (32 x 15)	1.18 (30)	1.87 (48)	3.5 (89)	2.2 (56)	1.63 (42)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	0.9 (0.41)
1.25 x 0.75 (32 x 20)	1.18 (30)	1.87 (48)	3.5 (89)	2.2 (56)	1.63 (42)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	1.0 (0.45)
1.25 x 1 (32 x 25)	1.18 (30)	2.04 (52)	3.5 (89)	2.2 (56)	1.73 (44)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	1.0 (0.45)
1.5 x 0.5 (40 x 15)	1.18 (30)	2.04 (52)	3.5 (89)	2.2 (56)	1.79 (46)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	0.9 (0.41)
1.5 x 0.75 (40 x 20)	1.18 (30)	2.04 (52)	3.5 (89)	2.2 (56)	1.79 (46)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	0.9 (0.41)
1.5 x 1 (40 x 25)	1.18 (30)	2.04 (52)	3.5 (89)	2.2 (56)	1.69 (43)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	0.9 (0.41)
2 x 0.5 (50 x 15)	1.18 (30)	2.30 (59)	3.86 (98)	2.2 (56)	2.07 (53)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	0.9 (0.41)
2 x 0.75 (50 x 20)	1.18 (30)	2.30 (59)	3.86 (98)	2.2 (56)	2.07 (53)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	0.9 (0.41)
2 x 1 (50 x 25)	1.18 (30)	2.30 (59)	3.86 (98)	2.2 (56)	1.97 (50)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	1.0 (0.45)
2.5 x 0.5 (65 x 15)	1.18 (30)	2.46 (63)	4.37 (111)	2.2 (56)	2.22 (57)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	1.0 (0.45)
2.5 x 0.75 (65 x 20)	1.18 (30)	2.46 (63)	4.37 (111)	2.2 (56)	2.22 (57)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	1.0 (0.45)
2.5 x 1 (65 x 25)	1.18 (30)	2.46 (63)	4.37 (111)	2.2 (56)	2.13 (54)	U-Bolt (3/8ø)	20 - 22 (27 - 30)	1.0 (0.45)

\*Hole diameters are suggested hole saw diameters. \*\*T: Take-out (Center of run to end of pipe to be engaged)



## TECHNICAL DATA


## HOLE CUT SYSTEM MODEL V-723 SADDLE LET MECHANICAL TEE

The Viking Corporation, 210 N Industrial Park Drive, Hastings MI 49058

Telephone: 269-945-9501 Technical Services: 877-384-5464 Fax: 269-818-1680 Email: techsvcs@vikingcorp.com

### 4. HOLE CUTTING

The hole-cut method of pipe preparation is required when using mechanical tees, mechanical crosses, and saddle-lets. The method of pipe preparation requires the cutting or drilling of a specified hole size on the centerline of the pipe. Always use the correct hole saw size as shown this data sheet and never use a torch for cutting a hole. After the hole has been cut all rough edges must be removed and the area within 5/8" (16 mm) of the hole should be inspected to ensure a clean smooth surface, free of any indentations or projections that could affect proper gasket sealing. The area within the "A" dimension should also be inspected and must be free for dirt, scale or any imperfection that could affect proper seating or assembly of the fitting.

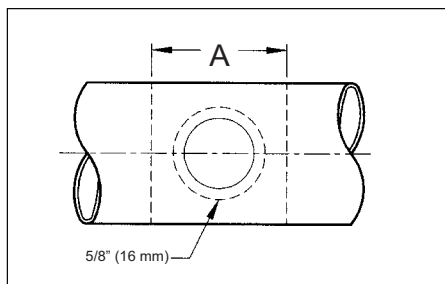

**Table 2: Hole Sizes for Mechanical Tees**

**Model V-723**

Mechanical Tees Branch Size in (mm)	Hole Dimensions		Surface Preparation "A"
	Hole Saw Size	Maximum Diameter Allowed	
1/2, 3/4, 1 (15, 20, 25)	1-3/16 (30)	1-1/4 (32)	3-1/2 (89)

### 5. INSTALLATION


#### NOTES:

- Use a wrench to hold the threaded outlet in place when installing the sprinkler.
- Tighten the nuts evenly.

**Table 3: K-factor of Saddle Lets**

Outlet Size	1/2"	3/4"	1"
K-factor of Saddle-Lets	K12	K15	K15

Do not install sprinkler directly into Saddle-Let with 1" outlet.

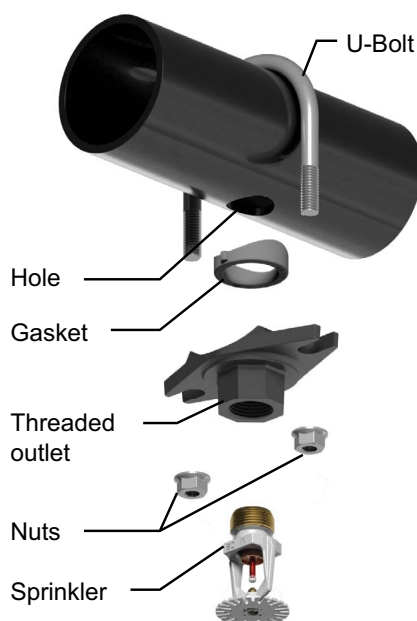

**Figure 1: V-723 Saddle-Let Installation**





## TECHNICAL DATA

### HOLE CUT SYSTEM MODEL V-723 SADDLE LET MECHANICAL TEE


The Viking Corporation, 210 N Industrial Park Drive, Hastings MI 49058  
Telephone: 269-945-9501 Technical Services: 877-384-5464 Fax: 269-818-1680 Email: techsvcs@vikingcorp.com

## 6. FLOW DATA

### Equivalent Length of Outlet Size Schedule 40 Carbon Steel Pipe Per UL 213, Section 16 C=120

Model	Nominal Inlet Size Inches	Nominal Outlet Size Inches	Equivalent Length Feet	C <sub>v</sub> Values
V-723	1.25	1	6	27
V-723	1.5	1	6	27
V-723	2	1	6	27
V-723	2.5	1	3	38

Flow test data has shown that the total head loss between point A and B for the fittings can be expressed in terms of the pressure difference across the inlet and branch. The pressure difference can be obtained from the relationship below.

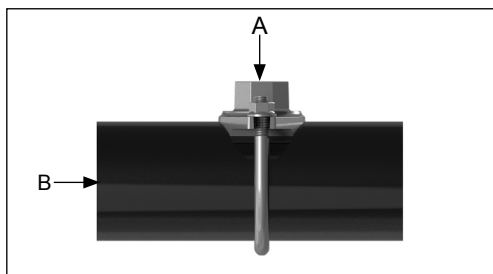

Formulas for Cv Values:

$$\Delta P = \frac{Q^2}{C_v^2}$$

$$Q = C_v \times \sqrt{\Delta P}$$

Where:

Q = Flow (GPM)

ΔP = Pressure Drop (psi)

C<sub>v</sub> = Flow Coefficient



# **HANGER MATERIAL**

Threaded Rods

Low Carbon Steel Threaded Rod

The most economical and most common form of Threaded Rod. Typically used by the plumbing and contracting trades. Used in maintenance departments in various applications including hanging, mounting, bracing, supporting, and fastening applications.

- Low carbon steel according to ASTM A307, Grade A requirements
- Conforms to ASME B18.31.3
- Class 1A rolled threads
- Zinc Plated according to Fe/Zn 3AT Per ASTM F1941
- Hot Dip Galvanized according to ASTM A153 or F2329
- 60,000 psi Min. Tensile Strength



Thread - Coarse																
		1 ft		2 ft		3 ft		6 ft		10 ft		12 ft				
		Plain	Zinc	Plain	Zinc	Plain	Zinc	Hot Dip Galvanized	Plain	Zinc	Hot Dip Galvanized	Plain	Zinc	Hot Dip Galvanized	Plain	Zinc
Diameter	Thread Size	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.
#6	32	-	-	-	-	47002	47052	-	47102	47152	-	-	-	-	-	-
#8	32	-	-	-	-	47003	47053	-	47103	47153	-	47136	47186	-	-	-
#10	24	-	-	-	-	47004	47054	-	47104	47154	-	47137	47187	-	-	-
#12	24	-	-	-	-	47006	47056	-	-	47156	-	-	-	-	-	-
1/4"	20	0156376	0156317	0156377	0156318	47007	47057	-	47107	47157	-	47140	47190	-	47207	47257
5/16"	18	0156378	0156319	0156379	0156320	47009	47059	-	47109	47159	-	47141	47191	-	47209	47259
3/8"	16	0156380	0156321	0156381	0156322	47011	47061	47602	47111	47161	47618	47142	47192	47634	47211	47261
7/16"	14	0156382	0156323	0156383	0156324	47013	47063	0156404	47113	47163	-	47143	47193	-	47213	47263
1/2"	13	0156384	0156325	0156385	0156326	47015	47065	47604	47115	47165	47620	47144	47194	47636	47215	47265
9/16"	12	0156386	0156327	0156387	0156328	47017	47067	-	47117	47167	-	47145	47195	-	47217	47267
5/8"	11	0156388	0156329	0156389	0156330	47019	47069	47606	47119	47169	47622	47146	47196	47638	47219	47269
3/4"	10	0156390	0156331	0156391	0156332	47021	47071	47607	47121	47171	47623	47147	47197	47639	47221	47271
7/8"	9	0156392	0156333	0156393	0156334	47023	47073	0156408	47123	47173	47624	47148	47198	47640	47223	47273
1"	8	0156394	0156335	0156395	0156336	47025	47075	47609	47125	47175	47625	47149	47199	47641	47225	47275
1-1/8"	7	-	-	-	-	47027	47077	-	47127	47177	47626	47150	47200	47642	47227	47277
1-1/4"	7	-	-	-	-	47028	47078	47611	47128	47178	47627	47151	47201	47643	47228	47278
1-3/8"	6	-	-	-	-	47029	47079	-	47129	47179	-	47233	47237	47644	47229	47279
1-1/2"	6	-	-	-	-	47030	47080	-	47130	47180	47629	47234	47238	47645	47230	47280
1-3/4"	5	-	-	-	-	47031	47081	-	47131	47181	47630	47235	47239	47646	47231	47281
2"	4.5	-	-	-	-	47032	47082	-	47132	47182	-	47236	47240	47647	47232	47282

Thread - Fine							
		3 ft		6 ft		12 ft	
		Plain	Zinc	Plain	Zinc	Plain	Zinc
Diameter	Thread Size	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.
#10	32	47005	47055	47105	47155	-	-
1/4"	28	47008	47058	47108	47158	47208	47258
5/16"	24	47010	47060	47110	47160	47210	47260
3/8"	24	47012	47062	47112	47162	47212	47262
7/16"	20	47014	47064	47114	47164	47214	47264
1/2"	20	47016	47066	47116	47166	47216	47266
9/16"	18	47018	47068	47118	47168	-	47268
5/8"	18	47020	47070	47120	47170	47220	47270
3/4"	16	47022	47072	47122	47172	47222	47272
7/8"	14	47024	47074	47124	47174	47224	47274
1"	14	47026	47076	47126	47176	47226	47276
1-1/8"	12	47033	47083	47133	47183	47094	-
1-1/4"	12	47034	47084	47134	47184	47095	47098
1-1/2"	12	47035	47087	47135	47185	47096	-

Left Hand Low Carbon Steel Threaded Rod

The most economical and most common form of Threaded Rod. Typically used by the plumbing and contracting trades. Used in maintenance departments in various applications; left hand threading. Plain Finish, or bare metal finish which may contain a light coating of oil.

- 6 foot lengths

Thread - Left Hand - Coarse		
Diameter	Thread Size	Plain
1/4"	20	47302
5/16"	18	47303
3/8"	16	47304
1/2"	13	47306
5/8"	11	47308
3/4"	10	47309
7/8"	9	47310
1"	8	47311
1-1/8"	7	47312
1-1/4"	7	47313
1-1/2"	6	47315
2"	4.5	47318

Metric Threaded Rod

- Made from heat treated Class 8.8 steel.



Thread - Coarse				
		Class 4.6		Class 8.8
		Plain	Zinc	Plain
Diameter	Thread Size	Part No.	Part No.	Part No.
M2	0.4	-	0162065	-
M3	0.5	-	0162068	-
M4	0.7	47556	0162070	-
M5	0.8	47570	0162071	-
M6	1.0	47571	0162072	47870
M8	1.25	47572	0162073	47872
M10	1.5	47573	0162075	47873
M12	1.75	47574	0162078	47874
M14	2.0	47575	0162081	47875
M16	2.0	47576	0162083	47876
M18	2.5	47577	0162085	47877
M20	2.5	47578	0162086	47878
M22	2.5	47579	-	47879
M24	3.0	47580	0162088	47880


Thread - Coarse				
		Class 4.6		Class 8.8
		Plain	Zinc	Plain
Diameter	Thread Size	Part No.	Part No.	Part No.
M27	3.0	47581	0162089	47881
M30	3.5	47582	0162090	47882
M33	3.5	47733	-	47883
M36	4.0	47583	-	47884
M39	4.0	47734	-	47885
M42	4.5	47735	-	47886
M48	5.0	47737	-	-

Thread - Fine		
		Class 4.6
		Zinc
Diameter	Thread Size	Part No.
M8	1.0	0162074
M10	1.0	0162077
M10	1.25	0162076
M12	1.25	0162080
M12	1.5	0162079
M14	1.5	0162082
M16	1.5	0162084

# 105 Stainless Steel Loop Hanger



- Recommended for the suspension of stationary stainless steel pipe lines
- Conforms with Federal Specification WW-H-171 (Type 7), Manufacturers Standardization Society (MSS) SP-58 (Type 7)

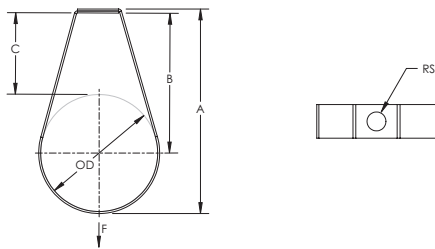

Material: Stainless Steel 304 (EN 1.4301)

Part Number	Pipe Size	Outer Diameter OD	Rod Size RS	A	B	C	Static Load F
1050050S4	1/2"	0.675"	3/8"	2 7/8"	2 5/16"	1 7/8"	600 lb
1050075S4	3/4"	1.050"	3/8"	3 1/8"	2 3/8"	1 7/8"	600 lb
1050100S4	1"	1.315"	3/8"	3 3/8"	2 9/16"	1 7/8"	600 lb
1050125S4	1 1/4"	1.660"	3/8"	3 3/4"	2 11/16"	1 7/8"	600 lb
1050150S4	1 1/2"	1.900"	3/8"	4 1/16"	2 15/16"	2"	600 lb
1050200S4	2"	2.375"	3/8"	4 7/16"	3 1/16"	1 7/8"	600 lb
1050250S4	2 1/2"	2.875"	1/2"	4 15/16"	3 5/16"	1 7/8"	970 lb
1050300S4	3"	3.500"	1/2"	5 9/16"	3 5/8"	1 7/8"	970 lb
1050350S4	3 1/2"	4.000"	1/2"	6 1/16"	3 7/8"	1 7/8"	970 lb
1050400S4	4"	4.500"	5/8"	6 9/16"	4 1/8"	1 7/8"	1,250 lb
1050500S4	5"	5.563"	5/8"	7 5/8"	4 11/16"	1 7/8"	1,250 lb
1050600S4	6"	6.625"	3/4"	8 3/4"	5 1/16"	1 3/4"	1,600 lb
1050800S4	8"	8.625"	3/4"	10 3/4"	6 1/16"	1 3/4"	1,800 lb

## WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.


© 2021 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.


All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.



# 300 Universal Beam Clamp



- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI®/MSS-SP-58 (Type 19 and 23)

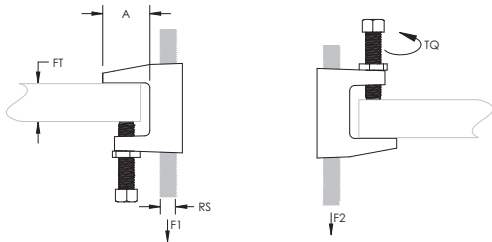

Material: Steel



Part Number	Rod Size RS	Flange Thickness FT	A	Torque TQ	Static Load 1 F1	Static Load 2 F2	Certifications	Standard Packaging Quantity
Finish: Plain								
3000037PL	3/8"	13/16" Max	1 1/8"	5 ft lb	500 lb	250 lb	cULus, FM	100 pc
3000050PL	1/2"	13/16" Max	1 1/8"	8 ft lb	950 lb	760 lb	cULus, FM	50 pc
3000062PL	5/8"	13/16" Max	1 1/8"	5 ft lb	950 lb	760 lb	cULus	50 pc
3000075PL	3/4"	13/16" Max	1 1/8"	5 ft lb	950 lb	760 lb	cULus	50 pc
3000087PL	7/8"	13/16" Max	1 1/8"	5 ft lb	950 lb	760 lb	cULus	50 pc
Finish: Electrogalvanized								
3000037EG	3/8"	13/16" Max	1 1/8"	5 ft lb	500 lb	250 lb	cULus, FM	100 pc
3000050EG	1/2"	13/16" Max	1 1/8"	8 ft lb	950 lb	760 lb	cULus, FM	50 pc
3000062EG	5/8"	13/16" Max	1 1/8"	5 ft lb	950 lb	760 lb	cULus	50 pc
3000075EG	3/4"	13/16" Max	1 1/8"	5 ft lb	950 lb	760 lb	cULus	50 pc
3000087EG	7/8"	13/16" Max	1 1/8"	5 ft lb	950 lb	760 lb	cULus	50 pc

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.

ANSI is a registered trademark of American National Standards Institute. FM is a registered certification mark of FM Approvals LLC, LTD. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

## WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at [erico.pentair.com](http://erico.pentair.com) and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2017 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.


All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.



## SAMMYS® FOR WOOD - Vertical Application



### Application

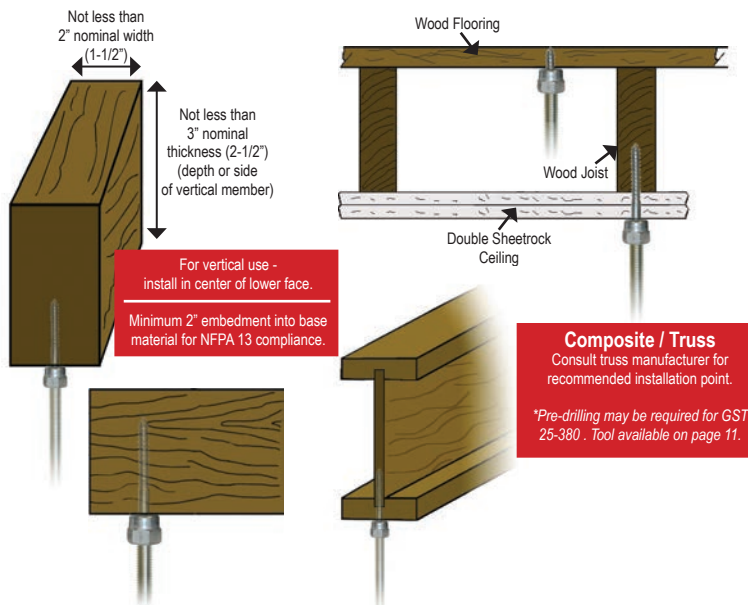

### Product Features

- No pre-drilling required.
- Quick to install using the Sammy Nut Driver with an 18V cordless drill/driver.
- Saves time from traditional methods.
- Reduces installation costs.
- Manufactured in the U.S.A.




Approvals	Rod Size	Part Number	Model	Screw Descriptions	Ultimate Pullout (lbs)	UL Test Load (lbs)	FM Test Load (lbs)	Box Qty	Case Qty
<b>VERTICAL MOUNT</b>									
	1/4"	8002957	GST 100	1/4 x 1"	210 (7/16" OSB) 670 (3/4" Ply)			25	125
	1/4"	8003957	GST 200	1/4 x 2"	1760 (Fir)			25	125
	3/8"	8007957	GST 10	1/4 x 1"	210 (7/16" OSB) 670 (3/4" Ply)	300		25	125
	3/8"	8008957	GST 20	1/4 x 2"	1760 (Fir)	850	1475	25	125
	3/8"	8068925	GST 20-SS	1/4 x 2"	1760 (Fir)	850		25	125
	3/8"	8009925	GST 25-380	3/8 x 2-1/2"	2113 (Fir)	1500		25	125
	3/8"	8010957	GST 30	1/4 x 3"	2060 (Fir)	1500	1475	25	125
	3/8"	8069925	GST 30-SS	1/4 x 3"	2060 (Fir)			25	125
	1/2"	8013925	GST 2	1/4 x 2"	1760 (Fir)			25	125
	1/2"	8015925	GST 3	1/4 x 3"	2275 (Fir)			25	125




**SPECIAL NUT DRIVER SYSTEM:** The nut drivers were designed with a unique spin-off feature which provides a fast and safe installation each time. When the face of the driver comes into contact with the material you are installing into, continue drilling until nut driver spins free. Installation is then complete. Warranty requires the use of the appropriate nut driver for installations.

## SIDEWINDER® FOR WOOD - Horizontal Application



### Application

Not less than 2" nominal width (1-1/2") up to 3-1/2" pipe; not less than 3" (2-1/2") nominal width 4" & 5" pipe

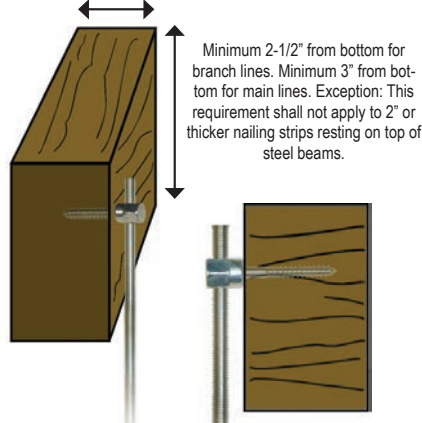

Floor Joist

### Product Features

- No pre-drilling required.
- Quick to install using the Sammy Nut Driver with an 18V cordless drill/driver.
- Saves time from traditional methods.
- Reduces installation costs.
- Manufactured in the U.S.A.

### Composite / Truss

Consult truss manufacturer for recommended installation point.

\*Pre-drilling may be required for Model SWG 25-380. Tool available on page 11.

Watch a video demonstration at [www.itwbuildex.com](http://www.itwbuildex.com)



#14 SW Red  
Nut Driver  
Part # 8114910

Approvals	Rod Size	Part Number	Model	Screw Descriptions	Ultimate Pullout (lbs)	UL Test Load (lbs)	Box Qty	Case Qty
<b>HORIZONTAL MOUNT</b>								
	1/4"	8019957	SWG 200	1/4 x 2"	1725 (Fir)		25	125
	3/8"	8020957	SWG 10	1/4 x 1"	622 (Fir)	300	25	125
	3/8"	8021957	SWG 20	1/4 x 2"	1725 (Fir)	1050	25	125
	3/8"	8073925	SWG 20-SS	1/4 x 2"	1725 (Fir)	850	25	125
	3/8"	8022925	SWG 25-380	3/8 x 2-1/2"	2249 (Fir)	1500	25	125
	3/8"	8023925	SWG 30	1/4 x 3"	1884 (Fir)		25	125

\* May require pre-drilling; consult joist manufacturer.

## SAMMYS SWIVEL HEAD™ FOR WOOD - Swivel Application





#14 Black  
Nut Driver  
Part # 8113910



#14 SH Orange  
Nut Driver  
Part # 8273910

### Application



### Product Features

- Eliminates distortion of threaded rod.
- Accommodates up to 3 1/2" x 12 pitch roof.
- Allows 17° deflection from vertical.
- Saves time from traditional methods.
- Reduces installation costs.
- Manufactured in the U.S.A.

Approvals	Rod Size	Part Number	Model	Screw Descriptions	Ultimate Pullout (lbs)	UL Test Load (lbs)	FM Test Load (lbs)	Min Thickness	Box Qty	Case Qty
<b>SWIVEL MOUNT</b>										
	3/8"	8139957	SH-GST 20	1/4 x 2"	1257 (Fir)	1050	1475		25	125
	3/8"	8269957	SH-GST/CST 20	5/16 x 1-3/4"	1903 Dim. Lumber 1406 @ 45° off vertical Dim. Lumber	1500 850 @ 45°			25	125
	1/2"	8303957	SH-GST/CST 2.0	5/16 x 1-3/4"	903 Dim. Lumber 1406 @ 45° off vertical Dim. Lumber				25	125

\* May require pre-drilling; consult joist manufacturer.



# **SPRINKLER HEADS**



# Victaulic® FireLock™ Series FL-QR

## Standard Coverage, Quick Response

### Upright, Pendent and Recessed Pendent Sprinklers

#### K2.8 (4.0), K4.2 (6.1), K5.6 (8.1), K8.0 (11.5)



41.01



## 1.0 PRODUCT DESCRIPTION

QUICK RESPONSE UPRIGHT SPRINKLERS				
SIN	V2815	V4215	V2704	V3402
ORIENTATION	UPRIGHT	UPRIGHT	UPRIGHT	UPRIGHT
K-FACTOR <sup>1</sup>	2.8 Imp./4.0 S.I.	4.2 Imp./6.1 S.I.	5.6 Imp./8.1 S.I.	8.0 Imp./11.5 S.I.
CONNECTION	½" NPT/15mm BSPT	½" NPT/15mm BSPT	½" NPT/15mm BSPT/IGS	¾" NPT/20mm BSPT/IGS
MAX. WORKING PRESSURE	175 psi/1200 kPa	175 psi/1200 kPa	175 psi/1200 kPa cULus 250 psi /1725 kPa	175 psi/1200 kPa
RE-DESIGNATION	GL2815	GL4215	–	–
GLOBE EQUIVALENT	–	–	GL5615	GL8118

QUICK RESPONSE PENDENT SPRINKLERS				
SIN	V2801	V4201	V2708	V3406
ORIENTATION	PENDENT	PENDENT	PENDENT	PENDENT
K-FACTOR <sup>1</sup>	2.8 Imp./4.0 S.I.	4.2 Imp./6.1 S.I.	5.6 Imp./8.1 S.I.	8.0 Imp./11.5 S.I.
CONNECTION	½" NPT/15mm BSPT	½" NPT/15mm BSPT	½" NPT/15mm BSPT/IGS	¾" NPT/20mm BSPT/IGS
MAX. WORKING PRESSURE	175 psi /1200 kPa	175 psi /1200 kPa	175 psi /1200 kPa cULus 250 psi/1725 kPa	175 psi/1200 kPa
RE-DESIGNATION	GL2801	GL4201	–	–
GLOBE EQUIVALENT	–	–	GL5601	GL8101

QUICK RESPONSE RECESSED PENDENT SPRINKLERS				
SIN	V2801	V4201	V2708	V3406
ORIENTATION	PENDENT	PENDENT	PENDENT	PENDENT
K-FACTOR <sup>1</sup>	2.8 Imp./4.0 S.I.	4.2 Imp./6.1 S.I.	5.6 Imp./8.1 S.I.	8.0 Imp./11.5 S.I.
CONNECTION	½" NPT/15mm BSPT	½" NPT/15mm BSPT	½" NPT/15mm BSPT/IGS	¾" NPT/20mm BSPT/IGS
MAX. WORKING PRESSURE	175 psi/1200 kPa	175 psi/1200 kPa	175 psi/1200 kPa cULus 250 psi/1725 kPa	175 psi/1200 kPa
ESCUTCHEON	Recessed	Recessed	Recessed	Recessed
RE-DESIGNATION	GL2801	GL4201	–	–
GLOBE EQUIVALENT	–	–	GL5601	GL8101

AVAILABLE GUARDS/SHIELDS				
SPRINKLER	V28	V42	V27	V34
Upright			■	■
Pendent			■	■

AVAILABLE WRENCHES							
SPRINKLER	V56-2 Recessed	V56 Open End	V27-2 Recessed	V27 Open End	V34-2 Recessed	V34 Open End	⅜ Hex-Bit
V2815 and V4215		■					
V2707 and V2704				■			■
V3402						■	■
V2801, and V4201	■	■					
V2706 and V2708			■	■			■
V3406					■	■	■

<sup>1</sup> For K-Factor when pressure is measured in Bar, multiply S.I. units by 10.0.

**Factory Hydrostatic Test:** 100% @ 500 psi/3447 kPa/34 Bar

**Min. Operating Pressure:** UL/FM: 7 psi/48 kPa/5 Bar

VdS: 5 psi/35 kPa/35 Bar (Upright only)

**Temperature Rating:** See tables in section 2.0

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.



## 2.0 CERTIFICATIONS/LISTINGS



0786

0832

UPRIGHT APPROVALS/LISTINGS				
SIN	V2815	V4215	V2704	V3402
Nominal K Factor Imperial	2.8	4.2	5.6	8.0
Nominal K Factor S.I. <sup>2</sup>	4.0	6.1	8.1	11.5
Orientation	UPRIGHT	UPRIGHT	UPRIGHT	UPRIGHT
Approved Temperature Ratings F°/C°				
cULus	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C
FM	–	–	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C
LPCB/UKCA	–	–	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C
VdS/CE	–	–	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C
CCC K-ZSTZ	–	–	155°F/68°C 175°F/79°C 286°F/141°C	155°F/68°C 175°F/79°C 286°F/141°C

<sup>2</sup> For K-Factor when pressure is measured in Bar, multiply S.I. units by 10.

PENDENT APPROVALS/LISTINGS				
SIN	V2801	V4201	V2708	V3406
Nominal K Factor Imperial	2.8	4.2	5.6	8.0
Nominal K Factor S.I. <sup>2</sup>	4.0	6.1	8.1	11.5
Orientation	PENDENT	PENDENT	PENDENT	PENDENT
Escutcheon	Flush/Extended	Flush/Extended	Flush/Extended	Flush/Extended
Approved Temperature Ratings F°/C°				
cULus	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C
FM	–	–	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C
CCC K-ZSTX	–	–	155°F/68°C 200°F/93°C 286°F/141°C	155°F/68°C 200°F/93°C 286°F/141°C

<sup>2</sup> For K-Factor when pressure is measured in Bar, multiply S.I. units by 10.

## NOTES

- Reference the specific agency website listings for the most up-to-date certification information.
- Where cULus Listed, Polyester and VC-250 Coatings Listed as Corrosion Resistant (V3402 with VC-250 Only)
- Where FM Approved, VC-250 Coating Approved as Corrosion Resistant
- New York City Acceptance - All UL Listed and/or FM Approved sprinklers acceptable to NYC per section 28-113 of the Administrative Code and the OTCR Rule.

## 2.0 CERTIFICATIONS/LISTINGS (CONTINUED)

RECESSED PENDENT APPROVALS/LISTINGS				
SIN	V2801	V4201	V2708	V3406
Nominal K Factor Imperial	2.8	4.2	5.6	8.0
Nominal K Factor S.I. <sup>2</sup>	4.0	6.1	8.1	11.5
Orientation	PENDENT	PENDENT	PENDENT	PENDENT
Escutcheon	Recessed	Recessed	Recessed	Recessed
Approved Temperature Ratings F°/C°				
cULus	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C 286°F/141°C
FM WITH ½" ADJUSTMENT ESCUTCHEON ONLY	–	–	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C	135°F/57°C 155°F/68°C 175°F/79°C 200°F/93°C
CCC K-ZSTX	–	–	155°F/68°C 200°F/93°C 286°F/141°C	155°F/68°C 286°F/141°C

<sup>2</sup> For K-Factor when pressure is measured in Bar, multiply S.I. units by 10.

### NOTES

- Reference the specific agency website listings for the most up-to-date certification information.
- Where cULus Listed, Polyester and VC-250 Coatings Listed as Corrosion Resistant (V3402 with VC-250 Only)
- Where FM Approved, VC-250 Coating Approved as Corrosion Resistant
- New York City Acceptance - All UL Listed and/or FM Approved sprinklers acceptable to NYC per section 28-113 of the Administrative Code and the OTCR Rule.

### 3.0 SPECIFICATIONS – MATERIAL

**Deflector:** Bronze

**Bulb Nominal Diameter:** 3.0 mm

**Load Screw:** Bronze

**Pip Cap:** Bronze

**Spring Seal:** PTFE coated Beryllium nickel alloy

**Frame:** Brass

**Lodgement Spring:** Stainless steel

**Installation Wrench:** Ductile iron

**Sprinkler Frame Finishes:**

- Plain brass
- Chrome plated
- White polyester painted<sup>3, 4</sup>
- Flat black polyester painted<sup>3, 4</sup>
- Custom polyester painted<sup>3, 4</sup>
- VC-250<sup>5</sup>







<sup>3</sup> Not available on the Intermediate Level Style Pendent.

<sup>4</sup> UL Listed for corrosion resistance.




<sup>5</sup> UL Listed and FM Approved for corrosion resistance.

**NOTE**

- For cabinets and other accessories, refer to separate sheet.

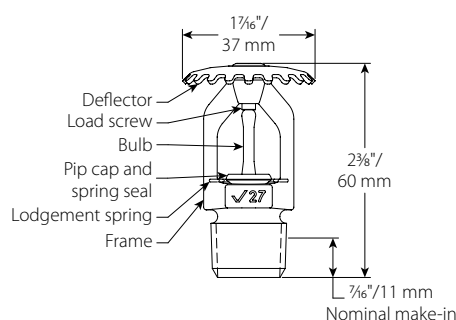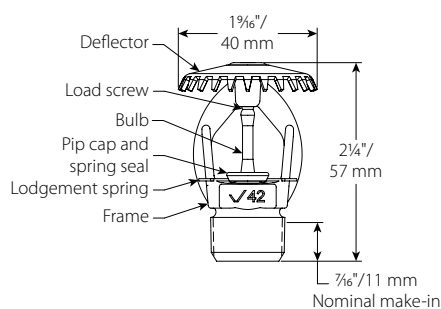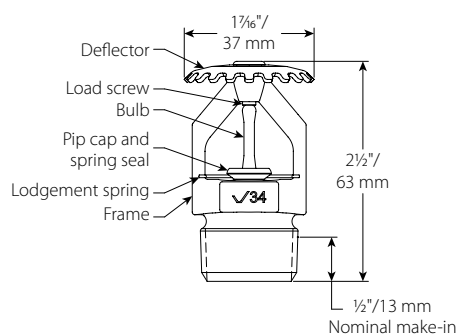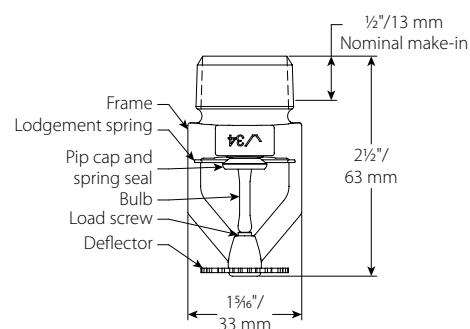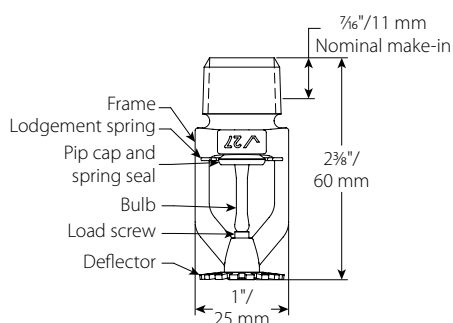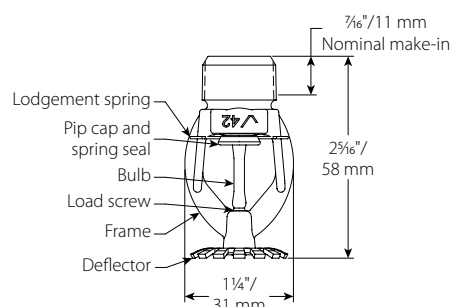


## 4.0 DIMENSIONS

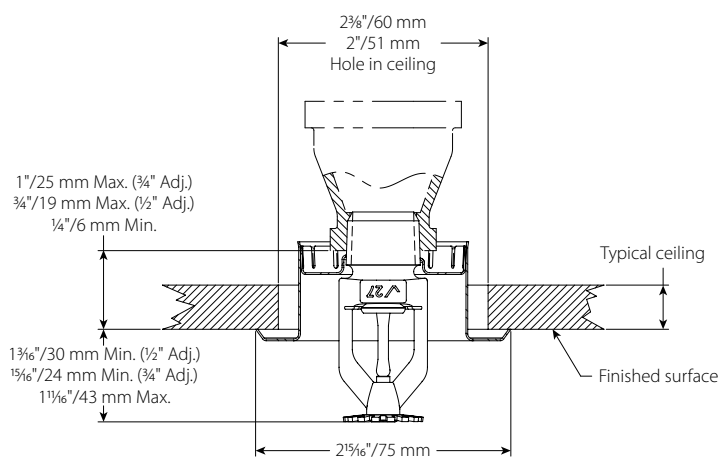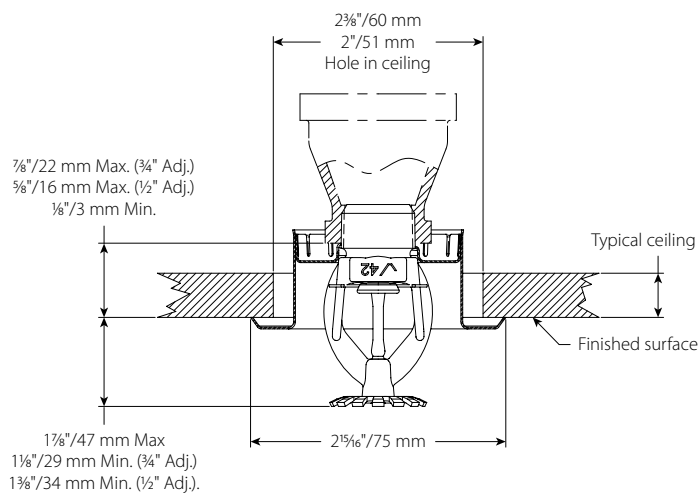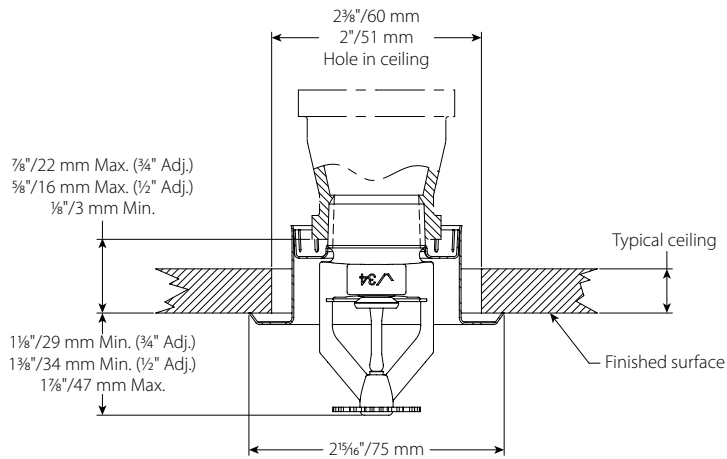






5.0 PERFORMANCE

Sprinkler systems are to be designed to and installed per NFPA, FM Datasheets, and any local standards.

6.0 NOTIFICATIONS

**WARNING**



- Read and understand all instructions before attempting to install any Victaulic products.
- Always verify that the piping system has been completely depressurized and drained immediately prior to installation, removal, adjustment, or maintenance of any Victaulic products.
- Wear safety glasses, hardhat, and foot protection.

Failure to follow these instructions could result in death or serious personal injury and property damage.

- These products shall be used only in fire protection systems that are designed and installed in accordance with current, applicable National Fire Protection Association (NFPA) standards, or equivalent standards, and in accordance with applicable building and fire codes. These standards and codes contain important information regarding protection of systems from freezing temperatures, corrosion, mechanical damage, etc.
- The installer shall understand the use of this product and why it was specified for the particular application.
- The installer shall understand common industry safety standards and potential consequences of improper product installation.
- It is the system designer's responsibility to verify suitability of materials for use with the intended fluid media within the piping system and external environment.
- The material specifier shall evaluate the effect of chemical composition, pH level, operating temperature, chloride level, oxygen level, and flow rate on materials to confirm system life will be acceptable for the intended service.

Failure to follow installation requirements and local and national codes and standards could compromise system integrity or cause system failure, resulting in death or serious personal injury and property damage.

7.0 REFERENCE MATERIALS

Ratings: All glass bulbs are rated for temperatures from -67°F/-55°C.

- [I-40: Victaulic FireLock™ Automatic Sprinklers Installation and Maintenance Instructions](#)
- [I-V9: Style V9 Victaulic FireLock™ IGS™ Installation-Ready™ Sprinkler Coupling Installation Instructions](#)

<p><b>User Responsibility for Product Selection and Suitability</b></p> <p>Each user bears final responsibility for determining the suitability of Victaulic products for their end-use application, in accordance with industry standards, project specifications, and Victaulic's published performance, maintenance, and safety data, as well as all warnings and installation instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, warranty, installation instructions, or this disclaimer.</p> <p><b>Installation</b></p> <p>Always refer to and follow the <a href="#">Victaulic Installation Handbook</a> or installation instructions for the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at victaulic.com.</p> <p><b>Warranty</b></p> <p>Refer to the Warranty section of the current Price List or contact Victaulic for details.</p>	<p><b>Intellectual Property Rights</b></p> <p>No statement concerning the use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its affiliates, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries. Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.</p> <p><b>Note</b></p> <p>All products bearing a Victaulic trademark are manufactured by Victaulic or to Victaulic specifications. All products are to be installed only in accordance with the applicable Victaulic installation instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.</p>
---	---



# STANDARD RESPONSE AUTOMATIC SPRINKLERS GL SERIES DRY TYPE PENDENT

## DESCRIPTION AND OPERATION

The Globe GL Series Dry Type Pendent Sprinkler is designed for use in special applications such as freezing environments and conditions where sediment or foreign materials might accumulate in ordinary drop nipples.

The Globe GL Series Dry Type Pendent Sprinkler utilizes a frangible glass ampule sprinkler. At the ampule's rated temperature, the sprinkler opens releasing the bulb seat, causing the inner tube assembly to move, allowing spring assembly to pivot alongside the inner tube. At this time, water flows through the sprinkler and is distributed by the deflector, in an approved discharge pattern.

The heart of Globe's GL Series sprinkler proven actuating assembly is a hermetically sealed frangible glass ampule that contains a precisely measured amount of fluid. When heat is absorbed, the liquid within the bulb expands increasing the internal pressure. At the prescribed temperature the internal pressure within the ampule exceeds the strength of the glass causing the glass to shatter. This results in water discharge which is distributed in an approved pattern.



**SURFACE  
MOUNT**



**SLEEVE & SKIRT**



**EXTENDED**



**RECESSED**

## TECHNICAL DATA

- See reverse side for Approvals and Specifications.
- Temperature Ratings -  
135°F (57°C), 155°F (68°C), 175°F (79°C)  
200°F (93°C), 286°F (141°C)
- Water Working Pressure Rating - 175 psi (12 Bars)
- Factory tested hydrostatically to 500 psi (34 Bars)
- Maximum low temperature glass bulb rating is -67°F (-55°C)
- Frame - bronze • Deflector - brass • Screw - brass
- Bulb Seat - brass • Spring - nickel alloy • Seal - teflon
- Retainer - brass • Pin - stainless steel
- Torsion Spring - stainless steel • Orifice Insert - brass
- Bulb - glass with glycerin solution, 5mm size
- 3/4"NPT or 1"NPT • Outer Tube - galvanized steel pipe • Inner Tube - stainless steel

## •SPRINKLER TEMPERATURE RATING/CLASSIFICATION and COLOR CODING

CLASSIFICATION	AVAILABLE SPRINKLER TEMPERATURES		BULB COLOR	N.F.P.A. MAXIMUM CEILING TEMPERATURE	
ORDINARY	135°F/155°F	57°C/68°C	ORANGE/RED	100°F	38°C
INTERMEDIATE	175°F/200°F	79°C/93°C	YELLOW/GREEN	150°F	66°C
HIGH	286°F	141°C	BLUE	225°F	107°C



# STANDARD RESPONSE AUTOMATIC SPRINKLERS GL SERIES DRY TYPE PENDENT

## SPECIFICATIONS

SIN MODEL	NOMINAL "K" FACTOR	THREAD SIZE	LENGTH	FINISHES
GL5679	5.6 (80 metric)	1"NPT	cULus Variable to 48" FM Variable to 36"	Factory Bronze Chrome White Polyester <sup>2</sup> Black Polyester <sup>1,2</sup>
GL5680	5.6 (80 metric)	3/4"NPT		
GL8179	8.0 (115 metric)	1"NPT		

NOTE: METRIC CONVERSIONS ARE APPROXIMATE.

<sup>1</sup>FINISHES AVAILABLE ON SPECIAL ORDER.

<sup>2</sup>cULus LISTED CORROSION RESISTANT WHEN SPECIFIED ON ORDER.

## APPROVALS

STYLE	SIN MODEL	HAZARD <sup>1</sup>	135°F (57°C)	155°F (68°C)	175°F (79°C)	200°F (93°C)	286°F (141°C)	*FM	cULus	NYC-DOB MEA 101-92-E	MIN. DISTANCE BETWEEN SPRINKLERS <i>Feet (Meters)</i>
Pendent	GL5679	ALL	X	X	X	X	X	X	X	X	6 (1.8)
Recessed	GL5680	ALL	X	X	X	X	X	---	X	X	
Pendent	GL8179	ALL	X	X	X	X	X	---	X	X	


<sup>1</sup>SPRINKLERS SHALL BE LIMITED AS PER THE REQUIREMENTS OF NFPA13 AND ANY OTHER RELATED DOCUMENTS.

\*PENDENT STYLE - FM APPROVED 155°F (68°C), 200°F (93°C), AND 286°F (141°C)

\*RECESSED PENDENT STYLE - FM APPROVED 155°F (68°C) AND 200°F (93°C)

ALL: ALL HAZARDS

## CROSS SECTIONS

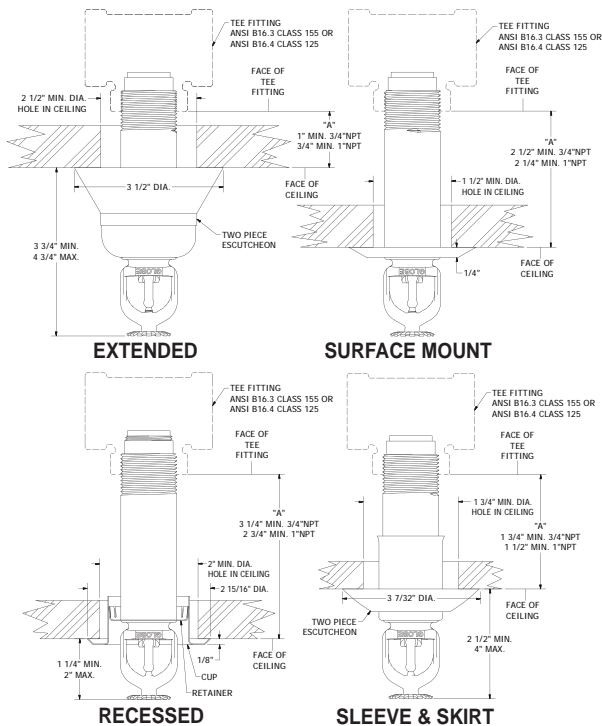

## IMPORTANT INSTALLATION DATA

Globe GL Series Dry Pendent Sprinklers should be installed in accordance with the requirements set forth in NFPA 13. These sprinklers are to be installed using a pipe wrench applied to the outer tube. When this is not possible, the proper sprinkler head wrench may be used with extreme care for lengths up to approximately 18". Excessive force may distort the frame thus destroying the unit.

When installed in a wet system extending into a freezing area see chart on Dry Caution Sheet for minimum exposed barrel length to prevent ice plugs. Please refer to our Dry Caution Sheet for further important installation data.

## ORDERING INFORMATION SPECIFY

- Quantity • Model Number • Style • Orifice • Temperature • Finishes
- Quantity - Wrenches - P/N 333010
- Quantity Recessed Wrenches - P/N 337014
- Escutcheons Desired
- Quantity - Protective Caps - P/N 327109-cap (*Friction Fit Recessed*)

"A" Dimension - Distance from face of fitting to the finished ceiling line regardless of escutcheon used.

## GLOBE® PRODUCT WARRANTY

Globe agrees to repair or replace any of its own manufactured products found to be defective in material or workmanship for a period of one year from date of shipment.

For specific details of our warranty please refer to Price List Terms and Conditions of Sale (Our Price List).