

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Charlie Howe PROPERTY LOCATION: Hwy 3015 SUBDIVISION _____ LOT # _____

NEW REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance: _____

Type of Structure: Garage Bldg

Proposed Wastewater System Type: 25% Reduction

Projected Daily Flow: 250 GPD

Number of bedrooms: 7 Number of Occupants: 10 Employees max

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well _____ feet

Permit valid for: Five years No expiration

Permit conditions: _____

Authorized State Agent: [Signature] Date: 1-20-23 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Charlie Howe PROPERTY LOCATION: Hwy 3015 SUBDIVISION _____ LOT # _____

Facility Type: Garage Bldg New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** 25% Reduction (Initial) Wastewater Flow: 250 GPD

(See note below, if applicable 25% Reduction (Repair))

Installation Requirements/Conditions

Septic Tank Size Ex 1000 gallons Exact length of each trench 60 feet Trench Spacing: 9 Feet on Center

Pump Tank Size Ex 1000 gallons Trenches shall be installed on contour at a Soil Cover: 6 inches

Maximum Trench Depth of: 20 inches (Maximum soil cover shall not exceed 36" above the trench bottom)

(Trench bottoms shall be level to +/- 1/4" in all directions)

Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 6 inches below pipe 2 inches above pipe

Conditions: NEW SYSTEM INSTALLED, BUT LINES IN WAY OF FUTURE PROJECTIONS CUTTING OFF 60' FROM EACH LINE AND CENTERING 2 NEW 60' LINES FOR TOTAL OF 4 LINES

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 1-20-23
Construction Authorization Expiration Date: 1-20-28


Application # BCOM 2207-0002

Harnett County Department of Public Health Site Sketch

Property Location: Hwy 3015

Issued To: Charlie Howe Subdivision _____ Lot # _____

Authorized State Agent: James E. Merchant JPA 26HS Date: 1-20-23

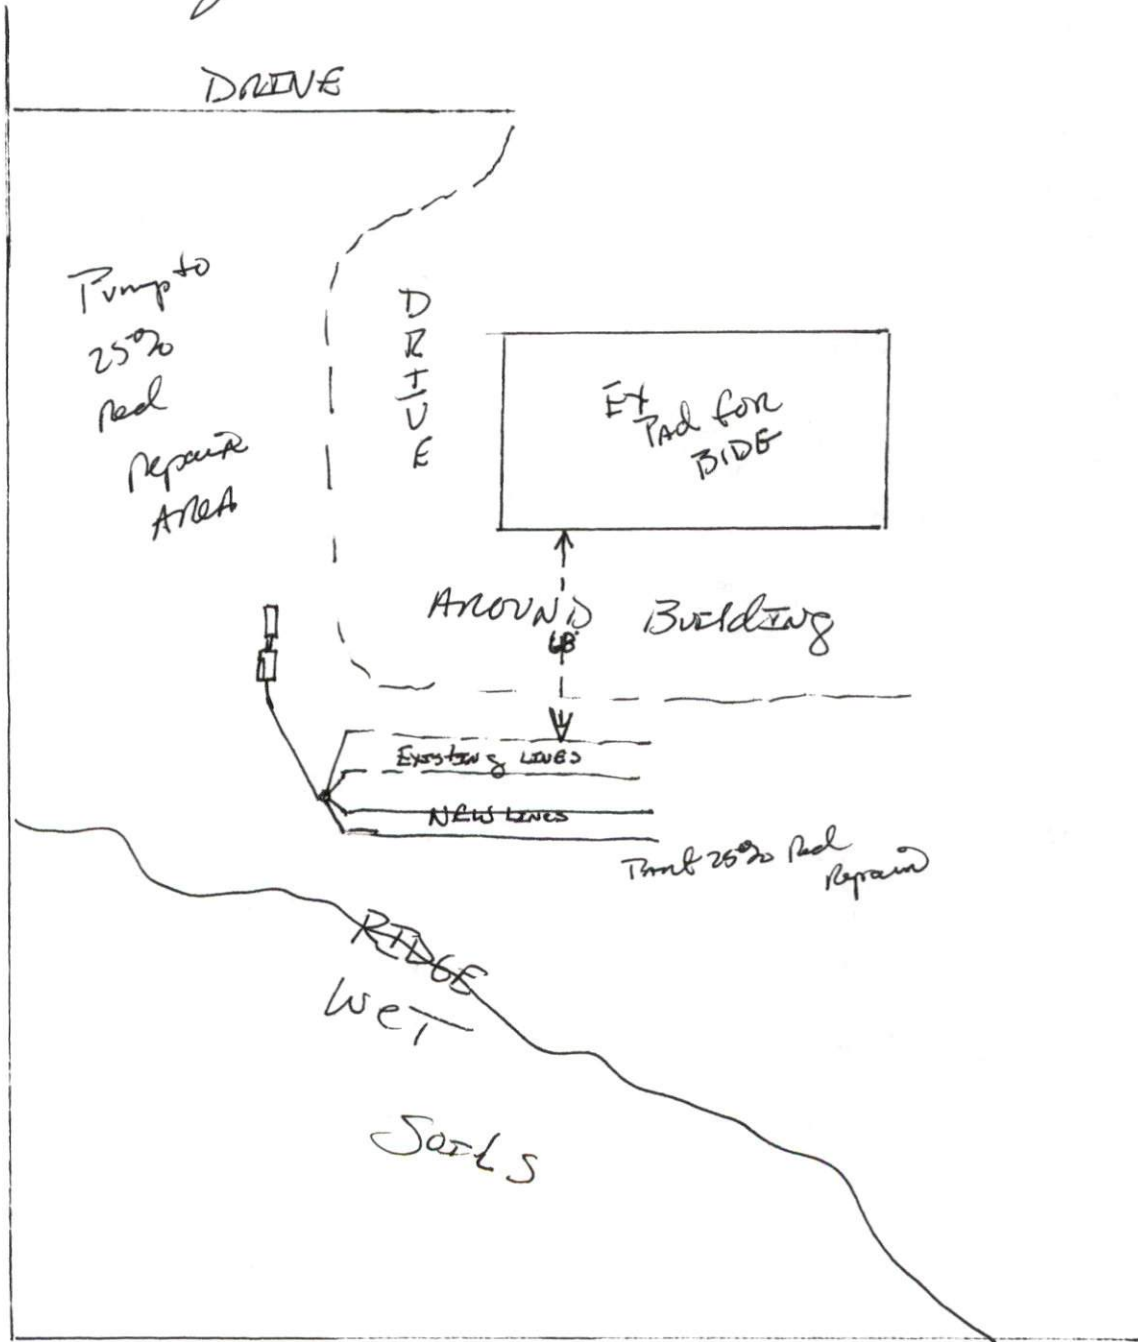

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.