
## Harnett County Department of Public Health

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 27 Brown Rd, Lillington (SR#1264) ISSUED TO: Wom2 Developers REPAIR EXPANSION | NEW X Site Improvements required prior to Construction Authorization Issuance: Type of Structure: Mod 32'x64' Proposed Wastewater System Type: 25% Reduction Projected Daily Flow: 360 Number of bedrooms: 3 Number of Occupants: 6 Basement Yes ☐ No Pump Required: Yes May be required based on final location and elevations of facilities Type of Water Supply: Community 🗵 Public 🔲 Well Distance from well \_\_\_\_\_\_\_\_feet Permit valid for: X Five years No expiration Permit conditions: T Date: 1/10/2020 The issuance of this permit by the Health Defortment in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance ISSUED TO: Wom2 Developers PROPERTY LOCATION: 27 Brown Rd, Lillington (SR1264) NOISIVIGAUS Facility Type: Mod 32'x64' Expansion Basement? Yes Basement Fixtures? Yes 25% Reduction Type of Wastewater System\*\* (Initial) Wastewater Flow: 360 (See note below, if applicable ) 25% Reduction Number of trenches 2 Installation Requirements/Conditions Septic Tank Size 1000 gallons Exact length of each trench 90 Trench Spacing: 9 Feet on Center Soil Cover: 6 \_\_\_\_\_inches Pump Tank Size gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 18-24 inches (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: ft. TDH vs. \_\_ inches below pipe Aggregate Depth: \_\_\_\_\_\_ inches above pipe inches total WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. \*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH Date: 1/10/2020 Authorized State Agent:

Construction Authorization Expiration Date: 1/10/2025

## Harnett County Department of Public Health Site Sketch

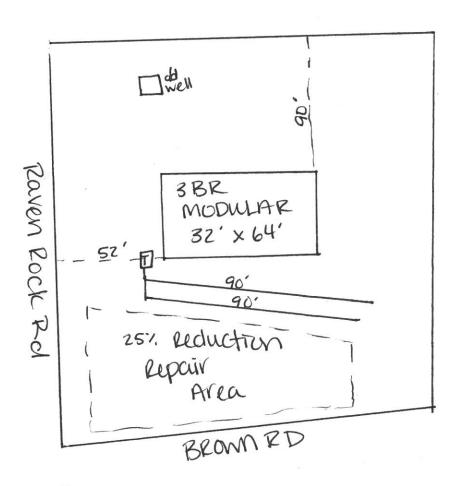

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.