
## Harnett County Department of Public Health <a href="mailto:lmprovement Permit">lmprovement Permit</a>

A building permit cannot be issued with only an Improvement Permit

ITTUEN TO TON DOVIS			grass Rd, Bunnlevel (		
ISSUED TO: Tab Davis NEW REPAIR	REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance:				
Type of Structure: SWMH		on	required prior to construction Authoriz	ation issuance.	
Proposed Wastewater System Typ		ction			
Projected Daily Flow: 240	GPD				
Number of bedrooms: 2	Number of Occi	upants: 4max			
Basement Yes No					
Pump Required: Yes X Type of Water Supply: Com		uired based on final location and elevations of facilities  Well Distance from well	Permit valid for:	★ Five years	
Permit conditions:	indinty Z rubic	Well Distance from well leet	Terrific valid for.	No expiration	
	2 11/1	1/2/6 5			
Authorized State Agent::	DATA (1)	REAS- Date: 3/20/2020		CHED SITE SKETCH	
	lan, plat, or the intended use	rantees the issuance of other permits. The permit holder is responsible for c changes. The Improvement Permit shall not be affected by a change in ow ions of this permit.			
		Construction Authorization			
		(Required for Building Permit)			
The construction and installation requirer with the attached system layout.	nents of Rules 1950, 1952,	.1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by reference	es into this permit and shall be met. Systems s	hall be installed in accordance	
ISSUED TO: Tab Davis		PROPERTY LOCATION: <u>540</u> SUBDIVISION	Nutgrass Rd, Bunnle	vel (SR2026)	
Facility Type: SWMH 14	4'x70'	New □ Expansion □ Repair	r	201 //	
Basement? Yes 🔀		ixtures? Yes No			
Type of Wastewater System**			(Initial) Wastewater Flow: 2	240 GPD	
(See note below, if applicable			· · · · · · · · · · · · · · · · · · ·	SOST GIF	
	25% Redu	uction (Repair)			
nstallation Requirements/Cond	itions	Number of trenches 3			
Septic Tank Size 1000	gallons	Exact length of each trench 50 feet	Trench Spacing: 9	Feet on Center	
Pump Tank Size	gallons	Trenches shall be installed on contour at a		ches	
		Maximum Trench Depth of: 18-24 inches			
		(Trench bottoms shall be level to +/-1/4"	36" above the trench botto	m)	
	( TDII	in all directions)		* 1 11 2	
Pump Requirements:	tt. 10H vs	GPM	A Death	inches below pipe	
Conditions:			Aggregate Depth:	inches above pipe inches total	
Conditions.				menes total	
WATER LINES (INCLUDING NO UTILITIES ALLOWED IN		BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR DRAIN FIELD AREA.	REPAIR AREA.		
**If applicable: 1 understand th	e system type specifie	ed is different from the type specified on the application	n. I accept the specifications of th	is permit.	
) . // I D	700 P				
by Controlled Authorities Significant	nature:	, plat, or the intended use changes. The Construction Authorization shall no	vate:	and the state The	
		, plat, or the intended use changes. The Construction Authorization shall no of the Laws and Rules for Sewage Treatment and Disposal and to the cond		TTACHED SITE SKETCH	
STREET OF THE PROPERTY OF THE	/ / / / / / / / / / / / / / / / / / /	or the comp and notes for senage meatinem and proposal and to the cond	novins of this perime.	TINCTED SHE SKETCH	
Authorized State Agent:	BALL	AREHS-I Date:	3/20/2020	_	
0 -		Construction Authorization Expiration			

## Harnett County Department of Public Health Site Sketch

Property Location: 540 Nutgrass Rd, Burnlevel	(SR#2026)
Issued To: Tab DaviS Subdivision_	Lot #
Authorized State Agent: Bold LEHS-I	Date: 3 20 2030

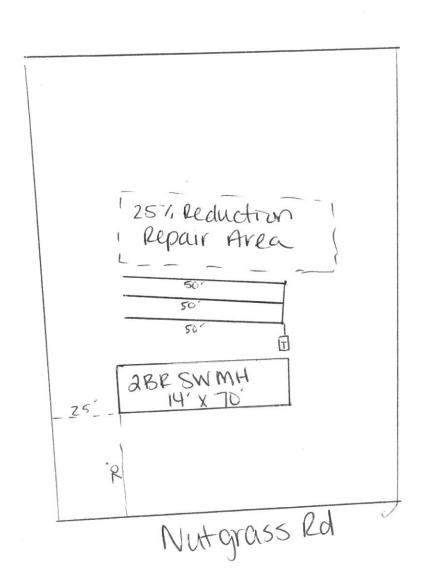

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.