


- GENERAL NOTES**
- IT IS THE RESPONSIBILITY OF THE PLUMBING CONTRACTOR TO COMPLY WITH STATE AND LOCAL PLUMBING CODES AND VERIFY THE ACCEPTABILITY OF SINKS, DRAINS, AND RELATED ITEMS AND REQUIRED ITEMS INCLUDED, BUT NOT LIMITED TO, GREASE INTERCEPTORS, BACKFLOW PREVENTERS.
  - PLUMBING CONTRACTOR SHALL SUPPLY AND INSTALL ANY ADDITIONAL FIXTURES FOR CODE COMPLIANCE SUCH AS GREASE INTERCEPTORS, BACKFLOW PREVENTERS, ETC.
  - PLUMBING CONTRACTOR SHALL PROVIDE ALL VISIBLE HUB DRAINS WITH RECESSED "SNAP-IN" HUB SCREENS. NO "SNAP-IN" HUB SCREENS ARE REQUIRED FOR HUB DRAINS UNDER CASES. ORDER DRAIN COVER FROM PLASTIC ODDITIES 1-800-438-5327. PART NO. PSI-310
  - PLUMBING CONTRACTOR IS RESPONSIBLE FOR RUNNING PVC DRAIN LINES FROM DRAINS ON CASES TO THEIR RESPECTIVE HUB DRAINS.
  - ALL SANITARY WASTE AND VENT PIPING SHALL BE NO-HUB ASSEMBLY, CAST IRON WITH STAINLESS STEEL BANDS OR PVC - SCHEDULE 40 ASTM-D2665
- QUALITY CONTROL NOTES:**
- GENERAL CONTRACTOR TO ENSURE:
    - POSITIVE DRAINING IN PREP AREAS, RESTROOMS AND COOLERS.
    - CLEAN OUT COVERS AND TILE RINGS TO BE FLUSH WITH FINISH FLOOR TILE.
    - NO FLOOR CLEANOUTS SHALL BE LOCATED IN AREAS WITH ACRYLIC RESIN FLOOR WHERE POSSIBLE. SEE SHEET A1.05.
    - SEE SHEET P6.01 FOR HUB DRAIN INSTALLATION DETAILS
  - PLUMBING CONTRACTOR SHALL COORDINATE FLOOR DRAIN LOCATIONS WITH GENERAL CONTRACTOR AND SHEET A1.02.
  - PLUMBING CONTRACTOR TO VERIFY THAT ALL SANITARY DRAINS AND HUB DRAINS ARE CLEAR OF DEBRIS. HUB DRAINS ARE TO BE TEMPORARILY SEALED WITH PVC PLUG UNTIL A CASE IS INSTALLED OR CONDENSATE IS FLOWING.
  - ALL SANITARY TEES SHALL BE COMBINATION TEES.
  - DIMENSIONS ARE SHOWN FROM INTERIOR SURFACE OF EXTERIOR BUILDING WALLS OR COLUMN CENTER LINE, UNLESS OTHERWISE INDICATED. DIMENSIONS SHALL BE MAINTAINED WITHIN ONE INCH AS INDICATED ON PLANS.
  - NOT USED.
  - NOT USED.
  - V.T.R.'S SHALL BE A MINIMUM OF 10'-0" FROM ANY FRESH AIR INTAKE. COORDINATE AS REQUIRED WITH MECHANICAL CONTRACTOR AND MECHANICAL PLAN.
  - NOT USED.
  - PLUMBING CONTRACTOR TO CAP OFF EXISTING DRAINS, CLEANOUTS, ETC. AND ABANDONED SEWER LINES THAT CAN NOT BE REUSED. REPAIR FLOOR AS REQUIRED.
  - PLUMBING CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF EXISTING DRAINS AND SANITARY SEWER LINES. PLUMBING CONTRACTOR TO REPORT ANY DISCREPANCIES TO THE DELHAIZE CONSTRUCTION MANAGER.
  - WHERE EXISTING CLEANOUTS OCCUR UNDER CASEWORK, RELOCATE AS REQUIRED.
  - PLUMBING CONTRACTOR SHALL BE RESPONSIBLE FOR:
    - INSTALLING/RELOCATING HUB DRAINS (4" BELL HUBS ARE REQUIRED WHERE TWO CASES SHARE ONE CONDENSATE HUB IN THE FLOOR FOR EXISTING CASES. 4" BELL HUBS REQUIRED WHERE CASES ARE NEW OR RELOCATED). ALL EXPOSED HUBS SHALL BE 4" BELL TYPE WITH PVC SCREEN INSERTS. (NO MORE THAN TWO CASES CAN BE PIPED TO ONE HUB). PLUMBING CONTRACTOR WILL BE REQUIRED TO INSTALL HUBS AS NOTED ON THE PLANS AND SHALL NOT COMBINE HUBS IN AREAS OF NEW WORK.
    - VERIFYING ALL HUB DRAIN PLACEMENTS WITH THE DRAWINGS, CASE MANUFACTURER SPECS, AND THE CONSTRUCTION MANAGER. IF THIS IS NOT DONE, ALL ASSOCIATED COST WILL BE THE RESPONSIBILITY OF THE PLUMBING CONTRACTOR. ALL HUB DRAINS SHALL EXTEND ABOVE FINISHED FLOOR USING A 4" HUB BELL. (SEE DETAIL 1/P6.01)
  - REFRIGERATION CONTRACTOR TO INSTALL CASE DRAINS ONLY, INCLUDING RUNNING PVC DRAIN LINES FROM DRAINS ON CASES TO THEIR RESPECTIVE HUB DRAINS. CASE DRAINS TO BE CUT ON A 45° ANGLE WITH AN APPROVED AIR GAP AS DICTATED BY THE LOCAL JURISDICTION. CASE DRAINS SHALL NOT BE VISIBLE OUTSIDE OF THE KICK PLATES.
  - PLUMBING CONTRACTOR SHALL ADJUST EXISTING FLOOR CLEANOUT COVERS TO BE FLUSH AND LEVEL WITH THE NEW FINISHED FLOOR. SEE BID NOTES FOR QUANTITY. NO STAINLESS STEEL COVER PLATES WILL BE ALLOWED. IF THE EXISTING CLEANOUT COVER IS OF THE ADJUSTABLE TYPE, THE CONTRACTOR SHALL RAISE OR LOWER THE COVER TO MATCH THE NEW FINISHED FLOOR ELEVATION. LEVELING SHALL BE ACCOMPLISHED BY CORE DRILLING OR SAW-CUTTING SUFFICIENT CONCRETE TO ACCESS THE LINE, PLUMB AND LEVEL THE COVER. REPLACE ANY DAMAGED CLEANOUT COVERS. IF THE EXISTING CLEANOUT COVER IS NOT OF THE ADJUSTABLE TYPE, THE CONTRACTOR SHALL CORE DRILL AROUND ROUND CLEANOUT COVERS OR SAW-CUT AROUND RECTILINEAR COVERS TO ACCESS THE LINE. REPLACE THE CLEANOUT WITH AN ADJUSTABLE CLEANOUT AS SPECIFIED (SIOUX CHIEF 834-4PWR). VERIFY COMPATIBILITY WITH DRAIN LINES. REPLACEMENT CONCRETE WHERE CONCRETE HAS BEEN REMOVED TO ACCOMPLISH THE WORK SHALL BE MINIMUM 3000 psi.

- KEYED NOTES - WASTE AND VENT**
- EXISTING HUB DRAIN FOR EXISTING OR NEW CASES, OR REFRIGERATOR/FREEZER EVAPORATOR COILS - NO CHANGES.
  - NEW HUB DRAIN. VERIFY LOCATION WITH OWNER PRIOR TO CONSTRUCTION. SEE HUB DRAIN DETAIL, 1/P6.01. ROUTE NEW WASTE PIPE TO CONNECT AS SHOWN. SEE HUB DRAIN DETAIL, 1/P6.01.
  - TIE DRAIN FOR THIS CASE INTO THE HUB DRAIN SERVING AN ADJACENT CASE OF SIMILAR TYPE. CASES OF DIFFERENT TYPES MAY NOT SHARE A DRAIN.
  - EXISTING HUB DRAIN, ACCORDING TO THE RECORD PLANS IS SLIGHTLY OUT OF ALIGNMENT (WITHIN A FEW INCHES) FROM WHERE THE HUB DRAIN SHOULD BE FOR THIS CASE TYPE AND MAY NEED ADJUSTMENT A FEW INCHES TO BRING IT IN ALIGNMENT. EXISTING DRAIN IS SHOWN, BUT A NEW DRAIN MAY BE REQUIRED TO SERVE EQUIPMENT IF DIRECTED BY OWNER. SEE HUB DRAIN DETAIL, 1/P6.01.
  - INSTALL A CAP WHERE EXISTING DRAIN LINE WAS CUT.
  - THERE IS NO SANITARY PIPE WORK IN THE EXISTING RESTROOMS. RE-CAULK AROUND EXISTING FIXTURES.
  - EXISTING HI-TO "ELECTRIC" WATER COOLER TO REMAIN IN SERVICE



2600 Maitland Center Parkway  
 Suite #200  
 Maitland, FL 32751  
 P (407) 661-9100  
 F (407) 661-9101  
 c-p.com  
 Florida Corporate Certificate #AA C000526

COPYRIGHT © 2021 - ALL REPORTS, PLANS, SPECIFICATIONS, COMPUTER FILES, FIELD DATA, NOTES & OTHER DOCUMENTS ARE INSTRUMENTS OF SERVICE PREPARED BY CUHACI PETERSON. (CP) AS INSTRUMENTS OF SERVICE REMAIN THE PROPERTY OF CP. CP SHALL RETAIN ALL COMMON LAW, STATUTORY, AND OTHER RESERVED RIGHTS, INCLUDING THE COPYRIGHT THEREIN. ANY USE OR REPRODUCTION OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION FROM CP IS A VIOLATION OF FEDERAL COPYRIGHT LAWS.

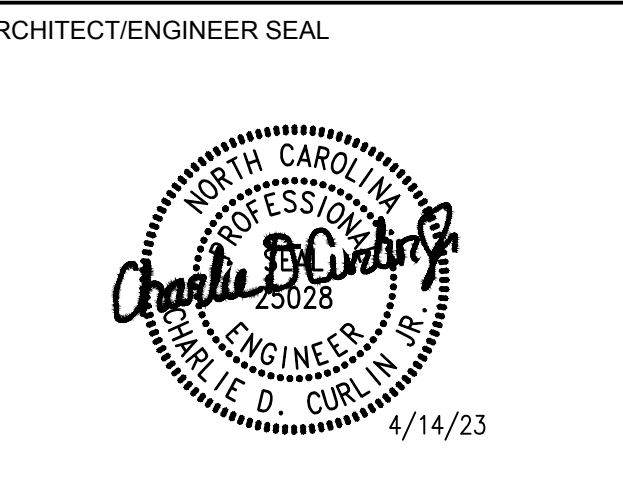

CONSULTANT

**SHULTZ ENGINEERING GROUP, PC**  
 212 N. McDowell St., Suite 204  
 Charlotte, NC 28204  
 (P) 704.334.7363 | (F) 704.347.0093  
 www.shultzeg.com | SEG - 23-052  
 NC FIRM LICENSE NUMBER: C-0889  
 P.M. C.C. M. I.M. E. K. P. H.M.

**FOOD LION**  
 2110 EXECUTIVE DRIVE  
 SALISBURY, NC 28145  
 PH: 704-633-8250 FX: 704-636-4940

| REVISION / ISSUE HISTORY |            |                       |
|--------------------------|------------|-----------------------|
| REV                      | DATE       | REVISION / ISSUE NAME |
|                          | 04/14/2023 | PERMIT                |

|  |                  |
|--|------------------|
| PROJECT NO<br>2220380                                | DRAWN BY<br>HM   |
| PERMIT SUB DATE<br>04/14/2023                        | CHECKED BY<br>CC |
| PROJECT<br><b>FOOD LION STORE #2594</b>              |                  |
| 3260 RAY ROAD<br>SPRING LAKE, NC 28390<br>2594FLMK23 |                  |

CLIENT  
**FOOD LION**  
 2110 EXECUTIVE DRIVE  
 SALISBURY, NC 28145  
 PH: 704-633-8250 F: 704-636-5940

SHEET TITLE  
**SANITARY SEWER AND DRAIN PLAN**  
 SHEET NO 2594P1.01.00 REV  
**P1.01**