

VF2A-FS

Two Section Full Solid Door Freezer

VALIANCE®

by  HOSHIZAKI

VF2A-FS
05/12/25
Item #13736

W x D x H

54.31" x 32.00" x 81.70"
(including 4" casters)



Dimensions / Capacity

Two Section VF2A-FS

Interior Storage Capacity (CF) (AHAM)	42.45 ft³
Overall Width x Depth	54.31" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.63" x 52.31"
Depth with Door Open at 90°	57.5"
Adjustable Shelves	6
Shelf Dimensions (W x D)	23.94" x 25.16"
Crated Shipping Weight	543 lbs
Crated Length x Depth x Height	58" x 33.5" x 83.88"

Electrical / Refrigeration

Two Section VF2A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	-10° to 0°F
Amperage	4.6
Energy Consumption (kWh/day) @ASHRAE	6.94
Approx. Nominal Compress. BTU/HR (HP)	1718(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.2oz)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: **28**
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time or temperature initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VF2A-FS


Two Section Full Solid Door Freezer

VALIANCE®


by  HOSHIZAKI

VF2A-FS
05/12/25
Item #13736


FRONT VIEW

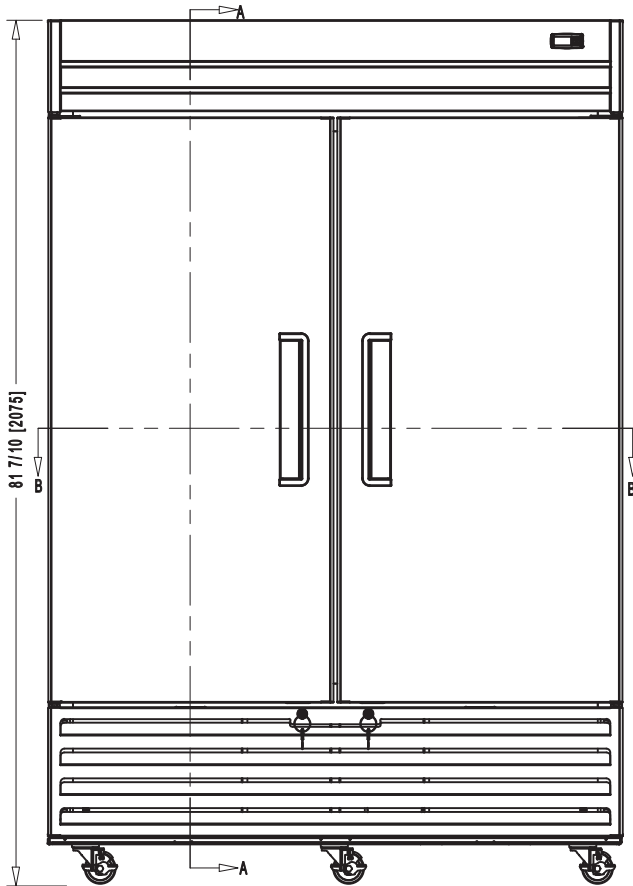

SIDE VIEW

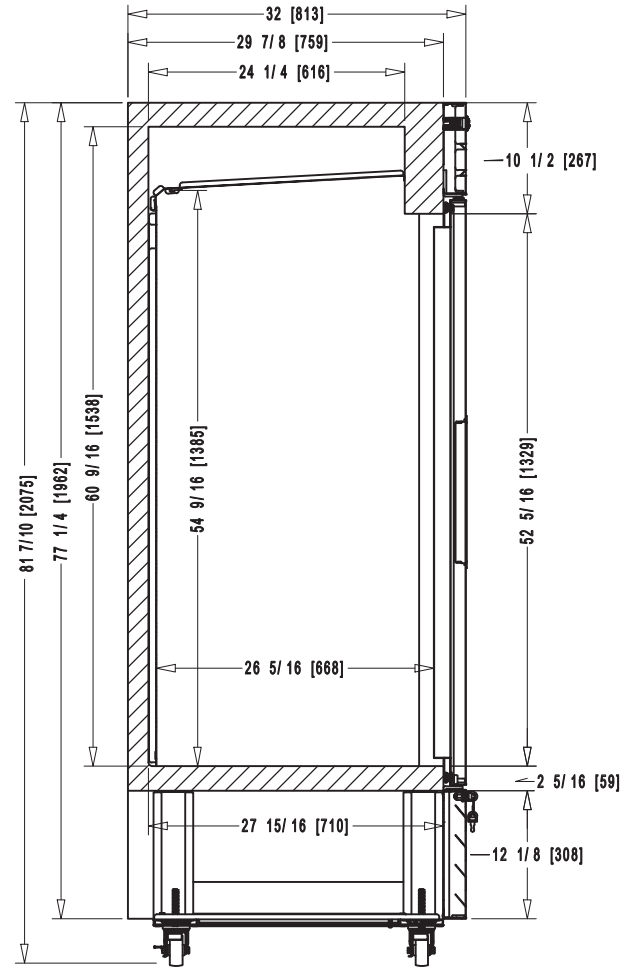

PLAN VIEW

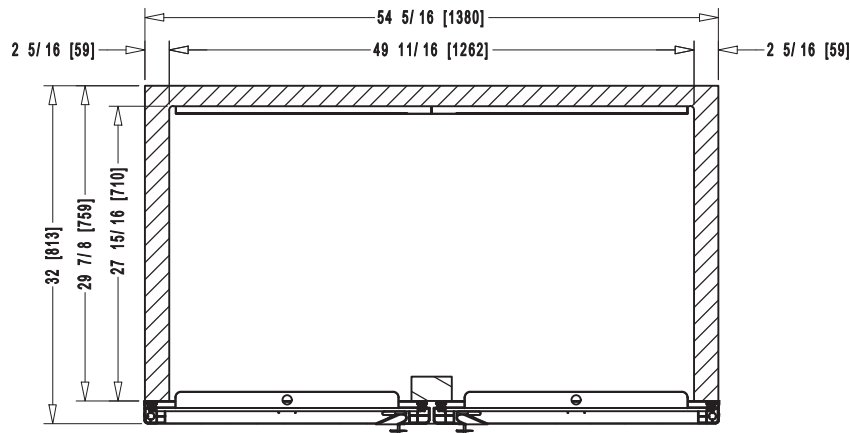

VR2A-FS

Two Section Full Solid Door Refrigerator

VALIANCE®

by  HOSHIZAKI

VR2A-FS
05/12/25
Item #13737

W x D x H

54.31" x 32.00" x 81.70"
(including 4" casters)



Dimensions / Capacity

Two Section VR2A-FS

Interior Storage Capacity (CF) (AHAM)	42.45 ft ³
Overall Width x Depth	54.31" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.63" x 52.31"
Depth with Door Open at 90°	57.5"
Adjustable Shelves	6
Shelf Dimensions (W x D)	23.94" x 25.16"
Crated Shipping Weight	471 lbs
Crated Length x Depth x Height	58" x 33.5" x 83.88"

Electrical / Refrigeration

Two Section VR2A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	36° to 40°F
Amperage	3.5
Energy Consumption (kWh/day) @ASHRAE	1.48
Approx. Nominal Compress. BTU/HR (HP)	2322(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.1oz)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: **29**
Project: _____
Qty: _____
AIA#: _____


FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22


If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.


FRONT VIEW

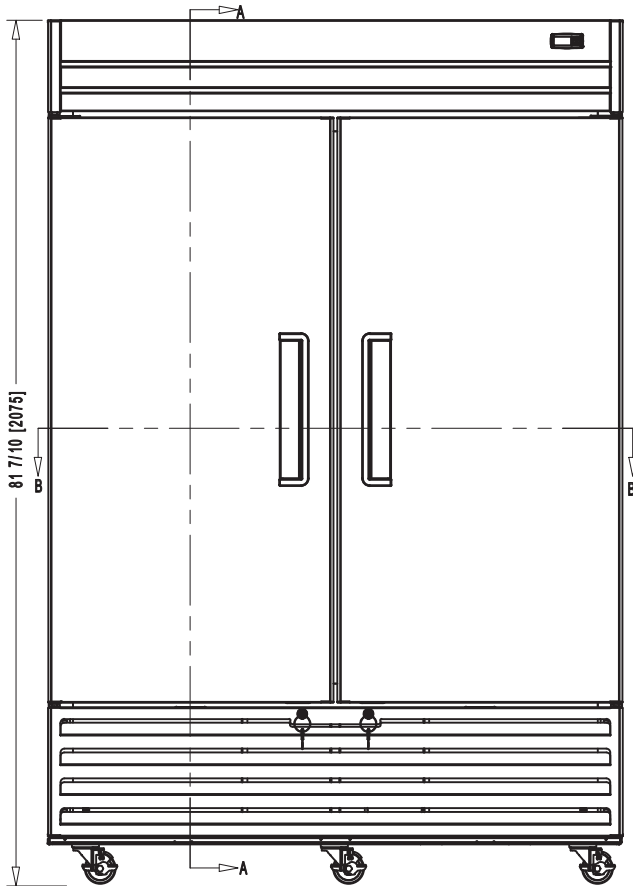

SIDE VIEW

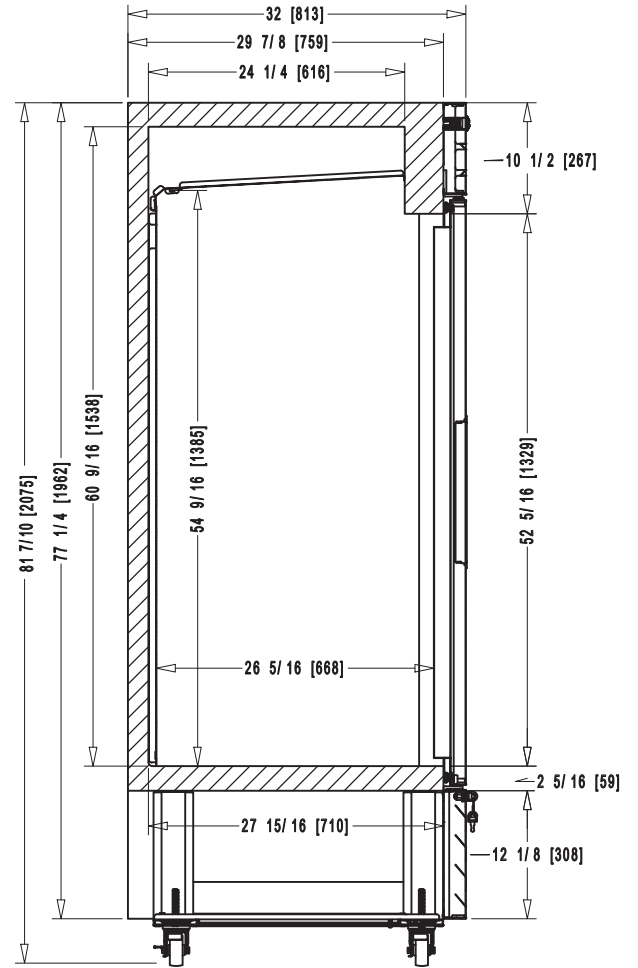


PLAN VIEW

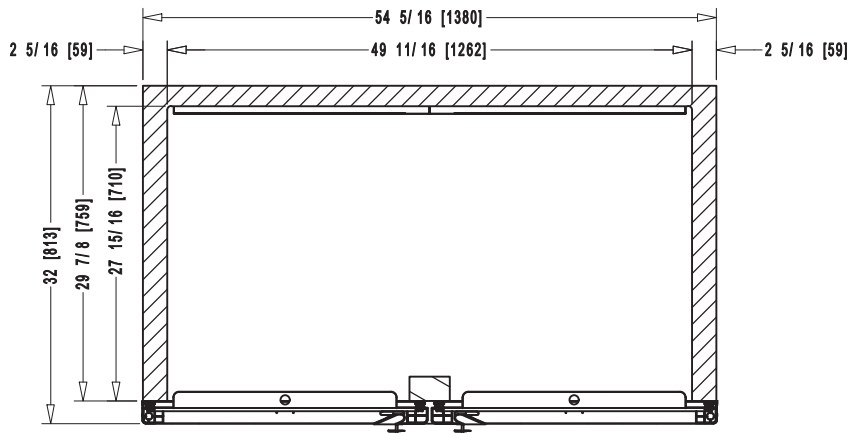



Regency 24" x 12" Removable Sink Side Splash
#600CSSP2412



Technical Data

Length	24 Inches
Height	12 Inches
Color	Silver
Gauge	18 Gauge
Material	Stainless Steel
Stainless Steel Type	Type 304
Type	Splash Guards

Features

- 12" height provides ample surface area to shield splashes
- Constructed of durable 18 gauge type 304 stainless steel
- Quick and easy installation
- Contains water and other products within sink area
- Ideal for maintaining a clean and dry work environment

Plan View



Notes & Details

Upgrade your sink set up with the Regency 24" x 12" removable sink side splash. This removable sink side splash provides a shield for unwanted splashes and spills from washing hands or dishes. The 12" height provides ample surface area for water and product containment, keeping your kitchen surfaces dry and protected.

Made of durable 18 gauge type 304 stainless steel, this side splash is built to last. Plus, simple installation allows you to begin shielding your kitchen from splashes as soon as possible. Feel confident in maintaining a clean and dry environment with this side splash.

**WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.