



**REGENCY**  
Tables and Sinks

**Regency 49 1/2" 16-Gauge Stainless Steel One Compartment Commercial Sink with Stainless Steel Legs, Cross Bracing, and 1 Drainboard - 23" x 23" x 12" Bowl - Left Drainboard**

#60S1232324XL



**Technical Data**

Length	49 1/2 Inches
Width	28 1/2 Inches
Height	44 3/4 Inches
Drainboard Length	24 Inches
Bowl Depth	12 Inches
Work Surface Height	34 3/4 Inches
Basket Drain Size	3 1/2 Inches
Bowl Front to Back	23 Inches
Bowl Left to Right	23 Inches
Faucet Centers	8 Inches

**Features**

- Features a durable 16-gauge type 304 stainless steel construction
- Designed with a 12" deep bowl and rounded corners for easy cleaning
- Stainless steel legs, sockets, bullet feet, and crossbracing for maximum strength and longevity
- Includes a 3 1/2" basket strainer with 1 1/2" IPS drain connection
- Backsplash and rolled edges prevent splashes and overflow


**Certifications**



Technical Data

Features	NSF Listed
Gauge	16 Gauge
Leg Construction	Stainless Steel
Material	Stainless Steel
Number of Compartments	1 Compartment
Stainless Steel Type	Type 304
Style	1 Drainboard
Type	Straight / Line Sinks

Plan View

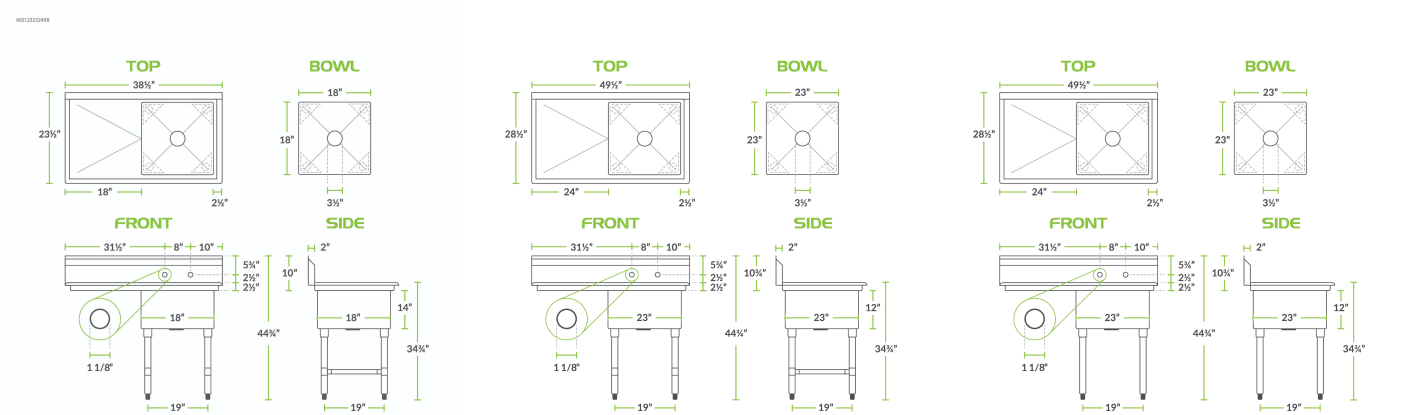


Notes & Details

Outfit your facility with a long-lasting sink with this Regency 49 1/2" stainless steel one compartment sink with 1 drainboard. It's constructed from high-quality, 16-gauge type 304 stainless steel, making it more corrosion-resistant and durable than other sinks made from thinner, 18-gauge material. This sink features a sturdy, 24" drainboard so you can easily wash and dry dishes and utensils in one convenient location. It's also dipped a minimum of 1/4" to facilitate better drainage, and the welded construction contributes to the long-lasting use and overall strength of this sink / drainboard combo.

The 12" deep bowl is die-stamped to a minimum of 1/4" to ensure proper drainage. Plus, it includes a 3 1/2" basket strainer to catch food debris, which prevents the drain from clogging. For easy cleaning, the compartment has rounded corners so you can rinse and wipe down the sink.

A backsplash is included and comes complete with (2) 1 1/8" diameter holes punched on 8" centers to accommodate 1 faucet (sold separately). This sink also includes a 1 1/2" raised rolled edge, which is 2" tall on the front and both sides to contain splashes and overflow. The legs are constructed of 1 5/8" diameter stainless steel with stainless steel cross-bracing and adjustable plastic feet for added stability. These features serve to prolong the life of your sink while adding exceptional strength to the unit.

**WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).



Regency Spec Line 88" 14 Gauge Stainless Steel Three  
Compartment Commercial Sink with 2 Drainboards - 16" x  
20" x 14" Bowls

#600S3162018S



Technical Data

Length	88 Inches
Width	25 1/2 Inches
Height	45 3/8 Inches
Drainboard Length	18 Inches
Bowl Depth	14 Inches
Backsplash Height	11 Inches
Work Surface Height	35 Inches
Basket Drain Size	3 1/2 Inches
Bowl Front to Back	20 Inches
Bowl Left to Right	16 Inches

Features

- Made of superior quality, 14 gauge, type 304 stainless steel
- Stainless steel front apron, legs, sockets, and bullet feet
- Cross bracing on all four sides for maximum strength and longevity
- Includes 1 1/2" IPS drain connection and 3 1/2" basket strainers
- 11" Backsplash and rolled edges prevent splashes and overflow


Certifications



Technical Data

Drain Outlet Size	1 1/2 Inches
Features	Massachusetts Accepted Plumbing Product NSF Listed
Gauge	14 Gauge
Leg Construction	Stainless Steel
Material	Stainless Steel
Number of Compartments	3 Compartments
Stainless Steel Type	Type 304
Style	2 Drainboards
Type	Straight / Line Sinks

Plan View

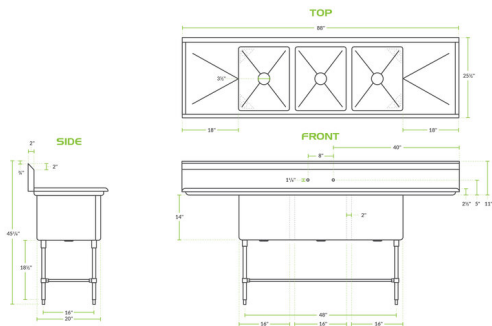

Notes & Details

This Regency Spec Line 88" 14 gauge stainless steel three compartment commercial sink with 2 drainboards is the perfect addition to your establishment! This sink is ideal for setting up a washing, rinsing, and sanitizing station. It's constructed from superior quality, 14 gauge, type 304 stainless steel, making it more corrosion-resistant and durable than other sinks made from thinner, 16 gauge material. It features a stainless steel front apron and (2) 18" drainboards, so you can easily wash and dry dishes and utensils in one convenient location. Plus, this sink has rolled edges and a tall, 11" backsplash, which helps prevent splashes and overflow.

To ensure proper drainage, this sink comes with (3) 3 1/2" basket drains with strainers. These drains catch food debris, preventing the drains from clogging. Additionally, this sink sits on (4) stainless steel legs, which feature adjustable stainless steel bullet feet to accommodate uneven floors. The stainless steel legs provide your sink with a solid, reliable foundation to rest upon, so you always have somewhere to wash, rinse, and sanitize dirty dishes. Additionally, this sink features front-to-back and left-to-right cross bracing for maximum stability.

**WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).