

NOTE:
THIS STRUCTURE IS IN COMPLIANCE WITH THE 2009 & 2012 INTERNATIONAL BUILDING CODES AND INTERNATIONAL RESIDENTIAL CODES. LOADS ARE IN ACCORDANCE WITH ASCE/SEI 7-05 and 7-10.

WIND SPEED (3 SECOND WIND GUST)		120 MPH	130 MPH
IMPORTANCE FACTOR	WIND	0.77	0.77
	SNOW	0.8	0.8
	SEISMIC	1.0	1.0
BUILDING CATEGORY		I	I
EXPOSURE		C	C
INTERNAL PRESSURE COEFFICIENT		±0.55	±0.55
COMPONENT AND CLADDING PRESSURE	WALLS	+32.2/-40.5 PSF	+37.8/-47.5 PSF
	ROOF	+21.8/-65.4 PSF	+25.6/-76.8 PSF
STRUCTURE TYPE		ENCLOSED or OPEN	ENCLOSED or OPEN
GROUND SNOW LOAD		20 PSF	30 / 40 / 50 PSF
SEISMIC DESIGN CATEGORY		D2	D2

A-FRAME CARPORT DIMENSIONS (SEE TABLE 1)

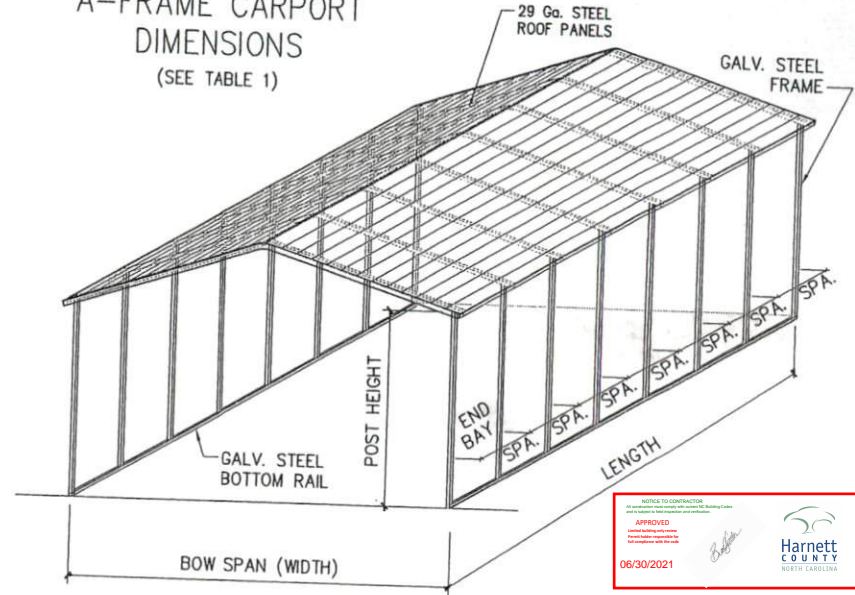


TABLE 1


FRAME SPACING BASED ON WIND SPEED AND SNOW LOAD

BOW SPAN	POST HEIGHT	120 / 20		130 / 30		130 / 40		130 / 50			
		TS 2 1/2" x 2 1/2"		TS 2 1/2" x 2 1/2"		TS 2 1/2" x 2 1/2"		TS 2 1/2" x 2 1/2"			
		GAGE	SPACING	GAGE	SPACING	GAGE	SPACING	GAGE	SPACING		
12'	8'-0"	14	5'-0"	14	4'-6"	14	4'-0"	14	3'-6"		
	12'-0"	12		12		12					
16'	8'-0"	14		14		14		12		3'-6"	
	12'-0"	12		12		12					
18'	8'-0"	14		14		14		12		3'-6"	
	12'-0"	12		12		12					
20'	8'-0"	14		14		14		12		3'-6"	
	12'-0"	12		12		12					
22'	8'-0"	12		12		12		12		3'-6"	
	12'-0"	12		12		12					
24'	8'-0"	12		4'-3"*		14		4'-0"		3'-6"	3'-0"
	12'-0"	12		12		12		12		12	

NOTE: CORNER BRACE REQUIRED FOR ALL 10' & 12' POSTS AND FOR ALL 20'-24' SPANS * OR TS 2 1/2 x 2 1/2 12 Ga. @ 4'-6" MAY BE USED
TS 2 1/2 x 2 1/2 - 14 GAGE STEEL TUBING MAY BE SUBSTITUTED FOR TS 2 1/2 x 2 1/2 - 12 GAGE STEEL TUBING OR VICE VERSA. THE ASSOCIATED CONNECTION MATERIALS AND BRACING MUST BE ADJUSTED ACCORDINGLY TO ACCOMMODATE THE CHANGE IN SIZE.

METAL ACCESSORIES FOR USE IN EXTERIOR WALL CONSTRUCTION AND NOT DIRECTLY EXPOSED TO THE WEATHER SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A 153, CLASS B-2. METAL PLATE CONNECTORS, SCREWS, BOLTS, AND NAILS EXPOSED TO THE WEATHER SHALL BE STAINLESS STEEL OR HOT DIPPED GALVANIZED.

- NOTES:
- ALL STEEL TUBING SHALL HAVE A MINIMUM YIELD STRENGTH (Fy) OF 65 KSI OR BETTER.
 - ALL FASTENERS ARE CASE HARDENED STEEL HEX SELF-TAPPING SCREWS, 3/4"-14 FOR FRAMING, #12-14 FOR TOP AND TRIM. ROOF DECK SCREWS SHALL HAVE RUBBER WASHERS.
 - FASTEN METAL ROOF AND SIDE PANELS WITH SELF DRILLING FASTENERS AT 8" O.C. MAX.
 - ALL FIELD CONNECTIONS SHALL BE 1/4"x1" SELF DRILLING SCREWS, UNLESS NOTED OTHERWISE.
 - ALL SHOP CONNECTIONS SHALL BE WELDED.
 - THE OWNER IS RESPONSIBLE FOR COMPLYING WITH LOCAL BUILDING CODE REQUIREMENTS.


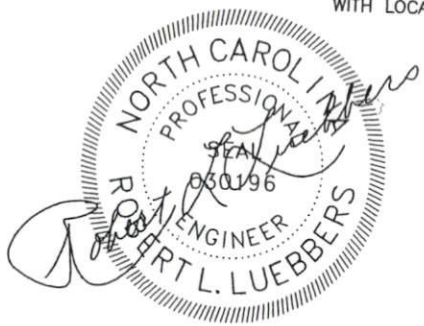


NEWMART BUILDERS A-FRAME CARPORTS


850 LOCUST STREET
SOUTH HILL, VA 23970
PHONE (434) 447-2693
TOLL FREE 1-800-547-8480
FAX (434) 447-2694

*PROVIDE CORNER BRACE FOR 10' TO 12' POSTS.
 **PROVIDE CORNER BRACE AND TOP STRUT FOR 20' TO 24' WIDTHS.

A-FRAME CARPORT

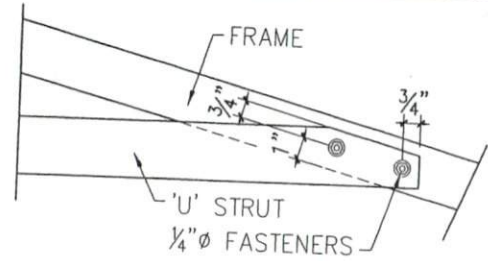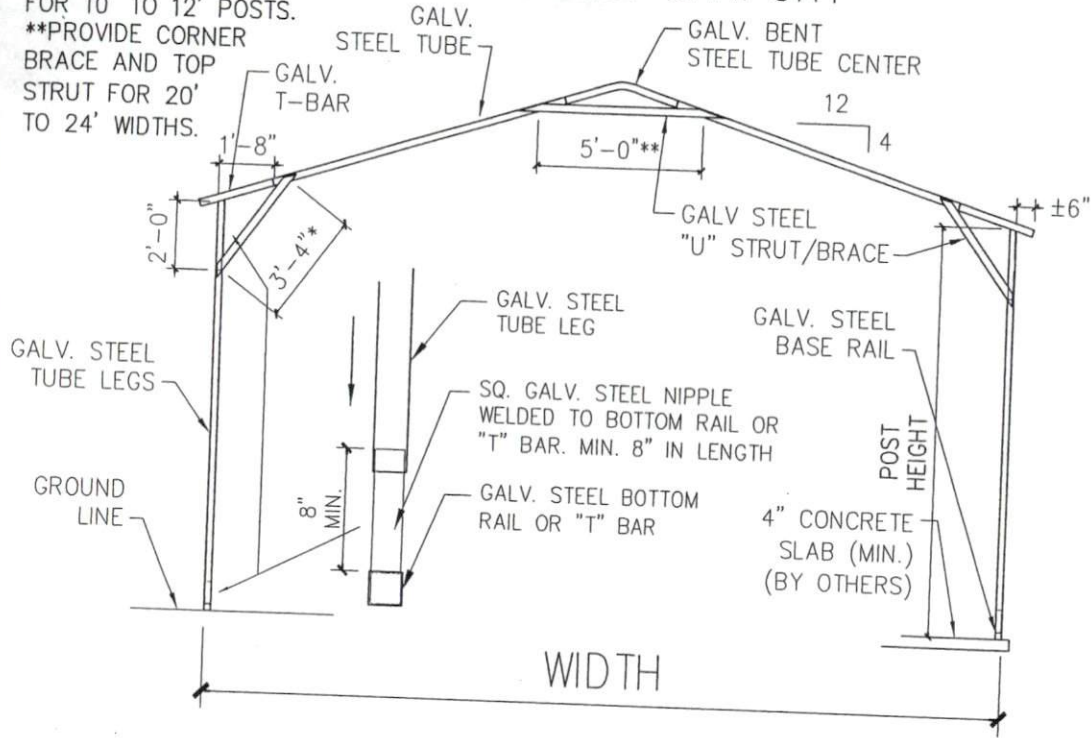


STRUT OR BRACE CONNECTION


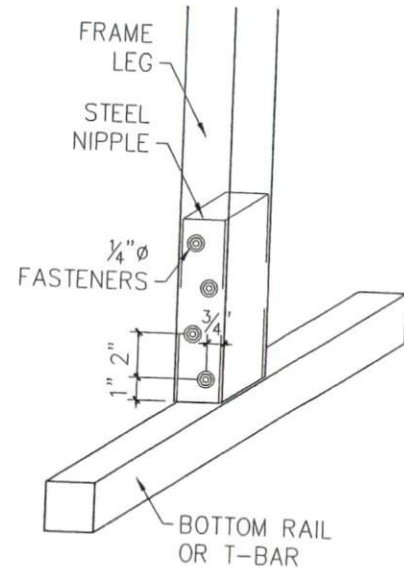




FRAME CONNECTION

GROUND ANCHOR DETAIL

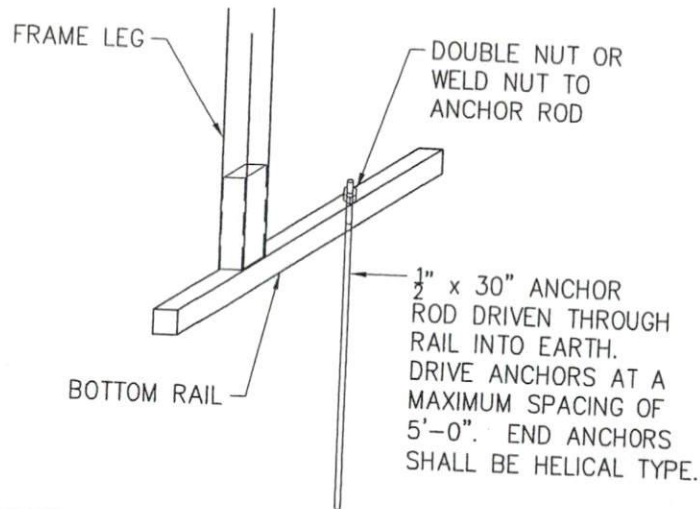

HELICAL ANCHOR DETAIL

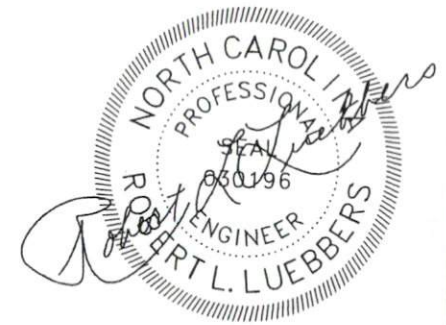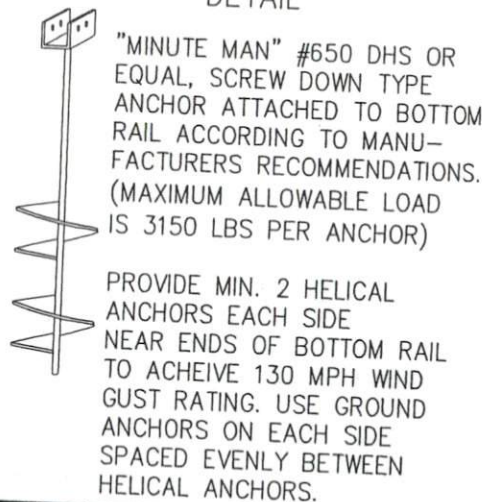


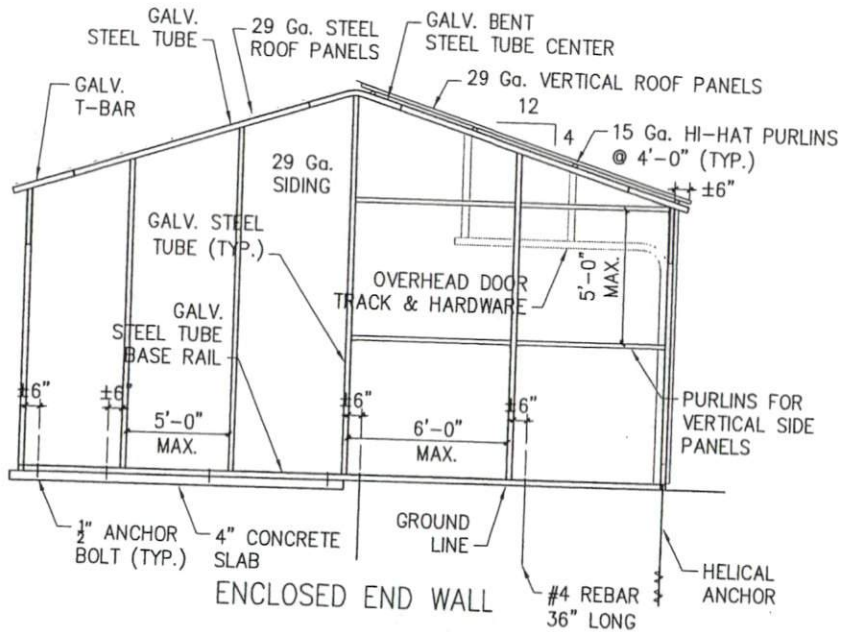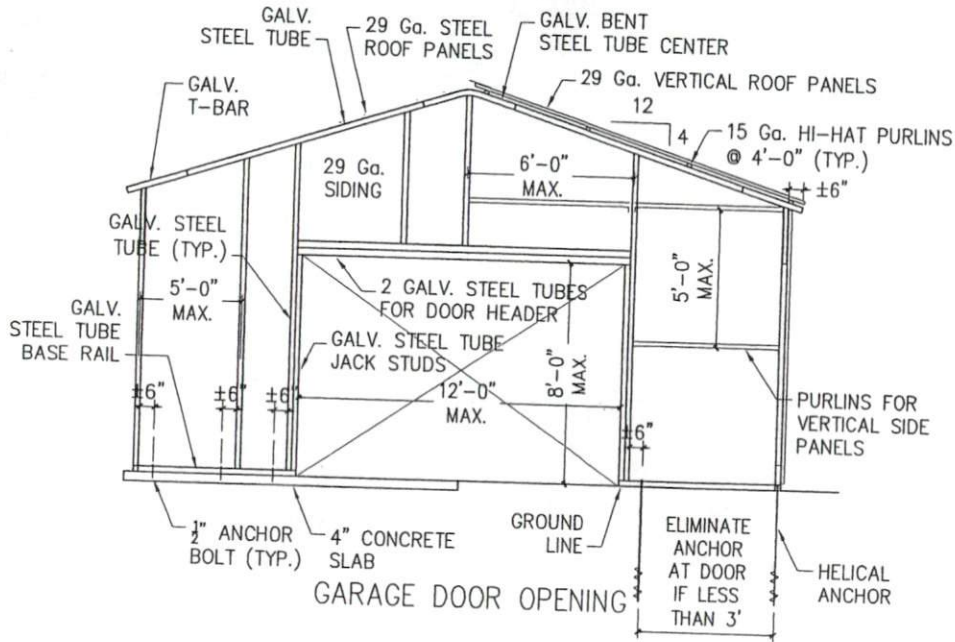

NOTE:
EXTERIOR WINDOWS AND GLASS DOORS SHALL BE TESTED BY AN APPROVED INDEPENDENT TESTING LABORATORY AND BEAR AN AAMA OR WDMA OR OTHER APPROVED LABEL IDENTIFYING THE MANUFACTURER, PERFORMANCE CHARACTERISTICS AND APPROVED PRODUCT EVALUATION ENTITY TO INDICATE COMPLIANCE WITH THE REQUIREMENTS OF THE FOLLOWING SPECIFICATION:

ANSI/AAMA/NWDA 101/IS2 2/97
THE CONSTRUCTION SHALL BE TESTED IN ACCORDANCE WITH ASTM E 330, STANDARD TEST METHODS FOR STRUCTURAL PERFORMANCE FOR EXTERIOR WINDOWS, CURTAIN WALLS, AND DOORS BY UNIFORM STATIC AIR PRESSURE.


NOTE:
ALL WINDOWS AND DOORS SHALL HAVE A MINIMUM DESIGN PRESSURE RATING OF ± 35 PSF.

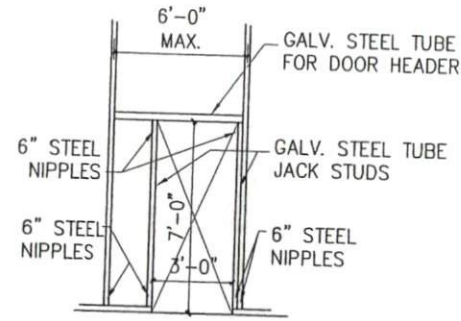


STANDARD DOOR OPENING


CARPORT WIDTH	MAX. DOOR WIDTH
12'	8'
18'	10'
20'	12'
22'	12'
24'	12'

MAX. DOOR WIDTH FOR SIDE OPENING IS 12'

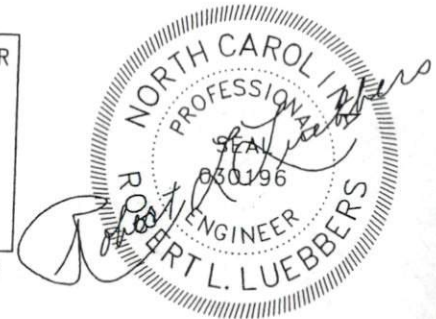


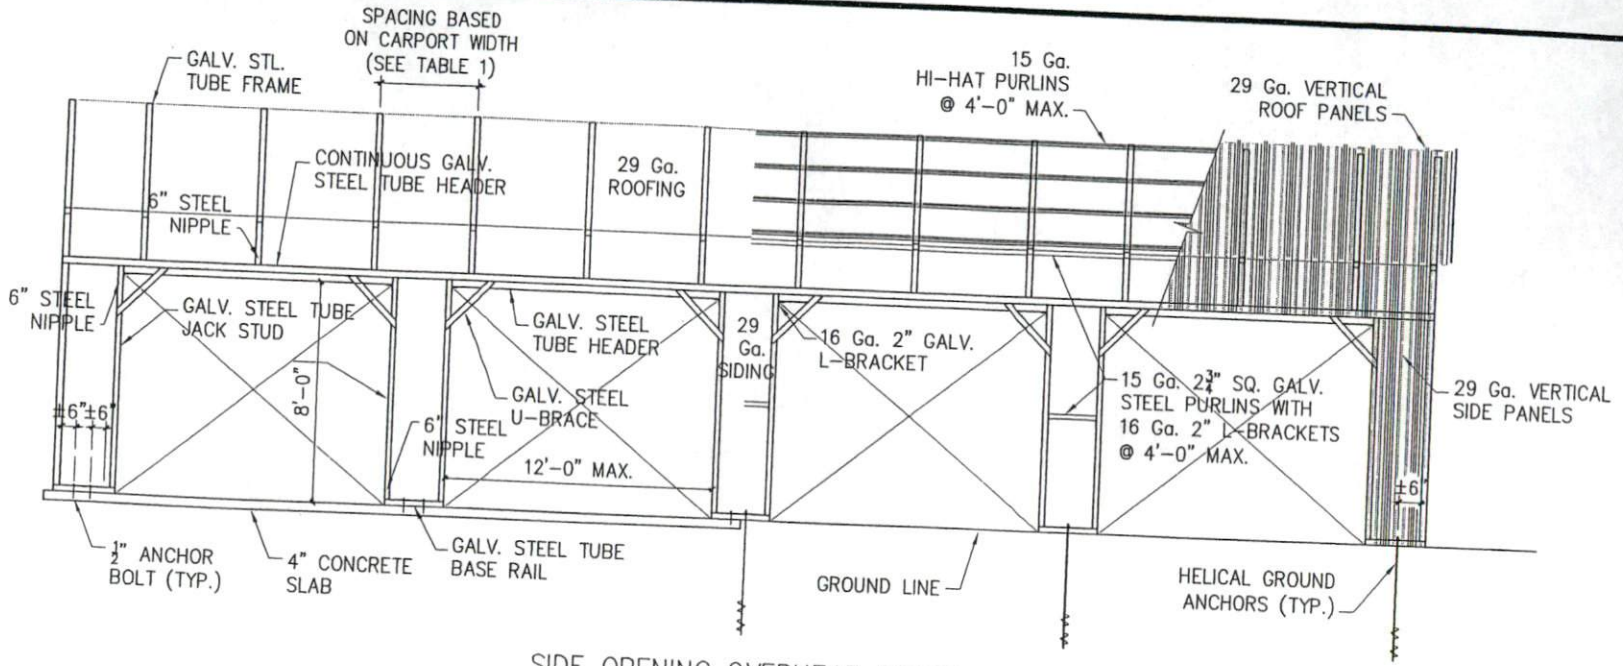


SIDE OPENING OVERHEAD DOORS

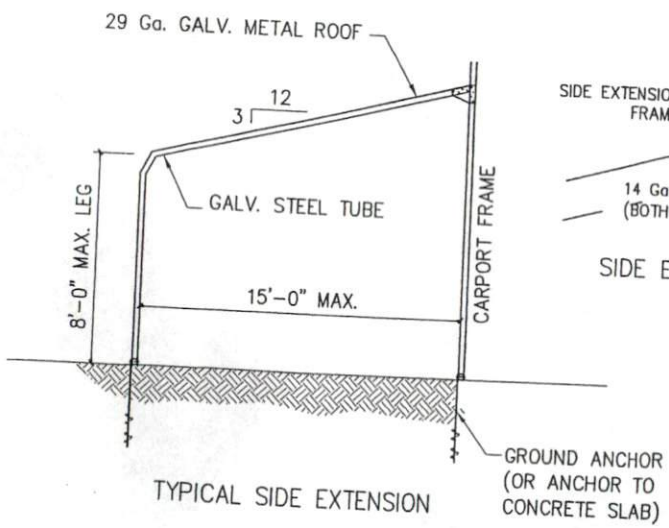

TYPICAL SIDE EXTENSION

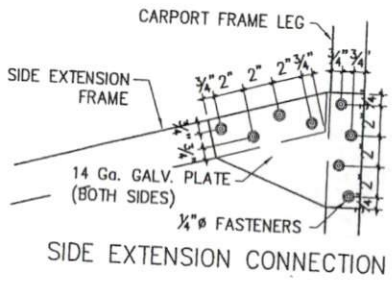

SIDE EXTENSION CONNECTION

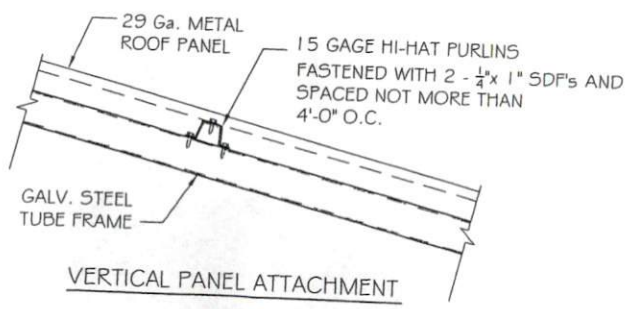

VERTICAL PANEL ATTACHMENT

