DOLLAR GENERAL

SITE NATIONAL REPORTS OF STREET OF S

| DEVELO | PMENT DATA |
|---------------------------------|--|
| DEVELOPMENT NAME: | DOLLAR GENERAL |
| STREET ADDRESS: | NC HIGHWAY 55 |
| | TOWN OF ERWIN |
| | HARNETT COUNTY |
| PROPERTY IDENTIFICATION #(PIN): | 0598-92-2261 |
| PARCEL ID NUMBER (PID) | 070598 0150 |
| DEED BOOK/PAGE: | 2408/0828 |
| PLAT BOOK/PAGE: | |
| EXISTING ZONING: | B2 HIGHWAY BUSINESS (ZONING CASE ZT-2024-007) |
| WATERSHED DISTRICT: | NONE |
| OVERLAY DISTRICT: | PHASE II STORMWATER |
| | |
| TOTAL SITE ACRES: | 107,507 SF (2.47 AC) PROPOSED DOLLAR GENERAL PARCEL |
| INSIDE TOWN LIMITS: | NO |
| EXISTING USE: | VACANT |
| PROPOSED BUILDING USE: | RETAIL SALES |
| | |
| PROPOSED TOTAL BUILDING AREA: | 10,640 SF |
| MAX BUILDING HEIGHT: | 35 FT |
| MIN LOT AREA: | 20,000 SF |
| MIN LOT WIDTH: | 100 FT |
| FRONT SETBACK: | 30 FT |
| SIDE SETBACK(RESIDENTIAL): | 20 FT |
| REAR SETBACK: | 20 FT |
| LANDSCAPE REQUIREMENTS: | |
| PERIMETER BUFFER | 20 FT ADJACENT TO RURAL DISTRICT |
| STREET FRONTAGE | 5 FT |
| PARKING REQUIREMENTS: | |
| TOTAL REQUIRED: | |
| TOTAL PROVIDED: | 42 |
| ACCESIBLE SPACES PROVIDED: | 2 |
| PARKING SPACE DIMENSIONS: | 8'X20' MIN |
| LOADING AREA: | 1 PROVIDED 12'X55' MIN |
| | |

| | IMPERVIOUS S | UMMARY TABLE | |
|--------------------------------|--------------------|--------------|-----------------|
| DOLLAR GENERAL SITE AREA = 107 | 7,507 SF (2.47 AC) | | |
| BUILDINGS | 10,640 SF | 0.24 ACRES | 9.90 % OF AREA |
| PAVEMENT | 21,745 SF | 0.50 ACRES | 20.23 % OF AREA |
| SIDEWALK | 2,080 SF | 0.05 ACRES | 1.93 % OF AREA |
| TOTAL IMPERVIOUS AREA | 34,465 SF | 0.79 ACRES | 32.06 % OF AREA |
| GREEN/OPEN SPACE | 73,042 SF | 1.68 ACRES | 67.94 % OF AREA |
| EXISTING IMPERVIOUS AREA | 5,175 SF | 0.12 ACRES | |
| INCREASE IN IMPERVIOUS AREA | 29,290 SF | 0.67 ACRES | |

Proposed Dollar General Store NC Highway 55

Town of Erwin
Harnett County, NC

TENANT & DEVELOPER

Dollar General Corporation

Rhetson Companies, Inc.
Attn. Greg Stewart
2075 Juniper Lake Road
West End, NC 27376
(910) 944-0881
permits@rhetson.com



CIVIL ENGINEER

Bowman North Carolina, Ltd.
4006 Barrett Drive
Suite 104
Raleigh, NC 27609
(919) 553-6570
mlowder@bowman.com
FIRM# F-1445

CURRENT PROPERTY OWNERS

Dayna Bayless & Steve Wilford Murphy 175 Drum Inlet Morehead City, NC 28557



| Ir | ndex of Drawings |
|--------------|--|
| SHEET NUMBER | SHEET TITLE |
| C1.0 | COVER SHEET |
| C1.1 | GENERAL NOTES, ABBREVIATIONS. AND LEGEND |
| C2.0 | DEMOLITION PLAN |
| C2.1 | EROSION CONTROL PLAN — INITIAL |
| C2.2 | EROSION CONTROL PLAN — FINAL |
| C2.3 | EROSION CONTROL NOTES |
| C2.4 | NORTH CAROLINA GENERAL PERMIT (NCG01) |
| C2.5 | NCG01 SELF-INSPECTION FORM |
| C3.0 | SITE PLAN |
| C3.1 | VEHICLE EXHIBIT PLAN |
| C4.0 | GRADING PLAN |
| C5.0 | UTILITY PLAN |
| C5.1 | UTILITY DETAIL |
| C6.0 | EROSION CONTROL DETAILS |
| C6.1 | EROSION CONTROL DETAILS |
| C6.2 | CONSTRUCTION DETAILS |
| C6.3 | CONSTRUCTION DETAILS |
| C6.4 | STORMWATER MANGEMENT DETAILS (1 OF 3) |
| C6.5 | STORMWATER MANGEMENT DETAILS (2 OF 3) |
| C6.6 | STORMWATER MANGEMENT DETAILS (3 OF 3) |
| C7.0 | LANDSCAPING PLAN |
| DDX | PRE-DEVELOPMENT DRAINAGE AREA |
| DDP | POST-DEVELOPMENT DRAINAGE AREA |
| DDP-BYPASS | POST-DEVELOPMENT BYPASS DRAINAGE AREA |
| DDP-INLETS | POST-DEVELOPMENT DRAINAGE AREA TO INLETS |
| PAGE 1 OF 1 | LIGHTING PLAN |

EROSION CONTROL NOTES:

AN EROSION AND SEDIMENTATION CONTROL PERMIT SHALL BE REQUIRED BY NCDEQ PRIOR TO START OF CONSTRUCTION.

SURVEY NOTE:
ALL EXISTING BOUNDARY AND TOPOGRAPHIC INFORMATION
TAKEN FROM A LAND SURVEY PREPARED BY:
BOWMAN NORTH CAROLINA LTD.

STREAM/WETLAND NOTE:
THERE ARE NO EXISTING STREAM/AND OR WETLAND FEATURES
ON THE PROPOSED PARCEL.

FLOOD ZONE NOTE:
THE PROPERTY IS LOCATED IN FLOOD ZONE X AS SHOWN ON FEMA FLOOD PANEL 3720059800J, DATED OCTOBER 3, 2006.






Suite 104
RALEIGH, NC 27609
Phone: (919)553-6570
bowman.com

DOLLAR GENERAL
NC 55 E ERWIN

COVER SHEET

PRELIMINARY DO NOT USE FOR



2/10/2025 1ST SUBMITTAL

3/18/2025 REVISIONS PER NCDEQ COMMEN

4/4/2025 2ND SUBMITTAL

DATE DESCRIPTION

ML KXO ML

DESIGN DRAWN CHKD

SCALE H:

JOB No. 220154-01-001

DATE FEBRUARY 10, 202

FILE No.

SHEET C1.0

Cad file name: V:\220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-COV.dwg

GENERAL NOTES

ARE NECESSARY TO PERFORM THE PROPOSED WORK.

SIGHT DISTANCE COEFFICIENT OR

LIMITS OF CLEARING & GRADING

CULVERT ENTRANCE LOSS COEFFICIENT

RATE OF VERTICAL CURVATURE

LATERAL

LINEAR FEFT

LIP OF PAN

LOWER LEVE

LINE OF SIGHT

LOADING SPACE

MONUMENT FOUND

MATCH EXISTING

MISCELLANEOUS

MEDIAN STRIP

MEAN SEA LEVEL

NORTHING/NORTH

NOT APPLICABLE

NORTH BOUND LANF

NOW OR FORMERLY

OUTSIDE DIAMETER

OVERHEAD CABLE

OVERHEAD ELECTRIC

OVERHEAD TELEPHONE

NET FLOOR AREA

NOT TO SCALE

ON CENTER

OVERHANG

OVERHEAD

PERIMETER

PROPERTY LINE

PLAN AND PROFILE

POINT OF CURVATURE

POINT OF CURB RETURN

POINT OF INTERSECTION

POINT OF GRADE LINE

POINT OF TANGENCY

PUBLIC UTILITY EASEMENT

POLYVINYL CHLORIDE PIPE OR

POINT OF VERTICAL CURVATURE

POINT OF VERTICAL INTERSECTION

POINT OF VERTICAL TANGENCY

POINT OF VERTICAL REVERSE CURVE

AMOUNT OF RUNOFF (FLOW RATE)

REINFORCED CONCRETE PIPE

ROAD OR ROOF DRAIN

ROUGH GRADING PLAN

RESOURCE MANAGEMENT AREA REMOTE OUTSIDE MONITO

RESOURCE PROTECTION AREA

SANITARY SEWER MANHOLE

PRELIMINARY

PROPOSED

PAVFMFNT

RFDUCFR

RFINFORCED

REQUIRED

RETAINING

REVISION

RAII ROAD

SCHFDULF

SECTION

SEWER

RIGHT OF WAY

SPEED OR SLOPE

SANITARY SEWER

SIGHT DISTANCE

SQUARE FEET

SPECIFICATIONS

STORM SEWER

SHOULDER

STATION

STACK

STANDARD

STRUCTURE

SERVICE

SIDEWALK

CROSS SLOPE

SQUARE YARD

TO BE REMOVED

TOP OF CURB

TEMPORARY

TEST HOLE

TOP OF PIPE

SOUTH BOUND LANE

SPACE OR SITE PLAN

STORM SEWER MANHOLE

STORM WATER MANAGEMENT

TOP OF BANK OR TEST BORING

TEST PIT OR TREE PROTECTION

TOP OF WALL OR TAILWATER

TIME OF CONCENTRATION

TOP OF FOUNDATION

UTILITY EASEMENT

UNDERGROUND FLECTRIC

UNDERGROUND CABLE

US GEOLOGICAL SURVEY

HANDICAPPED VAN PARKING SPACE

UNDERGROUND TELEPHONE

UNDERGROUND

UNDFRDRAIN

UTILITY POLE

UTILITY

VFI OCITY

VERTICAL BEND

VERTICAL CURVE

VERTICAL FOOT

WEIGHT OR WIDTH

WEST BOUND LANE

WITH THRUST BLOCK

WATER VALVE

TRANSFORMER

YARD INLET

YEAR

WATER SURFACE ELEVATION

WATER LINE WATER METER

WATER MAIN

CROSSING

IRON PIPE FOUND

IRON PIPE SET

JUNCTION BOX

IRRIGATION

JOINT

UPPER LEVEL

RIGHT

ROUTE

POINT OF COMPOUND CURVATURE

POINT OF REVERSE CURVATURE

POINT OF CURVE EDGE OF PAVEMENT

POINT OF CURVATURE TOP OF CURB

NUMBER

NORTH CAROLINA DEPT. OF TRANSPORTATION

MILES PER HOUR

MECHANICAL

MANHOLE

MINIMUM

- 1. UTILITY CONFLICTS: ALL EXISTING UTILITIES SHOWN WERE COMPILED USING THE BEST AVAILABLE INFORMATION AND FIELD OBSERVATION. BOWMAN CONSULTING INC. DOES NOT GUARANTEE THE LOCATION OF UNDERGROUND UTILITIES SHOWN HEREON. CONTRACTOR TO BE RESPONSIBLE FOR FIELD VERIFYING THE LOCATION OF AND PROTECTING ALL EXISTING UTILITIES, INCLUDING THOSE NOT SHOWN OR SHOWN INCORRECTLY ON THE PLANS. ANY DAMAGE TO EXISTING UTILITIES SHALL BE REPAIRED IN A TIMELY FASHION TO THE SATISFACTION OF THE APPROPRIATE GOVERNING AGENCY AND THE OWNER OF THE IMPACTED UTILITY AT THE CONTRACTOR'S EXPENSE.
- 2. ALL MATERIALS AND WORKMANSHIP SHALL BE IN CONFORMANCE WITH THE LATEST STANDARDS AND SPECIFICATIONS FOR THE APPROPRIATE GOVERNING AGENCY. THE CONTRACTOR SHALL HAVE IN HIS POSSESSION AT THE JOB SITE AT ALL TIMES THE APPROPRIATE GOVERNING AGENCY'S PUBLIC WORKS MANUAL, ALL APPROVED EASEMENT AGREEMENTS, AND ONE (1) SIGNED COPY OF THE PLANS AS APPROVED BY THE APPROPRIATE GOVERNING AGENCY. THE CONTRACTOR SHALL OBTAIN WRITTEN APPROVAL FROM THE APPROPRIATE GOVERNING AGENCY FOR ANY VARIANCE TO THE 42.
- 3. CONTRACTOR SHALL OBTAIN, AT HIS OWN EXPENSE, ALL APPLICABLE CODES, LICENSES, STANDARDS, SPECIFICATIONS, PERMITS, BONDS, ETC., WHICH
- 4. THE CONTRACTOR SHALL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITIONS AT AND ADJACENT TO THE JOB SITE INCLUDING THE SAFETY OF ALL PERSONS AND PROPERTY DURING PERFORMANCE OF THE WORK. THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS AND MUST COMPLY WITH OSHA REGULATIONS.
- 5. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY THE OWNER/DEVELOPER AND ENGINEER OF ANY PROBLEM CONFORMING TO THE APPROVED PLANS FOR ANY ELEMENT OF THE PROPOSED IMPROVEMENTS PRIOR TO ITS CONSTRUCTION.
- THE CONTRACTOR SHALL REPAIR ANY EXCAVATIONS OR PAVEMENT FAILURES CAUSED BY HIS/HER CONSTRUCTION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL AND REPLACEMENT OF ALL MATERIALS WITHIN DEDICATED RIGHT-OF-WAY AND ALL MATERIALS AND WORKMANSHIP SHALL MEET THE ROADWAY DESIGN AND CONSTRUCTION STANDARDS OF THE APPROPRIATE GOVERNING AGENCY.
- 8. THE CONTRACTOR SHALL NOTIFY THE LOCAL JURISDICTION AT LEAST 24 HOURS PRIOR TO THE START OF CONSTRUCTION. THE APPROPRIATE FIRE DEPARTMENT SHALL BE NOTIFIED AT LEAST 48 HOURS IN ADVANCE OF ANY STREET CLOSURES AND IN THE EVENT THAT ANY FIRE HYDRANTS ARE TO BE TEMPORARILY REMOVED FROM SERVICE. THE CONTRACTOR SHALL ALSO BE RESPONSIBLE FOR PROVIDING AT LEAST 48 HOURS ADVANCED NOTICE OF ANY NEED TO SHUT DOWN ANY PORTION OF THE EXISTING WATER SYSTEM AND FOR OBSERVATIONS AND/OR INSPECTIONS REQUIRED.
- 9. THE CONTRACTOR SHALL PROVIDE ALL SIGNS, BARRICADES, FLAGMEN, LIGHTS OR OTHER DEVICES NECESSARY FOR SAFE TRAFFIC CONTROL IN ACCORDANCE WITH THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES AND AS MODIFIED BY THE NORTH CAROLINA SUPPLEMENT TO THE MUTCD. A TRAFFIC CONTROL PLAN SHALL BE SUBMITTED TO AND APPROVED BY THE APPROPRIATE GOVERNING AGENCY PRIOR TO THE ISSUANCE OF ANY CONSTRUCTION PERMIT FOR WORK WITHIN THE RIGHT-OF-WAY.
- 10. THE CONTRACTOR SHALL CONTACT NC811 AT 1-800-632-4949 AT LEAST 2 BUSINESS DAYS PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE ALL CONSTRUCTION ACTIVITIES WITH ANY AFFECTED UTILITY COMPANY.
- 11. THE CONTRACTOR SHALL OBTAIN COPIES OF THE "SOILS AND INVESTIGATION" REPORT FROM GEOTECHNICAL ENGINEER ALONG WITH THE "PAVEMENT THICKNESS DESIGN REPORT". THE CONTRACTOR MUST HAVE COPIES OF SAME ON THE SITE AT ALL TIMES.
- 12. THE CONTRACTOR IS REQUIRED TO PROVIDE AS-CONSTRUCTED HORIZONTAL AND VERTICAL CONSTRUCTION INFORMATION, INCLUDING THE LOCATIONS OF ALL SANITARY LINES AND SERVICES, WATER LINES AND SERVICES, AND OTHER UTILITY LINES AND SERVICES TO THE ENGINEER FOR PREPARATION
- 13. LIMITS OF CONSTRUCTION EASEMENTS AND RIGHTS-OF-WAY SHALL BE DELINEATED WITH TEMPORARY STAKING BY THE CONTRACTOR. SAFETY FENCING 55. ALL SIDEWALKS TO BE 4" THICK CONCRETE UNLESS OTHERWISE SHOWN ON THE PLAN. SHALL BE PER APPROPRIATE GOVERNING AGENCY.
- 14. WHERE EXCAVATION IS REQUIRED UNDER EXISTING ASPHALT OR CONCRETE PAVEMENT, THE EXISTING PAVEMENT SHALL BE SAW CUT IN A MANNER TO EFFECT A SMOOTH, STRAIGHT-CUT EDGE. ASPHALT PATCH SHALL BE PER APPROPRIATE GOVERNING AGENCY STANDARDS.
- 15. REFER TO FINAL RECORDED PLAT FOR ACTUAL LOT, TRACT, PARCEL, AND EASEMENT LOCATIONS AND DESIGNATIONS.
- 16. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL AND REPLACEMENT OF ALL MATERIALS WITHIN DEDICATED RIGHT-OF-WAYS AND ALL MATERIALS AND WORKMANSHIP SHALL MEET THE ROADWAY DESIGN AND CONSTRUCTION STANDARDS OF THE APPROPRIATE GOVERNING AGENCY.
- 17. THE CONTRACTOR SHALL PROTECT ALL ADJACENT PROPERTY TO THE PROJECT WORK SITE (SEE THE EROSION CONTROL PLAN). THE CONTRACTOR SHALL OBTAIN ALL PERMITS NECESSARY (IF APPLICABLE) TO COMPLETE THE CONSTRUCTION AND SHALL COMPLY WITH ALL LOCAL, STATE AND FEDERAL REGULATIONS.
- 18. WATER WILL BE PROVIDED BY THE CONTRACTOR TO KEEP WIND EROSION IN CHECK. USE OF WATER AS A DUST PREVENTATIVE SHALL NOT BE PAID FOR SEPARATELY, BUT INCLUDED IN THE COST OF THE WORK.
- 19. ANY SETTLEMENT OR SOIL ACCUMULATIONS BEYOND THE PROPERTY LIMITS DUE TO GRADING OR EROSION SHALL BE REPAIRED IMMEDIATELY BY THE 62. ALL HANDICAP RAMPS SHALL BE BUILT IN ACCORDANCE WITH THE MOST CURRENT EDITION OF THE APPROPRIATE GOVERNING AGENCY STANDARDS,
- 20. ANY CONSTRUCTION DEBRIS OR MUD TRACKING IN THE PUBLIC RIGHT-OF-WAY RESULTING FROM THIS DEVELOPMENT SHALL BE REMOVED IMMEDIATELY BY THE CONTRACTOR. THE CONTRACTOR SHALL IMMEDIATELY FIX ANY EXCAVATIONS OR PAVEMENT FAILURES CAUSED BY THE DEVELOPMENT AND SHALL PROPERLY BARRICADE THE SITE UNTIL CLEAN UP OR REPAIR IS COMPLETE.
- 21. IT WILL BE THE CONTRACTOR'S RESPONSIBILITY TO GRADE STREET CORES, RIGHT-OF-WAY TEMPLATES, AND LOTS ACCORDING TO GRADING
- 22. STREET CONTOURS SHOWN AT PROPOSED STREET LOCATIONS REPRESENT FINISHED GRADE ELEVATION TO TOP OF ASPHALT.
- 23. COMPACTION FILL MATERIAL SHALL BE COMPACTED ACCORDING TO THE APPROPRIATE GOVERNING AGENCY REGULATIONS AND THE RECOMMENDATIONS OF THE GEOTECHNICAL ENGINEER.
- 24. TOLERANCE ROUGH GRADING: TOLERANCE SHALL BE +/- 0.1 FEET.
- 25. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE SURE ALL APPROPRIATE PERMITS FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITY HAVE BEEN OBTAINED PRIOR TO GRADING. CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF ALL TEMPORARY WATER DIVERSION/CONTROL DEVICES AND EROSION CONTROL DEVICES NECESSARY TO PROTECT ADJACENT PROPERTIES, WATERWAYS AND PUBLIC RIGHT-OF-WAY. CONTRACTOR IS RESPONSIBLE FOR THE MAINTENANCE OF SAID DEVICES THROUGHOUT CONSTRUCTION AND UNTIL THE PERMANENT PROTECTION NECESSARY HAS BEEN COMPLETED.
- 26. IT IS THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN THE MOST CURRENT APPROVED ARCHITECTURAL/ MECHANICAL/ELECTRICAL/PLUMBING/STRUCTURAL PLANS AND COORDINATE SAME WITH THE SITE PLAN, PRIOR TO BEGINNING CONSTRUCTION
- 27. WHEN DURING THE COURSE OF CONSTRUCTION, ANY OBJECT OF AN UNUSUAL NATURE IS ENCOUNTERED. THE CONTRACTOR SHALL CEASE WORK IN THAT AREA AND IMMEDIATELY NOTIFY THE OWNER, APPROPRIATE GOVERNING AGENCY, AND/OR THE ARCHITECT/ENGINEER.
- 28. THE EXISTING UNDERGROUND UTILITIES SHOW HEREON ARE BASED UPON AVAILABLE INFORMATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATION OF ALL UTILITIES BEFORE COMMENCING WORK AND FOR ANY DAMAGES WHICH OCCUR BY HIS FAILURE TO LOCATE OR PRESERVE THESE UNDERGROUND UTILITIES. IF DURING CONSTRUCTION OPERATIONS THE CONTRACTOR SHOULD ENCOUNTER UTILITIES OTHER THAN IN THOSE SHOWN ON THE PLANS, HE SHALL IMMEDIATELY NOTIFY THE ENGINEER AND TAKE NECESSARY AND PROPER STEPS TO PROTECT THE FACILITY AND ASSURE THE CONTINUANCE OF SERVICE.
- 29. ALL STEPS WITH THREE OR MORE RISERS SHALL HAVE HAND RAILS, PER LOCAL CODE.
- 30. A SMOOTH GRADE SHALL BE MAINTAINED FROM THE CENTERLINE OF EXISTING ROAD TO PROPOSED CURB AND GUTTER AND/OR PROPOSED EDGE OF PAVEMENT TO PRECLUDE THE FORMING OF FALSE GUTTERS AND/OR THE PONDING OF ANY WATER IN THE ROADWAY. REMOVE AND RECONSTRUCT EXISTING PAVEMENT AND/OR CURB AS DICTATED BY FIELD CONDITIONS TO PROVIDE POSITIVE DRAINAGE AT TIE-IN-POINTS.
- 31. OVERLAY OF EXISTING PAVEMENT SHALL BE MINIMUM OF 1 1/2 INCH DEPTH; ANY COST ASSOCIATED WITH PAVEMENT OVERLAY, OR THE MILLING OF EXISTING PAVEMENT TO OBTAIN REQUIRED DEPTH. SHALL BE ASSUMED BY THE CONTRACTOR.
- 32. ALL RIGHT-OF-WAY DEDICATED FOR PUBLIC USE SHALL BE CLEAR AND UNENCUMBERED.
- 33. AN AIR QUALITY PERMIT SHALL BE OBTAINED IF REQUIRED.
- 34. ANY LIGHTING SHOWN HEREON IS AS SPECIFIED BY THE CLIENT AND IS INCLUDED FOR INFORMATION PURPOSES ONLY, AS DIRECTED BY THE OWNER AND/OR PUBLIC AGENCY REQUIREMENTS. BOWMAN CONSULTING GROUP, LTD. HAS NOT PERFORMED THE LIGHTING DESIGN, AND THEREFORE DOES NOT WARRANT AND IS NOT RESPONSIBLE FOR THE DEGREE AND/OR ADEQUACY OF ILLUMINATION ON THIS PROJECT.
- 35. THE CONTRACTOR WILL BE REQUIRED TO NOTIFY ALL RESIDENCES WITHIN VICINITY OF THE PROPERTY BOUNDARY TEN (10) DAYS PRIOR TO ANY BLASTING IN ACCORDANCE WITH THE APPROPRIATE GOVERNING AGENCY REQUIREMENTS.
- 36. NO BLASTING SHALL BE PERMITTED WITHIN 25' OF EXISTING UTILITY LINES OR STRUCTURES. BLASTING TO BE EXTENDED 25' BEYOND PROPOSED STRUCTURES IF CONDITIONS WARRANT FUTURE EXTENSIONS.
- 37. ALL RETAINING WALLS 4' IN HEIGHT AND OVER (MEASURED FROM BOTTOM OF FOOTER TO TOP OF WALL) REQUIRE A SEPARATE BUILDING PERMIT.
- 38. THE APPROVAL OF THIS PLAN DOES NOT CONSTITUTE THE APPROVAL OF FUTURE WORK.
- 39. ALL HANDICAPPED SPACES SHALL HAVE AN ABOVE GRADE IDENTIFICATION SIGN MEETING APPROPRIATE GOVERNING AGENCY STANDARDS.
- 40. WHERE A PROPOSED PIPE CROSSES OR PARALLELS A STREET OR DRIVE AISLE. THE ASPHALT SHALL BE NEATLY SAWCUT TO FULL DEPTH. AFTER INSTALLATION OF THE PIPE, THE ROADWAY SHALL BE PATCHED IN ACCORDANCE WITH THE APPROPRIATE GOVERNING AGENCY STANDARDS.

GENERAL NOTES (CONT.)

- THE CONTRACTOR SHALL CAREFULLY EXAMINE THE SITE AND MAKE ALL INSPECTIONS NECESSARY IN ORDER TO DETERMINE THE FULL EXTENT OF WORK REQUIRED TO MAKE THE PROPOSED WORK CONFORM TO THE DRAWINGS AND SPECIFICATIONS. THE CONTRACTOR SHALL SATISFY HIMSELF AS I THE NATURE AND LOCATION OF THE WORK, CONDITIONS, AND CONFIRMATION AND CONDITION OF EXISTING GROUND SURFACE AND THE CHARACTER O THE EQUIPMENT AND FACILITIES NEEDED PRIOR TO AND DURING EXECUTION OF THE WORK. THE CONTRACTOR SHALL SATISFY HIMSELF AS TO THE CHARACTER, QUANTITY AND QUALITY OF SURFACE AND SUBSURFACE MATERIALS OR OBSTACLES TO BE ENCOUNTERED. ANY INACCURACIES OR DISCREPANCIES BETWEEN THE DRAWINGS AND SPECIFICATIONS MUST BE BOUGHT TO THE OWNER'S ATTENTION IN ORDER TO CLARIFY THE EXACT NATURE OF THE WORK TO BE PERFORMED PRIOR TO THE COMMENCEMENT OF ANY WORK.
- THE CONTRACTOR WILL BE RESPONSIBLE FOR ANY DAMAGE TO THE EXISTING ROADS AND UTILITIES WHICH OCCURS AS A RESULT OF THE PROJECT CONSTRUCTION WITHIN OR CONTIGUOUS TO THE EXISTING RIGHT-OF-WAY.
- 43. ALL STREET CUT AND PATCH WORK IN PUBLIC RIGHT-OF-WAY REQUIRED FOR UTILITIES INSTALLATION SHALL BE PERFORMED IN STRICT ACCORDANCE WITH CITY, COUNTY, AND/OR APPROPRIATE GOVERNING AGENCY STANDARDS AND SPECIFICATIONS.
- 44. THE APPROVAL OF THIS PLAN SHALL IN NO WAY GRANT PERMISSION FOR THE CONTRACTOR TO TRESPASS ON OFF-SITE PROPERTIES.
- 45. THE APPROVAL OF THESE PLANS SHALL IN NO WAY RELIEVE THE CONTRACTOR OF COMPLYING WITH OTHER APPLICABLE LOCAL, STATE, AND FEDERAL REQUIREMENTS.
- 46. THESE PLANS MAKE NO REPRESENTATION AS TO THE SUBSURFACE CONDITIONS AND THE PRESENCE OF SUBSURFACE WATER OR THE NEED FOR SUBSURFACE DRAINAGE FACILITIES.
- 47. THE CONTRACTOR IS RESPONSIBLE FOR ARRANGING ALL NECESSARY INSPECTIONS.
- 48. EMERGENCY VEHICLE ACCESS SHALL BE MAINTAINED DURING ALL PHASES OF CONSTRUCTION.
- 49. ALL FINISHED GRADING, SEEDING, SODDING OR PAVING SHALL BE DONE IN SUCH A MANNER TO PRECLUDE THE PONDING OF WATER.
- THE ENGINEER SHALL NOT HAVE CONTROL OVER OR CHARGE OF AND SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS. METHODS. TECHNIQUES, SEQUENCES OR PROCEDURES OR FOR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK SHOWN ON THESE PLANS THE ENGINEER SHALL NOT BE RESPONSIBLE FOR THE CONTRACTOR'S SCHEDULES OR FAILURE TO CARRY OUT THE WORK. THE ENGINEER IS NOT RESPONSIBLE FOR ACTS OR OMISSIONS OF THE CONTRACTOR, SUBCONTRACTORS, OR THEIR AGENTS OR EMPLOYEES, OR OF ANY OTHER PERSONS PERFORMING PORTIONS OF THE WORK.
- CONTRACTOR SHALL BE RESPONSIBLE FOR THE DIGGING OF TEST HOLES PRIOR TO BEGINNING OF ANY CONSTRUCTION ON THE PROJECT. IF CONFLICTS ARE DISCOVERED AS A RESULT OF TEST HOLE FINDINGS, NOTIFY OWNER'S REPRESENTATIVE IMMEDIATELY.
- 52. EXCAVATION SUPPORT SYSTEMS SHALL CONFORM TO THE PROVISIONS OF OSHA CONSTRUCTION STANDARD 29 CFR PART 1926 SUBPART P, OR CURRENT EDITION.
- 53. AT LOCATIONS WHERE THE FINAL SURFACE COURSE OF ASPHALT PAVEMENT IS TO BE FEATHERED INTO THE EXISTING SURFACE COURSE. THE EXISTING SURFACE COURSE IS TO BE SCABBLED TO A MINIMUM DEPTH OF 1" AND A TACK COAT APPLIED PRIOR TO FINAL PAVING TO INSURE A SMOOTH, WELL BONDED JOINT.
- 54. ANY NEW PAVEMENT OPENED TO TRAFFIC SHALL RECEIVE A TACK COAT PRIOR TO PLACEMENT OF ANY OVERLYING ASPHALT COURSE.
- 56. ALL DEMOLITION SHALL BE PERFORMED IN STRICT COMPLIANCE WITH THE APPROPRIATE GOVERNING AGENCY.
- 57. ALL APPLICABLE EROSION AND SEDIMENT CONTROL MEASURES SHALL BE INSTALLED PRIOR TO COMMENCING DEMOLITION.
- 58. ITEMS SHOWN TO BE RELOCATED SHALL BE CAREFULLY REMOVED AND STORED BY THE CONTRACTOR UNTIL SUCH TIME AS THEY CAN BE PLACED IN THEIR NEW LOCATION. CONTRACTOR SHALL VERIFY THESE ITEMS WITH THE OWNER, PRIOR TO CONSTRUCTION.
- CONTRACTOR SHALL COORDINATE REMOVAL OR RELOCATION OF ALL EXISTING UNDERGROUND AND OVERHEAD ELECTRICAL, TELEPHONE AND CABLE 1 LINES AND REMOVAL OF UTILITY POLES, PEDESTALS AND TRANSFORMERS WITH UTILITY COMPANIES AND WITH DEVELOPER PRIOR TO DEMOLITION.
- 60. CONTRACTOR SHALL BE RESPONSIBLE FOR ADJUSTMENTS AND/OR RECONSTRUCTION OF ALL UTILITY COVER (MANHOLE FRAMES AND COVERS, VALVE BOX COVERS, ETC.) TO MATCH THE FINISHED GRADES OF THE AREAS EFFECTED BY THE CONSTRUCTION.
- THE CONTRACTOR MUST HAVE THE APPROVED CONSTRUCTION DRAWINGS IN POSSESSION PRIOR TO THE START OF CONSTRUCTION. AT LEAST ONE (1 COPY OF THE APPROVED PLANS, WITH REVISIONS, MUST BE KEPT ON-SITE AT ALL TIMES.
- NCDOT STANDARDS, AND CURRENT ADA REQUIREMENTS.
- THE STORM DRAIN, STORMWATER MANAGEMENT AND WATER QUALITY FACILITIES MUST BE MAINTAINED BY THE CONTRACTOR UNTIL SUCH TIME AS THEY ARE NOT ONLY 100% COMPLETE, BUT ALSO THAT 100% OF THE DRAINAGE AREA TO EACH FACILITY IS PERMANENTLY STABILIZED. SEED AND MULCH DOES NOT CONSTITUTE STABILIZATION IN TERMS OF THE CONTRACTOR MAINTENANCE OF THE STORM DRAIN, STORMWATER MANAGEMENT, AND WATER QUALITY FACILITIES. ALL STORM DRAIN, STORMWATER MANAGEMENT AND WATER QUALITY FACILITIES SHALL BE TURNED OVER TO THE OWNER COMPLETELY CLEAN AND FREE FROM ANY CONSTRUCTION RELATED SEDIMENT OR DEBRIS.
- 64. THE CONTRACTOR IS RESPONSIBLE FOR INSURING THAT ALL ADA ACCESSIBLE SIDEWALKS MAINTAIN SLOPES NOT TO EXCEED 5% LONGITUDINALLY AND 2% CROSS SLOPES. SLOPES AT ACCESSIBLE PARKING SPACES AND ACCESS AISLE SHALL BE A MAXIMUM OF 2%, AND THE MANEUVERING CLEARANCE AT EXTERIOR ENTRANCES SHALL HAVE A MAXIMUM SLOPE OF 2%.
- 65. DURING CONSTRUCTION, NO TEMPORARY CONNECTIONS TO FIRE HYDRANTS MAY BE MADE WITHOUT THE EXPRESS AUTHORIZATION OF THE UTILITY

GENERAL EROSION CONTROL NOTES

- 1. THE CONTRACTOR SHALL REMOVE ALL SEDIMENT, MUD AND CONSTRUCTION DEBRIS THAT MAY ACCUMULATE IN THE FLOWLINES AND PUBLIC RIGHTS-OF-WAY OF THE APPROPRIATE GOVERNING AGENCY AS A RESULT OF THIS CONSTRUCTION PROJECT. SAID REMOVAL SHALL BE CONDUCTED I A TIMFLY MANNER.
- 2. THE CONTRACTOR SHALL PREVENT SEDIMENT. DEBRIS AND ALL OTHER POLLUTANTS FROM ENTERING THE STORM SEWER SYSTEM DURING ALL DEMOLITION AND CONSTRUCTION OPERATIONS THAT ARE A PART OF THIS PROJECT. THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR REMEDIATION OF ANY ADVERSE IMPACTS TO ADJACENT WATERWAYS, WETLANDS, ETC., RESULTING FROM WORK DONE AS A PART OF THIS PROJECT.
- ALL DISTURBED AREAS MUST BE HYDRO-MULCHED W/ TACKIFIER AFTER FINAL GRADE IS REACHED ON ANY PORTION OF THE SITE NOT OTHERWISE PERMANENTLY STABILIZED.
- THE CONTRACTOR SHALL INSURE THAT ALL LOADS OF CUT AND FILL MATERIAL IMPORTED TO OR EXPORTED FROM THIS SITE SHALL BE PROPERLY COVERED TO PREVENT LOSS OF THE MATERIAL DURING TRANSPORT ON PUBLIC RIGHTS-OF-WAY. 5. THE USE OF REBAR, STEEL STAKES, OR STEEL FENCE POSTS TO STAKE DOWN STRAW OR HAY BALES; OR TO SUPPORT SILT FENCE USED AS AN
- EROSION CONTROL MEASURE; IS PROHIBITED. THE USE OF OSHA APPROVED COLORED WARNING CAPS ON REBAR OR FENCE POSTS USED WITH EROSION CONTROL MEASURES IS NOT ACCEPTABLE. IF STOCKPILES ARE LOCATED WITHIN 100 FEET OF A DRAINAGE WAY, ADDITIONAL SEDIMENT CONTROLS SUCH AS TEMPORARY DIKES OR SILT FENCE
- SHALL BE REQUIRED.
- APPROVED EROSION AND SEDIMENT CONTROL "BEST MANAGEMENT PRACTICES" SHALL BE MAINTAINED AND KEPT IN GOOD REPAIR FOR THE DURATION OF THE PROJECT. AT A MINIMUM, THE CONTRACTOR OR HIS AGENT SHALL INSPECT ALL BMP'S WEEKLY AND AFTER SIGNIFICANT PRECIPITATION EVENTS. ALL NECESSARY MAINTENANCE AND REPAIR SHALL BE COMPLETED IN A TIMELY MANNER. ACCUMULATED SEDIMENT AND DEBRIS SHALL BE REMOVED FROM A BMP WHEN THE SEDIMENT LEVEL REACHES ONE HALF THE HEIGHT OF THE BMP OR, AT ANY TIME THAT SEDIMENT OR DEBRIS ADVERSELY IMPACTS THE FUNCTION OF THE BMP. A BUILDUP OF EXCESSIVE SEDIMENT OCCURRING IN FLAT AREAS, BEHIND STRAW BALES, AND BEHIND SILT FENCES WILL BE REMOVED PROMPTLY. DISLOCATED STRAW BALES AND COLLAPSED OR TORN SILT FENCES WILL BE IMMEDIATELY
- THE CLEANING OF CEMENT TRUCK DELIVERY CHUTES SHALL OCCUR IN A PREDEFINED CONTAINMENT AREA. THE DISCHARGE OF WATER CONTAINING CEMENT TO THE STORM SEWER SYSTEM IS PROHIBITED.
- EROSION BALES SHALL BE PLACED SUCH THAT RUNOFF WILL NOT FLOW BETWEEN, AROUND OR UNDER BALES. BALES TO BE ANCHORED WITH 2" X 2" X 3' WOODEN STAKES OR TWO PER BALE.
- WHEN TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES ARE TO BE REMOVED, ANY SILT AND SEDIMENT DEPOSITS SHALL BE REMOVED AND SPREAD EVENLY IN OPEN AREAS.
- BEST MANAGEMENT PRACTICES (BMP) DETAILS SHOWN ON THESE PLANS ARE CONCEPTUAL ONLY. ADJUST AS NECESSARY TO FIT FIELD CONDITIONS.
- 13. TEMPORARY SEDIMENT BASINS SHALL BE USED DURING CONSTRUCTION TO CONTAIN ALL RUNOFF FROM THE SITE. IF TRENCH DEWATERING OR GROUND
- WATER REMOVAL IS REQUIRED, THE SEDIMENT POND OR OTHER APPROVED MEANS SHALL BE USED TO DETAIN ALL WATER PUMPED BY THESE
- THE CONTRACTOR SHALL SUBMIT A SCHEDULE OF CONSTRUCTION, GRADING AND LANDSCAPING, INCLUDING THE NAME AND 24 HOUR PHONE NUMBER OF THE RESPONSIBLE PARTY TO CONTACT REGARDING ANY EROSION OR SEDIMENT PROBLEM TO THE APPROPRIATE GOVERNING AGENCY PRIOR TO
- 15. EROSION CONTROL MEASURES TO BE COORDINATED WITH CONSTRUCTION MANAGER.
- 16. EROSION AND SEDIMENT CONTROL SHALL BE INSTALLED IN ACCORDANCE WITH REGULATIONS OF THE APPROPRIATE GOVERNING AGENCY.

 \ll

 \triangleleft

 \mathbf{m}

 \triangleleft

 α

Ш

DOULAR

PRELIMINARY DO NOT USE FOR



18/2025 REVISIONS PER NCDEQ COMMEN /4/2025 |2ND SUBMITTAL DESCRIPTION KXO ML DESIGN | DRAWN | CHKD IOB No. **220154-01-001**

PLAN STATUS

10/2025 | 1ST SUBMITTAL

DATE FEBRUARY 10, 202

C1.

SHEET


Cad file name: V:\220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-NTS.dwg


ADDITIONAL LEGENDS AND NOTES MAY BE FOUND ON OTHER SHEETS ASSOCIATED WITH THIS PLAN.


1. THIS IS A STANDARD SHEET, THEREFORE SOME ABBREVIATIONS MAY APPEAR ON THIS SHEET AND

THESE LEGENDS AND NOTES ARE TO BE REFERENCED IN ADDITION TO THIS STANDARD SHEET.

NOT BE USED ON THE PROJECT.

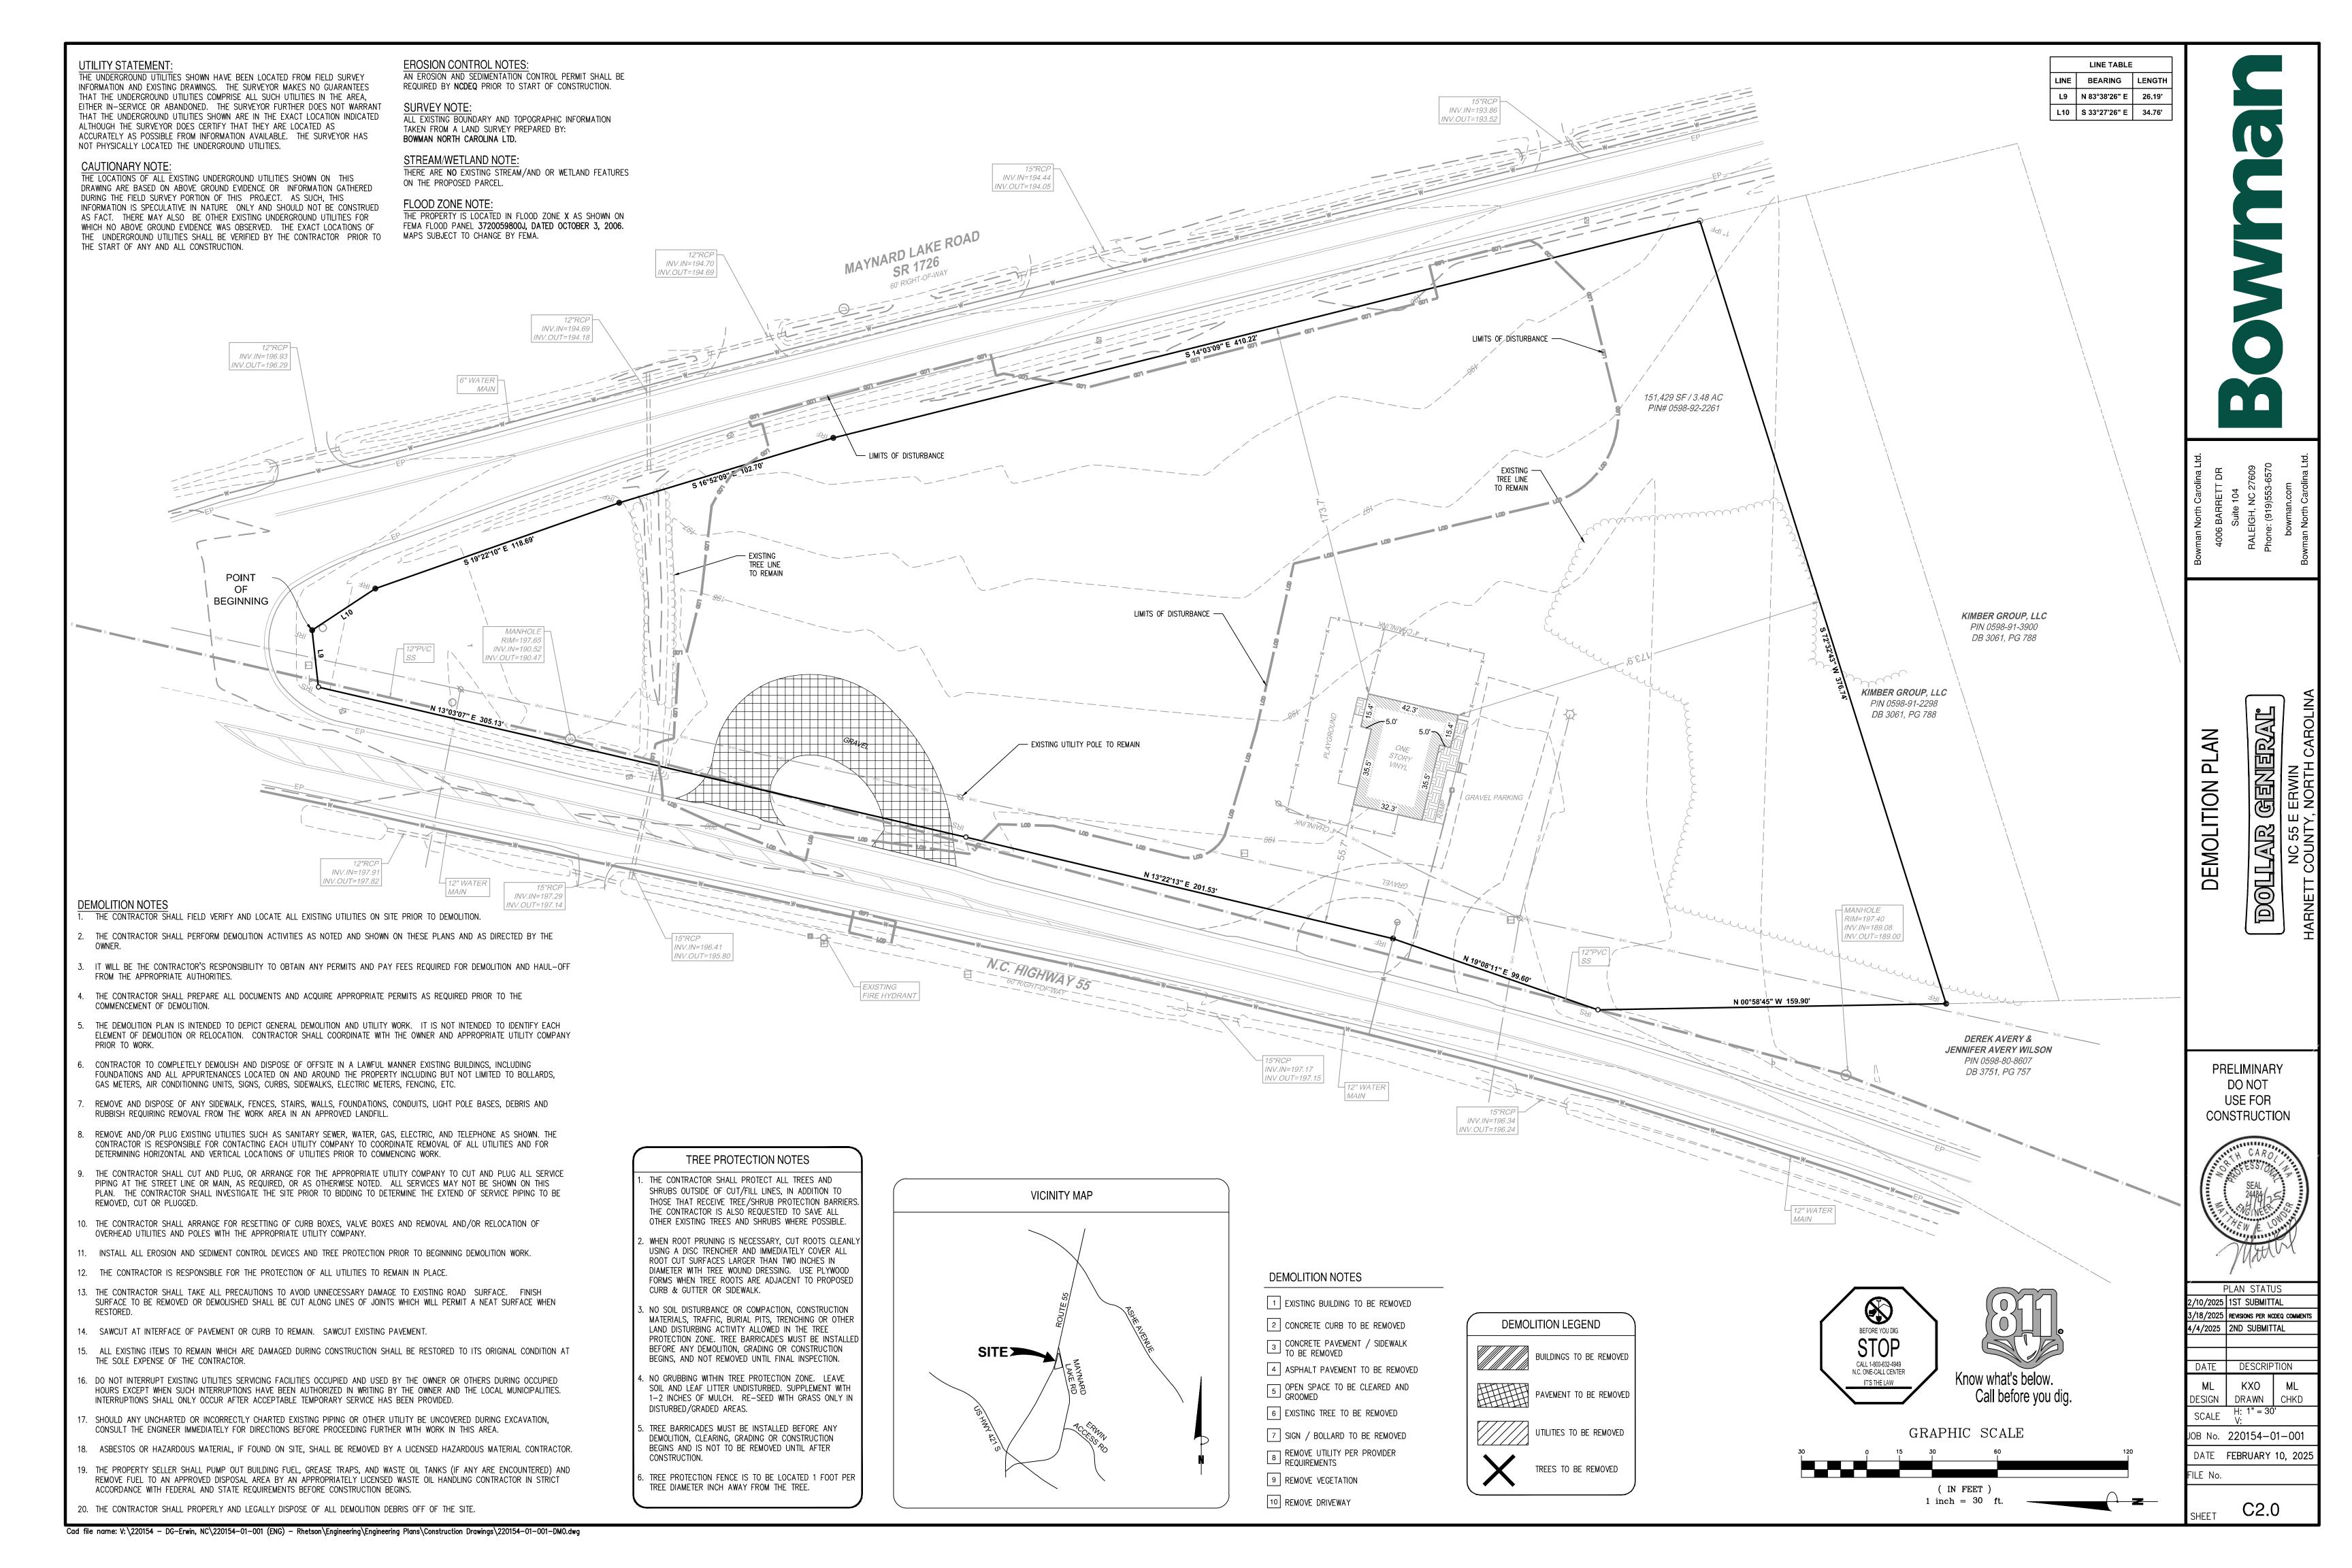

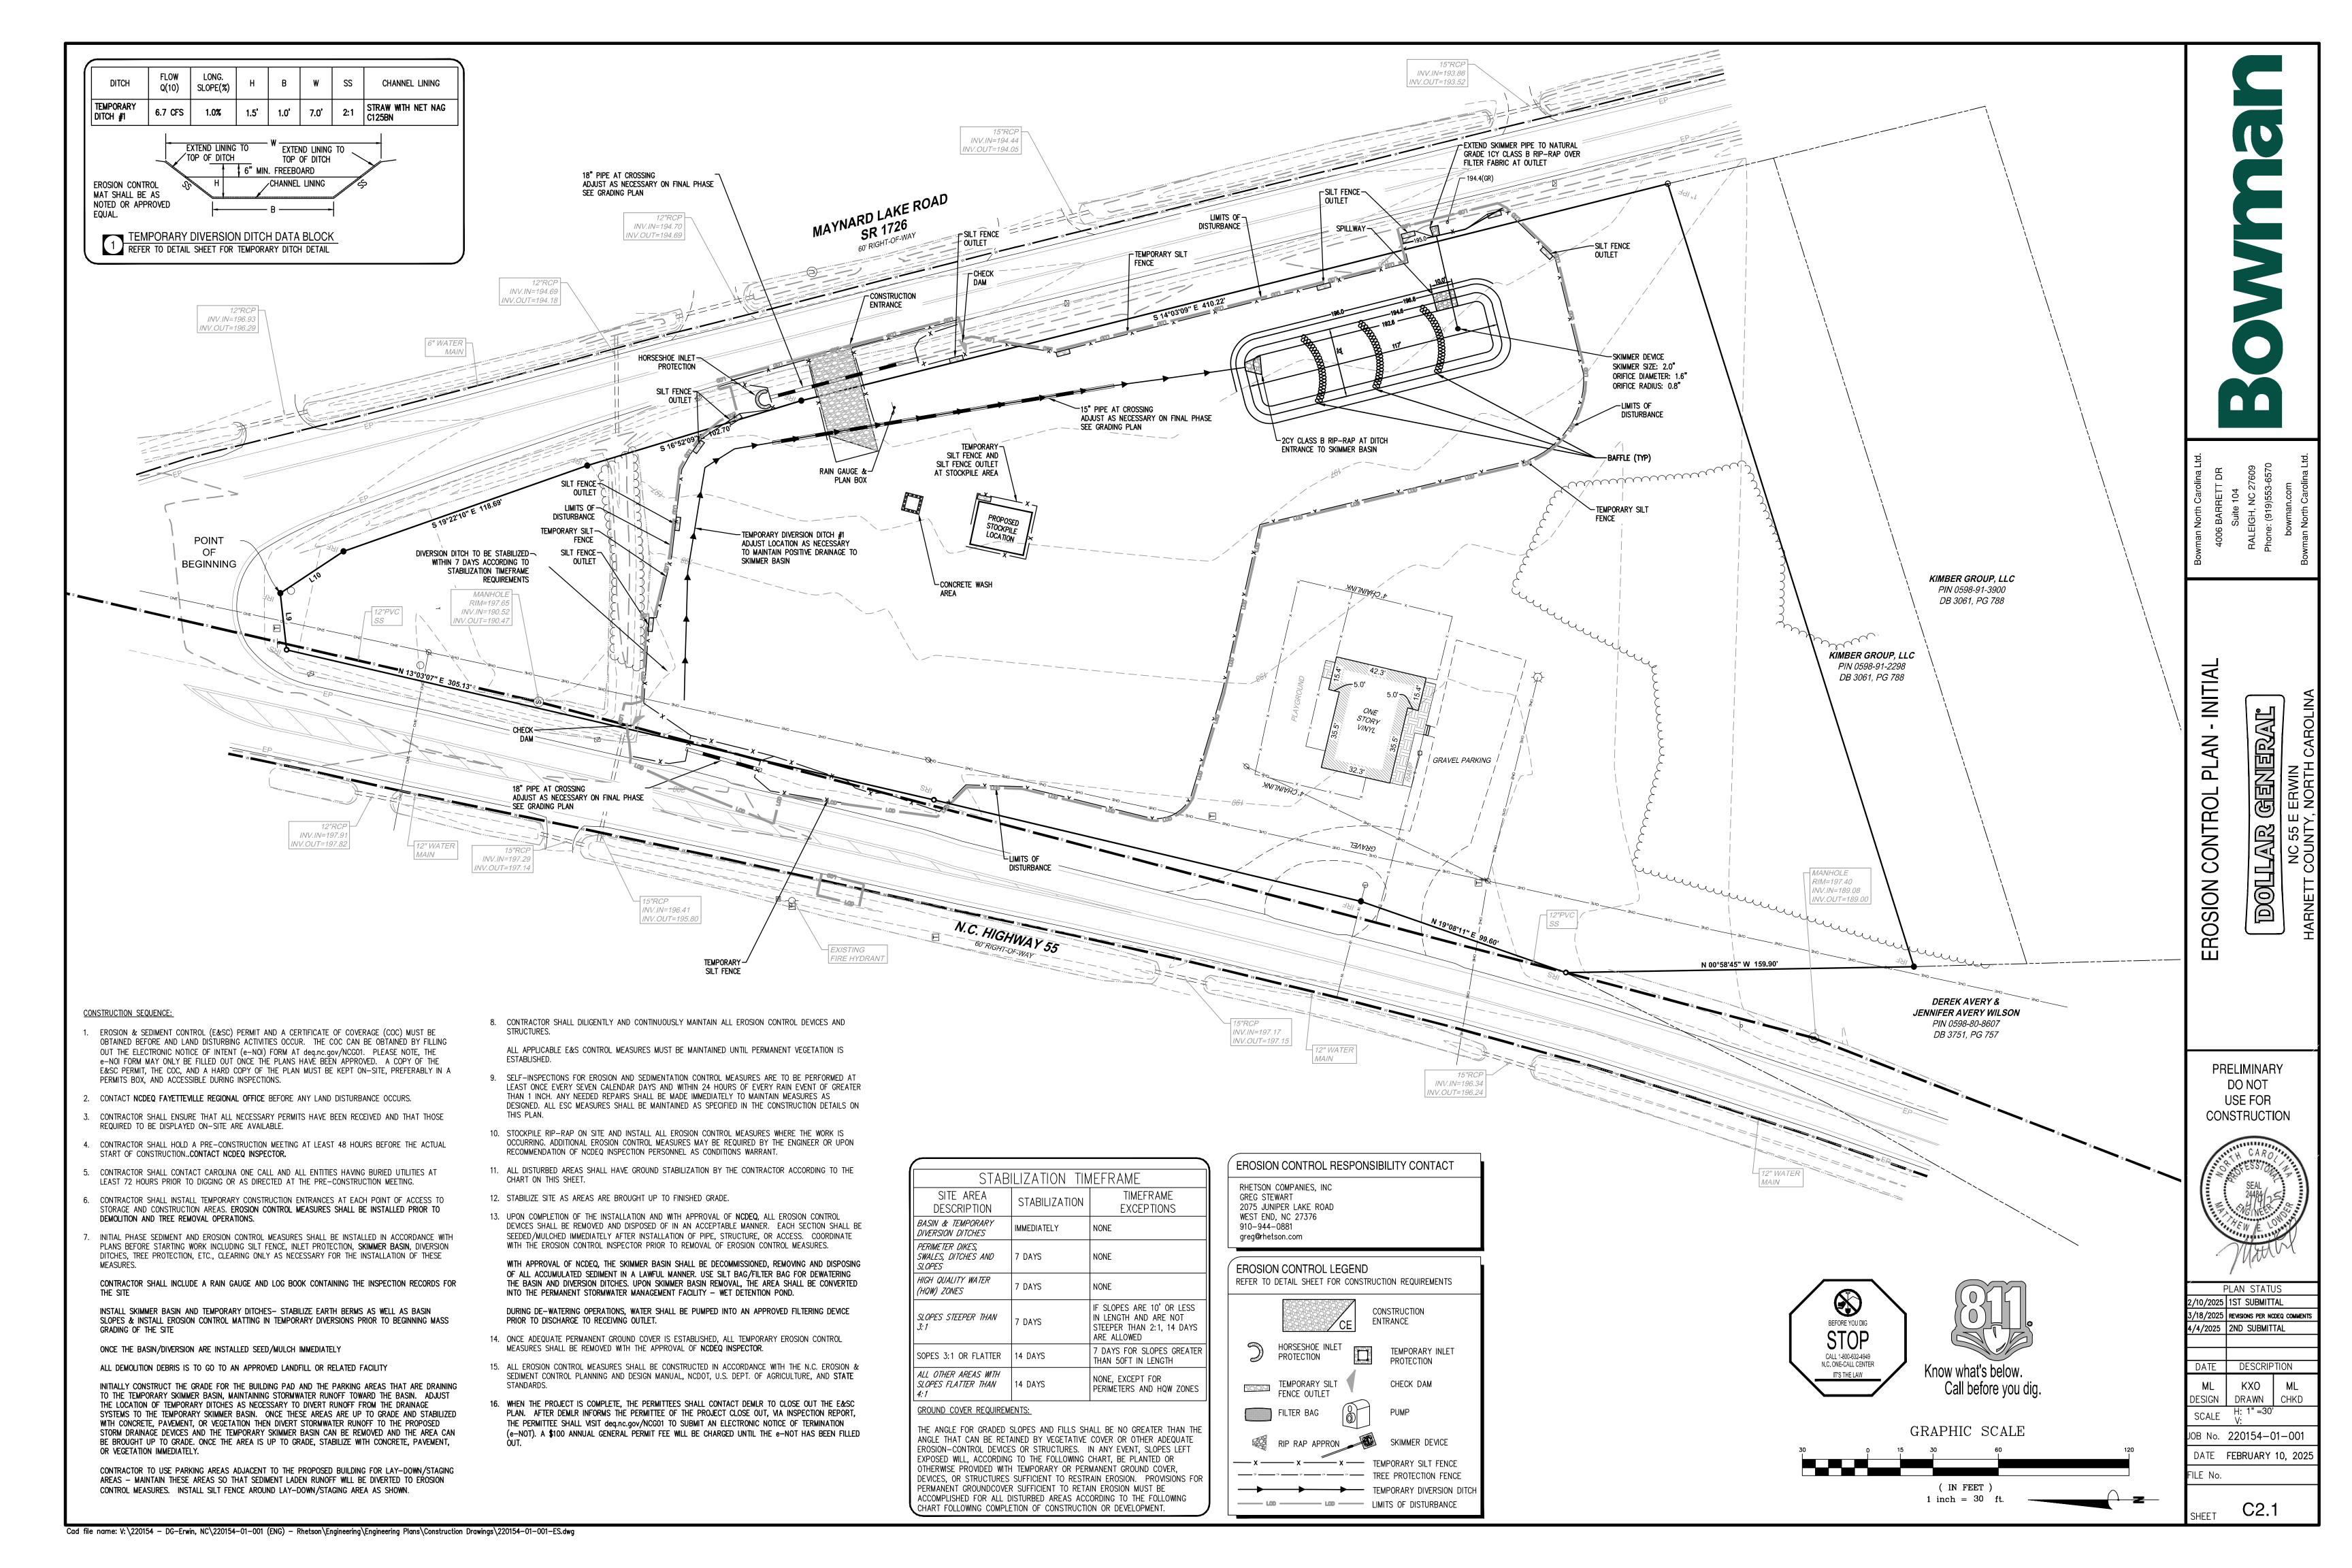

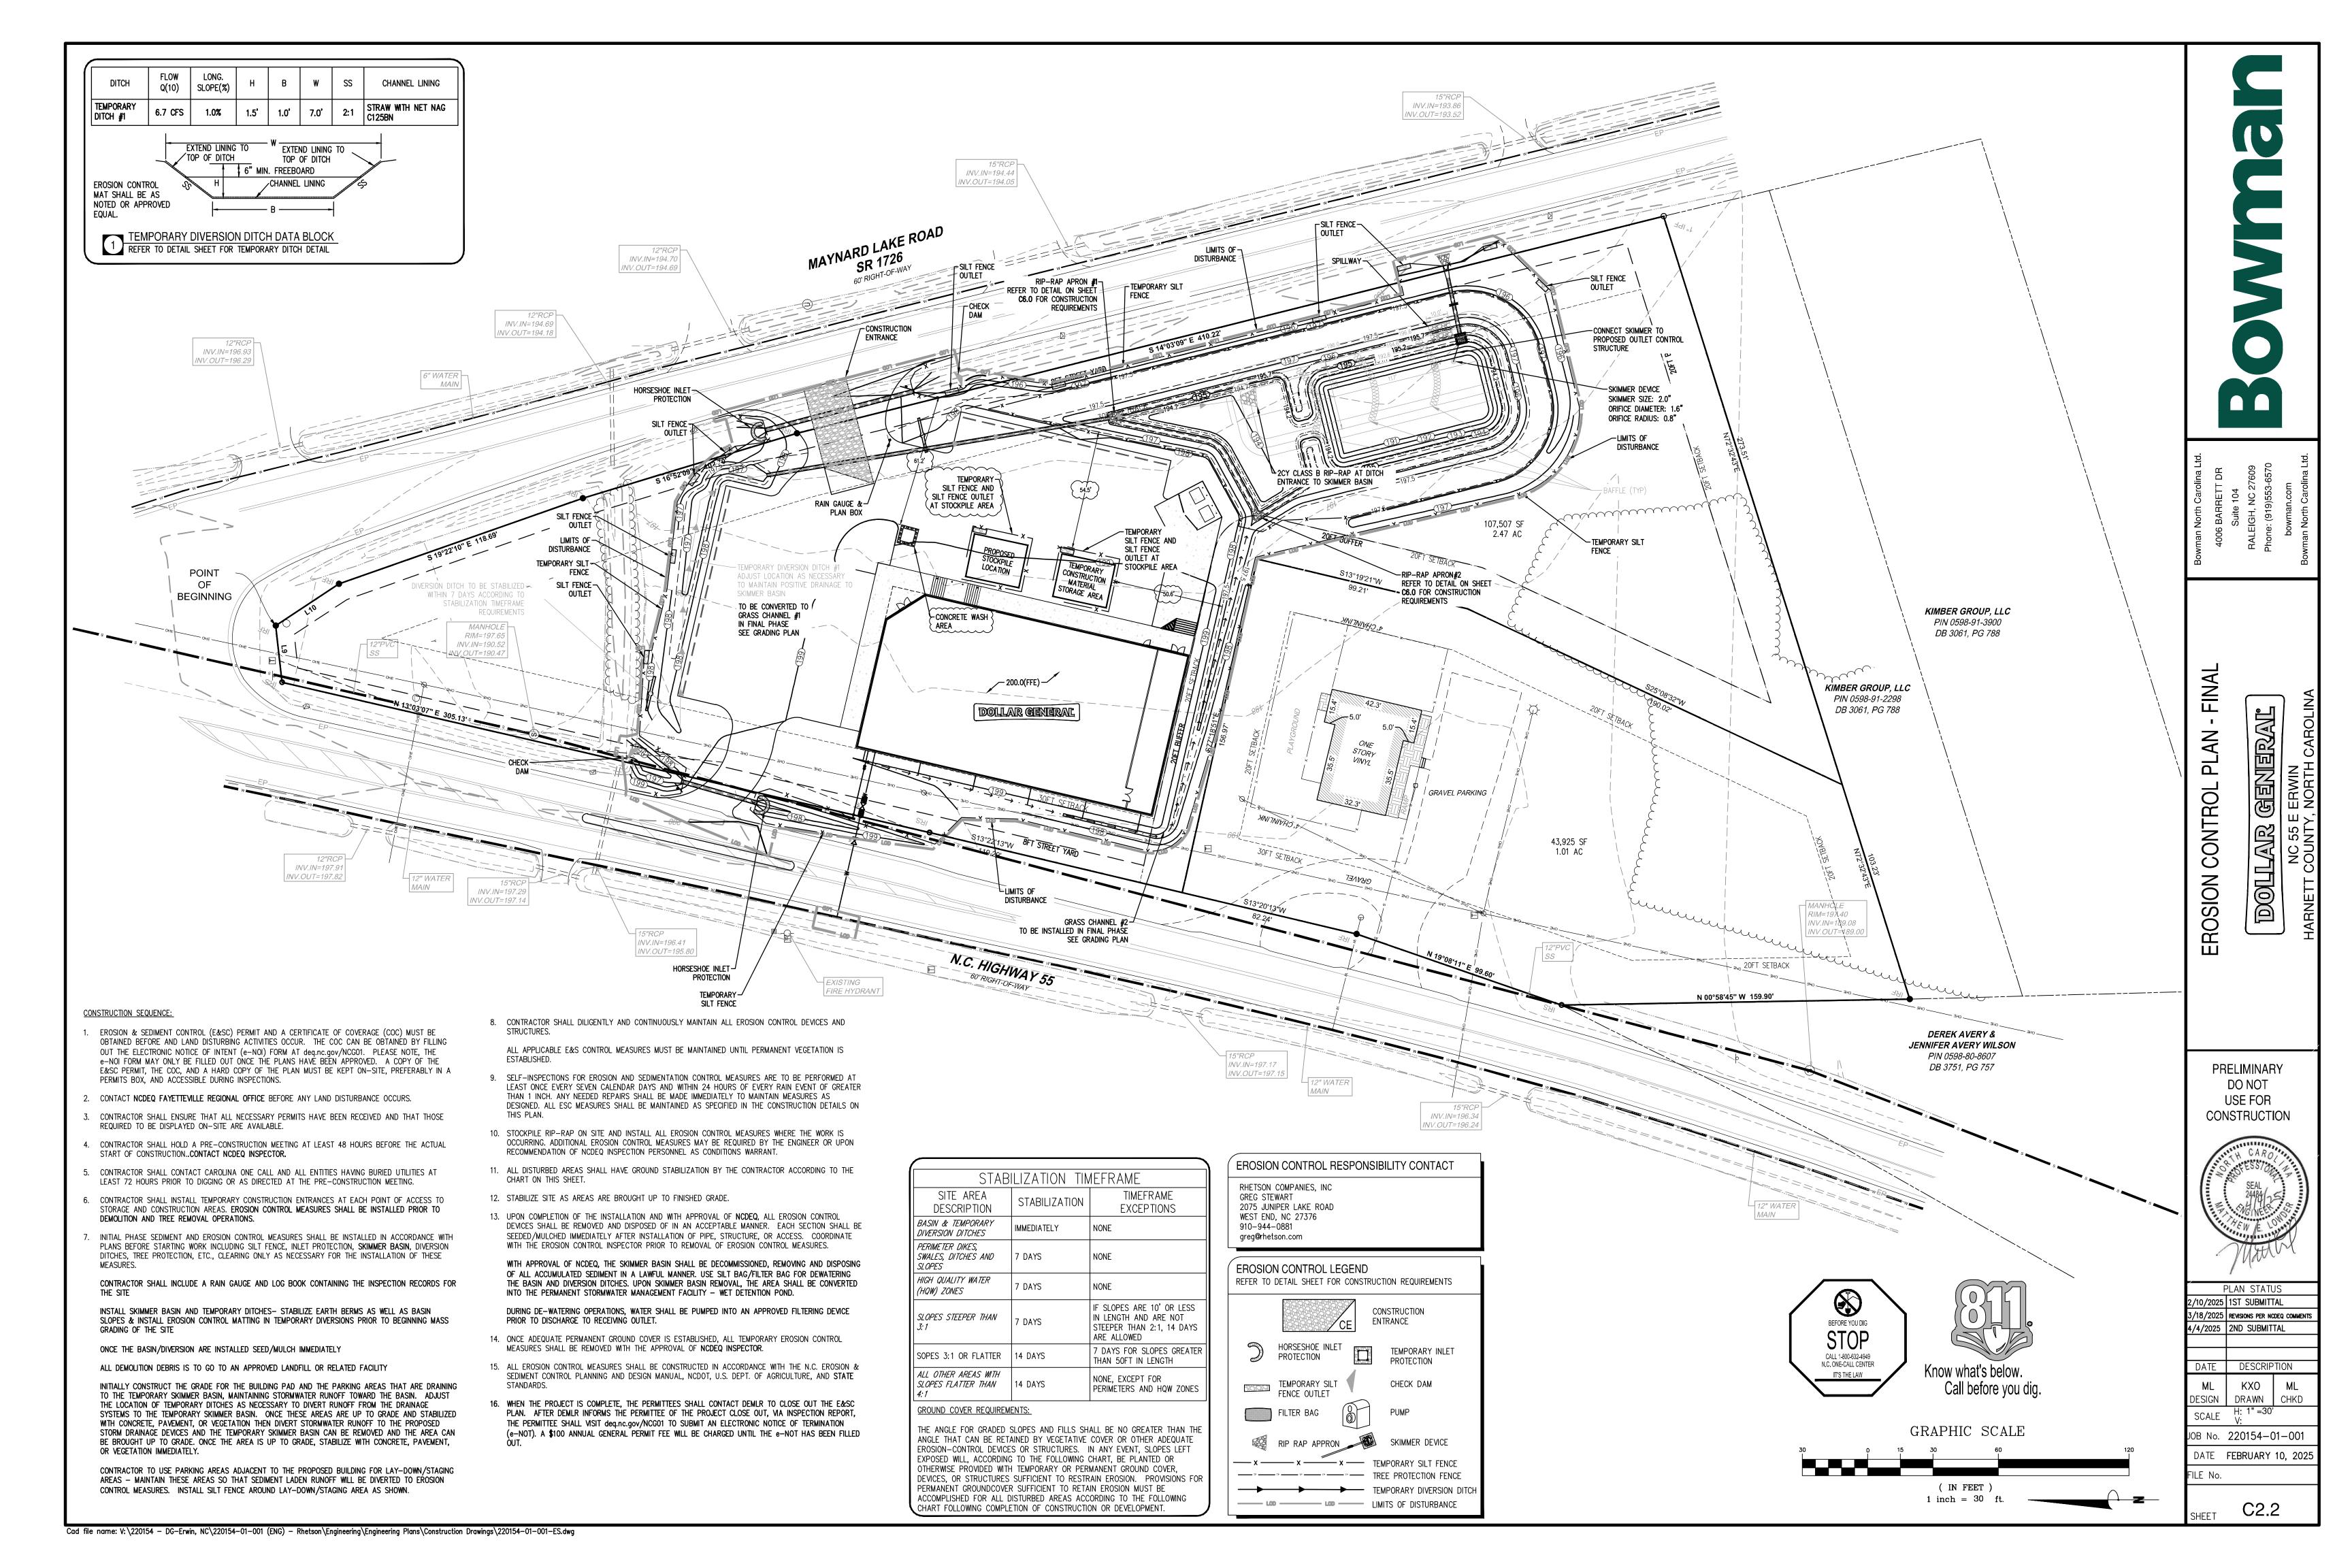

REFER TO DETAIL SHEETS FOR TEMPORARY AND PERMANENT SEEDING SCHEDULES FOR PROVIDING GROUND COVER THE FOR THE DEVELOPMENT.

BASIN NOTES:

SKIMMER BASIN DESIGN BASED ON 3 DAYS TO DRAIN.

BASIN AND DIVERSIONS SHALL BE SEEDED, MULCHED AND ANCHORED/LINED AND PINNED UPON INSTALLATION OF MEASURES.

EROSION CONTROL MEASURES TO BE INSTALLED PRIOR TO THE BEGINNING OF DEMOLITION & TREE REMOVAL

NOTE TO CONTRACTOR

IHE CONTRACTOR SHALL NOTIFY THE PROJECT ENGINEER AND THE EROSION CONTROL INSPECTOR OF THE LOCATION OF ANY OFF-SITE BORROW SOURCE OR OFF-SITE WASTE MATERIAL DISPOSAL SITE. OFF-SITE DISTURBANCES COUNT TOWARDS THE OVERALL PROJECT DISTURBED AREA AND MUST BE COVERED BY THE PERMIT FOR THIS PROJECT AND/OR THE PERMIT FROM ANOTHER ACTIVE NCDEQ PERMITTED SITE THAT IS APPROPRIATE FOR THE INTENDED USE (I.E. APPLICABLE MINING REQUIREMENTS). NO OFF-SITE ACTIVITIES SHALL OCCUR UNTIL THE PERMIT FOR THIS PROJECT HAS BEEN MODIFIED TO INCLUDE THE AFFECTED AREAS OR IT HAS BEEN VERIFIED WITH THE EROSION CONTROL INSPECTOR THAT THE OFF-SITE AREAS ARE COVERED UNDER ACTIVE APPLICABLE NCDEQ PERMITS.

EROSION CONTROL NOTES

TOTAL AREA DISTURBED = 1.65 ACRES TOTAL SITE AREA = 2.47 ACRES

SOIL TYPES =

Co - COXVILLE LOAM MaA - MARLBORO SANDY LOAM NoB - NORFOLK SANDY LOAM

- 2. UNLESS OTHERWISE INDICATED, ALL VEGETATIVE AND STRUCTURAL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE CONSTRUCTED AND MAINTAINED IN ACCORDANCE WITH THE MINIMUM STANDARDS AND SPECIFICATIONS OF THE NCDEQ EROSION AND SEDIMENT CONTROL HANDBOOK
- 3. THE CONTRACTOR SHALL INSTALL AND MAINTAIN THROUGHOUT THE PROJECT CONSTRUCTION ALL EROSION CONTROL MEASURES SHOWN WITHIN THESE PLANS IN ACCORDANCE WITH APPLICABLE NORTH CAROLINA EROSION AND SEDIMENT CONTROL REGULATIONS.
- 4. CONSTRUCTION WORK SHALL BE IN COMPLIANCE WITH REGULATIONS OF THE NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) STORM WATER GENERAL PERMIT.
- 5. EROSION AND SEDIMENT CONTROL MEASURES ARE TO BE PLACED PRIOR TO CLEARING AND/OR LAND DISTURBANCE.
- 6. A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN AND PERMIT SHALL BE MAINTAINED ON THE SITE AT ALL TIMES.
- 7. THE CONTRACTOR SHALL DILIGENTLY AND CONTINUOUSLY MAINTAIN ALL EROSION CONTROL DEVICES AND STRUCTURES TO MINIMIZE EROSION. THE CONTRACTOR SHALL MAINTAIN CLOSE CONTACT WITH THE NCDEQ EROSION CONTROL INSPECTOR SO THAT PERIODIC INSPECTIONS CAN BE PERFORMED AT APPROPRIATE STAGES OF CONSTRUCTION.
- 8. APPROVAL OF THIS PLAN IS NOT AN AUTHORIZATION TO GRADE ADJACENT PROPERTIES. WHEN FIELD CONDITIONS WARRANT OFF-SITE GRADING, PERMISSION MUST BE OBTAINED FROM THE AFFECTED PROPERTY OWNERS. A REVISED PLAN SHOWING OFF-SITE IMPACTS SHOULD BE SUBMITTED AND APPROVED PRIOR TO ANY OFF-SITE GRADING. CONTACT PROJECT ENGINEER AND PROJECT EROSION CONTROL INSPECTOR TO ENSURE ADDITIONAL EROSION CONTROL MEASURES ARE INSTALLED PRIOR TO OFF-SITE GRADING.
- 9. PRIOR TO COMMENCING LAND DISTURBING ACTIVITIES IN AREAS OTHER THAN INDICATED ON THESE PLANS (INCLUDING, BUT NOT LIMITED TO OFF-SITE BORROW OR WASTE AREAS, STAGING OR STORAGE AREAS), THE CONTRACTOR SHALL PREPARE AND SUBMIT A SUPPLEMENTARY EROSION CONTROL PLAN TO THE OWNER FOR REVIEW AND TO NCDEQ FOR APPROVAL. CONTRACTOR SHALL PAY ALL FEES REQUIRED AND SHALL INSTALL NECESSARY MEASURES AT NO SEPARATE PAYMENT. THE CONTRACTOR SHALL PROVIDE THE OWNER AND THE ENGINEER A COPY OF THE AMENDED PERMIT.
- 10. EROSION AND SEDIMENT CONTROL MEASURES SHALL BE MAINTAINED CONTINUOUSLY, RELOCATED WHEN AND AS NECESSARY, AND SHALL BE CHECKED AFTER EVERY RAINFALL. SEEDED AREAS SHALL BE CHECKED REGULARLY AND SHALL BE WATERED, FERTILIZED, RE-EEDED AND MULCHED AS NECESSARY TO OBTAIN A DENSE STAND OF GRASS.
- 11. STABILIZATION IS THE BEST FORM OF EROSION CONTROL. ALL DISTURBED AREAS WHICH ARE NOT OTHERWISE STABILIZED SHALL BE TOP SOILED AND SEEDED, TEMPORARILY OR PERMANENTLY IN ACCORDANCE WITH THE NCDEQ SEDIMENT CONTROL REGULATIONS. PERMANENT SEEDING AND GRASS ESTABLISHMENT IS REQUIRED PRIOR TO PROJECT COMPLETION AND ACCEPTANCE.
- 12. WHEN A CRUSHED STONE CONSTRUCTION ENTRANCE HAS BEEN COVERED WITH SOIL OR HAS BEEN PUSHED INTO THE SOIL BY CONSTRUCTION TRAFFIC, IT SHALL BE REPLACED WITH A DEPTH OF STONE EQUAL TO THAT OF THE ORIGINAL APPLICATION.
- 13. TEMPORARY GRAVEL CONSTRUCTION ENTRANCE SHALL BE REQUIRED AT ALL CONSTRUCTION STAGING AREA ENTRANCES AND ALL CONSTRUCTION ACCESS LOCATIONS INTO NON-PAVED AREA. SIX INCHES OF STONE SHALL BE USED FOR THE TEMPORARY GRAVEL CONSTRUCTION ENTRANCE.
- 14. ALL DRAINAGE INLETS SHALL BE PROTECTED FROM SILTATION. INEFFECTIVE PROTECTION DEVICES SHALL BE IMMEDIATELY REPLACED AND THE INLET CLEANED. FLUSHING IS NOT AN ACCEPTABLE METHOD OF
- 15. SEDIMENT BASINS AND TRAPS, PERIMETER DIKES, SEDIMENT BARRIERS AND OTHER MEASURES INTENDED TO TRAP SEDIMENT SHALL BE CONSTRUCTED AS A FIRST STEP IN ANY LAND-DISTURBING ACTIVITY AND SHALL BE MADE FUNCTIONAL BEFORE UP-SLOPE LAND DISTURBANCE TAKES PLACE.
- 16. ALL DISTURBED AREAS ARE TO DRAIN TO APPROVED SEDIMENT CONTROL MEASURES AT ALL TIMES DURING LAND DISTURBING ACTIVITIES AND DURING SITE DEVELOPMENT UNTIL FINAL STABILIZATION IS COMPLETED.
- 17. DURING DE-WATERING OPERATIONS, WATER SHALL BE PUMPED INTO AN APPROVED FILTERING DEVICE PRIOR TO DISCHARGE TO RECEIVING OUTLET.
- 18. THE CONTRACTOR SHALL INSPECT ALL EROSION CONTROL MEASURES PERIODICALLY AND AFTER EACH RUNOFF-PRODUCING EVENT. ANY NECESSARY REPAIRS OR CLEANUP TO MAINTAIN THE EFFECTIVENESS OF THE EROSION CONTROL DEVICES SHALL BE MADE IMMEDIATELY.

EROSION CONTROL NARRATIVE:

DOLLAR GENERAL, TOWN OF ERWIN, HARNETT COUNTY

CONTRACTOR WILL FIRST INSTALL THE CONSTRUCTION ENTRANCE. THE CONTRACTOR SHALL THEN MOBILIZE ON SITE AND INSTALL THE TEMPORARY EROSION CONTROL DEVICES INCLUDING SILT FENCE, INLET PROTECTION, SKIMMER BASIN, AND OTHER DEVICES IN ACCORDANCE WITH THE PLANS (CLEARING ONLY AS NECESSARY TO INSTALL THESE ITEMS). BEGIN DEMOLITION, CLEARING AND SITE GRADING OPERATIONS. STABILIZATION OF EARTHEN STRUCTURES IS REQUIRED IMMEDIATELY AFTER INSTALLATION. THE ON-SITE STORM SEWER SYSTEM CAN NOW BE INSTALLED. IMMEDIATELY AFTER AN INLET IS INSTALLED. INLET PROTECTION SHALL BE PROPERLY INSTALLED ON THE STRUCTURE. THE ON-SITE SANITARY SEWER AND WATER SYSTEMS MAY ALSO BE INSTALLED ONCE THE SITE IS BROUGHT UP TO GRADE. THE SITE PAD WILL BE PREPARED FOR THE PROPOSED BUILDING. THE ROUGH GRADE WILL THEN BE ESTABLISHED FOR THE SITE. INSTALLATION OF CURB AND GUTTER WILL THEN BE PERFORMED. BASE STONE WILL THEN BE PLACED AND FINE GRADED. ALL DISTURBED AREAS WILL BE DRESSED AND SEEDED. REMOVE ALL INLET PROTECTION FROM STORM STRUCTURES WHEN PAVING IS TO BEGIN. PAVING AND STRIPING WILL THEN BE COMPLETED. FINALIZE STORMWATER POND STRUCTURE ONCE UPSTREAM AREAS HAVE BEEN STABILIZED (REMOVE ACCUMULATED SEDIMENT). ALL LANDSCAPING WILL BE COMPLETED. THE ON-SITE STORM SEWER SYSTEM SHALL BE CLEANED OF ANY ACCUMULATED SEDIMENT WHICH SHALL BE DISPOSED OF IN A LAWFUL MANNER. ALL ACCUMULATED SEDIMENT BEHIND SILT FENCE AND OTHER SEDIMENT DEVICES SHALL BE REMOVED AND DISPOSED OF IN A LAWFUL MANNER. ACCORDING TO THE GROUND STABILIZATION REQUIREMENTS ON THIS SHEET, REMOVE ALL REMAINING SEDIMENT CONTROL MEASURES FROM THE SITE. CONTRACTOR SHALL MINIMIZE THE LENGTH OF TIME BETWEEN INITIAL LAND DISTURBANCE AND FINAL VEGETATION STABILIZATION OF THE SITE.

THE PROPOSED EROSION AND SEDIMENT CONTROL MEASURES ARE INTENDED TO TRAP ANY STORMWATER RUNOFF FROM THE CONSTRUCTION SITE AND DETAIN IT LONG ENOUGH FOR SEDIMENT AND POLLUTANTS TO SETTLE OUT OF THE STORMWATER BEFORE DISCHARGE. VARIOUS EROSION CONTROL MEASURES ARE USED TO PREVENT POLLUTANT-LADEN STORMWATER RUNOFF FROM FLOWING ONTO ADJACENT PROPERTIES.

- THE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL INSPECTIONS, CERTIFICATIONS, EQUIPMENT, ETC. THAT MAY BE REQUIRED.
- 2. THE CONTRACTOR SHALL NOTE THAT THE DRAWINGS ARE SCHEMATIC IN NATURE AND DO NOT SHOW EVERY OFFSET, TRANSITION, FITTING, ETC. THAT MAY BE REQUIRED FOR A COMPLETE AND WORKING
- 3. THE ENGINEER AND/OR OWNER DISCLAIM ANY ROLE IN THE CONSTRUCTION MEANS AND METHODS ASSOCIATED WITH THE PROJECT AS SET FORTH IN THESE PLANS.
- 4. CONTRACTOR SHALL MAINTAIN AN "AS BUILT" SET OF DRAWINGS TO RECORD THE EXACT LOCATION OF ALL PIPING PRIOR TO CONCEALMENT. DRAWINGS SHALL BE GIVEN TO THE ENGINEER UPON COMPLETION OF THE PROJECT WITH A COPY OF THE TRANSMITTAL LETTER TO THE OWNER.
- 5. IF DEPARTURES FROM THE SPECIFICATIONS OR DRAWINGS ARE DEEMED NECESSARY BY THE CONTRACTOR, DETAILS OF SUCH DEPARTURES AND REASONS THEREOF SHALL BE SUBMITTED TO THE ENGINEER FOR REVIEW. NO DEPARTURES FROM THE CONTRACT DOCUMENTS SHALL BE MADE WITHOUT THE WRITTEN PERMISSION OF THE OWNER.
- 6. THE CONTRACTOR MUST, AT ALL TIMES, KEEP THE PREMISES FREE FROM ACCUMULATIONS OF WASTE MATERIALS OR RUBBISH CAUSED BY HIM, HIS EMPLOYEES OR HIS WORK. ALL DEBRIS SHALL BE REMOVED FROM THE PROJECT SITE ON A DAILY BASIS.

SEDIMENT & EROSION CONTROL NOTES:

- THE EROSION AND SEDIMENTATION CONTROL MEASURES (BMPS) WERE DESIGNED USING THE NORTH CAROLINA NCDEQ REQUIREMENTS AND SHALL BE INSTALLED ACCORDINGLY. CONTRACTOR SHALL PERFORM ALL ACTIVITIES IN STRICT COMPLIANCE WITH THE NORTH CAROLINA NPDES GENERAL PERMIT FOR STORM WATER DISCHARGES FROM LARGE AND SMALL CONSTRUCTION ACTIVITIES (GENERAL PERMIT).
- 2. REFER TO THE EROSION AND SEDIMENT CONTROL DETAIL SHEETS FOR EROSION CONTROL DETAILS AND DESIGN TABLES FOR SEDIMENT BASINS, DIVERSION DITCHES, AND CULVERTS, SLOPE DRAINS, RIP-RAP APRONS AND OTHER EROSION CONTROL MEASURES.
- 3. EXISTING BOUNDARIES, TOPOGRAPHY, 100-YR FLOODPLAIN, UTILITY AND ROAD INFORMATION TAKEN FROM AN EXISTING CONDITIONS SURVEY. ALL EXISTING INFORMATION IS TO BE FIELD VERIFIED BY THE
- 4. SEE THE LANDSCAPE PLAN FOR LOCATIONS OF PROPOSED PLANTINGS AND FINAL STABILIZATION.
- 5. TEMPORARY DIVERSION DITCHES AND BERMS SHALL BE MAINTAINED AS THE SITE IS BROUGHT TO
- 6. DILIGENTLY AND CONTINUOUSLY MAINTAIN ALL EROSION CONTROL DEVICES AND STRUCTURES TO MINIMIZE EROSION. THE CONTRACTOR SHALL MAINTAIN CLOSE CONTACT WITH THE EROSION CONTROL INSPECTORS SO THAT PERIODIC INSPECTIONS CAN BE PERFORMED AT APPROPRIATE STAGES OF
- 7. SEE THE GENERAL NOTES SHEET AND THE GRADING AND DRAINAGE PLAN FOR OTHER NOTES REGARDING GRADING ACTIVITIES.
- 8. SEE SITE PLAN, GRADING AND DRAINAGE PLAN, UTILITY PLAN, PLANTING PLAN AND OTHER PLAN SHEETS FOR DETAILED DESIGN INFORMATION OF PERMANENT SITE APPURTENANCES SHOWN ON THIS
- 9. WHERE THE LIMITS OF DISTURBANCE AND TEMPORARY FENCE (SF. SF-PF, OR PF) LIMITS ARE ADJACENT, THE TEMPORARY FENCE LINE IS THE LIMITS OF DISTURBANCE. THE LINE TYPES ARE SHOWN SEPARATED FOR ILLUSTRATIVE PURPOSES ONLY.
- 10. CONTRACTOR SHALL NOT DISTURB ANY EXISTING VEGETATIVE GROUND COVER OR TREES OUTSIDE OF THE LIMITS OF DISTURBANCE OR WITHIN ANY REQUIRED BUFFER LIMITS UNLESS OTHERWISE NOTED OR ILLUSTRATED.
- 11. PROVIDE CONTROLS OF POLLUTANTS, INCLUDING, BUT NOT LIMITED TO DUST CONTROL, DE-WATERING, SOLID WASTE DISPOSAL, AND HAZARDOUS MATERIALS.
- 12. CLEAR ONLY AS REQUIRED TO INSTALL EROSION AND SEDIMENTATION CONTROL MEASURES. MASS CLEARING AND GRUBBING CAN BEGIN ONLY AFTER ALL DOWNSTREAM MEASURES HAVE BEEN INSTALLED.

DITCHES AND SLOPE DRAINS. CONTRACTOR SHALL MAINTAIN AND RELOCATE DIVERSION DITCHES AND

SLOPES DRAINS TO ENSURE STORM WATER RUNOFF DOES NOT ERODE THE FACE OF FINAL SLOPES.

- 13. USE ROCK OR WASHED STONE TO BRING CONSTRUCTION EXIT TO GRADE. IMPLEMENT WHEEL WASHES AS NECESSARY THROUGHOUT ALL PHASES OF CONSTRUCTION. 14. DIVERT STORM WATER RUNOFF OFF THE FACE OF THE SEDIMENT BASIN SLOPES USING DIVERSION
- 15. MAINTAIN POSITIVE FLOW TO THE SEDIMENT BASINS THROUGHOUT ALL PHASES OF CONSTRUCTION. PLACE EXCAVATED SOILS ALONG DOWNSTREAM EDGE OF THE DIVERSION DITCHES TO PROVIDE
- 16. REFER TO THE GRADING AND DRAINAGE PLAN FOR FINAL SITE AND PAVEMENT GRADES AND ELEVATIONS OF THE PROPOSED STORM SEWER SYSTEMS.
- 17. LAND DISTURBING ACTIVITIES SHALL NOT COMMENCE UNTIL APPROVAL TO DO SO HAS BEEN RECEIVED BY GOVERNING AUTHORITIES. THE GENERAL CONTRACTOR SHALL STRICTLY ADHERE TO THE APPROVED EROSION AND SEDIMENT CONTROL DRAWINGS DURING CONSTRUCTION OPERATIONS.
- 18. GENERAL CONTRACTOR SHALL COMPLY WITH ALL STATE AND LOCAL ORDINANCES THAT APPLY.
- 19. ALL WORK SHALL BE CONFINED TO PERMIT LIMITS SHOWN ON PLANS. UNLESS OTHERWISE NOTED, THE SITE PLAN PROPERTY LIMITS SHALL BE CONSIDERED THE PERMIT LIMITS.
- 20. SUFFICIENT EROSION CONTROL PRACTICES MUST BE INSTALLED AND MAINTAINED TO RETAIN SEDIMENT WITHIN THE BOUNDARIES OF THE SITE.
- 21. ADDITIONAL EROSION CONTROL MEASURES OR SILT BARRIERS TO BE PLACED AS SHOWN AND/OR DIRECTED BY THE PROJECT ENGINEER AND/OR LOCAL JURISDICTIONAL INSPECTOR.
- 22. FOR ALL CONSTRUCTION ALONG AND/OR ACROSS WATERWAYS, BANK PROTECTION AND STABILIZATION SHALL BE REQUIRED AS PER LOCAL JURISDICTIONAL EROSION CONTROL LAWS.
- 23. ALL TREE PROTECTION AND EROSION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO COMMENCING CONSTRUCTION AND SHALL BE MAINTAINED IN PROPER WORKING ORDER UNTIL ALL DISTURBED AREAS ARE STABILIZED AND GROUND COVER IS ESTABLISHED. CONSTRUCTION ENTRANCE PADS SHALL BE INSTALLED BY THE CONTRACTOR AT CONSTRUCTION ACCESS POINTS PRIOR TO LAND DISTURBANCE.
- 24. ALL EASEMENTS DISTURBED MUST BE DRESSED AND GRASSED TO CONTROL EROSION IN ACCORDANCE WITH EASEMENT PLATS PRIOR TO ACCEPTANCE.
- 25. CONSTRUCTION LIMITS SHALL NOT BE EXCEEDED WITHOUT THE APPROVAL OF NCDEQ INSPECTOR.

As of April 1, 2019, all new construction activities are required to complete and submit an electronic Stormwater General Permit. This form MUST be submitted prior to the commencement of any land disturbing activity on the above named project. The NOI form may be accessed at deq.nc.gov/NCG01.

After you submit a complete and correct NOI Form, a COC will be emailed to you within three business 1, 2019, a \$100 fee will be charged annually. This fee is to be sent to the DEMLR Stormwater Central Office staff in Raleigh.

Title 15A NCAC 4B .0118(a) and the NCG01 permit require that the following documentation be kept on file

- The approved E&SC plan as well as any approved deviation.
- Records of inspections made during the previous 30 days.
- 4. The Certificate of Approval

NOTIFICATION OF COMBINED SELF-MONITORING AND SELF-INSPECTION FORM: THE SEDIMENTATION POLLUTION CONTROL ACT WAS AMENDED IN 2006 TO REQUIRE THAT PERSONS RESPONSIBLE FOR LAND-DISTURBING ACTIVITIES INSPECT A PROJECT AFTER EACH PHASE OF THE PROJECT TO MAKE SURE THAT THE APPROVED EROSION AND SEDIMENTATION CONTROL PLAN IS BEING FOLLOWED.

TO SIMPLIFY DOCUMENTATION OF SELF-INSPECTION REPORTS AND NPDES SELF-MONITORING REPORTS, DWQ AND DEMLR DEVELOPED A COMBINED FORM. THE SELF-INSPECTION PROGRAM IS SEPARATE FROM THE WEEKLY SELF-MONITORING PROGRAM OF THE NPDES STORMWATER PERMIT FOR CONSTRUCTION ACTIVITIES. THE FOCUS OF THE SELF-INSPECTION REPORT IS THE INSTALLATION AND MAINTENANCE OF EROSION AND SEDIMENTATION CONTROL MEASURES ACCORDING TO THE APPROVED PLAN. THE INSPECTIONS SHOULD BE CONDUCTED AFTER EACH PHASE OF THE PROJECT, AND CONTINUED UNTIL PERMANENT GROUND COVER IS

IF YOU HAVE QUESTIONS OR CANNOT ACCESS THE FORM, PLEASE CALL THE APPLICABLE NCDENR REGIONAL OFFICE: (RALEIGH: 919-791-4200) (FAYETTEVILLE: 910-433-3300) (WILMINGTON: 910-796-7215) (WASHINGTON: 252-946-6481) (WINSTON-SALEM: 336-771-5000) (MOORESVILLE: 704-663-1699)

TREE PROTECTION NOTES:

- WHEN ROOT PRUNING IS NECESSARY, CUT ROOTS CLEANLY USING A DISC TRENCHER AND IMMEDIATELY COVER ALL ROOT CUT SURFACES LARGER THAN TWO INCHES IN DIAMETER WITH TREE WOUND DRESSING.
- NO SOIL DISTURBANCE OR COMPACTION, CONSTRUCTION MATERIALS, TRAFFIC, BURIAL PITS, TRENCHING OR OTHER LAND DISTURBING ACTIVITY ALLOWED IN THE TREE PROTECTION ZONE. TREE BARRICADES
- 4. NO GRUBBING WITHIN TREE PROTECTION ZONE. LEAVE SOIL AND LEAF LITTER UNDISTURBED.
- 5. TREE BARRICADES MUST BE INSTALLED BEFORE ANY DEMOLITION, CLEARING, GRADING OR CONSTRUCTION BEGINS AND IS NOT TO BE REMOVED UNTIL AFTER CONSTRUCTION.
- 6. TREE PROTECTION FENCE IS TO BE LOCATED 1 FOOT PER TREE DIAMETER INCH AWAY FROM THE TREE.

NORTH CAROLINA CONSTRUCTION GENERAL PERMIT NOTE:

Notice of Intent (NOI) form requesting a Certificate of Coverage (COC) under the NCG010000 Construction Please direct questions about the NOI form to Annette Lucas at Annette.lucas@ncdenr.gov or Paul Clark at Paul.clark@ncdenr.gov.

days. Initially, DEMLR will not charge a fee for coverage under the NCG01 permit. However, on or after May

- at the job site:
- The NCG01 permit and the COC, once it is received.

RULES DETAILING THE DOCUMENTATION OF THESE INSPECTIONS TOOK EFFECT OCTOBER 1, 2010.

ESTABLISHED. THE FORM CAN BE ACCESSED AT: http://portal.ncdenr.org/web/lr/erosion

(ASHEVILLE: 828-296-4500).

- 1. THE CONTRACTOR SHALL PROTECT ALL TREES AND SHRUBS OUTSIDE OF CUT/FILL LINES, IN ADDITION TO THOSE THAT RECEIVE TREE/SHRUB PROTECTION BARRIERS. THE CONTRACTOR IS ALSO REQUESTED TO SAVE ALL OTHER EXISTING TREES AND SHRUBS WHERE POSSIBLE.
- USE PLYWOOD FORMS WHEN TREE ROOTS ARE ADJACENT TO PROPOSED CURB & GUTTER OR SIDEWALK.
- MUST BE INSTALLED BEFORE ANY DEMOLITION, GRADING OR CONSTRUCTION BEGINS, AND NOT REMOVED UNTIL FINAL INSPECTION.
- SUPPLEMENT WITH 1-2 INCHES OF MULCH. RE-SEED WITH GRASS ONLY IN DISTURBED/GRADED AREAS.

O

7

 \circ

NOISO

ď

PRELIMINARY DO NOT USE FOR CONSTRUCTION

7111001



3/18/2025 REVISIONS PER NCDEQ COMMEN 4/4/2025 | 2ND SUBMITTAL DATE | DESCRIPTION KXO | ML

DESIGN | DRAWN | CHKD

/10/2025 | 1ST SUBMITTAL

H: n/a SCALE JOB No. **220154-01-001** DATE FEBRUARY 10, 202

Implementing the details and specifications on this plan sheet will result in the construction activity being considered compliant with the Ground Stabilization and Materials Handling sections of the NCGO1 Construction General Permit (Sections E and F, respectively). The permittee shall comply with the Erosion and Sediment Control plan approved by the delegated authority having jurisdiction. All details and specifications shown on this sheet may not apply depending on site conditions and the delegated authority having jurisdiction.

| SECTION E: GROUND STABIL | IZATION | |
|--|--|---|
| SECTION E. GROOND STADIE | Required Ground Stabi | lization Timeframes |
| Site Area Description | Stabilize within this many calendar days after ceasing land disturbance | Timeframe variations |
| (a) Perimeter dikes, swales, ditches, and perimeter slopes | 7 | None |
| (b) High Quality Water (HQV Zones |) 7 | None |
| (c) Slopes steeper than 3:1 | 7 | |
| (d) Slopes 3:1 to 4:1 | 14 | -7 days for slopes greater than 50' in length and with slopes steeper than 4:1 -7 days for perimeter dikes, swales, ditches, perimeter slopes and HQW Zones -10 days for Falls Lake Watershed |

Note: After the permanent cessation of construction activities, any areas with temporary ground stabilization shall be converted to permanent ground stabilization as soon as practicable but in no case longer than 90 calendar days after the last land disturbing activity. Temporary ground stabilization shal be maintained in a manner to render the surface stable against accelerated erosion until permanent qround stabilization is achieved.

7 days for perimeter dikes, swales, ditches,

-10 days for Falls Lake Watershed unless the

erimeter slopes and HQW Zones

GROUND STABILIZATION SPECIFICATION

Stabilize the ground sufficiently so that rain will not dislodge the soil. Use one of the techniques in

- Temporary grass seed covered with straw or | Permanent grass seed covered with straw or other mulches and tackifiers Hydroseeding
- Rolled erosion control products with or without temporary grass seed Appropriately applied straw or other mulch
 Shrubs or other permanent plantings covered
- Plastic sheeting.
 - Hydroseeding with mulch Uniform and evenly distributed ground cover sufficient to restrain erosion Structural methods such as concrete, asphalt or retaining walls Rolled erosion control products with grass seed

other mulches and tackifiers

reinforcement matting

Geotextile fabrics such as permanent soil.

POLYACRYLAMIDES (PAMS) AND FLOCCULANTS

surrounded by secondary containment structures.

. Select flocculants that are appropriate for the soils being exposed during construction, selecting from the NC DWR List of Approved PAMS/Flocculants.

- Apply flocculants at or before the inlets to Erosion and Sediment Control Measures. Apply flocculants at the concentrations specified in the NC DWR List of Approved
- PAMS/Flocculants and in accordance with the manufacturer's instructions. Provide ponding area for containment of treated Stormwater before discharging offsite. Store flocculants in leak-proof containers that are kept under storm-resistant cover or

EQUIPMENT AND VEHICLE MAINTENANCE

Maintain vehicles and equipment to prevent discharge of fluids.

- Provide drip pans under any stored equipment. ldentify leaks and repair as soon as feasible, or remove leaking equipment from the project. Collect all spent fluids, store in separate containers and properly dispose as hazardous waste
- (recycle when possible). Remove leaking vehicles and construction equipment from service until the problem has been
- Bring used fuels, lubricants, coolants, hydraulic fluids and other petroleum products to a recycling

LITTER, BUILDING MATERIAL AND LAND CLEARING WASTE Never bury or burn waste. Place litter and debris in approved waste containers.

or disposal center that handles these materials.

- 2. Provide a sufficient number and size of waste containers (e.g dumpster, trash receptacle) on site to contain construction and domestic wastes.
- Locate waste containers at least 50 feet away from storm drain inlets and surface waters unless no other alternatives are reasonably available. . Locate waste containers on areas that do not receive substantial amounts of runoff from upland
- areas and does not drain directly to a storm drain, stream or wetland. Cover waste containers at the end of each workday and before storm events or provide secondar
- containment. Repair or replace damaged waste containers. Anchor all lightweight items in waste containers during times of high winds. Empty waste containers as needed to prevent overflow. Clean up immediately if containers
- Dispose waste off—site at an approved disposal facility. . On business days, clean up and dispose of waste in designated waste containers.

- Do not dump paint and other liquid waste into storm drains, streams or wetlands. Locate paint washouts at least 50 feet away from storm drain inlets and surface waters unless no other alternatives are reasonably available.
- Contain liquid wastes in a controlled area. Containment must be labeled, sized and placed appropriately for the needs of site. Prevent the discharge of soaps, solvents, detergents and other liquid wastes from construction

Install portable toilets on level ground, at least 50 feet away from storm drains, streams or wetlands unless there is no alternative reasonably available. If 50 foot offset is not attainable, provide relocation of portable toilet behind silt fence or place on a gravel pad and surround with

Provide staking or anchoring of portable toilets during periods of high winds or in high foot traffic Monitor portable toilets for leaking and properly dispose of any leaked material. Utilize a licensed sanitary waste hauler to remove leaking portable toilets and replace with properly operating unit.

EARTHEN STOCKPILE MANAGEMENT

temporary or permanent control needs.

Show stockpile locations on plans. Locate earthen-material stockpile areas at least 50 feet away from storm drain inlets, sediment basins, perimeter sediment controls and surface waters unless it can be shown no other alternatives are reasonably available.

Protect stockpile with silt fence installed along toe of slope with a minimum offset of five feet from the toe of stockpile. Provide stable stone access point when feasible. Stabilize stockpile within the timeframes provided on this sheet and in accordance with the approved plan and any additional requirements. Soil stabilization is defined as vegetative, physical or chemical coverage techniques that will restrain accelerated erosion on disturbed soils for

CLEARLY MARKED SIGNAGE NOTING DEVICE (18"X24" MIN.)

NOTES:
1. ACTUAL LOCATION DETERMINED IN FIELD

ABOVE GRADE WASHOUT STRUCTURE NOT TO SCALE

2. THE CONCRETE WASHOUT STRUCTURES SHALL BE THE CONCRETE WASHOUT STRUCTURES SHALL BE MAINTAINED WHEN THE LIQUID AND/OR SOLID REACHES MAINTAINED WHEN THE LIQUID AND/OR SOLID REACHES 75% OF THE STRUCTURES CAPACITY TO PROVIDE 75% OF THE STRUCTURES CAPACITY. ADEQUATE HOLDING CAPACITY WITH A MINIMUM 12 INCHES OF FREEBOARD. 3.CONCRETE WASHOUT STRUCTURE NEEDS TO BE CLEARY MARKED WITH SIGNAGE NOTING DEVICE. 3.CONCRETE WASHOUT STRUCTURE NEEDS TO BE

CLEARY MARKED WITH SIGNAGE NOTING DEVICE.

CONCRETE WASHOUTS

Do not discharge concrete or cement slurry from the site. Dispose of, or recycle settled, hardened concrete residue in accordance with local and state solid

- waste regulations and at an approved facility. Manage washout from mortar mixers in accordance with the above item and in addition place th mixer and associated materials on impervious barrier and within lot perimeter silt fence. Install temporary concrete washouts per local requirements, where applicable. If an alternate method or product is to be used, contact your approval authority for review and approval. local standard details are not available, use one of the two types of temporary concrete
- washouts provided on this detail. Do not use concrete washouts for dewatering or storing defective curb or sidewalk sections. Stormwater accumulated within the washout may not be pumped into or discharged to the storm drain system or receiving surface waters. Liquid waste must be pumped out and removed from
- Locate washouts at least 50 feet from storm drain inlets and surface waters unless it can be shown that no other alternatives are reasonably available. At a minimum, install protection of
- storm drain inlet(s) closest to the washout which could receive spills or overflow. Locate washouts in an easily accessible area, on level ground and install a stone entrance pad in front of the washout. Additional controls may be required by the approving authority.
- Install at least one sign directing concrete trucks to the washout within the project limits. Post signage on the washout itself to identify this location. Remove leavings from the washout when at approximately 75% capacity to limit overflow events.
- Replace the tarp, sand bags or other temporary structural components when no longer functional. When utilizing alternative or proprietary products, follow manufacturer's instructions. 10. At the completion of the concrete work, remove remaining leavings and dispose of in an approved disposal facility. Fill pit, if applicable, and stabilize any disturbance caused by removal of

ERBICIDES, PESTICIDES AND RODENTICIDES

- Store and apply herbicides, pesticides and rodenticides in accordance with label restrictions. Store herbicides, pesticides and rodenticides in their original containers with the label, which lists directions for use, ingredients and first aid steps in case of accidental poisoning.
- . Do not store herbicides, pesticides and rodenticides in areas where flooding is possible or where they may spill or leak into wells, stormwater drains, ground water or surface water. If a spill occurs, clean area immediately.
- . Do not stockpile these materials onsite.

HAZARDOUS AND TOXIC WASTE

Create designated hazardous waste collection areas on—site.

Place hazardous waste containers under cover or in secondary containment. Do not store hazardous chemicals, drums or bagged materials directly on the ground.

NCG01 GROUND STABILIZATION AND MATERIALS HANDLING

EFFECTIVE: 04/01/19

PART III SELF-INSPECTION, RECORDKEEPING AND REPORTING

Self-inspections are required during normal business hours in accordance with the table below. When adverse weather or site conditions would cause the safety of the inspection personnel to be in jeopardy, the inspection may be delayed until the next business day on which it is safe to perform the inspection. In addition, when a storm event of equal to or greater than 1.0 inch occurs outside of normal business hours, the self-inspection shall be performed upon the commencement of the next business day. Any time when inspections were delayed shall be noted in the Inspection Record.

| Inspect | Frequency (during normal business hours) | Inspection records must include: |
|--|---|--|
| (1) Rain gauge maintained in good working order | Daily | Daily rainfall amounts. If no daily rain gauge observations are made during weekend holiday periods, and no individual-day rainfall information available, record the cumulative rain measurement for those u attended days (and this will determine if a site inspection needed). Days on which no rainfall occurred shall be recorded "zero." The permittee may use another rain-monitoring devil approved by the Division. |
| (Z) E&SC Measures | At least once per 7 calendar days and within 24 hours of a rain event > 1.0 inch in 24 hours | Identification of the measures inspected, Date and time of the inspection, Name of the person performing the inspection, Indication of whether the measures were operating properly, Description of maintenance needs for the measure, Description, evidence, and date of corrective actions taken. |
| (3) Stormwater discharge outfalls (SDOs) | At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours | 1. Identification of the discharge outfalls inspected, 2. Date and time of the inspection, 3. Name of the person performing the inspection, 4. Evidence of indicators of stormwater pollution such as oil sheen, floating or suspended solids or discloration, 5. Indication of visible sediment leaving the site, 6. Description, evidence, and date of corrective actions taken. |
| (4) Perimeter of site | At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours | If visible sedimentation is found outside site limits, then a record of the following shall be made: 1. Actions taken to clean up or stabilize the sediment that has let the site limits, 2. Description, evidence, and date of corrective actions taken, a 3. An explanation as to the actions taken to control future releases. |
| (5) Streams or wetlands onsite or offsite (where accessible) | At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours | If the stream or wetland has increased visible sedimentation or a stream has visible increased turbidity from the construction activity, then a record of the following shall be made: 1. Description, evidence and date of corrective actions taken, ar 2. Records of the required reports to the appropriate Division Regional Office per Part III, Section C, Item (2)(a) of this perm of this permit. |
| (6) Ground stabilization measures | After each phase of grading | 1. The phase of grading (installation of perimeter E&SC measures, clearing and grubbing, installation of storm drainage facilities, completion of all land-disturbing activity, construction or redevelopment, permanent ground cover). 2. Documentation that the required ground stabilization measures have been provided within the required timeframe or an assurance that they will be provided as soon as possible. |

NOTE: The rain inspection resets the required 7 calendar day inspection requirement.

SELF-INSPECTION, RECORDKEEPING AND REPORTING

. E&SC Plan Documentation

SECTION B: RECORDKEEPING

The approved E&SC plan as well as any approved deviation shall be kept on the site. The approved E&SC plan must be kept up—to—date throughout the coverage under this permit. The following items pertaining to the E&SC plan shall be kept on site and available for inspection at all times during

Documentation Requirements

| (a) Each E&SC Measure has been installed and does not significantly deviate from the locations, dimensions and relative elevations shown on the approved E&SC Plan. | Initial and date each E&SC Measure on a copy of the approved E&SC Plan or complete, date and sign an inspection report that lists each E&SC Measure shown on the approved E&SC Plan. This documentation is required upon the initial installation of the E&SC Measures or if the E&SC Measures are modified after initial installation. |
|---|---|
| (b) A phase of grading has been completed. | Initial and date a copy of the approved E&SC Plan or complete, date and sign an inspection report to indicate completion of the construction phase. |
| (c) Ground cover is located and installed in accordance with the approved E&SC Plan. | Initial and date a copy of the approved E&SC Plan or complete, date and sign an inspection report to indicate compliance with approved ground cover specifications. |
| (d) The maintenance and repair requirements for all E&SC Measures have been performed. | Complete, date and sign an inspection report. |
| (e) Corrective actions have been taken to E&SC Measures. | Initial and date a copy of the approved E&SC Plan or complete, date and sign an inspection report to indicate the completion of the corrective action. |

2. Additional Documentation to be Kept on Site

In addition to the E&SC plan documents above, the following items shall be kept on the site and available for inspectors at all times during normal business hours, unless the Division provides a

(a) This General Permit as well as the Certificate of Coverage, after it is received.

(b) Records of inspections made during the previous twelve months. The permittee shall record the required observations on the Inspection Record Form provided by the Division or a similar inspection form that includes all the required elements. Use of electronically—available records in lieu of the required paper copies will be allowed if shown to provide equal access and utility as

5. Documentation to be Retained for Three Years

All data used to complete the e-NOI and all inspection records shall be maintained for a period of three years after project completion and made available upon request. [40 CFR 122.41]

1. Occurrences that Must be Reported

Permittees shall report the following occurrences:

(b) Oil spills if: They are 25 gallons or more,

- They are less than 25 gallons but cannot be cleaned up within 24 hours,

(c) Releases of hazardous substances in excess of reportable quantities under Section 311 of the Clean

After a permittee becomes aware of an occurrence that must be reported, he shall contact the appropriate Division regional office within the timeframes and in accordance with the other requirements listed below. Occurrences outside normal business hours may also be reported to the Department's

| Occurrence | Reporting Timeframes (After Discovery) and Other Requirements |
|--|--|
| (a) Visible sediment deposition in a stream or wetland | Within 24 hours, an oral or electronic notification. Within 7 calendar days, a report that contains a description of the sediment and actions taken to address the cause of the deposition Division staff may waive the requirement for a written report on a case-by-case basis. If the stream is named on the NC 303(d) list as impaired for sedime related causes, the permittee may be required to perform addition. |
| | monitoring, inspections or apply more stringent practices if staff determine that additional requirements are needed to assure com with the federal or state impaired-waters conditions. |
| (b) Oil spills and | Within 24 hours, an oral or electronic notification. The notification |

- *Within 24 hours,* an shall include informa

location of the spill substances per Ite

(c) Anticipated A report at least ter bypasses [40 CFR 122.41(m)(3)] effect of the bypass. (d) Unanticipated

bypasses [40 CFR Within 7 calendar days, a report that includes an evaluation of the 122.41(m)(3)] quality and effect of the bypass. (e) Noncompliance Within 24 hours, an oral or electronic notification. with the conditions

including exact dates and times, and if the noncompliance has not continue; and steps taken or planned to reduce, eliminate, and CFR 122.41(I)(7)] prevent reoccurrence of the noncompliance. [40 CFR 122.41(I)(6). Division staff may waive the requirement for a written report on a

PART II, SECTION G, ITEM (4) DRAW DOWN OF SEDIMENT BASINS FOR MAINTENANCE OR CLOSE OUT

Sediment basins and traps that receive runoff from drainage areas of one acre or more shall use outlet structures that withdraw water from the surface when these devices need to be drawn down for maintenance or close out unless this is infeasible. The circumstances in which it is not feasible to withdraw water from the surface shall be rare (for example, times with extended cold weather). Non-surface withdrawals from sediment basins shall be allowed only when all of the following criteria have been met:

- (a) The E&SC plan authority has been provided with documentation of the non-surface withdrawal and the specific time periods or conditions in which it will occur. The non-surface withdrawal
- shall not commence until the E&SC plan authority has approved these items, (b) The non-surface withdrawal has been reported as an anticipated bypass in accordance with Part III, Section C, Item (2)(c) and (d) of this permit, (c) Dewatering discharges are treated with controls to minimize discharges of pollutants from stormwater that is removed from the sediment basin. Examples of appropriate controls include
- (d) Vegetated, upland areas of the sites or a properly designed stone pad is used to the extent feasible at the outlet of the dewatering treatment devices described in Item (c) above,
- (e) Velocity dissipation devices such as check dams, sediment traps, and riprap are provided at the discharge points of all dewatering devices, and
- (f) Sediment removed from the dewatering treatment devices described in Item (c) above is disposed of in a manner that does not cause deposition of sediment into waters of the United States.

NCG01 SELF-INSPECTION, RECORDKEEPING AND REPORTING

EFFECTIVE: 04/01/19

SELF-INSPECTION, RECORDKEEPING AND REPORTING

(a) Visible sediment deposition in a stream or wetland.

- They cause sheen on surface waters (regardless of volume), or They are within 100 feet of surface waters (regardless of volume).
- Water Act (Ref: 40 CFR 110.3 and 40 CFR 117.3) or Section 102 of CERCLA (Ref: 40 CFR 302.4) or G.S. 143-215.85.

(d) Anticipated bypasses and unanticipated bypasses.

(e) Noncompliance with the conditions of this permit that may endanger health or the environment.

2. Reporting Timeframes and Other Requirements

release of

hazardous

health or the

Environmental Emergency Center personnel at (800) 858-0368.

| n days before the date of the bypass, if possible. | : | | B | | |
|--|---|--|--------------|------------|---|
| state impaired-waters conditions. I or all or electronic notification. The notification about the date, time, nature, volume and or release. | | | Bowman North | 4006 BARRE | |
| ions or apply more stringent practices if staff itional requirements are needed to assure compliance | | | | RET | 3 |
| ned on the <u>NC 303(d) list</u> as impaired for sediment- permittee may be required to perform additional | : | | Carolina L | T DR | |
| days, a report that contains a description of the ns taken to address the cause of the deposition. vaive the requirement for a written report on a | | | Ltd. | | |
| oral or electronic notification. | | | | | |

1(b)-(c) above The report shall include an evaluation of the anticipated quality and Within 24 hours, an oral or electronic notification.

 Within 7 calendar days, a report that contains a description of the of this permit that noncompliance, and its causes; the period of noncompliance, may endanger been corrected, the anticipated time noncompliance is expected to environment[40

case-by-case basis.




/10/2025 | 1ST SUBMITTAL 3/18/2025 Revisions per ncdeq commen 4/4/2025 2ND SUBMITTAL DATE | DESCRIPTION KXO ML DESIGN | DRAWN | CHKD SCALE H: 1" = XXX' V: 1" = XXX' JOB No. **220154-01-001**

PLAN STATUS

DATE FEBRUARY 10, 202

Cad file name: V:\220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-ES.dwg



(NCG01)

PERMIT

RAL

CAROLINA GE

INIERAL

DOLLAR

Page 5 of 5

FORM

SELF-IN

PRELIMINARY

| | Y WATER STATE OF THE STATE OF T |
|-----------|--|
| F | PLAN STATUS |
| 2/10/2025 | 1ST SUBMITTAL |
| 3/18/2025 | REVISIONS PER NCDEQ COMMEN |
| 4/4/2025 | 2ND SUBMITTAL |
| | |
| | |
| DATE | DESCRIPTION |

DATE DESCRIPTION

ML KXO ML

DESIGN DRAWN CHKD

SCALE H: 1" = XXX'
V: 1" = XXX'

JOB No. 220154-01-001

DATE FEBRUARY 10, 2025

C2.5

Page 2 of 5 DEMLR Monitoring Form Rev. 07012020 PART 2: STORMWATER PLANS AND CONTROLS: For each question below, mark the corresponding box as Yes, No or N/A. For all items marked "No", note in Part 3A the Reference letter and provide the Corrective Action and location of the deficiency, the original date noted, and the date it was noted as being corrected. NOTE: Reference letters may be used multiple times. Reference Part 2A: Storm Water Plans and Related Documents A | Is the approval letter or certificate, COC and a copy of the NPDES Construction General Permit (CGP) on site? (Readily available electronic copy of CGP is acceptable) Is the approved plan on site and current? N/A Part 2B: Stormwater Pollutant Controls Yes No Reference Are erosion and sediment controls that are shown on the approved plan installed and operating properly with Are stormwater controls that are shown on the approved plan installed and operating properly with no repairs Vehicle Tracking: Are construction entrances operating properly with no repairs needed? Soil Stabilization: Are areas of the site where construction activities have ceased been properly stabilized Are earthen stockpiles stabilized or otherwise protected from sediment loss, and located at least 50 feet away or downhill from drain inlets and surface waters? Part 2C: Non-Storm Water Pollutant Controls Yes No N/A Reference Concrete, stucco, paint, etc. washouts: Are washouts installed, properly located, posted and operating with no Solid & hazardous wastes: Are trash, debris, and hazardous materials properly managed? Sanitary waste: Are portable toilets properly located and operating with no visible repairs needed?

Report oil spills and the release of hazardous substances to the appropriate DEQ Regional Office via phone call or email

within 24 hours of discovery. https://deq.nc.gov/contact/regional-offices
For any items listed in the section below, a full description of sedimentation is required in Part 3A. This includes, but may not be limited to: location, estimated amount of sediment that has left the site and/or entered waters, apparent causes of the sediment loss, and what corrective actions need to be taken to prevent this from recurring.

Reference

Part 2D: Sedimentation

Yes

No

N/A

Are sediment or other pollutants noted beyond the approved or permitted limits of disturbance?

M Are BMPs detected as releasing sediment or other pollutants into receiving waters?

Report visible sedimentation into streams or wetlands to the appropriate DEQ Regional Office via phone call or email within 24 hours of discovery. https://deq.nc.gov/contact/regional-offices

Equipment and stored fluids: Are fuels, lubricants, hydraulic fluids, etc. contained so as not to enter surface

DEMLR Monitoring Form Rev. 07012020

Project Name

Approving Authority

NCG010000 Certificate of

Coverage Number

PART 1A: Rainfall Data

Sat (Inspection Optional)

Sun (Inspection Optional)

completion of inspection?

inaccessible.

Are there any site or project conditions that limit

If yes, explain conditions and areas of site that were

DEMLR Monitoring Form Rev. 07012020

PART 3C: GROUND STABILIZATION: Must be recorded, at a minimum, after each phase. Add rows as needed.

Rain Amount (inches)

Daily Rainfall Required. If no rain,

indicate with a "zero"

| Site area description and location where construction activities have temporarily or permanently ceased | Time Limit for Ground Cover (see table below) | Have stabilization measures been installed? | Temporary or Permanent Stabilization (T/P) | Is Ground Cover Sufficient to Restrain Erosion? (Y/N) | Original Inspection Date | Describe Actions Needed Corrective actions should be performed as soon as possible and before the next storm event | Date Previous Action(s) Observed as Corrected |
|---|---|---|--|---|--------------------------------|--|---|
| | | | <u> </u> | | | | |
| | | | | | | | |
| |)*** | | 5-3 98% | | | | |
| | | | | | | | |
| | | | | | | | |

INSPECTION AND MONITORING RECORDS FOR ACTIVITIES UNDER STORMWATER GENERAL PERMIT NCG010000

AND SELF-INSPECTION RECORDS FOR LAND DISTURBING ACTIVITIES PER G.S. 113A-54.1

Date of Plan

Approval

Coverage under the NCG010000 permit must be renewed annually, if issued after April 1, 2019 until Notice of Termination is filed and approved.

PART 1B: Phase(s) of the Plan

| GROUND STABILIZATION TIMEFRAMES | | | | |
|--|---------------|---|--|--|
| Site Area Description | Stabilization | Timeframe Variations | | |
| Perimeter dikes, swales and slopes | 7 Days | None | | |
| High Quality Water (HQW) Zones | 7 Days | None | | |
| Slopes Steeper than 3:1 | 7 Days | 7 days for perimeter dikes, swales, slopes and HWQ zones 14 days for slopes 10 ft or less in length and not steeper than 2:1 10 days for Falls Lake Watershed | | |
| Slopes 3:1 to 4:1 | 14 Days | 7 days for perimeter dikes, swales, slopes and HWQ zones 7 days for slopes greater than 50 ft in length 10 days for Falls Lake Watershed | | |
| All other areas with slopes flatter than 4:1 | 14 Days | 7 days for perimeter dikes, swales, slopes and HWQ zones 10 days for Falls Lake Watershed | | |

DEMLR Monitoring Form Rev. 07012020

Page 1 of 5

Page 4 of 5

Land Quality or Local

Program Project/Permit #

Expiration Date,

if applicable

Date of COC Issuance

Check ALL applicable box(es) that apply to

completed & current phases

Completion of all land-disturbing activity, construction or development

Permanent ground cover sufficient to restrain erosion has been established

Initial installation of erosion and sediment control measures

Completion of any grading that requires ground cover

Clearing and grubbing of existing ground cover

PART 3A: EROSION AND SEDIMENTATION CONTROL MEASURES: Measures must be inspected at least ONCE PER 7 CALENDAR DAYS AND WITHIN 24 HOURS OF A RAINFALL EVENT EQUAL TO OR GREATER THAN 1.0 INCH PER 24 HOUR PERIOD. Add rows as needed.

| sion and Sedimentation Control Measures pected | | Inspection | Date Describe Actions Needed | | | |
|---|--|-------------|--|---------------------------------|--|--|
| sure ID or Location and Description | Reference(s) Operat Proper (Y/N | ting ty? | Corrective actions should be performed as soon as possible and before the next storm event | Action(s) Observed as Corrected | | |
| | March Marc | | | | | |
| | The state of the s | | | | | |

PART 3B: STORMWATER DISCHARGE OUTFALLS (SDOs): SDOs must be inspected at least ONCE PER 7 CALENDAR DAYS AND WITHIN

| Stormwa | ter Dischar | ge Outfalls | s Inspe | cted | | | Date Previous |
|---|--|---|-----------------------------|---|--------------------|--|---------------------------------|
| Stormwater Discharge Outfall ID or Location | Any Visible Sedimentation in Streams, Wetlands or Outside Site Limits? (Y/N) | Any Increase in Stream Turbidity from Discharge? (Y/N) | Visible Erosion below | Any visible oil sheen, floating or suspended solids or discoloration? (Y/N) | Inspection Date | Describe Actions Needed Corrective actions should be performed as soon as possible and before the next storm event | Action(s) Observed as Corrected |
| | | | | | | | -2-5-100 |
| | WAS 100-3 | | | | | | |
| | | | | | THE | | |

DEMLR Monitoring Form Rev. 07012020


Page 3 of 5


PART 3D: NEW OR REVISED MEASURES: Erosion and sedimentation control measures omitted or installed, at a minimum since the last inspection, shall be documented here or by initialing and dating each measure or practice shown on a copy of the approved erosion and sedimentation control plan. Alterations and relocations of measures shall also be documented if they significantly deviate from the approved plan. The removal of measures should also be documented. List dimensions of measures such as Sediment Basins and Dissipator Pads. Add rows as needed. Corrective actions should be included in Part 3A.

| Measure ID or Location and Description | Proposed Dimensions (ft.) | Actual Dimensions (ft.) | Significant Deviation* from Plan? (Y/N) | Date measure observed as installed, altered, relocated or removed | Installed (I) Altered (A) Relocated (R) Removed (X) |
|--|------------------------------|----------------------------|--|---|---|
| | | | | | |
| | | | | | |
| | | | | | |

| Financially Responsible Party (FRP) / Permittee | | 1800 — <u> </u> | County | mid-fit lass |
|---|--|-----------------------------------|--|--|
| INSPECTOR | Name | Employer | | |
| nspector Type (Mark) X | Address | | | |
| RP/Permittee | | | | man war and the same of the sa |
| gent/Designee | Phone Number | Email Address | | |
| By this signature, I certify | in accordance with the NCG010000 permi | t & G.S. 113A-54.1 that this repo | ort is accurate and complete to the be | est of my knowledge. |
| nancially Responsible Part | y / Permittee or Agent / Designee | Date & Time of Inst | pection | andri 200 kg - 120 an i 200 a |

Cad file name: V:\220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-ES.dwg

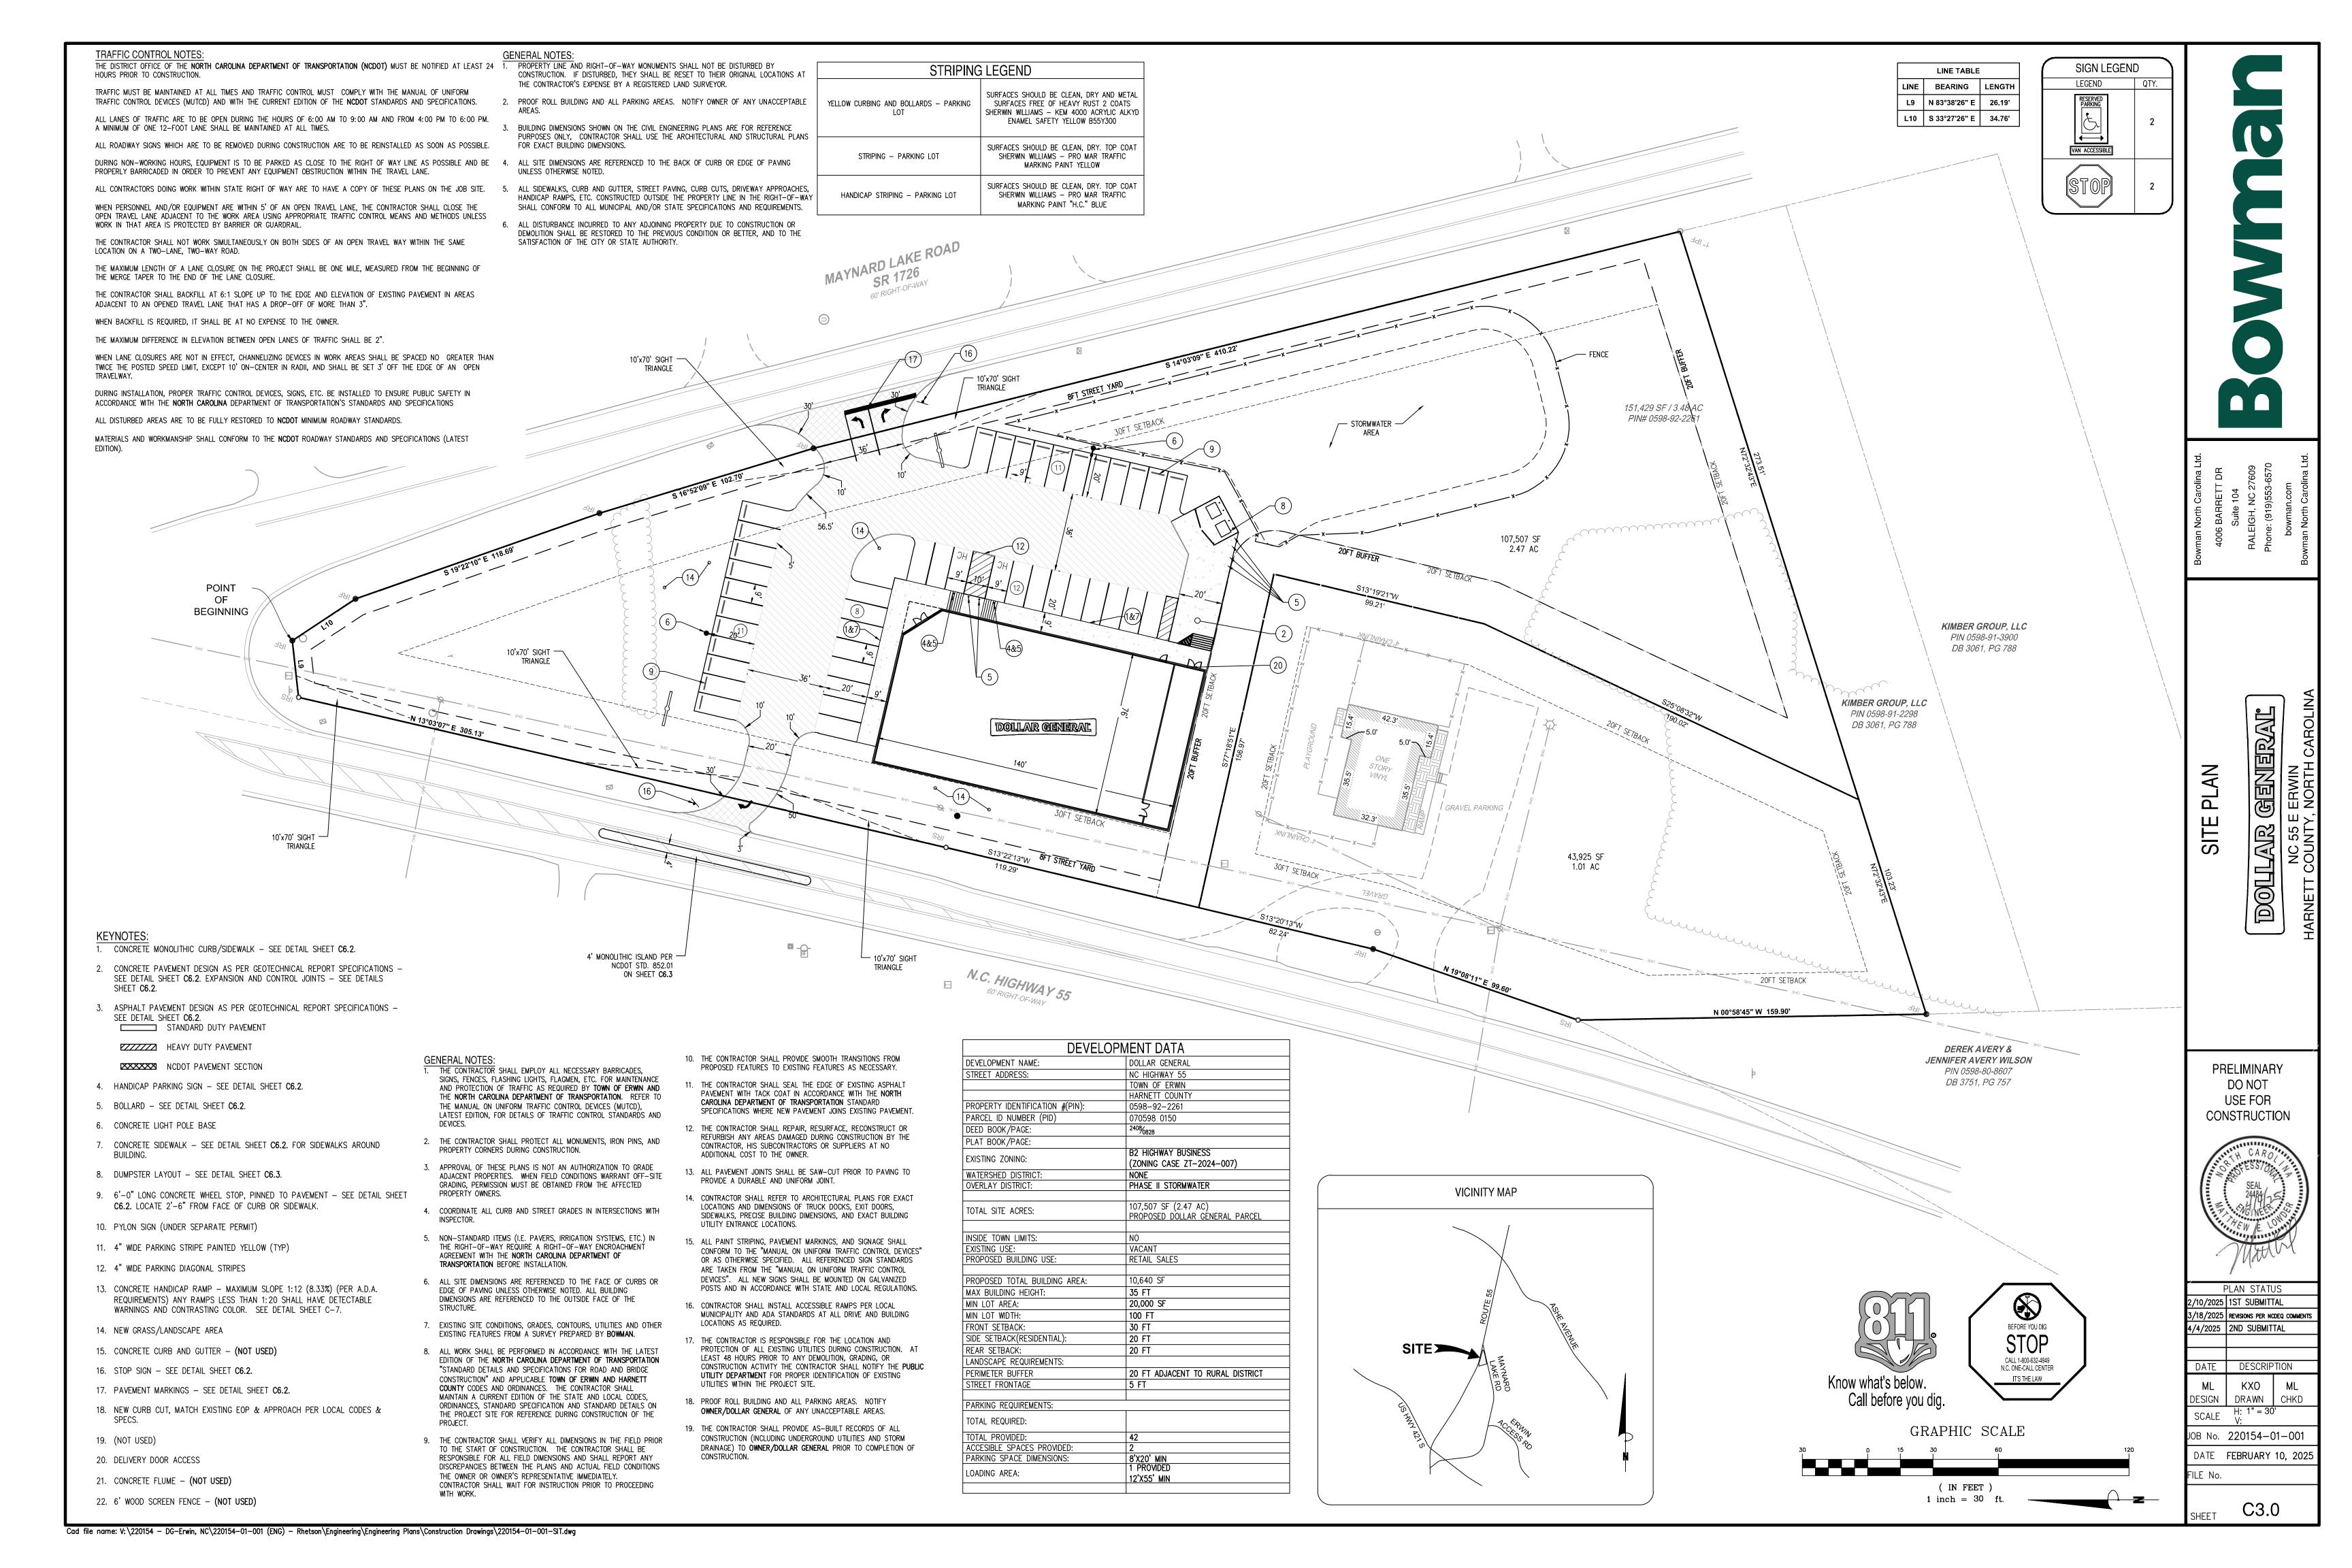

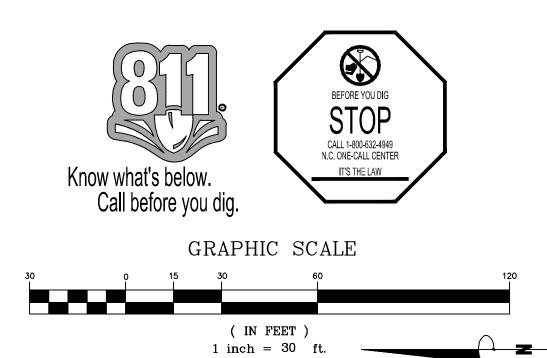

DOLLAR GENIERAL

NC 55 E ERWIN
HARNETT COUNTY, NORTH CAROLINA VEHICLE EXHIBIT PLAN PRELIMINARY DO NOT **USE FOR** CONSTRUCTION

PLAN STATUS 2/10/2025 | 1ST SUBMITTAL


3/18/2025 REVISIONS PER NCDEQ COMMENT 4/4/2025 2ND SUBMITTAL DATE DESCRIPTION


ML KXO ML DESIGN DRAWN CHKD


SCALE H: 1" = 30'
V: JOB No. 220154-01-001 DATE FEBRUARY 10, 2025

C3.1 SHEET

Cad file name: V: \220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-TRUCK.dwg

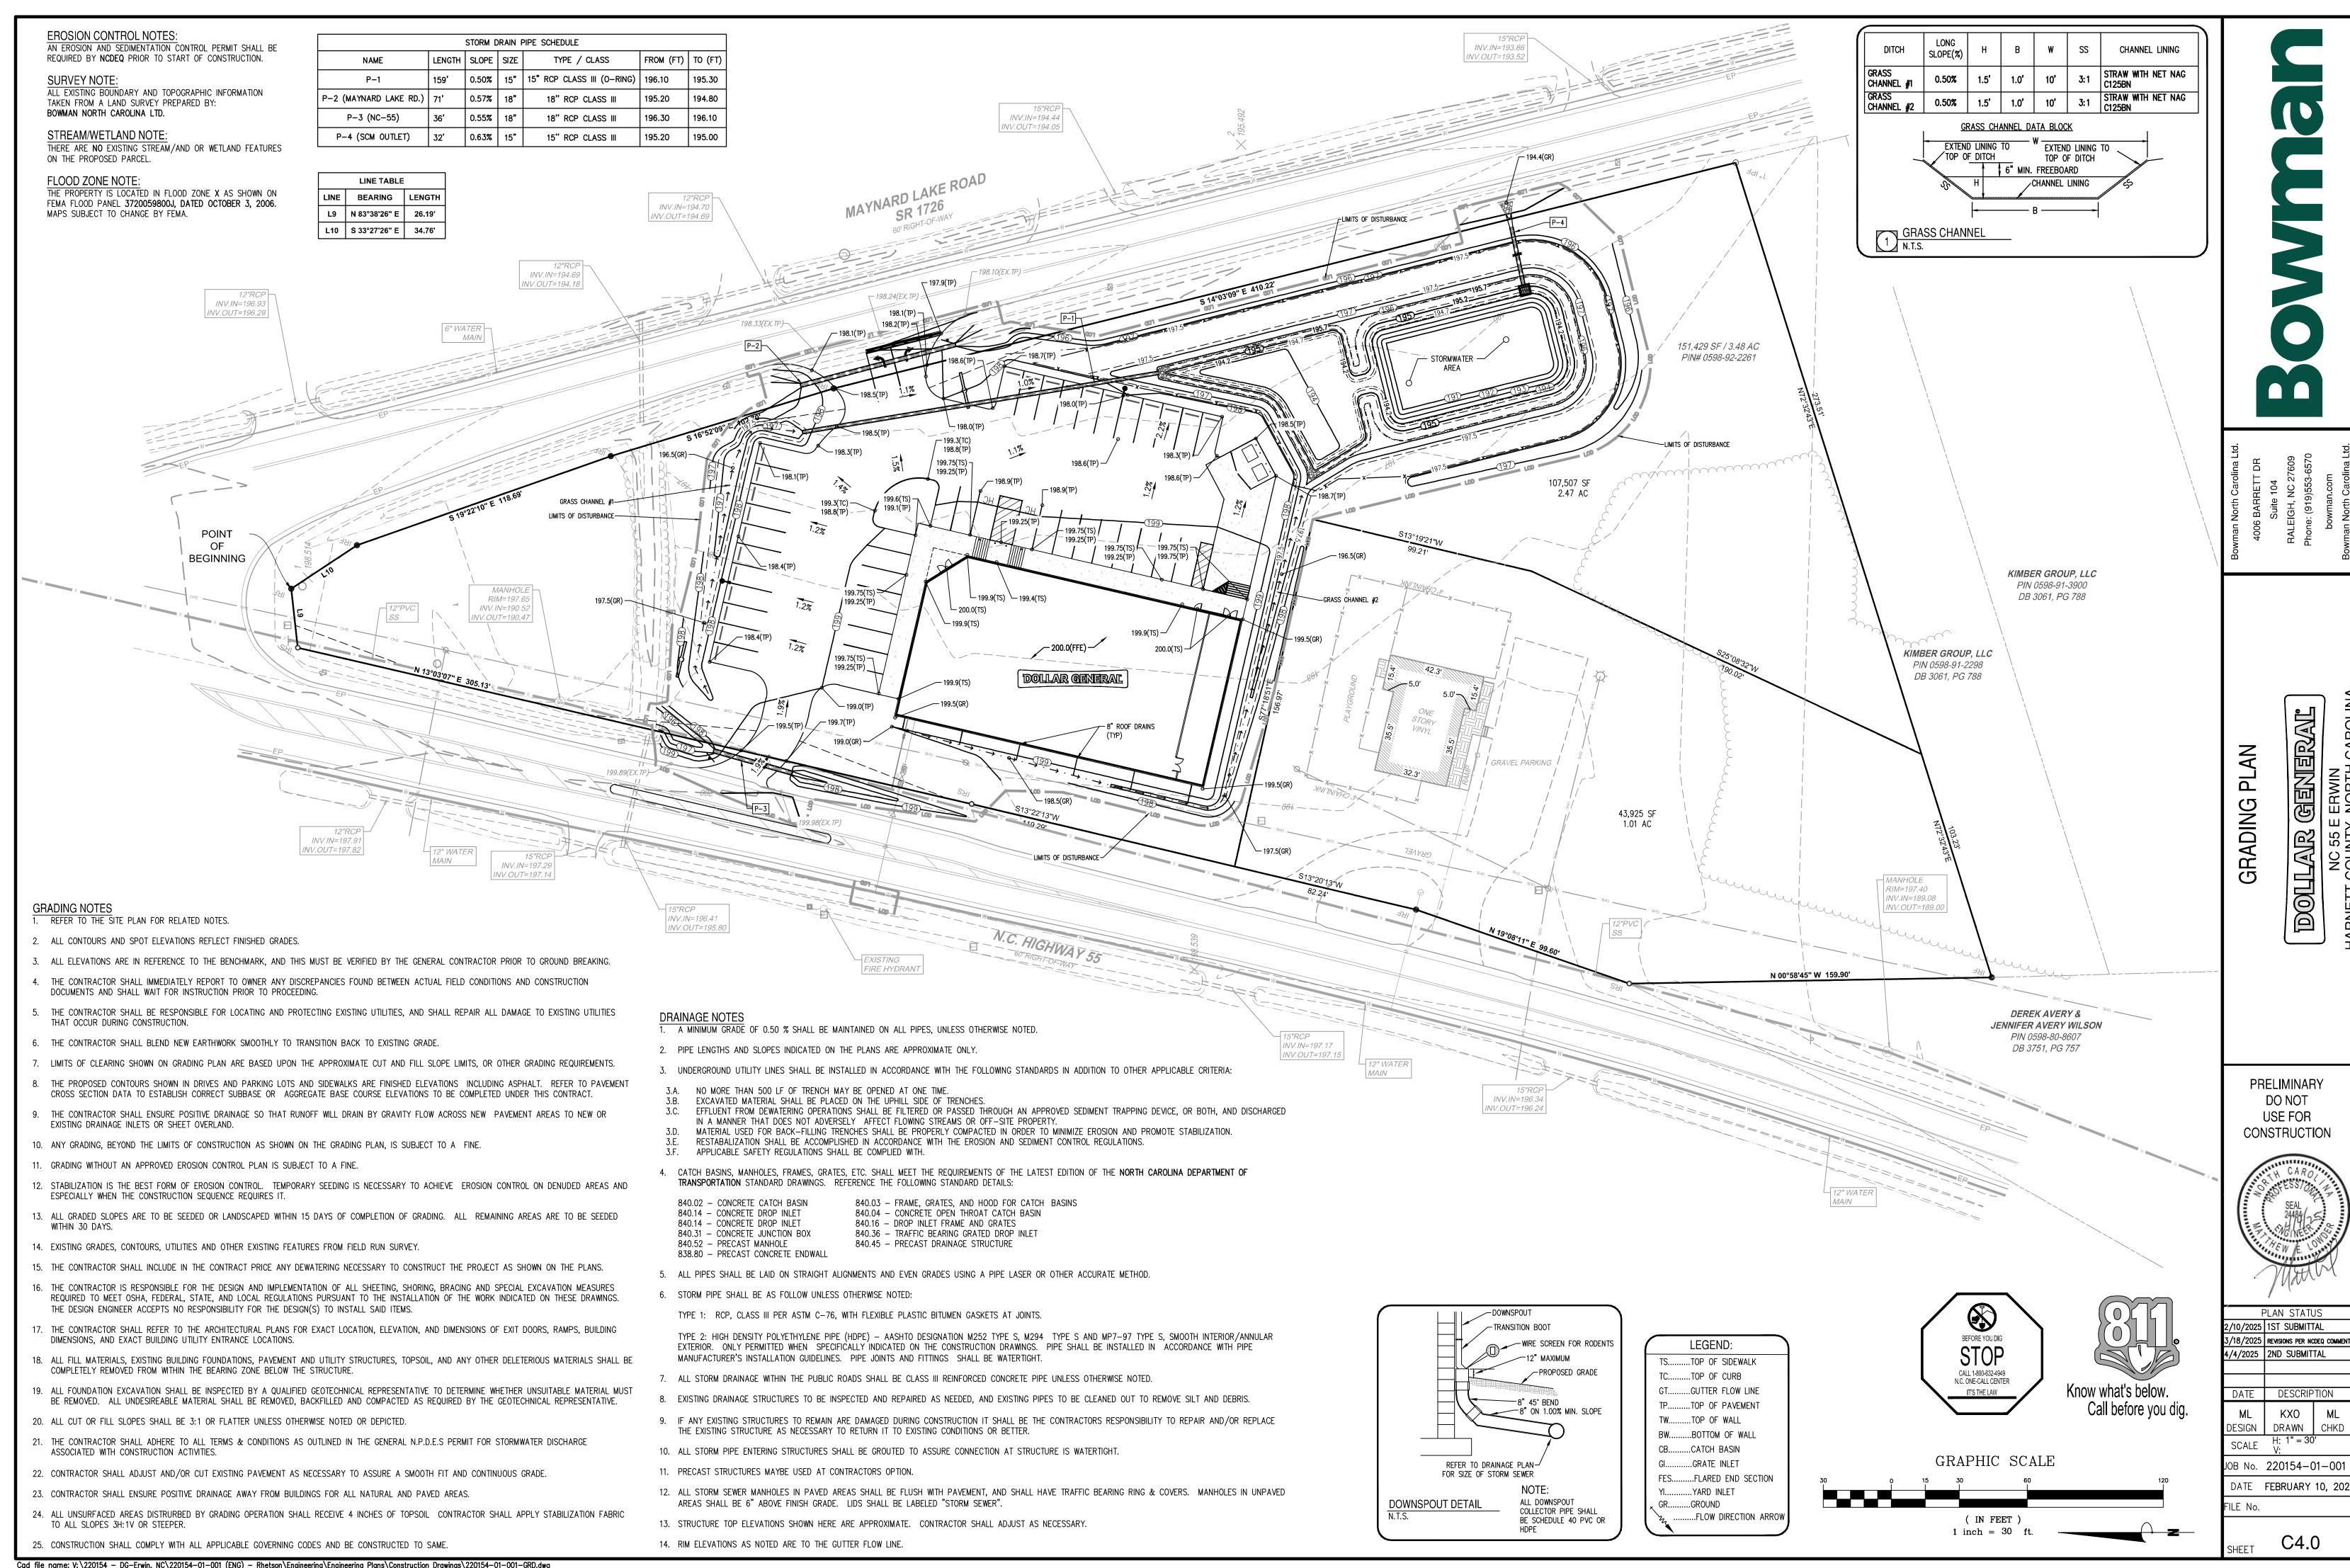

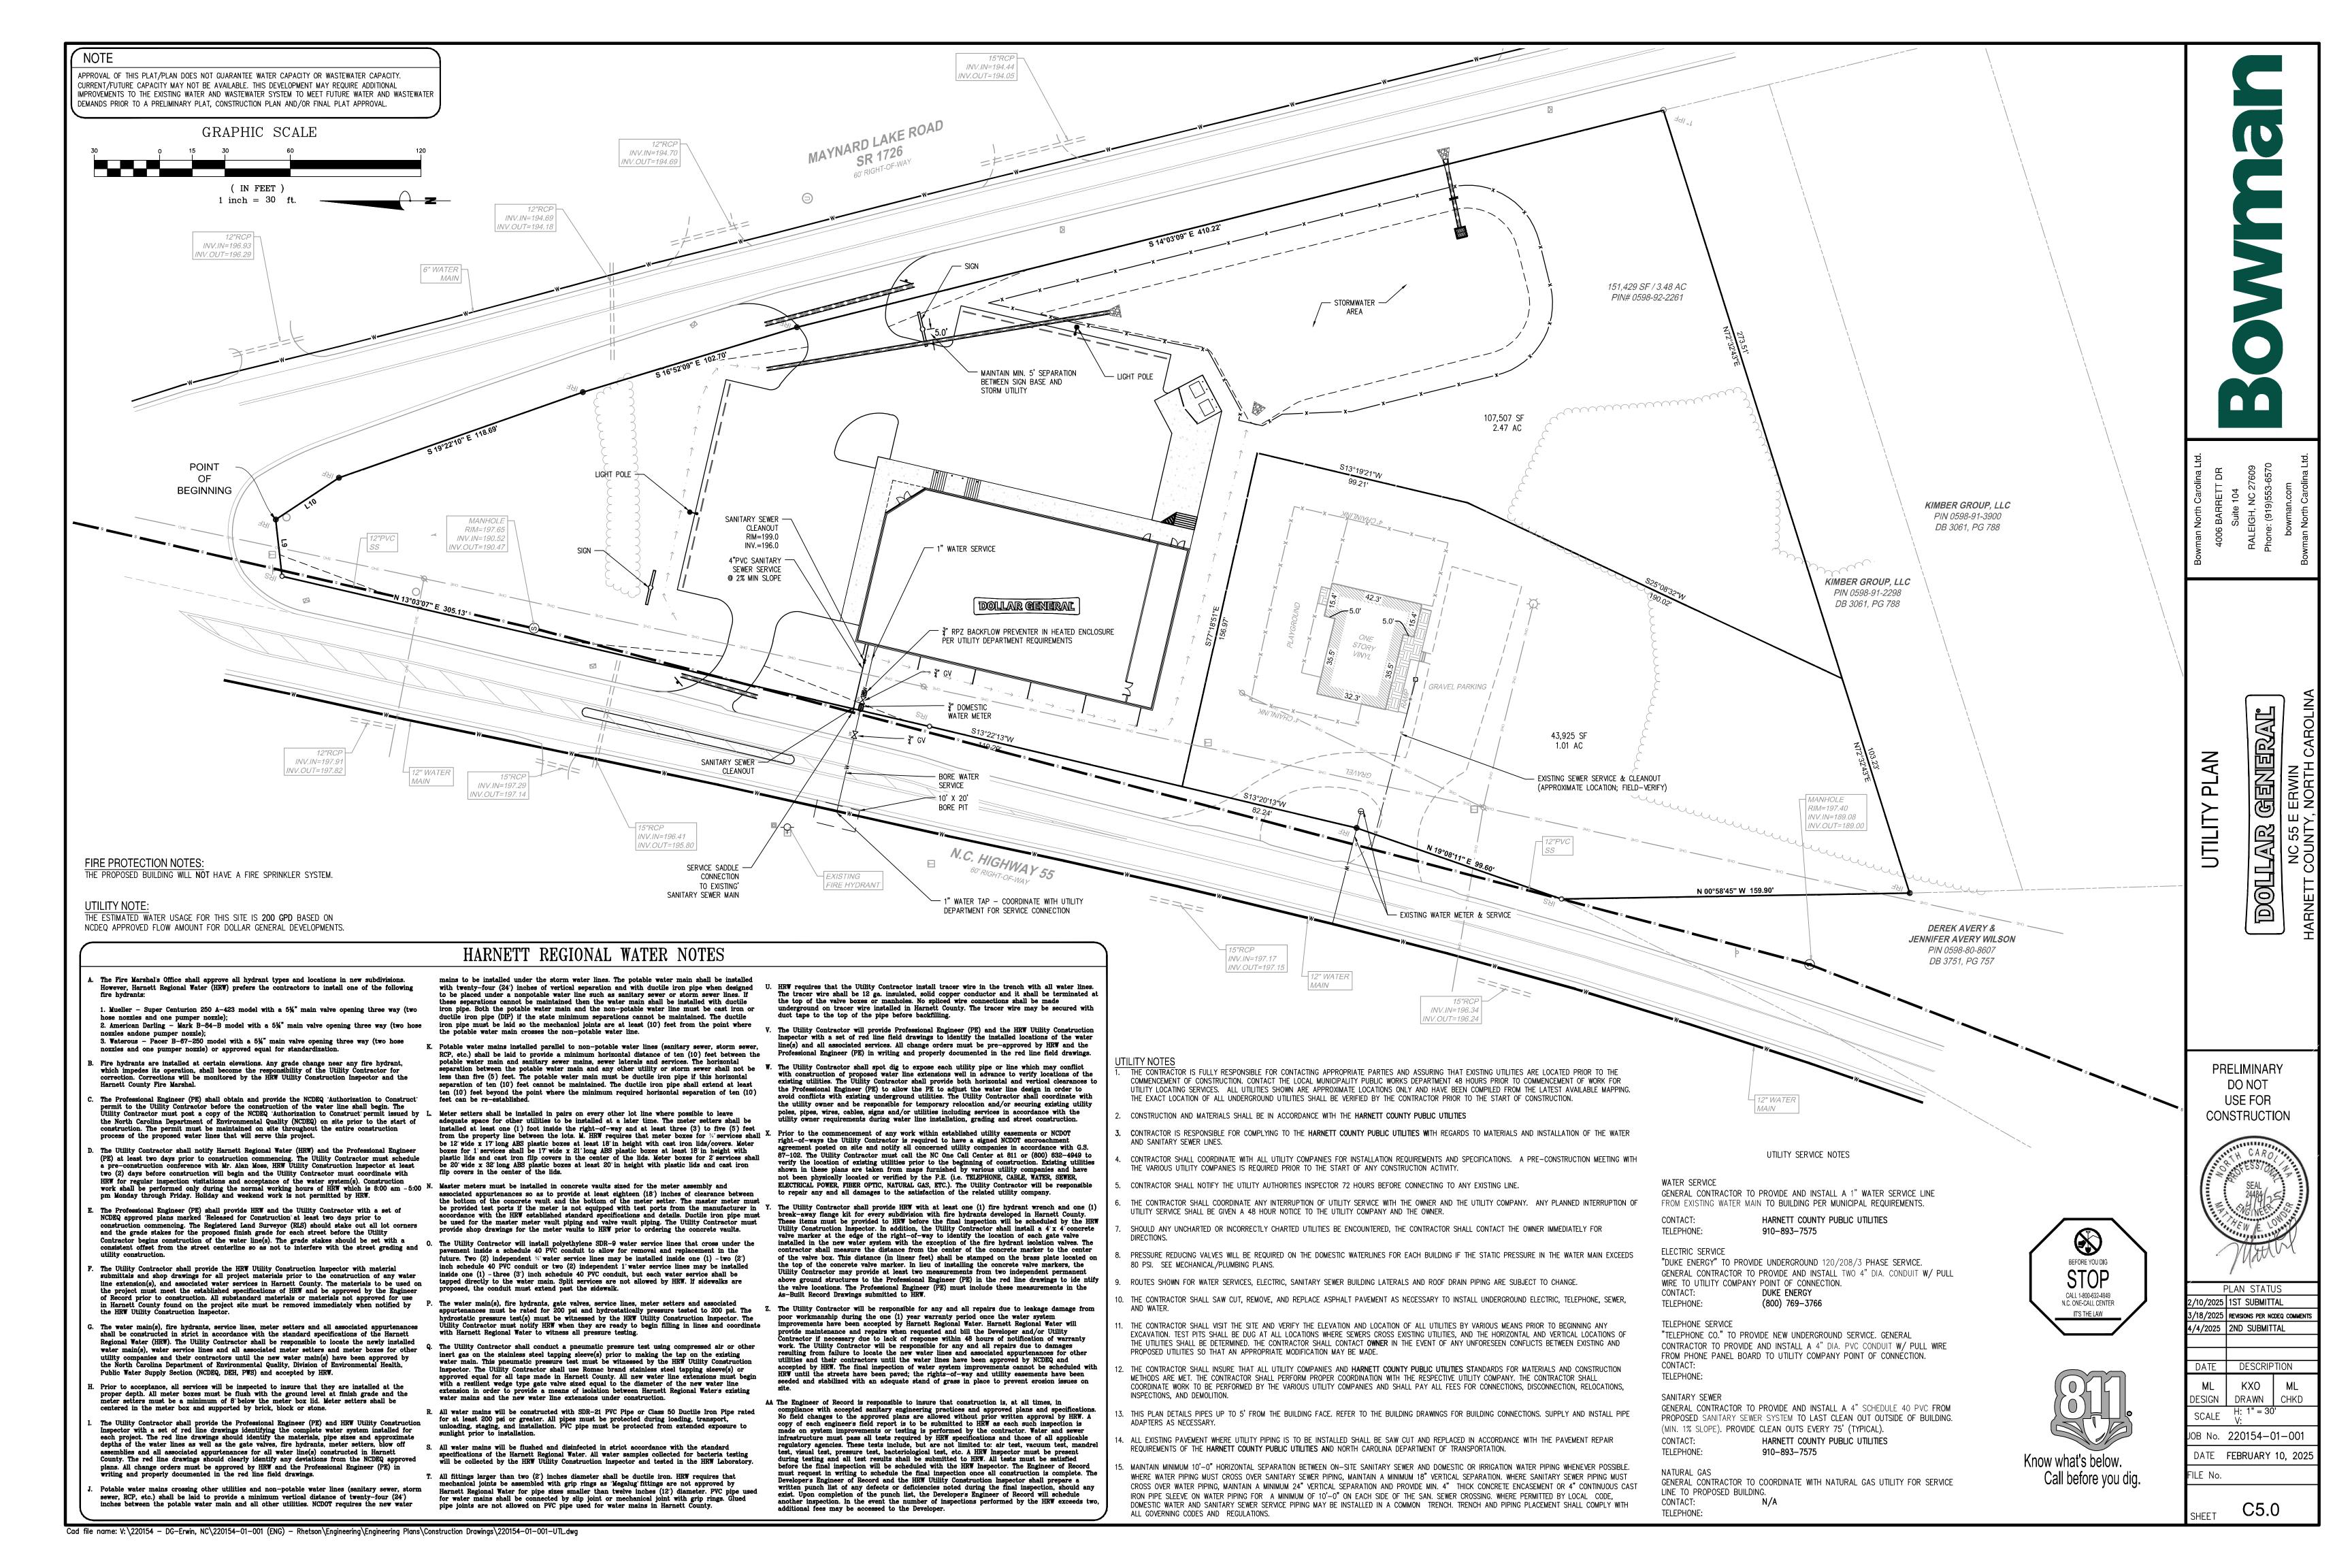

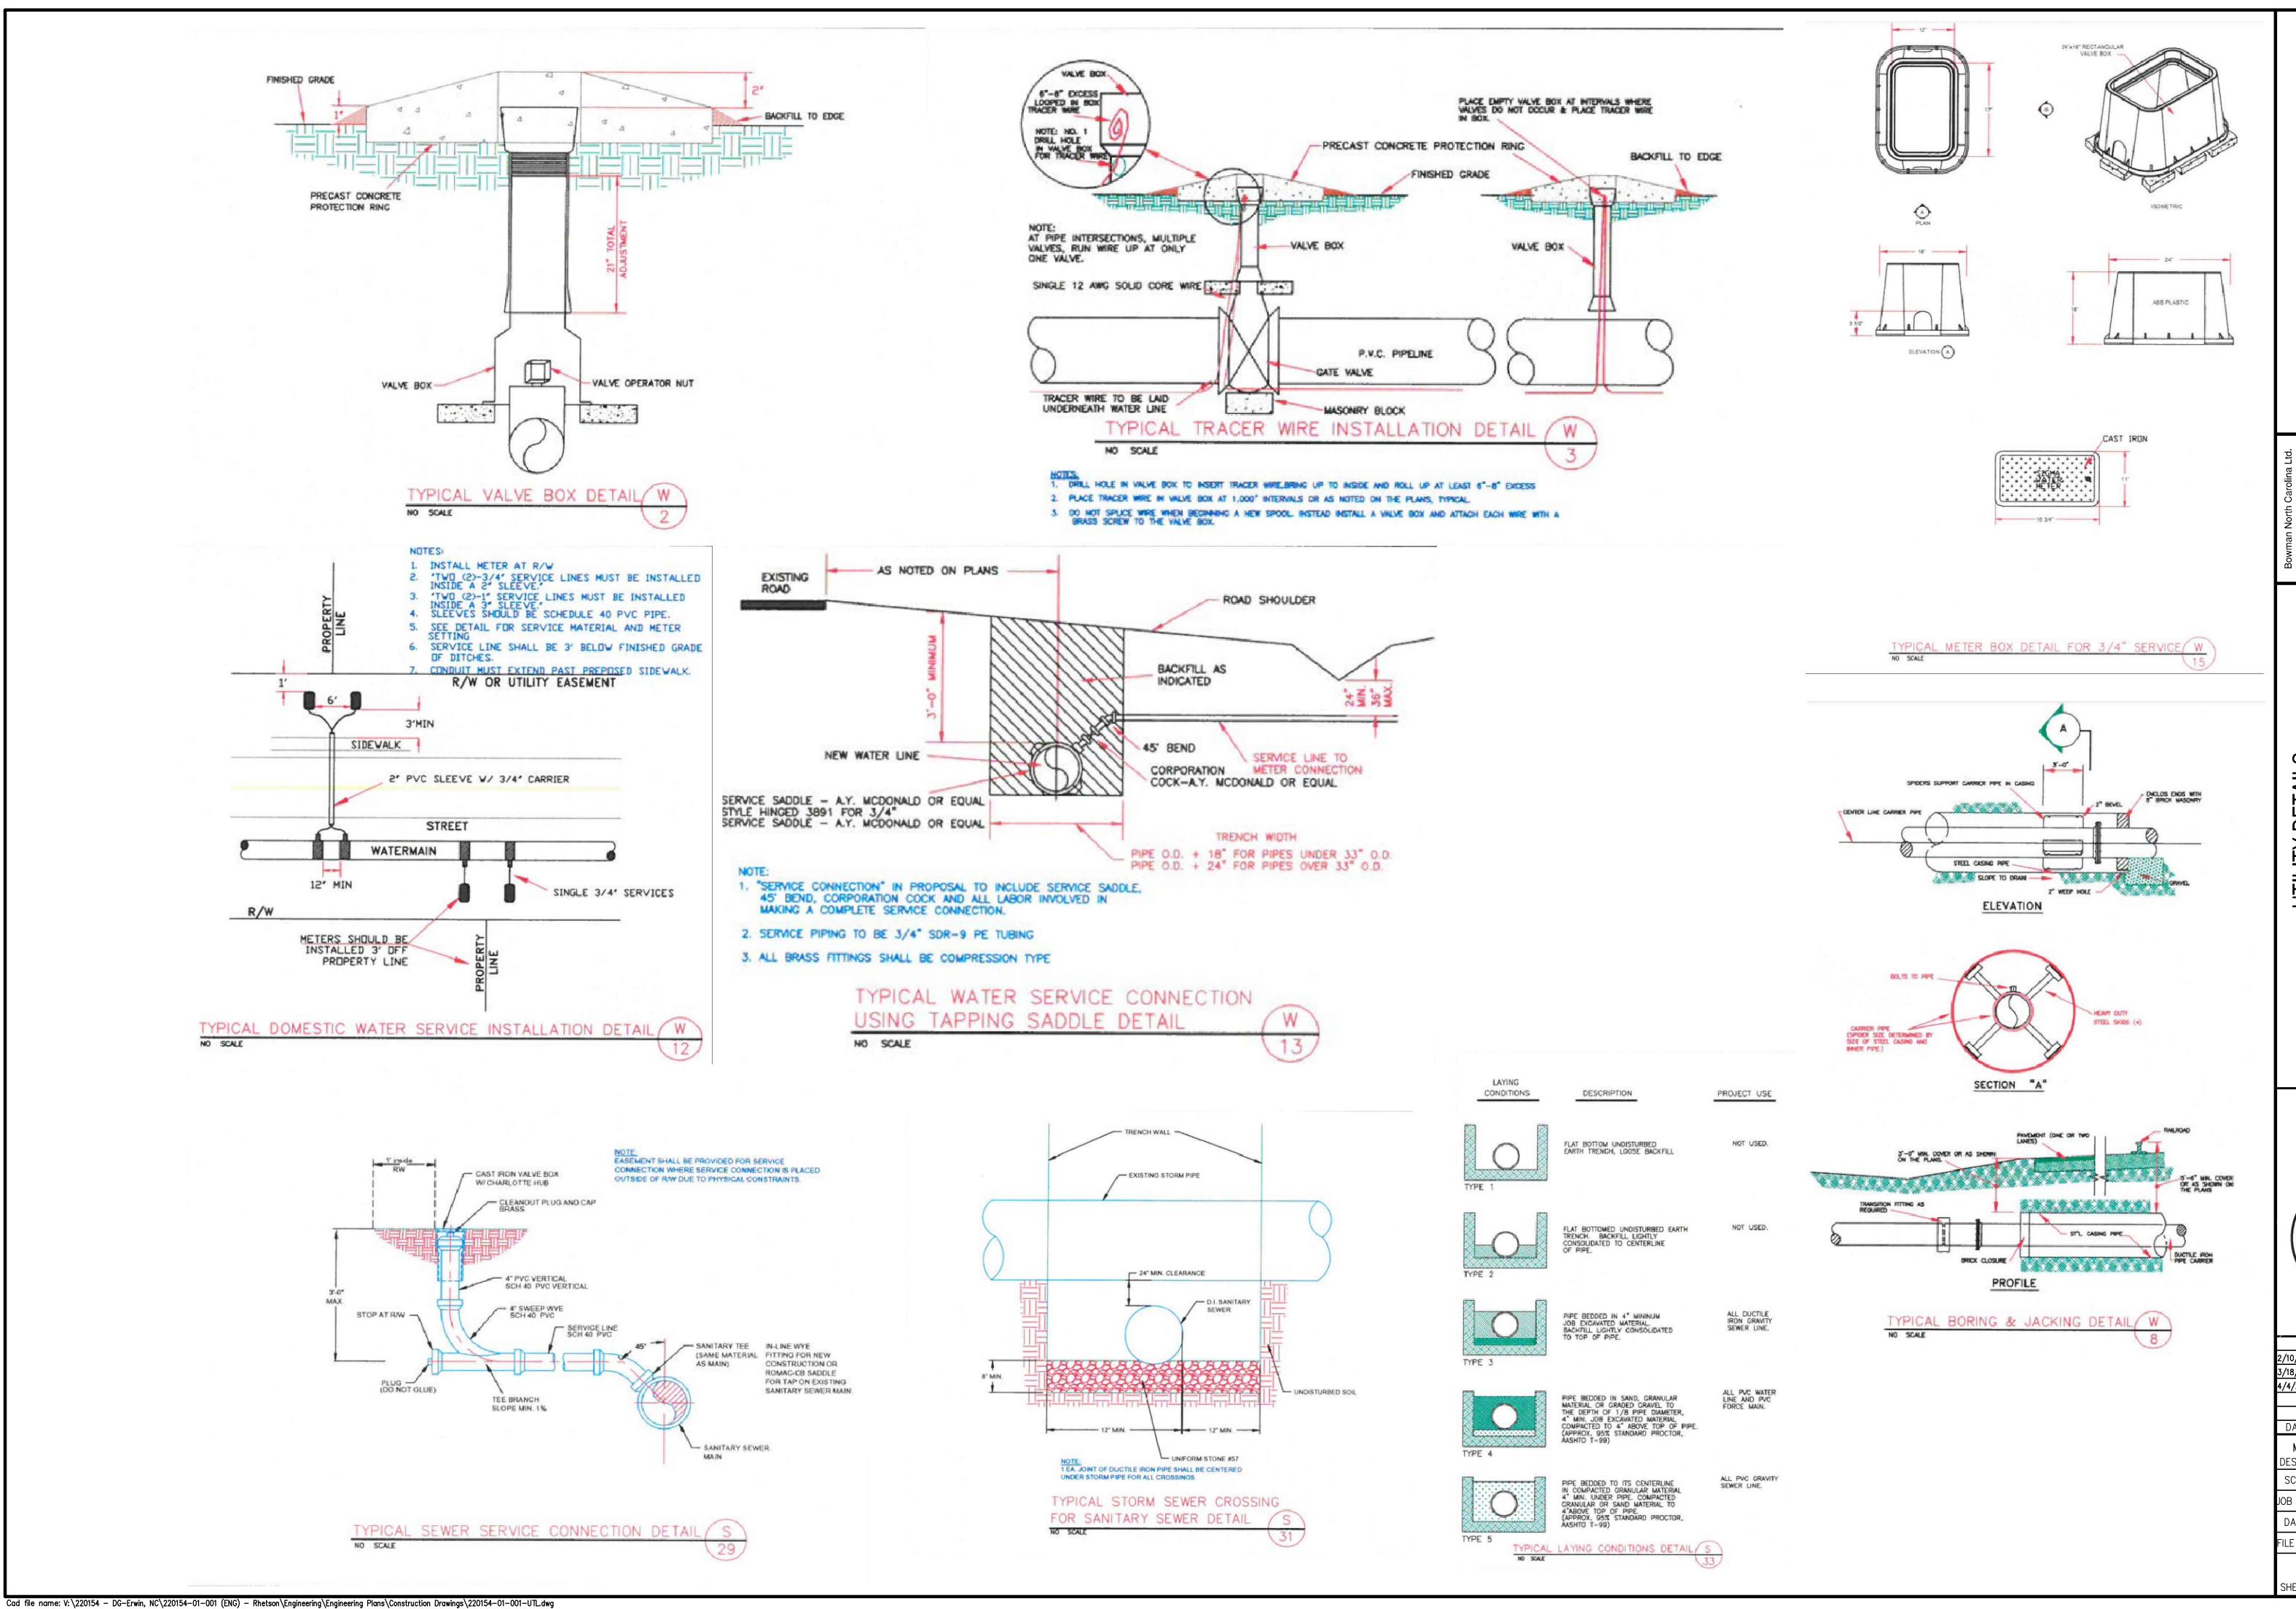


4006 BARRETT DR Suite 104 RALEIGH, NC 27609 Phone: (919)553-6570

UTILITY DETAILS
LILAR GENERAL

NC 55 E HARNETT COUNTY

PRELIMINARY DO NOT USE FOR CONSTRUCTION



PLAN STATUS
2/10/2025 1ST SUBMITTAL
3/18/2025 REVISIONS PER NODEQ COMMENT
4/4/2025 2ND SUBMITTAL

DATE DESCRIPTION

ML KXO ML
DESIGN DRAWN CHKD

SCALE H:
V:

JOB No. 220154-01-001

DATE FEBRUARY 10, 2025

E No.

SHEET C5.1



GENERAL

TAIL

VTROL

S


Rip-Rap Apron#1

MIN. STONE DIAMETER

STONE CLASS

DOLLAR EROSION


PRELIMINARY DO NOT **USE FOR** CONSTRUCTION



| ŀ | PLAN STATE | JS |
|-----------|------------------|--------------|
| 2/10/2025 | 1ST SUBMIT | ΓAL |
| 3/18/2025 | revisions per no | DEQ COMMENTS |
| 4/4/2025 | 2ND SUBMIT | TAL |
| | | |
| | | |
| DATE | DESCRIP | TION |
| ML | KXO | ML |

DESIGN DRAWN CHKD H: n/a SCALE JOB No. 220154-01-001 DATE FEBRUARY 10, 202

C6.0 SHEET

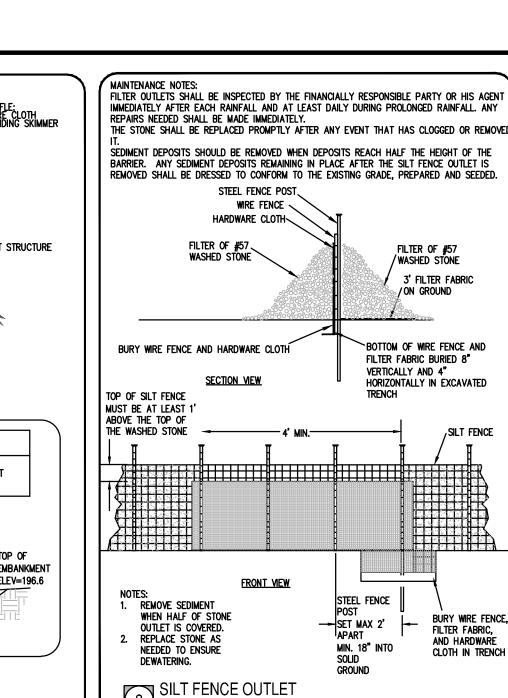

NOT TO SCALE

/WASHED STONE

₀/ON GROUND

BOTTOM OF WIRE FENCE AND

HORIZONTALLY IN EXCAVATED

,SILT FENCE

BURY WIRE FENCE

FILTER FABRIC,


ND HARDWARE


CLOTH IN TRENCH

FILTER FABRIC BURIED 8"

VERTICALLY AND 4"

3' FILTER FABRIC

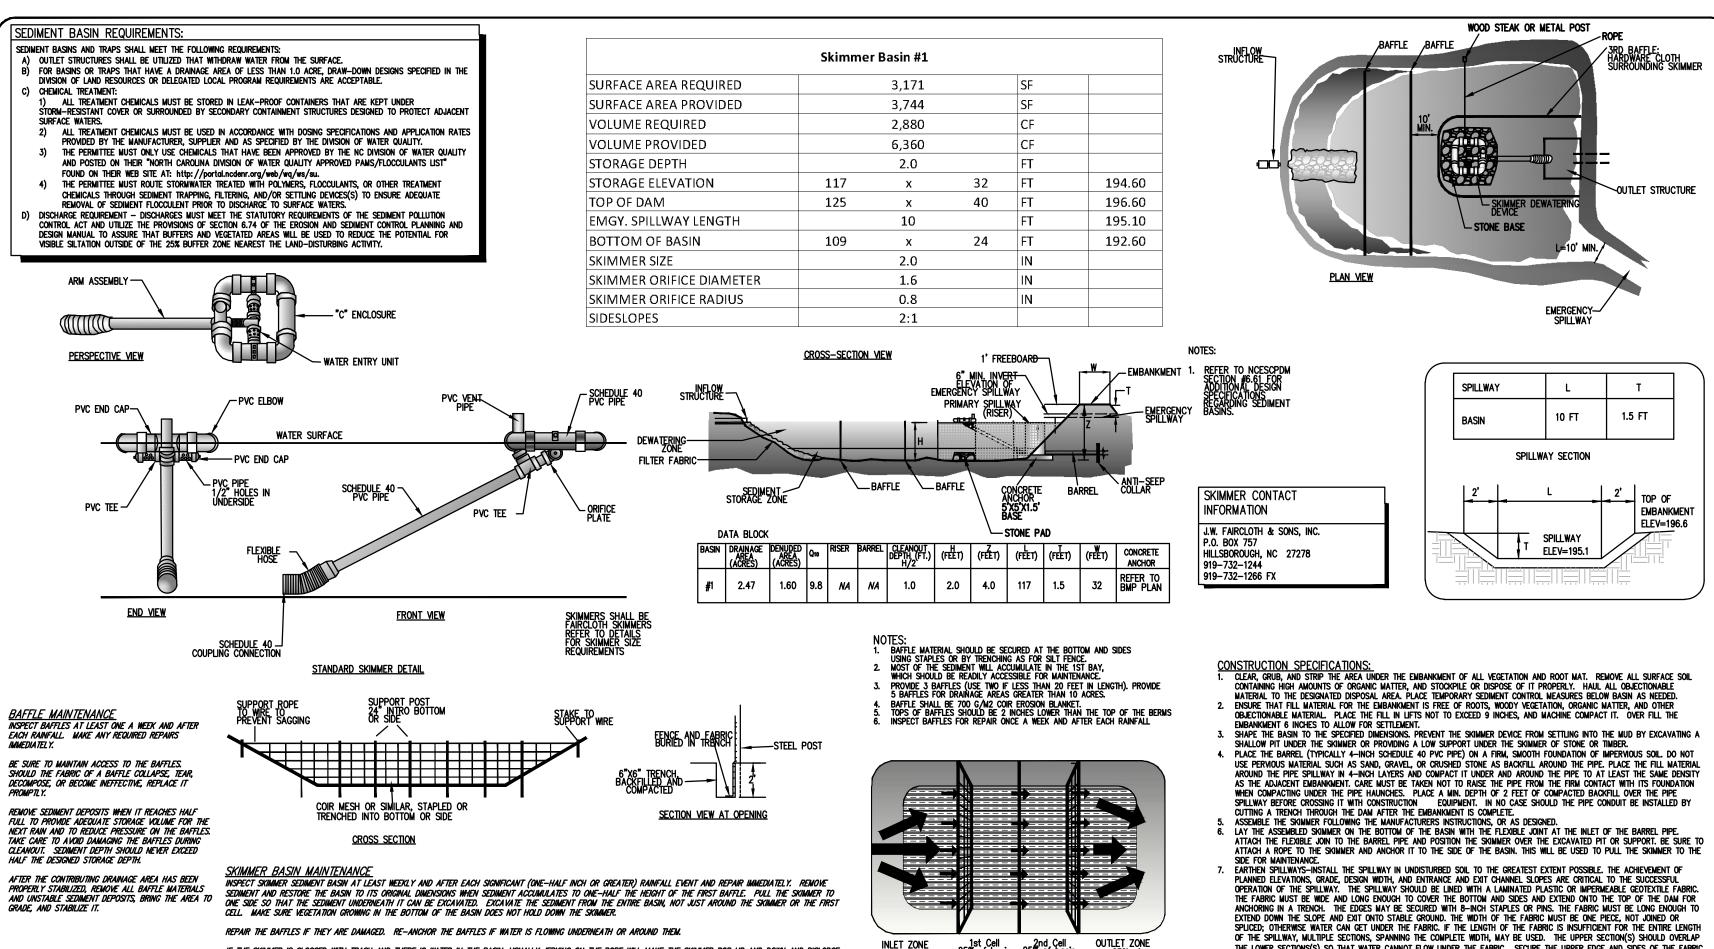

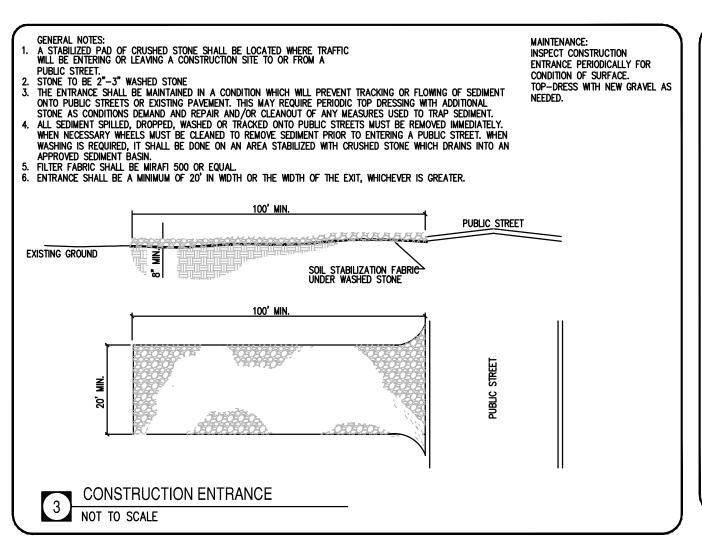

BE SURE AND REPLACE THE ORIFICE BEFORE REPOSITIONING THE SKIMMER.

SKIMMER BASIN


NOT TO SCALE

IF THE SKIMMER IS CLOGGED WITH TRASH AND THERE IS WATER IN THE BASIN, USUALLY JERKING ON THE ROPE WILL MAKE THE SKIMMER BOB UP AND DOWN AND DISLODGE THE DEBRIS AND RESTORE FLOW. IF THIS DOES NOT WORK, PULL THE SKIMMER OVER TO THE SIDE OF THE BASIN AND REMOVE THE DEBRIS. ALSO CHECK THE ORIFICE INSIDE THE SKIMMER TO SEE IF IT IS CLOGGED; IF SO REMOVE THE DEBRIS.


IF THE SKIMMER ARM OR BARREL PIPE IS CLOGGED, THE ORIFICE CAN BE REMOVED AND THE OBSTRUCTION CLEARED WITH A PLUMBER'S SNAKE OR BY FLUSHING WITH WATER.


CHECK THE FABRIC LINED SPILLWAY FOR DAMAGE AND MAKE ANY REQUIRED REPAIRS WITH FABRIC THAT SPANS THE FULL WIDTH OF THE SPILLWAY. CHECK THE EMBANKWENT, SPILLWAYS, AND OUTLET FOR EROSION DAMAGE, AND INSPECT THE EMBANKWENT FOR PIPING AND SETTLEMENT. MAKE ALL NECESSARY REPAIRS IMMEDIATELY. REMOVE ALL TRASH AND OTHER DEBRIS FROM THE SKIMMER AND POOL AREAS.


FREEZING WEATHER CAN RESULT IN ICE FORMING IN THE BASIN. SOME SPECIAL PRECAUTIONS SHOULD BE TAKEN IN THE WINTER TO PREVENT THE SKIMMER FROM PLUGGING WITH ICE.

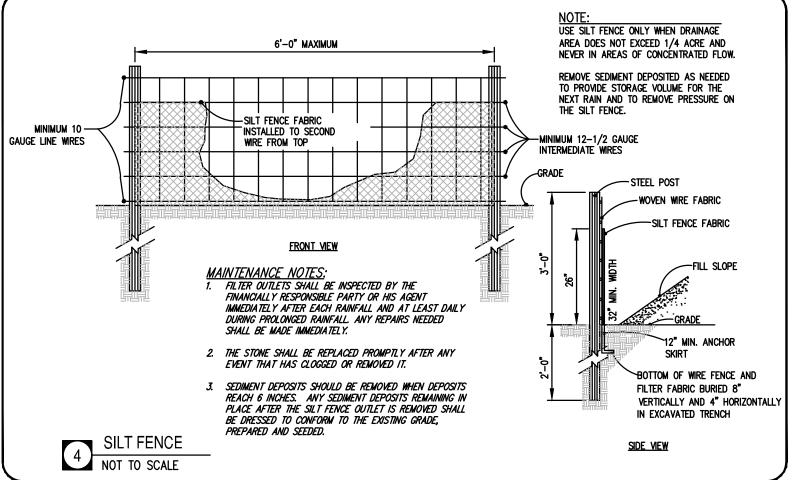



PLAN VIEW

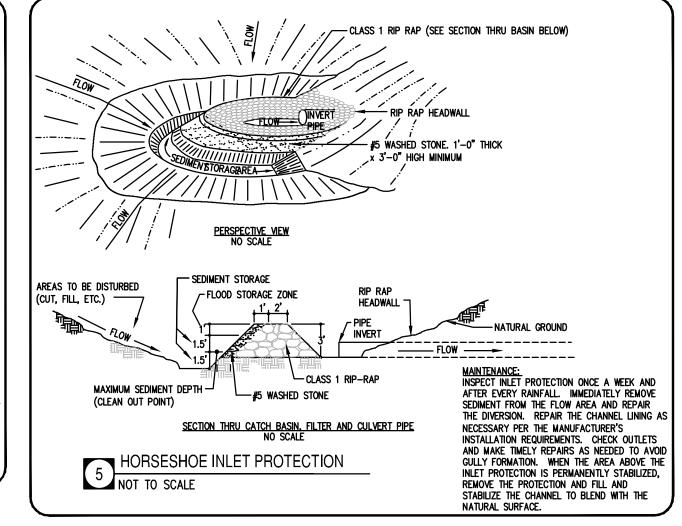

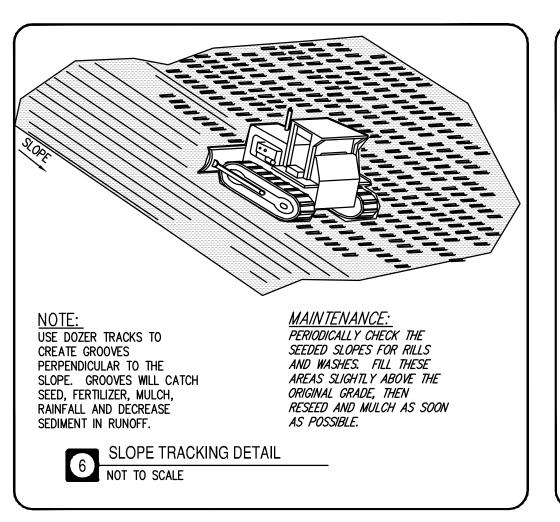

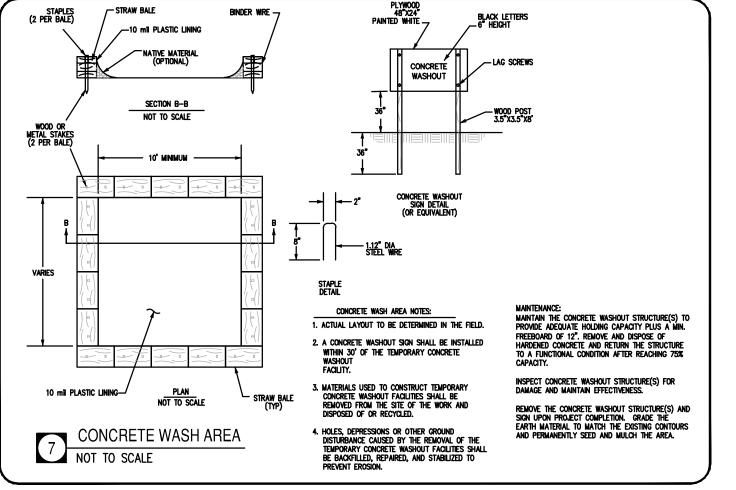

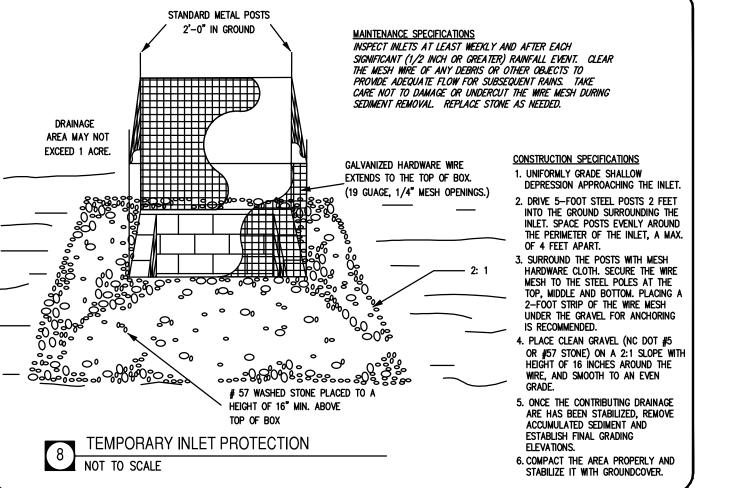

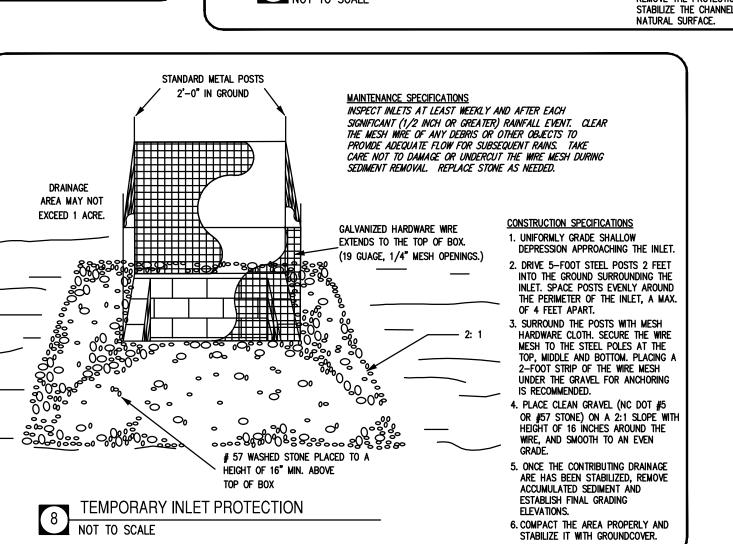

E LOWER SECTIONS(S) SO THAT WATER CANNOT FLOW UNDER THE FABRIC. SECURE THE UPPER EDGE AND SIDES OF THE FABRIC


MILETS—INSCHARGE WATER INTO THE BASIN IN A MANNER TO PREVENT EROSION. USE TEMPORARY SLOPE DRAINS OR DIVERSIONS WITH OUTLET PROTECTION TO DIVER SEDIMENT—LADEN WATER TO THE UPPER END OF THE POOL AREA TO IMPROVE BASIN TRAP

WITH OUTER PROTECTION TO EXTEN SECURIARY TO EXTEND SECURIARY SECURIARY STATES TO THE PRINCIPLE OF THE PRINCIPLE STEADLY IMMEDIATELY AFTER CONSTRUCTION.

10. INSTALL POROUS BAFFLES AS SPECIFIED IN PRACTICE 6.65, POROUS BAFFLES.

11. AFTER ALL THE SEDIMENT—PRODUCING AREAS HAVE BEEN PERMANENTLY STABILIZED, REMOVE THE STRUCTURE AND ALL THE UNSTABLE SEDIMENT. SMOOTH THE AREA TO BLEND WITH THE ADJOINING AREAS AND STABILIZE PROPERLY.

WITH A TRENCH WITH STAPLES OR PINS.

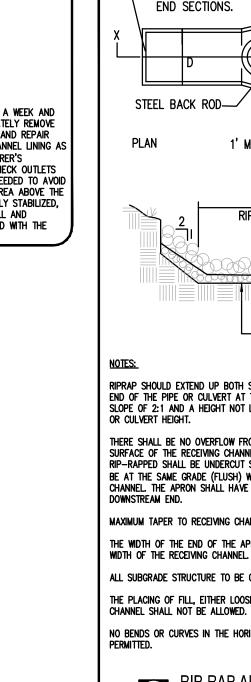

— HUB END ON OUTLET END SECTIONS.

SPIGOT END ON INLET

Rip-Rap Apron#2 ENTRY WIDTH (E) EXIT WIDTH (P) MIN. THICKNESS MIN. STO NE DIAMETER STONE CLASS NATURAL GRADE-CONSTRUCTION SPECIFICATIONS: SUBGRADE PREPARATION—PREPARE THE SUBGRADE FOR RIPRAP AND FILTER TO THE REQUIRED LINES AND GRADES SHOWN ON THE PLANS. COMPACT ANY FILL REQUIRED IN THE SUBGRADE TO A DENSITY APPROXIMATING THAT OF THE SURROUNDING UNDISTURBED MATERIAL OR OVERFILL DEPRESSIONS WITH RIPRAP. REMOVE BRUSH, TREES, STUMPS, AND OTHER OBJECTIONABLE MATERIAL. CUT THE SUBGRADE SUFFICIENTLY DEEP THAT THE FINISHED GRADE OF THE RIPRAP WILL BE AT THE ELEVATION OF THE SURROUNDING AREA. CHANNELS SHOULD BE EXCAVATED SUFFICIENTLY TO ALLOW PLACEMENT OF THE RIPRAP IN A MANNER SUCH THAT THE FINISHED INSIDE DIMENSIONS AND GRADE OF THE RIPRAP MEET DESIGN SPECIFICATIONS. SYNTHETIC FILTER FABRIC-PLACE THE CLOTH FILTER DIRECTLY ON THE PREPARED FOUNDATION. OVERLAP THE EDGES BY AT LEAST 12 INCHES, AND SPACE ANCHOR PINS 4" #5 WASHED STONE EVERY 3 FT ALONG THE OVERLAP. BURY THE UPSTREAM END OF THE CLOTH A MINIMUM OF —LAYER OF FILTER FABRIC 12 INCHES BELOW GROUND AND WHERE NECESSARY, BURY THE LOWER END OF THE CLOTH OR OVER LAP WITH THE NEXT SECTION AS REQUIRED. SEE FIGURE 6.14A PAGE 6.14.6. TAKE CARE NOT TO DAMAGE THE CLOTH WHEN PLACING RIPRAP. IF DAMAGE OCCURS REMOVE THE RIPRAP, AND REPAIR THE SHEET BY ADDING ANOTHER LAYER OF FILTER MATERIAL WITH A MINIMUM OVERLAP OF 12 INCHES AROUND THE DAMAGED AREA. IF EXTENSIVE DAMAGE IS SUSPECTED, REMOVE AND REPLACE THE ENTIRE SHEET. WHERE LARGE STONES ARE USED OR MACHINE PLACEMENT IS DIFFICULT, A 4-INCH LAYER OF FINE GRAVEL OR SAND MAY BE NEEDED TO PROTECT THE FILTER CLOTH. STONE PLACEMENT—PLACEMENT OF RIPRAP SHOULD FOLLOW IMMEDIATELY AFTER PLACEMENT OF THE FILTER. PLACE RIPRAP SO THAT IT FORMS A DENSE, WELL-GRADED MASS OF STONE WITH A MINIMUM OF VOIDS. THE DESIRED DISTRIBUTION OF STONES THROUGHOUT THE MASS MAY BE OBTAINED BY SELECTIVE LOADING AT THE QUARRY, AND CONTROLLED DUMPING DURING FINAL PLACEMENT. PLACE RIPRAP TO ITS FULL THICKNESS IN ONE OPERATION. DO NOT PLACE RIPRAP BY DUMPING THROUGH CHUTES OR OTHER METHODS THAT CAUSE SEGREGATION OF STONE SIZES. TAKE CARE NOT TO DISLODGE THE UNDERLYING BASE OR

THE TOE OF THE RIPRAP SLOPE SHOULD BE KEYED TO A STABLE FOUNDATION AT ITS BASE AS SHOWN IN FIGURE 6.15B. THE TOE SHOULD BE EXCAVATED TO A DEPTH ABOUT 1.5 TIMES THE DESIGN THICKNESS OF THE RIPRAP, AND SHOULD EXTEND HORIZONTALLY FROM THE HE FINISHED SLOPE SHOULD BE FREE OF POCKETS OF SMALL STONE OR CLUSTERS O LARGE HAND PLACING MAY BE NECESSARY TO ACHIEVE THE PROPER DISTRIBUTION OF STONE SIZES TO PRODUCE A RELATIVELY SMOOTH, UNIFORM SURFACE. THE FINISHED GRADE OF THE RIPRAP SHOULD BLEND WITH THE SURROUNDING AREA. NO OVERFALL OR PROTRUSION OF RIPRAP SHOULD BE APPARENT

IN GENERAL, ONCE A RIPRAP INSTALLATION HAS BEEN PROPERLY DESIGNED AND INSTALLED IT REQUIRES VERY LITTLE


RIP-RAP APRON NOT TO SCALE

RIPRAP SHOULD EXTEND UP BOTH SIDES OF THE APRON AND AROUND THE END OF THE PIPE OR CULVERT AT THE DISCHARGE OUTLET AT A MAXIMUM SLOPE OF 2:1 AND A HEIGHT NOT LESS THAN TWO THIRDS THE PIPE DIAMETER THERE SHALL BE NO OVERFLOW FROM THE END OF THE APRON TO THE SURFACE OF THE RECEIVING CHANNEL. THE AREA TO BE PAVED OR RIP-RAPPED SHALL BE UNDERCUT SO THAT THE INVERT OF THE APRON SHALL BE AT THE SAME GRADE (FLUSH) WITH THE SURFACE OF THE RECEIVING CHANNEL THE APRON SHALL HAVE A CUTOFF OR TOE WALL AT THE DOWNSTREAM END. MAXIMUM TAPER TO RECEIVING CHANNEL 5:1. THE WIDTH OF THE END OF THE APRON SHALL BE EQUAL TO THE BOTTOM ALL SUBGRADE STRUCTURE TO BE COMPACTED TO 95% OR GREATER. THE PLACING OF FILL, EITHER LOOSE OR COMPACTED IN THE RECEIVING


CHANNEL SHALL NOT BE ALLOWED. NO BENDS OR CURVES IN THE HORIZONTAL ALIGNMENT OF THE APRON WILL BE

MAINTENANCE. RIPRAP SHOULD BE INSPECTED PERIODICALLY FOR SCOUR OR DISLODGED STONES. CONTROL OF WEED AND BRUSH GROWTH MAY BE NEEDED IN SOME LOCATIONS.

Cad file name: V: \220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-ES.dwg

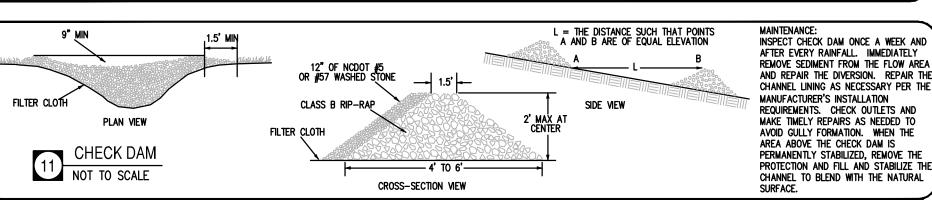

FILTER BAG
NOT TO SCALE

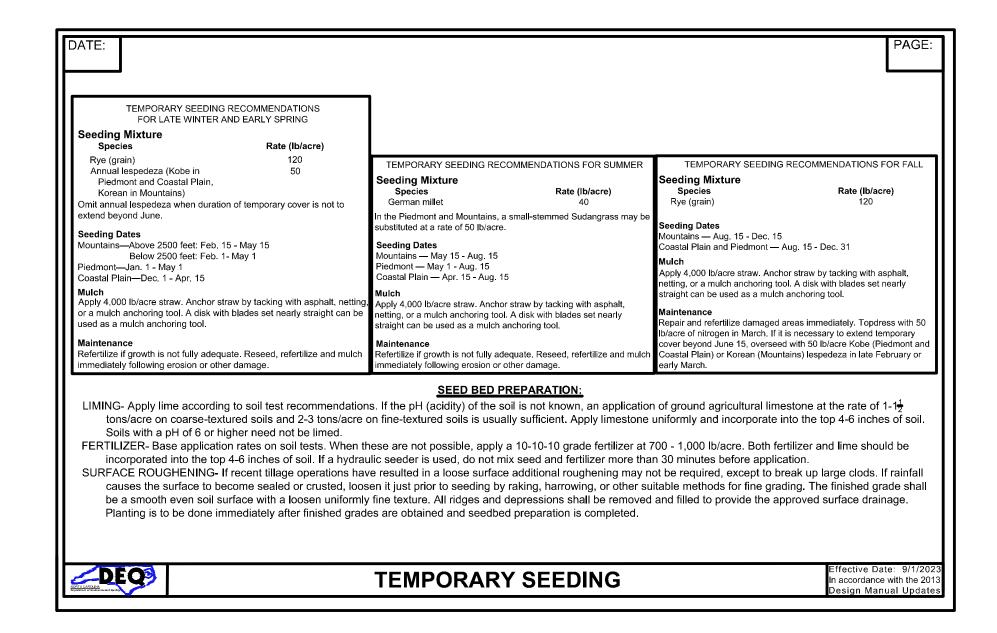


GENERALL
E ERWIN
7, NORTH CAROLIN NC 55 E HARNETT COUNTY

DETAILS

NTROL

EROSION CON

PRELIMINARY DO NOT USE FOR




| 2/10/2025 | 1ST SUBMITT | ΓAL | | | |
|--------------|--------------------------|--------------|--|--|--|
| 3/18/2025 | REVISIONS PER NO | DEQ COMMENTS | | | |
| 4/4/2025 | 2ND SUBMITTAL | | | | |
| | | | | | |
| | | | | | |
| DATE | DESCRIP | TION | | | |
| ML DESIGN | KXO DRAWN | ML CHKD | | | |
| SCALE | H: 1" = XX V: 1" = XX | | | | |


JOB No. 220154-01-001 DATE FEBRUARY 10, 2025

C6.1

Cad file name: V: \220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-ES.dwg

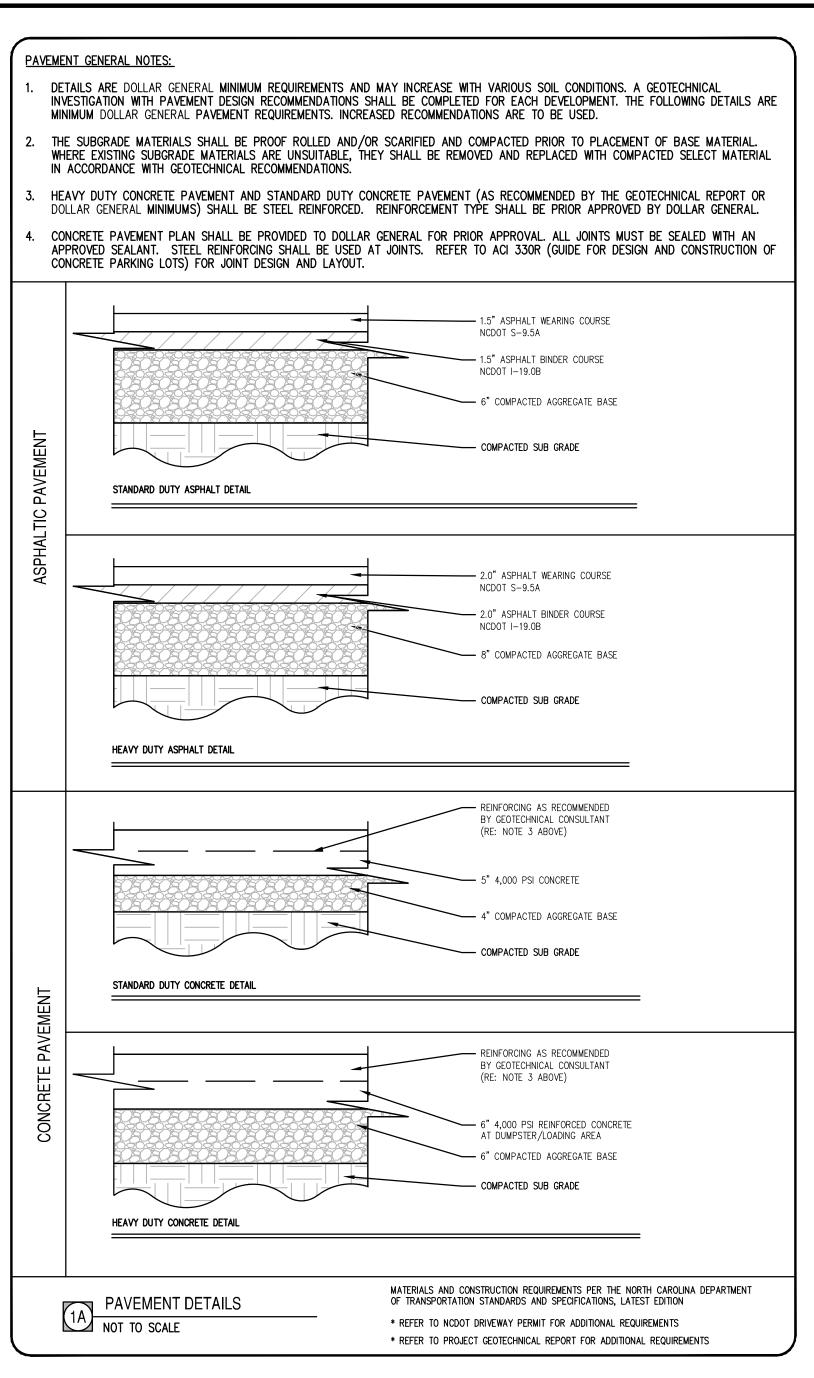

DIVISION SIX / DISTRICT TWO

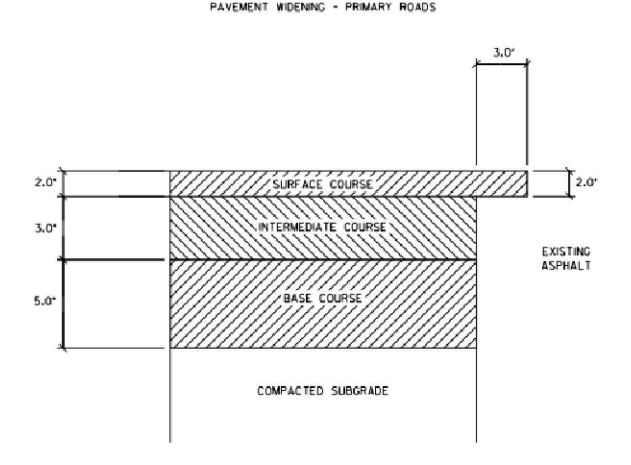

PAVEMENT SCHEDULE


2.0° S 9.5 C


(MILLING REQUIRED THREE FEET AT DEPTH OF 2.0" ON EACH SIDE OF PAVEMENT CUT)

> 3.0°1 19.0 C 5.0°B 25.0 C

PAVEMENT DETAILS


NOT TO SCALE

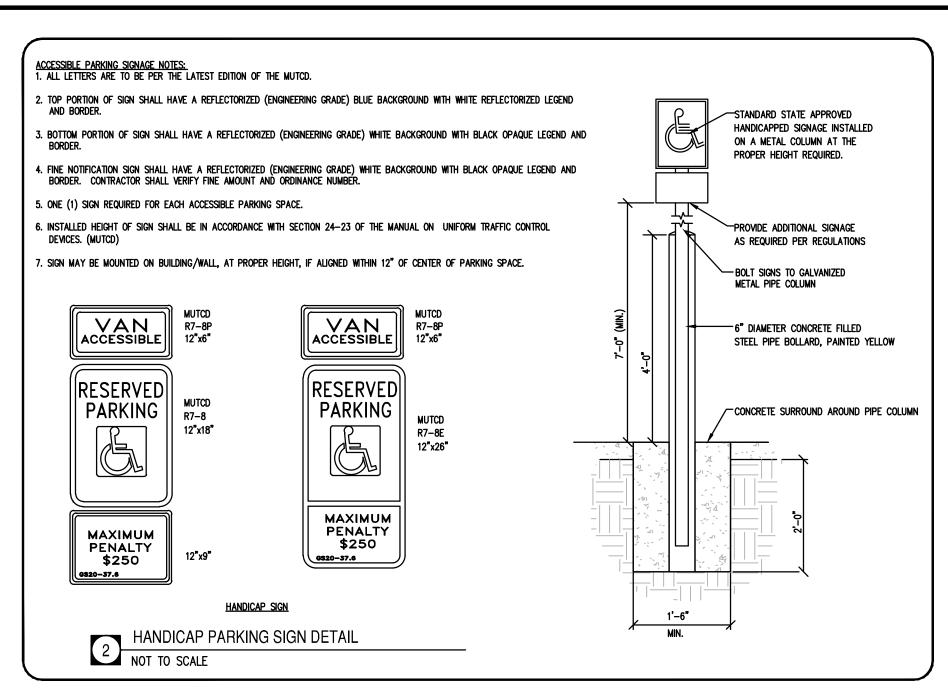

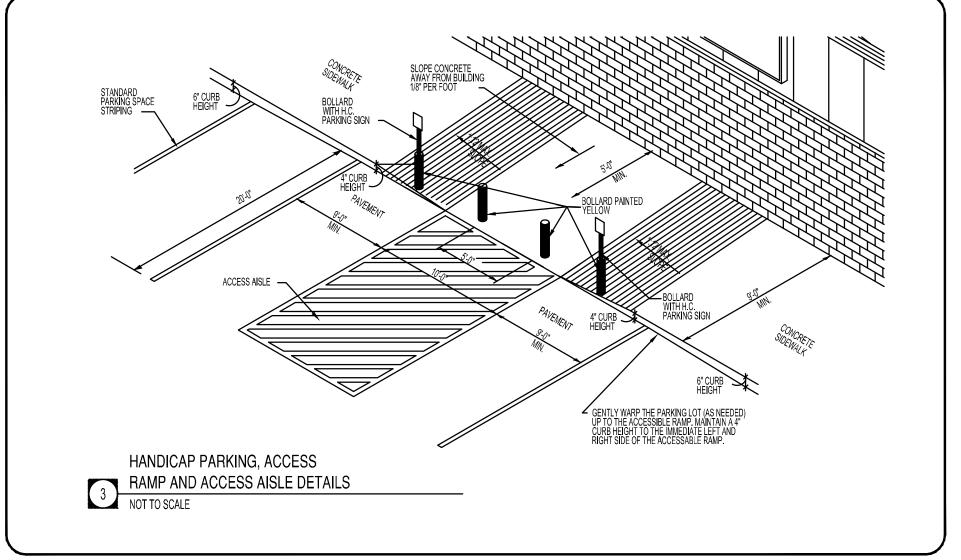


SITE ACCESSIBILITY DETAIL NOTES:


- 1. REFER TO SITE PLAN FOR EXACT LOCATION OF HANDICAP PARKING, WALKWAYS AND RAMPS.
- ALL WALKWAYS, RAMPS, AND HANDICAP PARKING SIGNAGE, ETC. SHALL MEET APPROVED AMERICANS WITH DISABILITIES ACT (ADA) STANDARDS AND
- ONE OUT OF EVERY SIX (6) ACCESSIBLE PARKING SPACES, BUT NOT LESS THAN ONE, IS REQUIRED TO BE VAN ACCESSIBLE.
- ALL CONCRETE ACCESSIBLE RAMPS (3000 PSI) SURFACES SHALL HAVE COLORED TOOLED/SERRATED SLIP RESISTANT SURFACING AND/OR TACTILE WARNING DEVICE PER ADA STANDARDS AND LOCAL ACCESSIBILITY CODE.
- ALL CONCRETE ACCESSIBLE RAMPS SHALL BE COLOR IMPREGNATED TO PROVIDE VISUAL CONTRAST (DARK TO LIGHT) WITH ADJOINING CONCRETE SURFACES (MINIMUM 70% COLOR CONTRAST).
- THE MATERIAL USED TO PROVIDE COLOR CONTRAST IN CONCRETE ACCESSIBLE RAMPS SHALL BE AN INTEGRAL (PERMANENT) PART OF THE CONCRETE AND SHALL NOT BE PAINTED ON OR CAPABLE OF FADING OR WEARING OFF.
- 7. FINISHED GRADES OF PAVEMENT IN HC PARKING AND ACCESSIBILITY AISLE SHALL NOT EXCEED 1:50 SLOPE IN ANY DIRECTION.

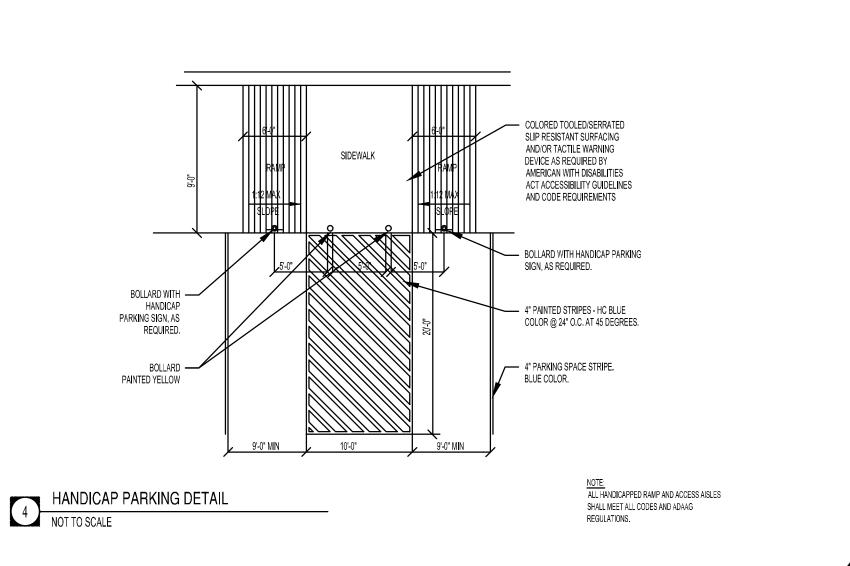



ALL HANDICAPPED RAMP AND ACCESS AISLES SHALL MEET ALL CODES AND ADA


REGULATIONS.

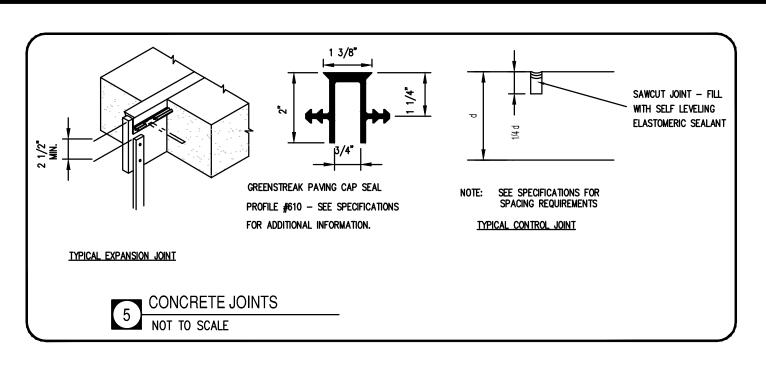


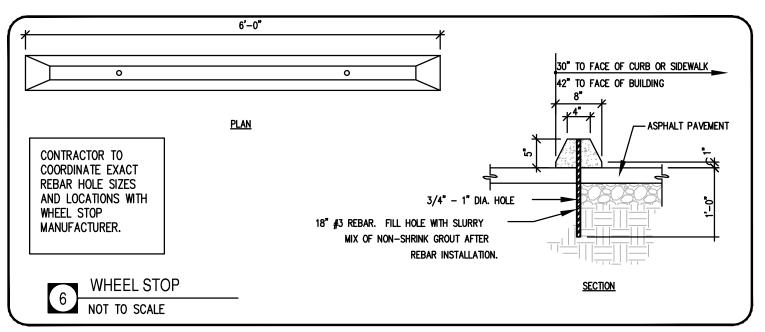


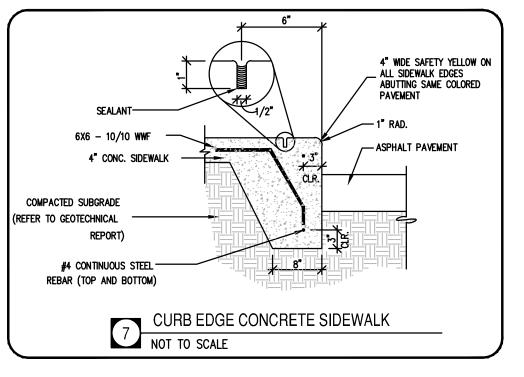


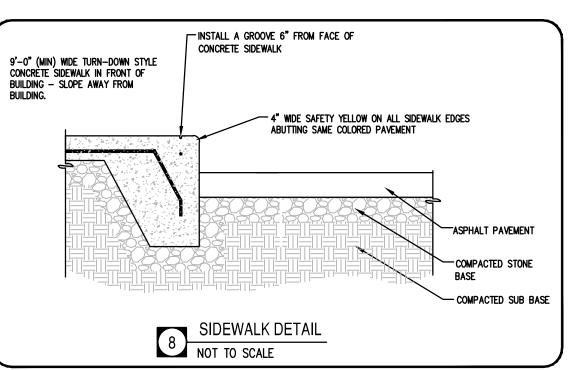

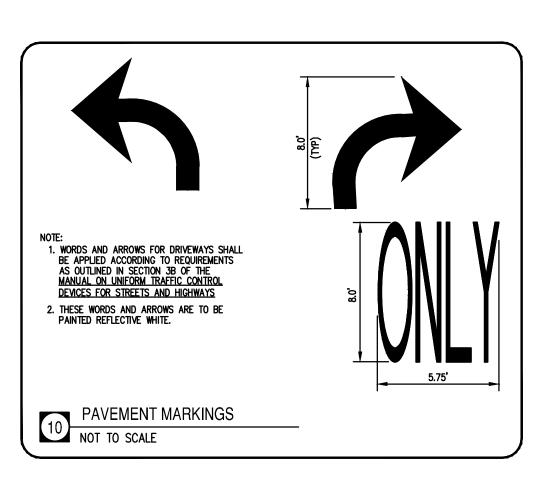

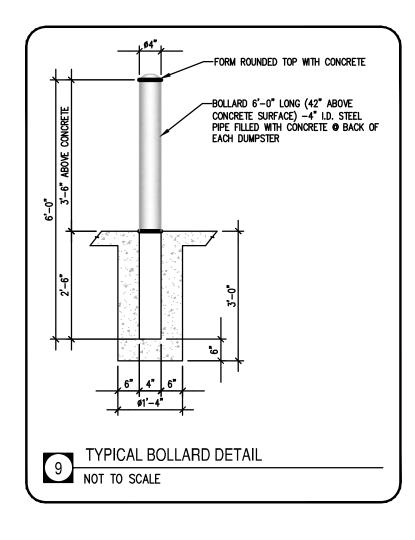

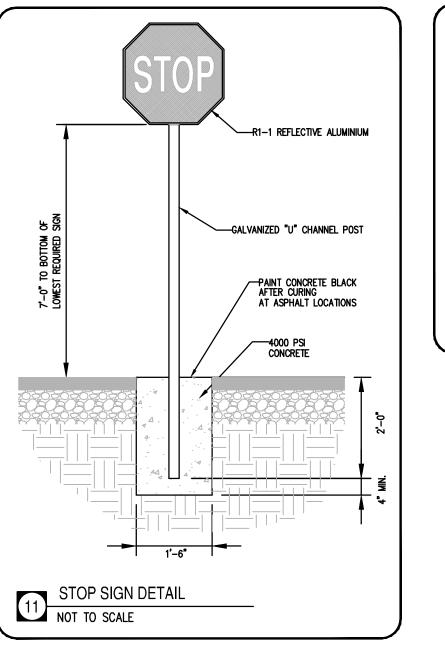

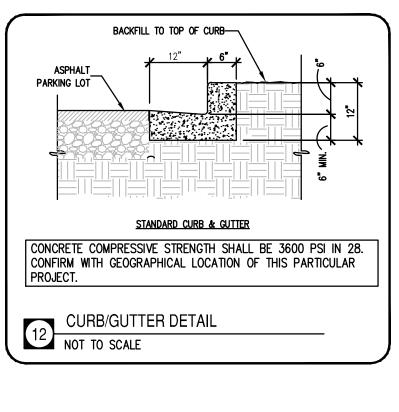



DOLLAR (
NC 55 E
ARNETT COUNTY

NOI-


CONSTRUC


PRELIMINARY DO NOT **USE FOR** CONSTRUCTION



PLAN STATUS

10/2025 1ST SUBMITTAL 18/2025 REVISIONS PER NCDEQ COMMEN 4/4/2025 2ND SUBMITTAL DATE | DESCRIPTION KXO ML DESIGN | DRAWN | CHKD SCALE JOB No. **220154-01-001** DATE FEBRUARY 10, 2025 C6.2 SHEET

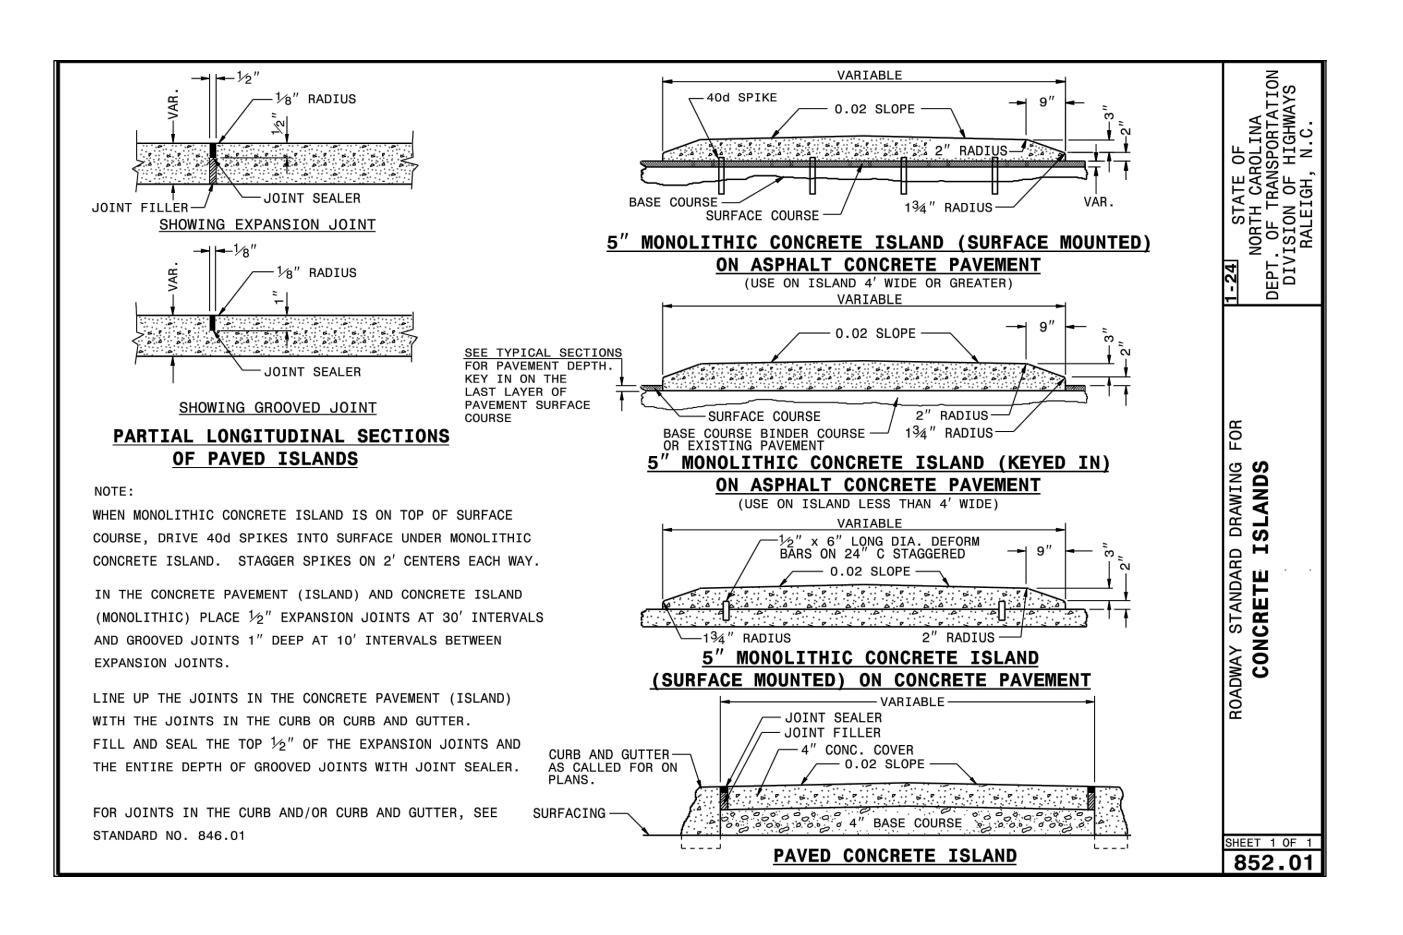

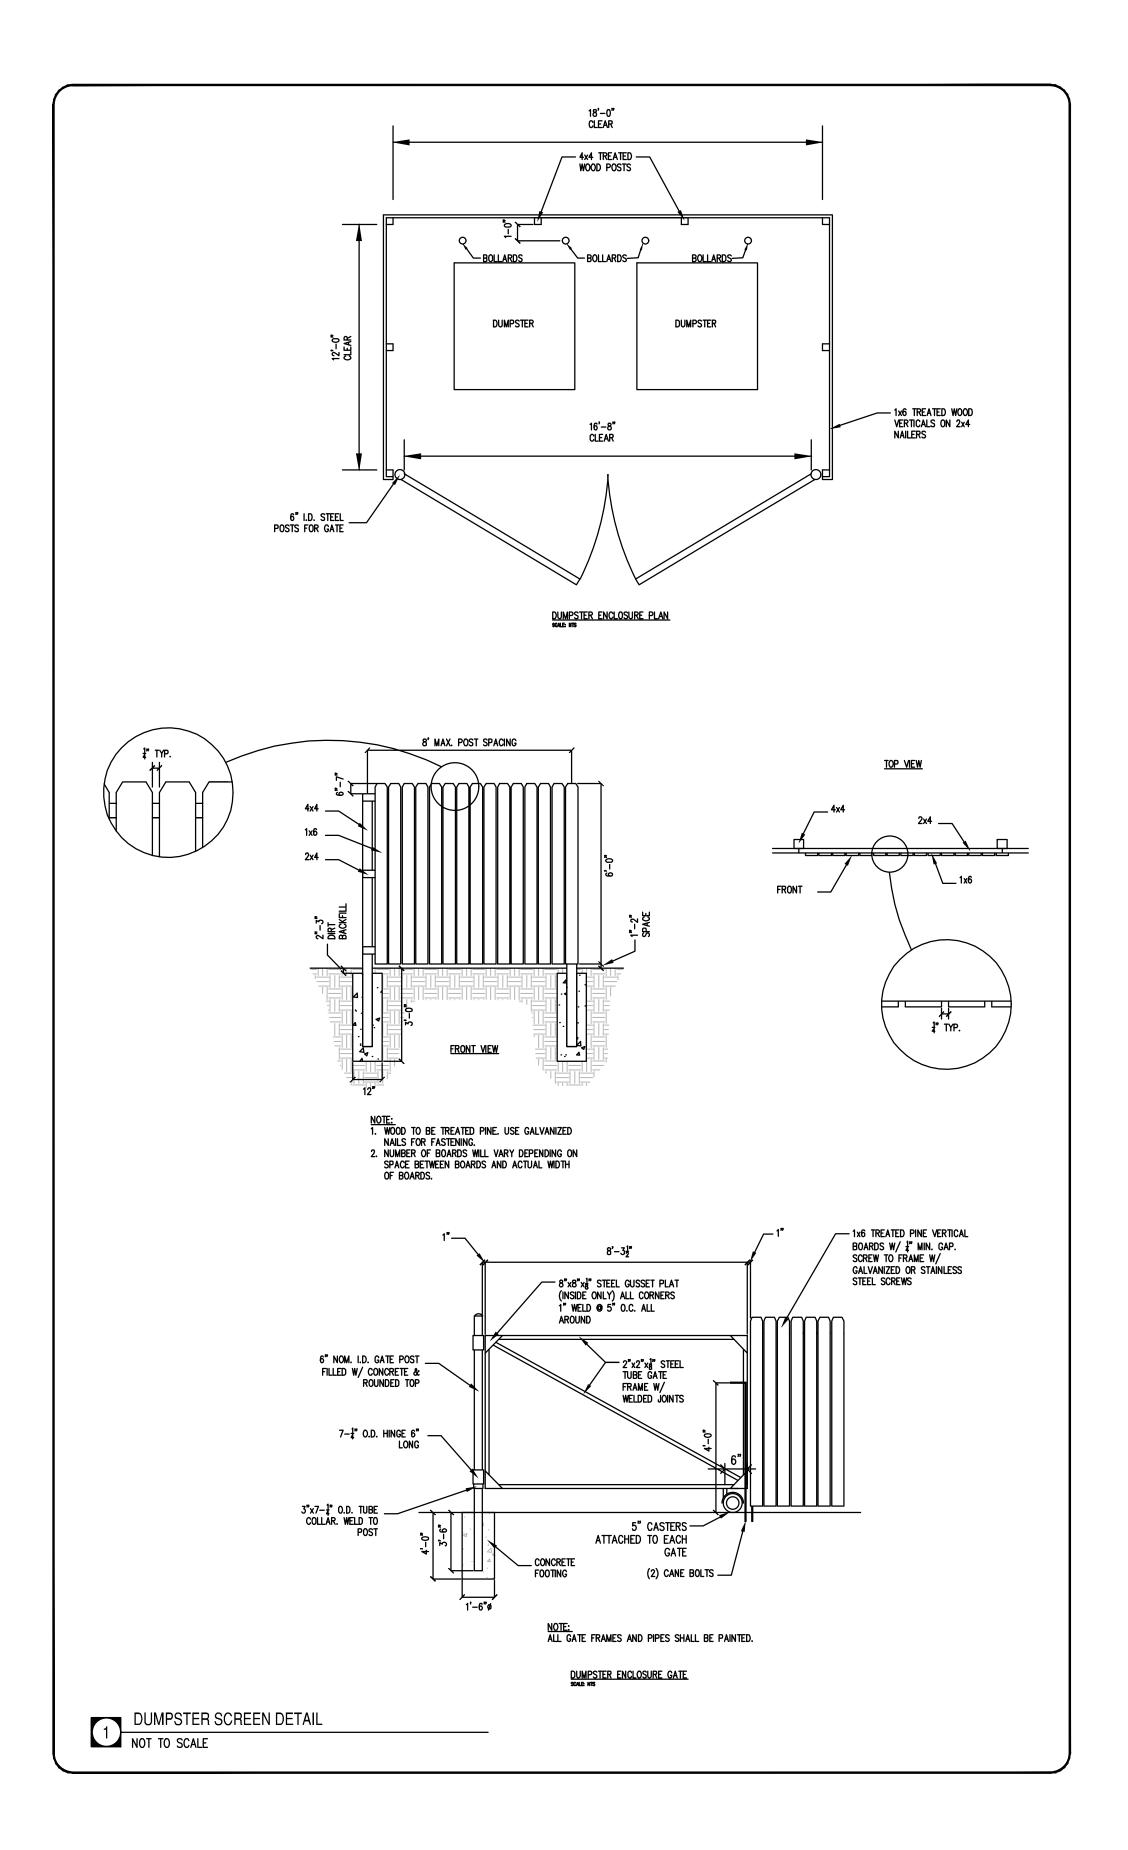



RALEIGH, NC 27609 Phone: (919)553-6570 bowman.com

DOLLAR GENIERAL

NC 55 E ERWIN
ARNETT COUNTY, NORTH CAROLINA

TION DETAILS

CONSTRUC

PRELIMINARY DO NOT USE FOR



PLAN STATUS
2/10/2025 1ST SUBMITTAL
3/18/2025 REVISIONS PER NODEQ COMMENTS
4/4/2025 2ND SUBMITTAL

DATE DESCRIPTION

ML KXO ML
DESIGN DRAWN CHKD

SCALE V:


JOB No. 220154-01-001

DATE FEBRUARY 10, 2025

No.

SHEET

C6.3

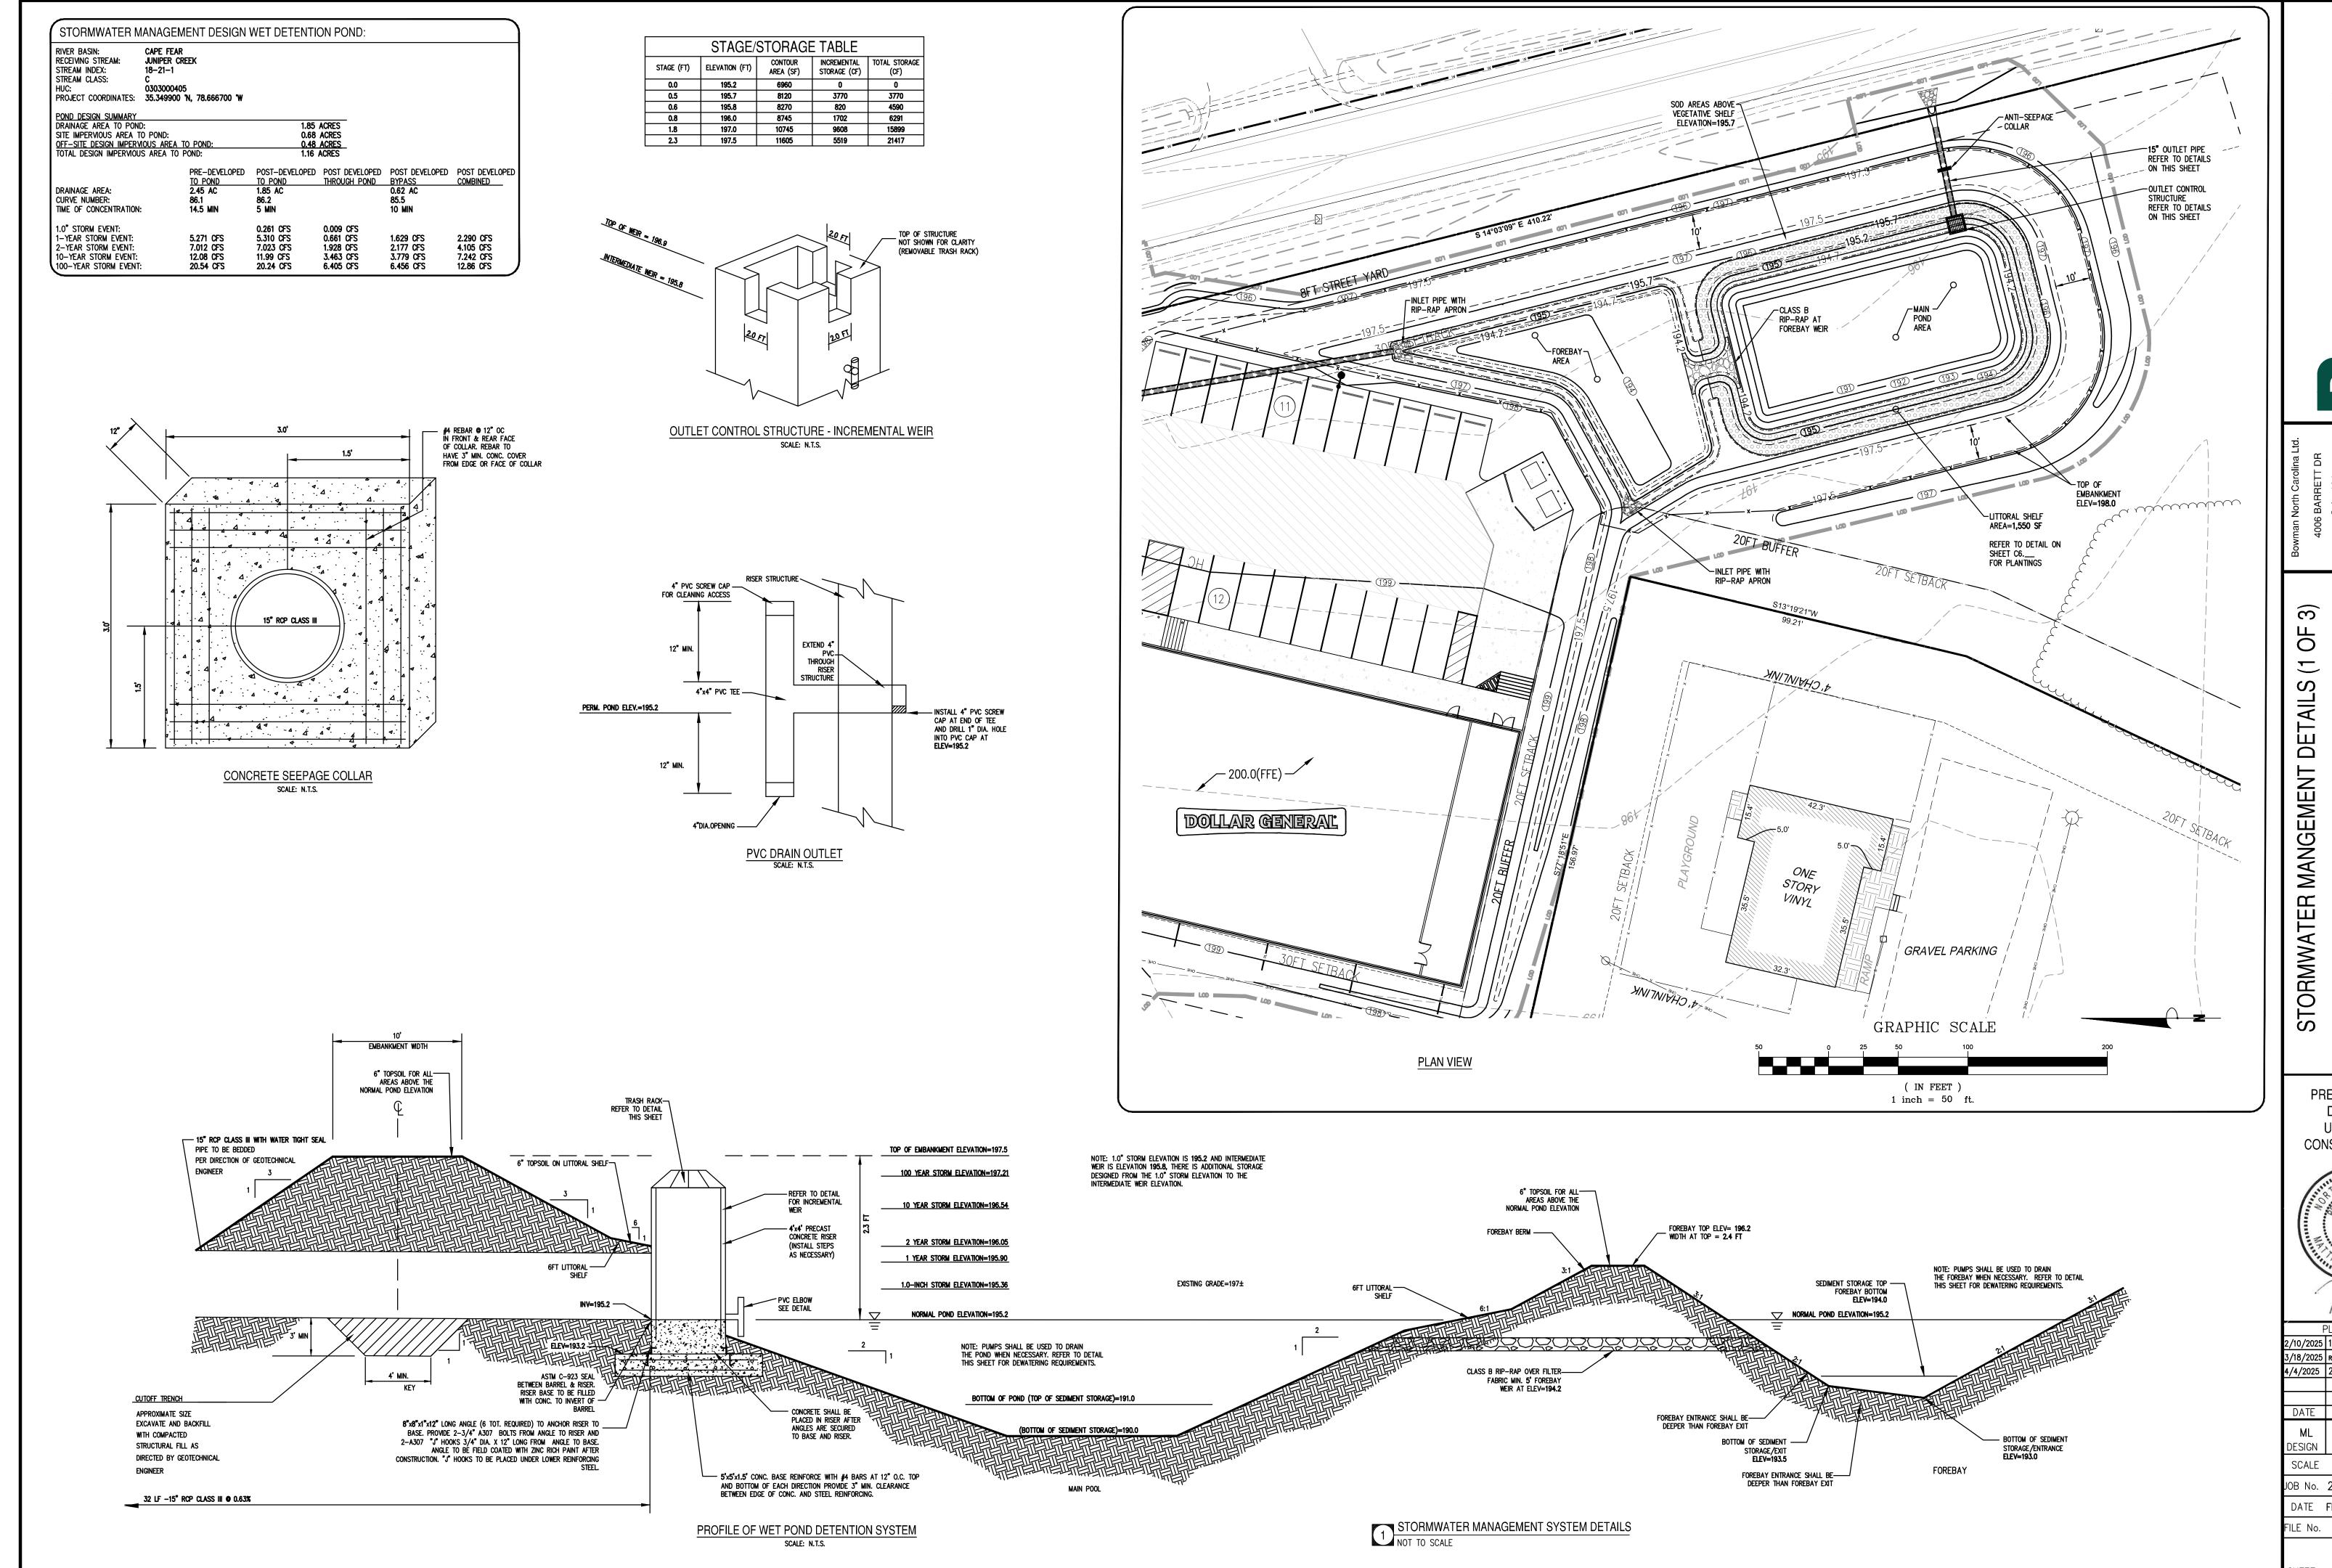

Cad file name: V:\220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-SWD.dwg

DOLLAR GENERAL

NC 55 E ERWIN

PRELIMINARY
DO NOT
USE FOR
CONSTRUCTION



PLAN STATUS

2/10/2025 1ST SUBMITTAL

3/18/2025 REVISIONS PER NODEQ COMMENTS

4/4/2025 2ND SUBMITTAL

DATE DESCRIPTION

ML KXO ML

DESIGN DRAWN CHKD

SCALE H: 1" = 20'
V: 1" = 2'


V: 1" = 2"

JOB No. 220154-01-001


DATE FEBRUARY 10, 2025


FILE No.

SHEET C6.4

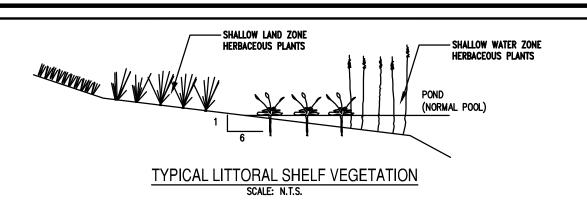

| | | LITTORAL SHELF | E DI ANTING | SCHEDIII E | | |
|--|-------------------------------|----------------|-------------|-------------------|---------|----------------|
| | | | | NURSERY CONTAINER | | 1 |
| SCIENTIFIC NAME | COMMON NAME | PLANTING ZONE | QUANTITY | TYPE | SPACING | PLANTING SEASO |
| Asclepias Incarnata | Swamp Milkweed Quill sedge | | | | | |
| Carex tenera | Quill Sedge | | | | | |
| Chelone glabra | White Turtlehead | | | | | |
| Eupatoriadelphus dubius | Dward Joe Pye Weed | | | | | |
| Eupatoriadelphus fistulosus | Joe Pye Weed | SHALLOW LAND | | | | |
| Eupatoriadelphus maculatus | Spotted Trumpetweed | | | | | |
| Hibiscus coccineus | Scarlet rosemallow | | 194 | PEAT POT | 6' O.C. | SPRING/SUMMER |
| Hibiscus laevis | Halberdleaf rosemallow | | | | | |
| Kosteletzyka virginica | Seashore Mallow | | | | | |
| Lobelia cardinalis | Cardinal Flower | | | | | |
| Lobelia elongata | Longleaf Lobelia | | | | | |
| Lobelia siphilitica | Great blue Lobelia | | | | | |
| Rhynchospora colorata | Starrush whitetop | | | | | |
| Saccharum baldwinii | Narrow plumegrass | | | | | |
| Acorus americanus | Sweetflag | | | | | |
| Alisma subcordatum | Water Plantain | | | | | |
| Hydrolea quadrivalvis | Waterpod | | | | | |
| Iris virginica | Waterpod Blue flag iris | | | | | |
| Juncus effusus var. pylaei or solutus | Softrush | | | | | |
| Ludwigia spp. | Primrose willow | | | | | |
| Peltandra virginica | Arrow arum | | | | | |
| Pontederia cordata | Pickerelweed | SHALLOW WATER | 104 | | | |
| Sagittaria latifolia | Duck Potato | SHALLOW WATER | 194 | | | |
| Sagittaria lancifolia | Bulltoungue | | | | | |
| Saururus cernuus | Lizard's tail | | | | | |
| Schoenoplectus tabernaemontani | Soft stem bulrush | | | | | |
| Schoenopleatus americanus | Three—square bulrush | | | | | |
| Schoenoplectus pungens var. pungens | | | | | | |
| Scirpus cyperinus | Woolgrass | | | | | |
| 7'1 "" | A' 1 1 |] | | | | |

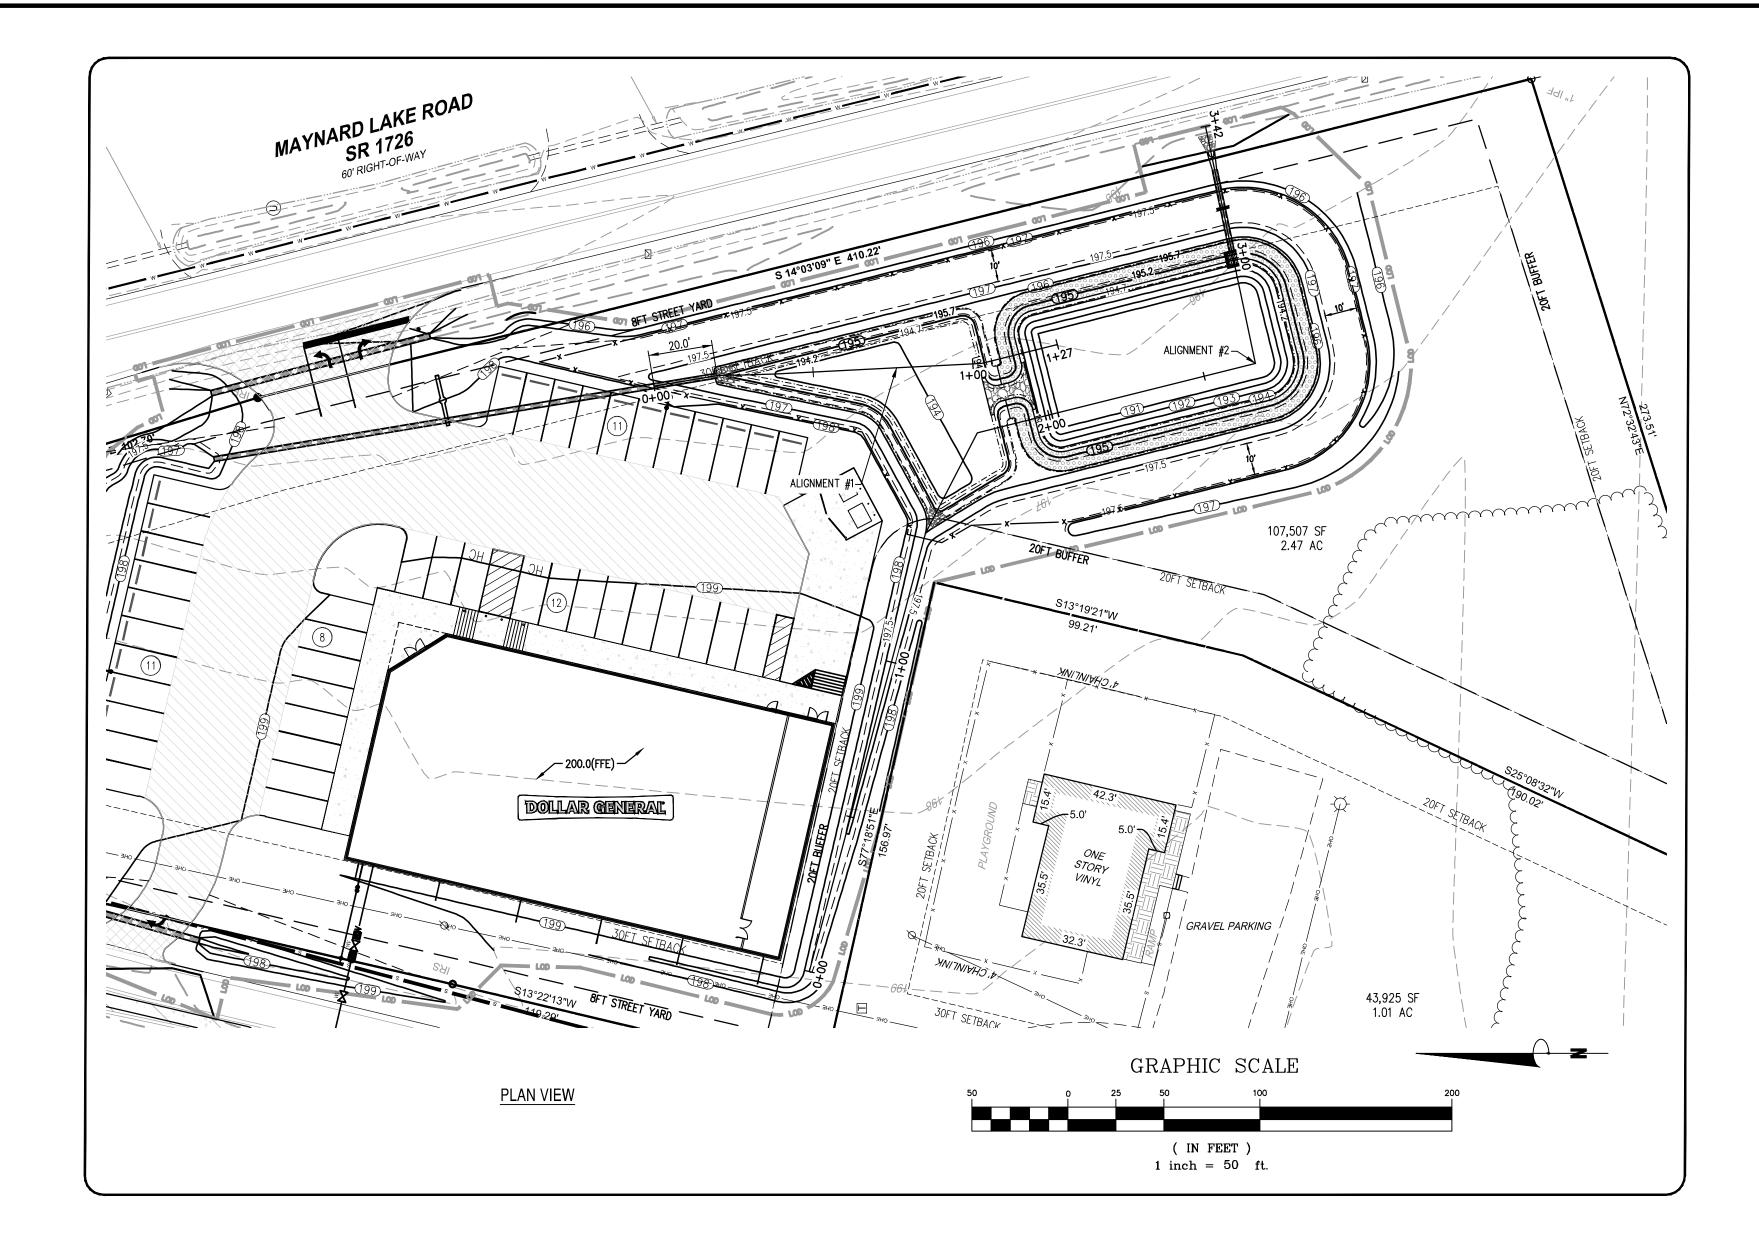

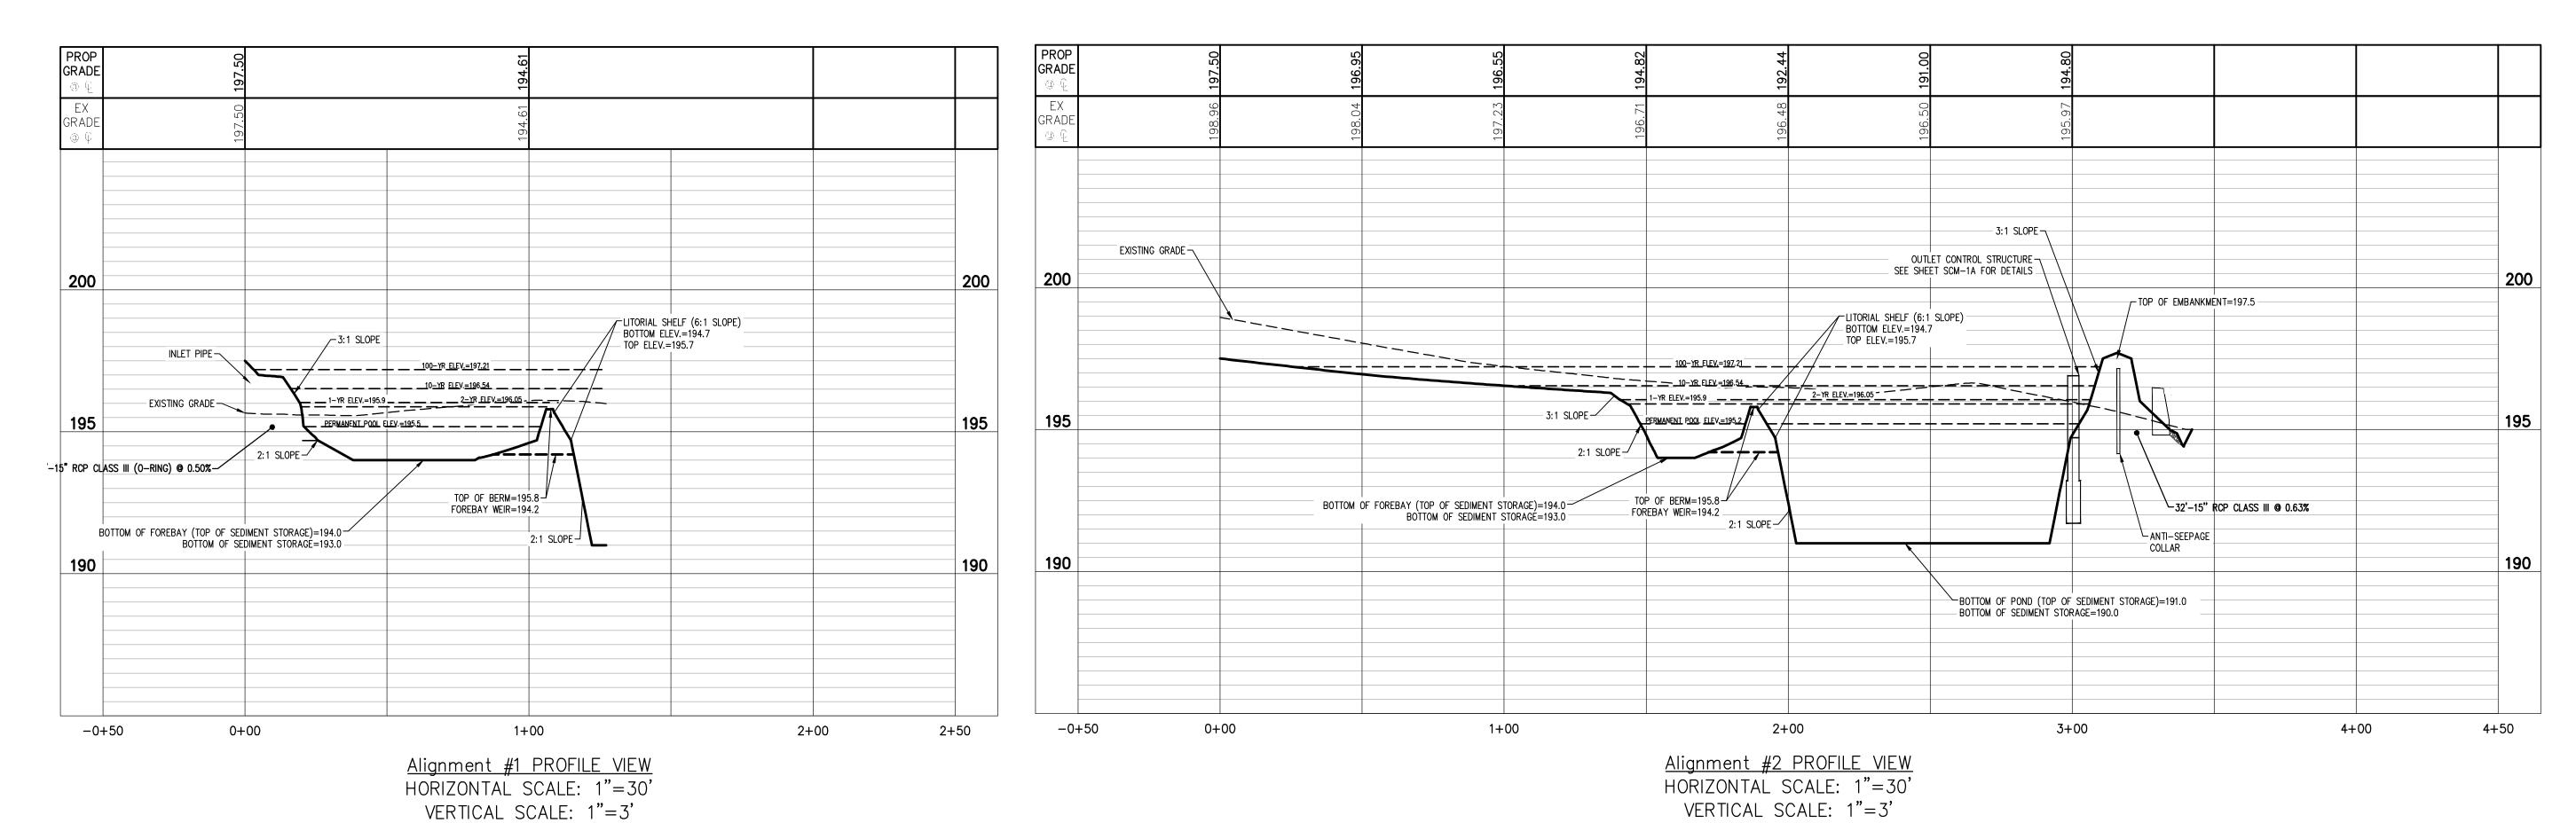

Suite 104
RALEIGH, NC 27609
Phone: (919)553-6570
bowman.com


DOULAR GENERAL

NC 55 E ERWIN
HARNETT COUNTY, NORTH CAROLINA

OF 3)

STORMWATER MANGEMENT DETAILS (2

PRELIMINARY DO NOT USE FOR



PLAN STATUS

2/10/2025 1ST SUBMITTAL

3/18/2025 REVISIONS PER NCDEQ COMMENTS

4/4/2025 2ND SUBMITTAL

DATE DESCRIPTION

ML KXO ML

DESIGN DRAWN CHKD

SCALE H: 1" = 30'
V: 1" = 3'

JOB No. 220154-01-001


DATE FEBRUARY 10, 2025


FILE No.

C6.5

SHEET

Cad file name: V:\220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-SWD.dwg

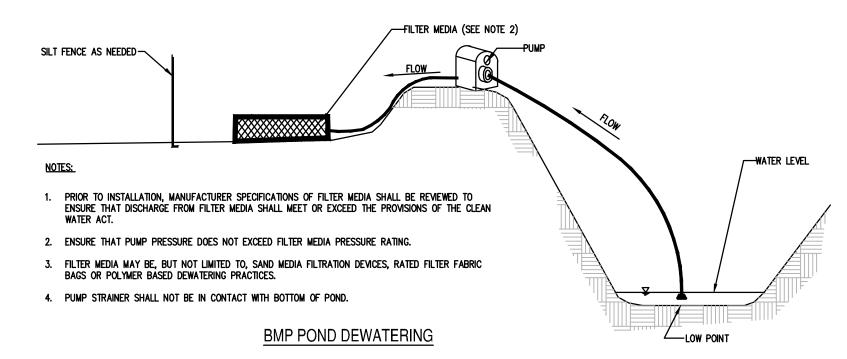

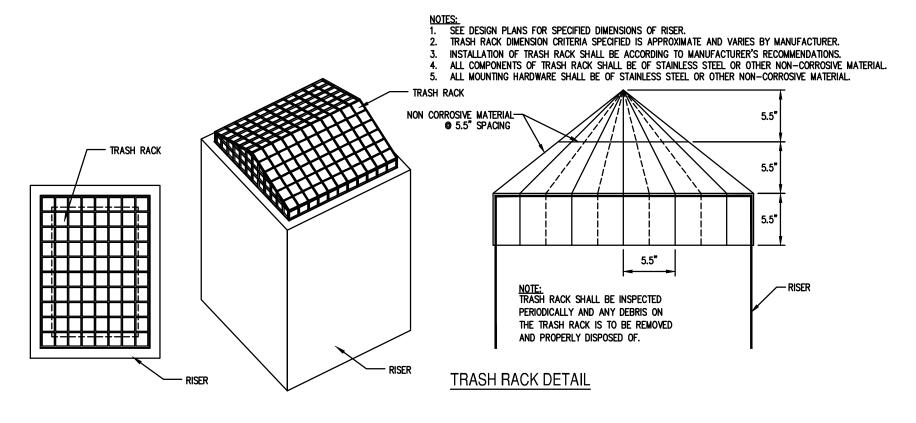

| 1 | SI | EEDBED PREPARATION: | |
|---|----|---|---|
| | 1. | CHISEL COMPACTED AREAS AND SPREAD TOPSOIL THREE INCHES DEEP OVER ADVERSE SOIL CONDITIONS AVAILABLE. | , |
| | 2. | RIP THE ENTIRE AREA TO SIX INCHES DEEP. | |

REMOVE ALL LOOSE ROCK, ROOTS AND OTHER OBSTRUCTIONS, LEAVING SURFACE REASONABLY SMOOTH AND APPLY AGRICULTURAL LIME, FERTILIZER, AND SUPERPHOSPHATE UNIFORMLY AND MIX WITH SOIL (SEE SEEDING

CONTINUE TILLAGE UNTIL A WELL-PULVERIZED, FIRM, REASONABLY UNIFORM SEEDBED IS PREPARED FOUR TO SIX

SEED ON A FRESHLY PREPARED SEEDBED AND COVER SEED LIGHTLY WITH SEEDING EQUIPMENT OR CULTIPACK AFTER SEEDING.

7. MULCH IMMEDIATELY AFTER SEEDING AND ANCHOR MULCH.

8. INSPECT ALL SEEDED AREAS AND MAKE NECESSARY REPAIRS OR RE—SEEDINGS WITHIN THE PLANTING SEASON, IF POSSIBLE. IF STAND SHOULD BE MORE THAN 60% DAMAGED, RE—ESTABLISH FOLLOWING THE ORIGINAL LIME,

CONSULT S&EC ENVIRONMENTAL ENGINEERS ON MAINTENANCE TREATMENT AND FERTILIZATION AFTER PERMANENT COVER IS ESTABLISHED. **LANDSCAPING NOTES:**

ALL LANDSCAPING SHALL BE IN COMPLIANCE WITH THE NCDEQ BMP REQUIREMENTS. LANDSCAPE CONTRACTOR SHALL PROVIDE A TWO-YEAR WARRANTY FOR BMP PLANTING SURVIVAL/REPLACEMENT.

SURVIVE MUST BE REPLACED. ESTABLISHMENT PROCEDURES, SUCH AS CONTROL OF INVASIVE WEEDS, ANIMAL AND VANDAL DAMAGE, MULCHING, RE-STAKING, WATERING, AND MESH OR TUBE PROTECTION REPLACEMENT, SHALL BE IMPLEMENTED TO THE EXTEND NEEDED TO ENSURE PLANT SURVIVAL. STAKING MUST BE REMOVED AFTER ESTABLISHMENT (APPROXIMATELY 12

AT THE END OF THE FIRST YEAR AND AT THE END OF THE TWO-YEAR WARRANTY PERIOD, ALL PLANTS THAT DO NOT

SOD WITHIN BMP AND SURROUNDING AREAS TO BE BERMUDA OR CENTIPEDE GRASS.

MONTHS), TO PREVENT GIRDLING (STRANGLING) OF ALL WOODY PLANTS.

- TARHEEL NATIVE TREES

GRASS OR WILDFLOWER SEED MUST BE APPLIED AT THE RATES SPECIFIED BY THE SUPPLIERS. IF PLANT ESTABLISHMENT CANNOT BE ACHIEVED WITH SEEDING BY THE TIME OF SUBSTANTIAL COMPLETION OF THE STORMWATER FACILITY PORTION OF THE PROJECT, THEN THE CONTRACTOR SHALL PLANT THE AREA WITH WILDFLOWER SOD, PLUGS, CONTAINER PLANTS, OR OTHER MEANS TO COMPLETE THE SPECIFIED PLANTING AND PROTECT AGAINST EROSION BEFORE WATER IS ALLOWED TO ENTER THE STORMWATER BMP FACILITY.

ALL MATERIALS SHALL BE ACQUIRED FROM AN APPROVED NCDEQ PLANT VENDOR. PLANT MATERIAL SHOULD BE PURCHASED FROM A LOCAL SOURCE TO ENSURE SURVIVABILITY. LOCAL VENDORS FOR THIS SITE INCLUDE:

— CILL IDE NATIVE PLANT NURSERY 919-662-5566

- GROWING WILD NURSERY 910-259-6361 NC FOREST SERVICE 919-731-7988 PLANT DELIGHTS NURSERY 919-772-4794

IMMEDIATELY AFTER THE WET DETENTION BASIN IS ESTABLISHED, THE PLANTS ON THE VEGETATED SHELF AND PERIMETER OF THE BASIN SHOULD BE WATERED TWICE WEEKLY IF NEEDED UNTIL THE PLANTS BECOME ESTABLISHED (COMMONLY SIX WEEKS)

NO PORTION OF THE WET DETENTION POND SHOULD BE FERTILIZED AFTER THE FIRST INITIAL FERTILIZATION THAT IS REQUIRED TO ESTABLISH THE PLANTS ON THE VEGETATED SHELF.

LANDSCAPING NOTES: I. CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE CODES AND ORDINANCES REGARDING LANDSCAPING.
2. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ESTABLISH A HEALTHY STAND OF GRASS ON ALL SEEDED

CONTRACTOR SHALL PROVIDE NATURAL TOPSOIL THAT IS FERTILE, FRIABLE, WITHOUT MIXTURE OF SUBSOIL MATERIALS, AND OBTAINED FROM A WELL DRAINED, AVAILABLE SITE. IT SHALL NOT CONTAIN SUBSTANCES WHICH MAY BE HARMFUL TO PLANT GROWTH. TOPSOIL SHALL BE SCREENED AND FREE FROM CLAY, LUMPS, STONES, ROOTS, PLANTS, OR SIMILAR SUBSTANCES 1" OR MORE IN DIAMETER, DEBRIS, OR OTHER OBJECTS WHICH MIGHT BE A HINDERANCE TO PLANTING OPERATIONS. TOPSOIL SHALL CONTAIN AT LEAST 4-6% ORGANIC MATTER BY WEIGHT AND HAVE A PH RANGE OF 5.5 TO 7.0.

CONTRACTOR SHALL BE RESPONSIBLE FOR THE WATERING AND THE MAINTENANCE OF ALL LANDSCAPED AREAS UNTIL THE LATER OF; (a) THIRTY (30) DAYS FOLLOWING THE PLANTING OF THE GRASS AND SHRUBS, OR (b) THE DATE THAT STORE OPENS FOR BUSINESS TO THE PUBLIC. CONTRACTOR SHALL ALSO BE RESPONSIBILITY FOR THE SURVIVAL OF THE BMP PLANTING MATERIALS DURING THE TWO-YEAR WARRANTY PERIOD AND SHALL REPLACE ALL PLANTS THAT DO NOT SURVIVE AT THE END OF THE FIRST YEAR AND AT THE END OF THE SECOND YEAR OF THE WARRANTY PERIOD.
CONTRACTOR TO VERIFY QUANTITIES PRIOR TO COMMENCING WORK.
ANY DISTURBED AREAS NOT SCHEDULED FOR HARDSCAPE, PLANTINGS, OR MULCH SHALL BE SEEDED LAWN.

REFER TO SITE PLAN FOR LOCATION OF AREAS TO BE SODDED.

NO PLANT SUBSTITUTIONS ARE PERMITTED WITHOUT WRITTEN APPROVAL OF THE OWNERS REPRESENTATIVE.

FOR NEW PLANTING AREAS, REMOVE ALL PAVEMENT, GRAVEL SUB-BASE AND CONSTRUCTION DEBRIS; REMOVE COMPACTED SOIL AND ADD 18" NEW TOPSOIL, OR TILL AND AMEND THE TOP 18" OF EXISTING SOIL TO MEET TOPSOIL/PLANTING MIX STANDARDS FOR TREES. ADJUST TREE PLANTING LOCATIONS TO AVOID UNDERGROUND UTILITIES. PLANT 15' FROM ALL UNDERGROUND UTILITIES (SEWER AND STORM DRAINAGE, GAS, WATER, PHONE, AND ELECTRICAL LINES.)

CONSTRUCTION SEQUENCE FOR WET DETENTION POND: INSTALL EROSION CONTROLS.

| | SCM element: | Potential problems: | How to remediate the problem: |
|--|---|--|---|
| S DEEP OVER ADVERSE SOIL CONDITIONS, IF | The entire SCM | Trash/debris is present. | Remove the trash/debris. |
| EAVING SURFACE REASONABLY SMOOTH AND UNIFORMLY AND MIX WITH SOIL (SEE SEEDING LY UNIFORM SEEDBED IS PREPARED FOUR TO SIX | The perimeter of the wet pond | Areas of bare soil and/or erosive gullies have formed. | Regrade the soil if necessary to remove the gully, plant ground cover and water until it is established. Provide lime and a one-time fertilizer application. |
| HTLY WITH SEEDING EQUIPMENT OR CULTIPACK R RE-SEEDINGS WITHIN THE PLANTING SEASON, IF | | The inlet pipe is clogged (if applicable). | Unclog the pipe. Dispose of the sediment in a location where it will not cause impacts to streams or the SCM. |
| E-ESTABLISH FOLLOWING THE ORIGINAL LIME, REATMENT AND FERTILIZATION AFTER PERMANENT | The inlet device | The inlet pipe is cracked or otherwise damaged (if applicable). | Repair or replace the pipe. |
| REQUIREMENTS. R BMP PLANTING SURVIVAL/REPLACEMENT. | | Erosion is occurring in the swale (if applicable). | Regrade the swale if necessary and provide erosion control devices such as reinforced turf matting or riprap to avoid future erosion problems. |
| R WARRANTY PERIOD, ALL PLANTS THAT DO NOT G, ANIMAL AND VANDAL DAMAGE, MULCHING, NT, SHALL BE IMPLEMENTED TO THE EXTEND AFTER ESTABLISHMENT (APPROXIMATELY 12 S. | The forebay | Sediment has accumulated to a depth greater than the original design depth for sediment storage. | Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the SCM. |
| ITIPEDE GRASS. IFIED BY THE SUPPLIERS. IF PLANT SUBSTANTIAL COMPLETION OF THE STORMWATER LANT THE AREA WITH WILDFLOWER SOD, PLUGS, | | Erosion has occurred. | Provide additional erosion protection such as reinforced turf matting or riprap if needed to prevent future erosion problems. |
| PLANTING AND PROTECT AGAINST EROSION Y. NT VENDOR. PLANT MATERIAL SHOULD BE AL VENDORS FOR THIS SITE INCLUDE: | | Weeds are present. | Remove the weeds, preferably by hand. If pesticide is used, wipe it on the plants rather than spraying. |
| | | Best professional practices show that pruning is needed to maintain optimal plant health. | Prune according to best professional practices. |
| PLANTS ON THE VEGETATED SHELF AND EDED UNTIL THE PLANTS BECOME ESTABLISHED FTER THE FIRST INITIAL FERTILIZATION THAT IS | The vegetated shelf | Plants are dead, diseased or dying. | Determine the source of the problem: soils, hydrology, disease, etc. Remedy the problem and replace plants. Provide a one-time fertilizer application to establish the ground cover if a soil test indicates it is necessary. |
| ORDINANCES REGARDING LANDSCAPING. A HEALTHY STAND OF GRASS ON ALL SEEDED | | Weeds are present. | Remove the weeds, preferably by hand. If pesticide is used, wipe it on the plants rather than spraying. |
| E, FRIABLE, WITHOUT MIXTURE OF SUBSOIL SITE. IT SHALL NOT CONTAIN SUBSTANCES BE SCREENED AND FREE FROM CLAY, LUMPS, IN DIAMETER, DEBRIS, OR OTHER OBJECTS OPSOIL SHALL CONTAIN AT LEAST 4-6% ORGANIC THE MAINTENANCE OF ALL LANDSCAPED AREAS | | Sediment has accumulated to a depth greater than the original design sediment storage depth. | Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the SCM. |
| ANTING OF THE GRASS AND SHRUBS, OR (b) CONTRACTOR SHALL ALSO BE RESPONSIBILITY HE TWO—YEAR WARRANTY PERIOD AND SHALL HE FIRST YEAR AND AT THE END OF THE | The main treatment area | Algal growth covers over 50% of the area. | Consult a professional to remove and control the algal growth. |
| RK. TINGS, OR MULCH SHALL BE SEEDED LAWN. PROVAL OF THE OWNERS REPRESENTATIVE. | | Cattails, phragmites or other invasive plants cover 50% of the basin surface. | Remove the plants by wiping them with pesticide (do not spray). |
| B-BASE AND CONSTRUCTION DEBRIS; REMOVE ND THE TOP 18" OF EXISTING SOIL TO MEET | | Shrubs have started to grow on the embankment. | Remove shrubs immediately. |
| ILITIES. PLANT 15' FROM ALL UNDERGROUND IND ELECTRICAL LINES.) | The embankment | Evidence of muskrat or beaver activity is present. | Consult a professional to remove muskrats or beavers and repair any holes or erosion. |
| CONSTRUCTION SEQUENCE | | A tree has started to grow on the embankment. | Consult a dam safety specialist to remove the tree. |
| OR WET DETENTION POND: INSTALL EROSION CONTROLS. | | An annual inspection by an appropriate professional shows that the embankment needs repair. | Make all needed repairs immediately. |
| CONSTRUCT DAM BASE AND AREAS BELOW THE NORMAL POOL. CONSTRUCTION TO BE PERFORMED UNDER THE INSPECTION OF THE GEOTECHNICAL ENGINEER. SEED UPON COMPLETION. | The outlet device | Clogging has occurred. | Clean out the outlet device and dispose of any sediment in a location where it will not cause impacts to streams or the SCM |
| INSTALL OUTLET PIPE, RIP—RAP APRON AND STONE FILTER RING. | | The outlet device is damaged | Repair or replace the outlet device. |
| CONSTRUCT OUTLET STRUCTURE. | Election well-stated in | Weeds or volunteer trees are growing on the mat. | Remove the weeds or trees. |
| REMOVE ACCUMULATED SEDIMENT AND SEED UPON COMPLETION. | Floating wetland island (if applicable) | The anchor cable is damaged, disconnected or missing. | Restore the anchor cable to its design state. |
| | | Erosion or other signs of damage have occurred at the outlet. | Repair the damage and improve the flow dissipation structure |
| | The receiving water | | |

STORMWATER MANAGEMENT NOTES:

A PERMITTED STRUCTURAL STORMWATER BMP/CONTROL SHALL ANNUALLY SUBMIT A MAINTENANCE AND INSPECTION REPORT FOR EACH BMP TO THE STORMWATER ADMINISTRATOR. ANNUAL INSPECTIONS SHALL BEGIN WITHIN ONE YEAR OF THE RECORDATION OF ANY DEED(S) SHOWING STORMWATER

UPON COMPLETION OF THE PROJECT, AND BEFORE A CERTIFICATE OF OCCUPANCY SHALL BE GRANTED, THE ENGINEER OF RECORD SHALL CERTIFY THAT THE COMPLETED PROJECT IS IN ACCORDANCE WITH THE APPROVED

A FINAL INSPECTION OF THE SITE AND STORMWATER MANAGEMENT BMP/CONTROLS TO BE SCHEDULED WITH AND COMPLETED BY THE PROJECT

NCDEQ AND THEIR ASSIGNS HAVE RIGHT TO ACCESS THE STORMWATER CONTROL(s) FOR INSPECTIONS OR MAINTENANCE AS NECESSARY.

THE FINAL PLAT OR CERTIFICATE OF OCCUPANCY. THE STORMWATER CONTROL IS TO BE INSPECTED TO ENSURE IT IS FUNCTIONING AS DESIGNED AND HAS FULL DESIGN VOLUME PRIOR TO ISSUANCE OF THE FINAL CERTIFICATE OF OCCUPANCY.

THE PROPERTY OWNER IS RESPONSIBLE FOR MAINTAINING THE STORMWATER

THE DEVELOPER OR HIS AGENT SHALL CONTACT THE **DESIGN ENGINEER W**HEN THE BEST MANAGEMENT PRACTICE(S) ARE CONSTRUCTED AND ABOUT TO BECOME OPERATIONAL SO A FINAL INSPECTION CAN BE PERFORMED TO DETERMINE COMPLIANCE WITH THE APPROVED PLAN CAN BE PERFORMED.

Discharges from the wet pond are causing erosion or sedimentation in the receiving Contact the local NCDEQ Regional Office.

ANNUAL MAINTENANCE INSPECTION AND REPORT REQUIRED - THE OWNER OF BMPs/CONTROL STRUCTURES.

STORMWATER MANAGEMENT PLANS AND DESIGNS.

THE ENGINEER'S CERTIFICATION OF COMPLETION WILL BE REQUIRED PRIOR TO

CONTROLS(s) ACCORDING TO THE APPROVED MAINTENANCE PLAN AND DIRECTION OF NCDEQ.

USE FOR CONSTRUCTION

PLAN STATUS

PRELIMINARY

DO NOT

DOLLAR

(m)

OF

DETAIL(


MANGEMENT


STORMWATE


/10/2025 | 1ST SUBMITTAL 3/18/2025 REVISIONS PER NCDEQ COMMENT 4/4/2025 2ND SUBMITTAL DATE | DESCRIPTION KXO ML DESIGN | DRAWN | CHKD SCALE H: 1" = XXX' V: 1" = XXX' JOB No. **220154-01-001** DATE FEBRUARY 10, 2025


C6.6


Cad file name: V:\220154 - DG-Erwin, NC\220154-01-001 (ENG) - Rhetson\Engineering\Engineering Plans\Construction Drawings\220154-01-001-SWD.dwg

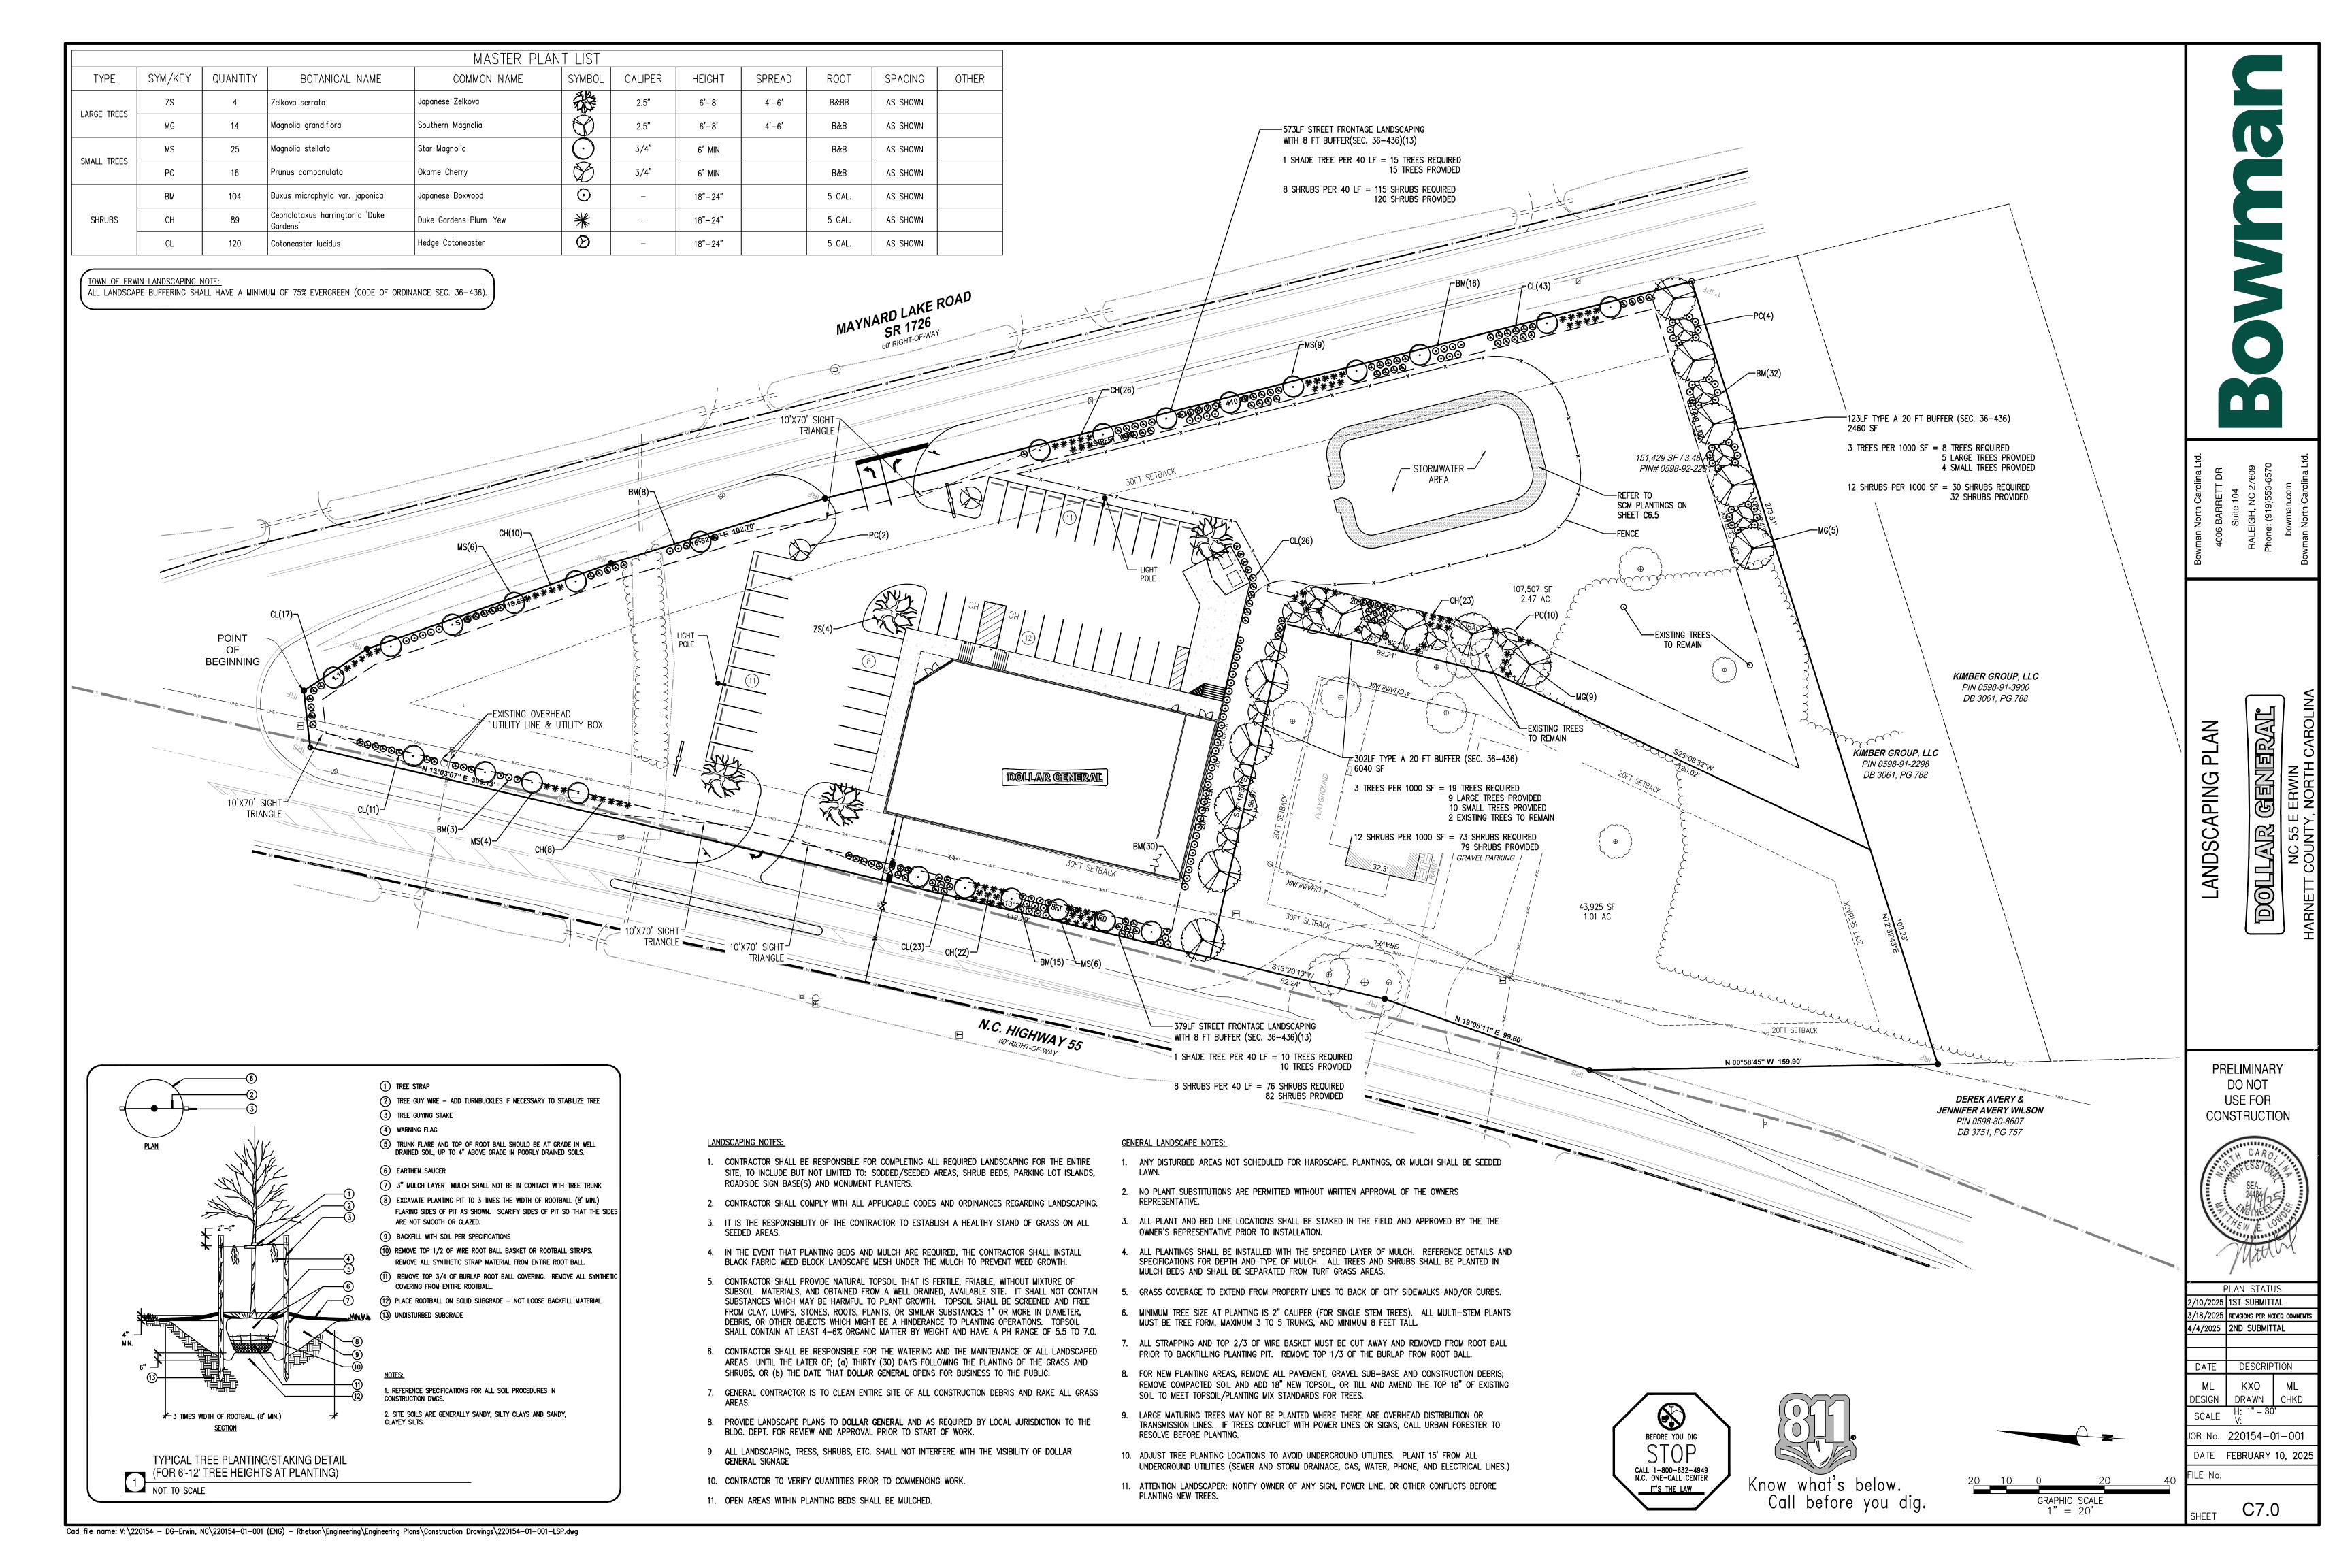


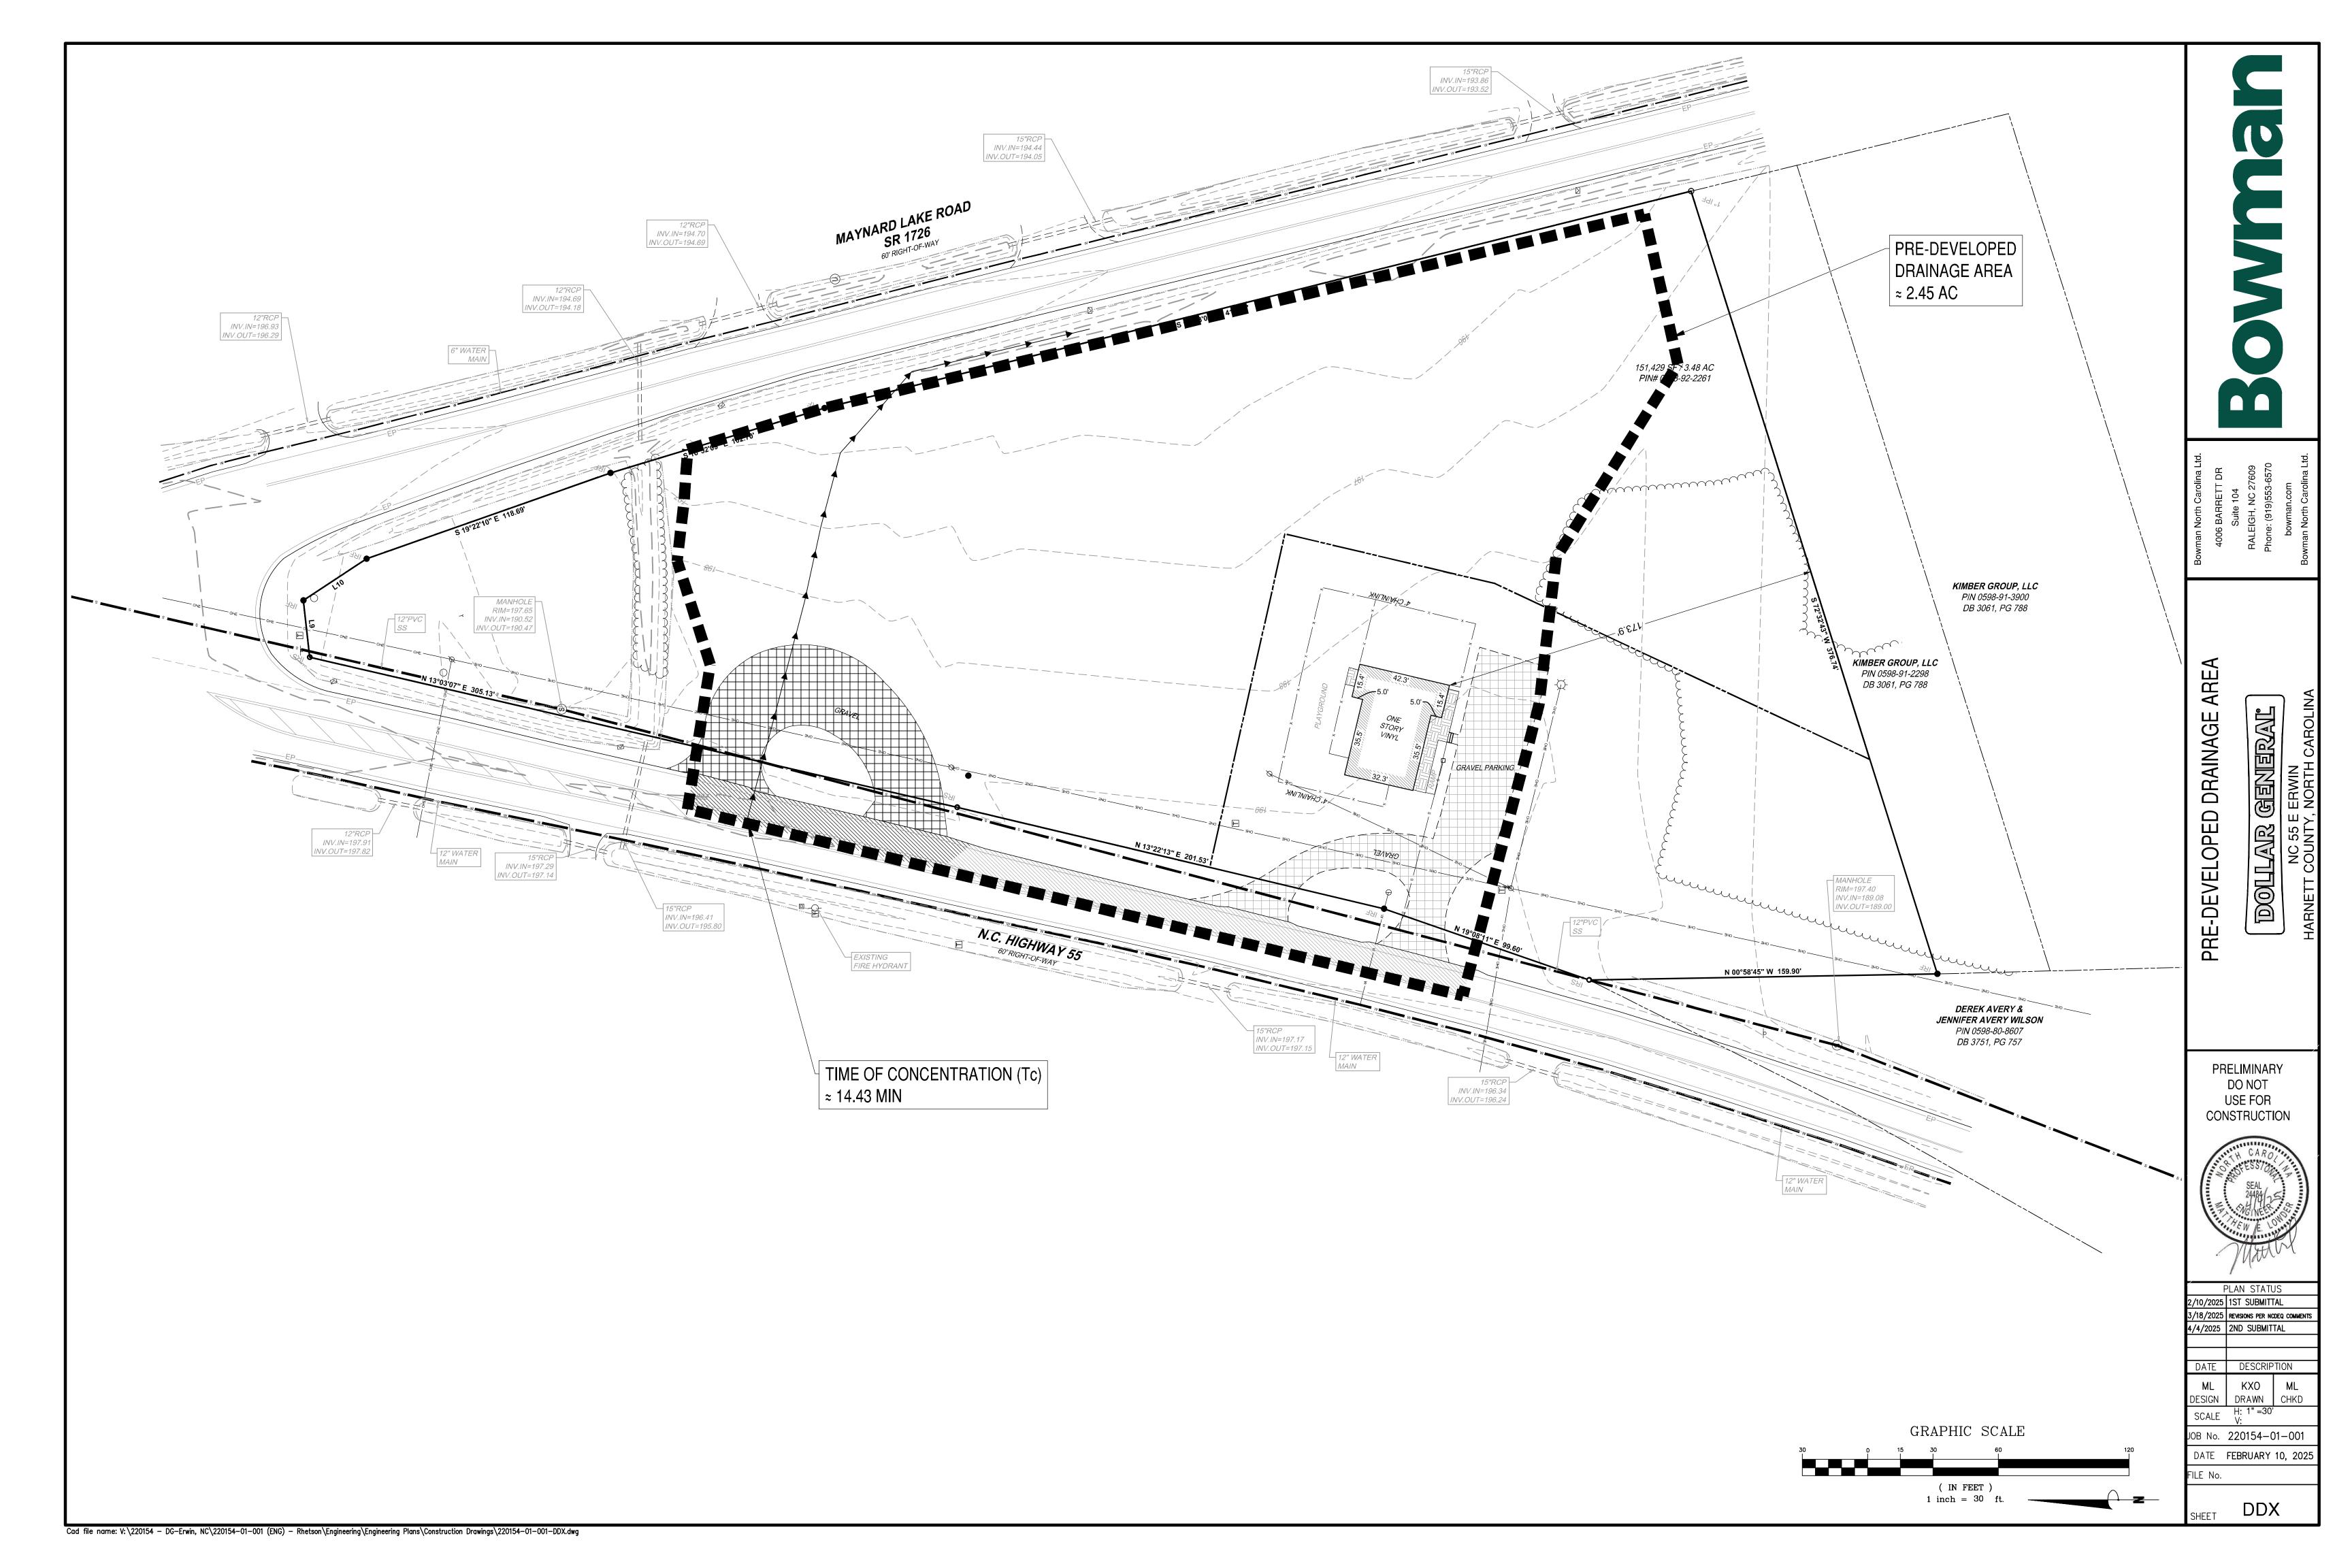

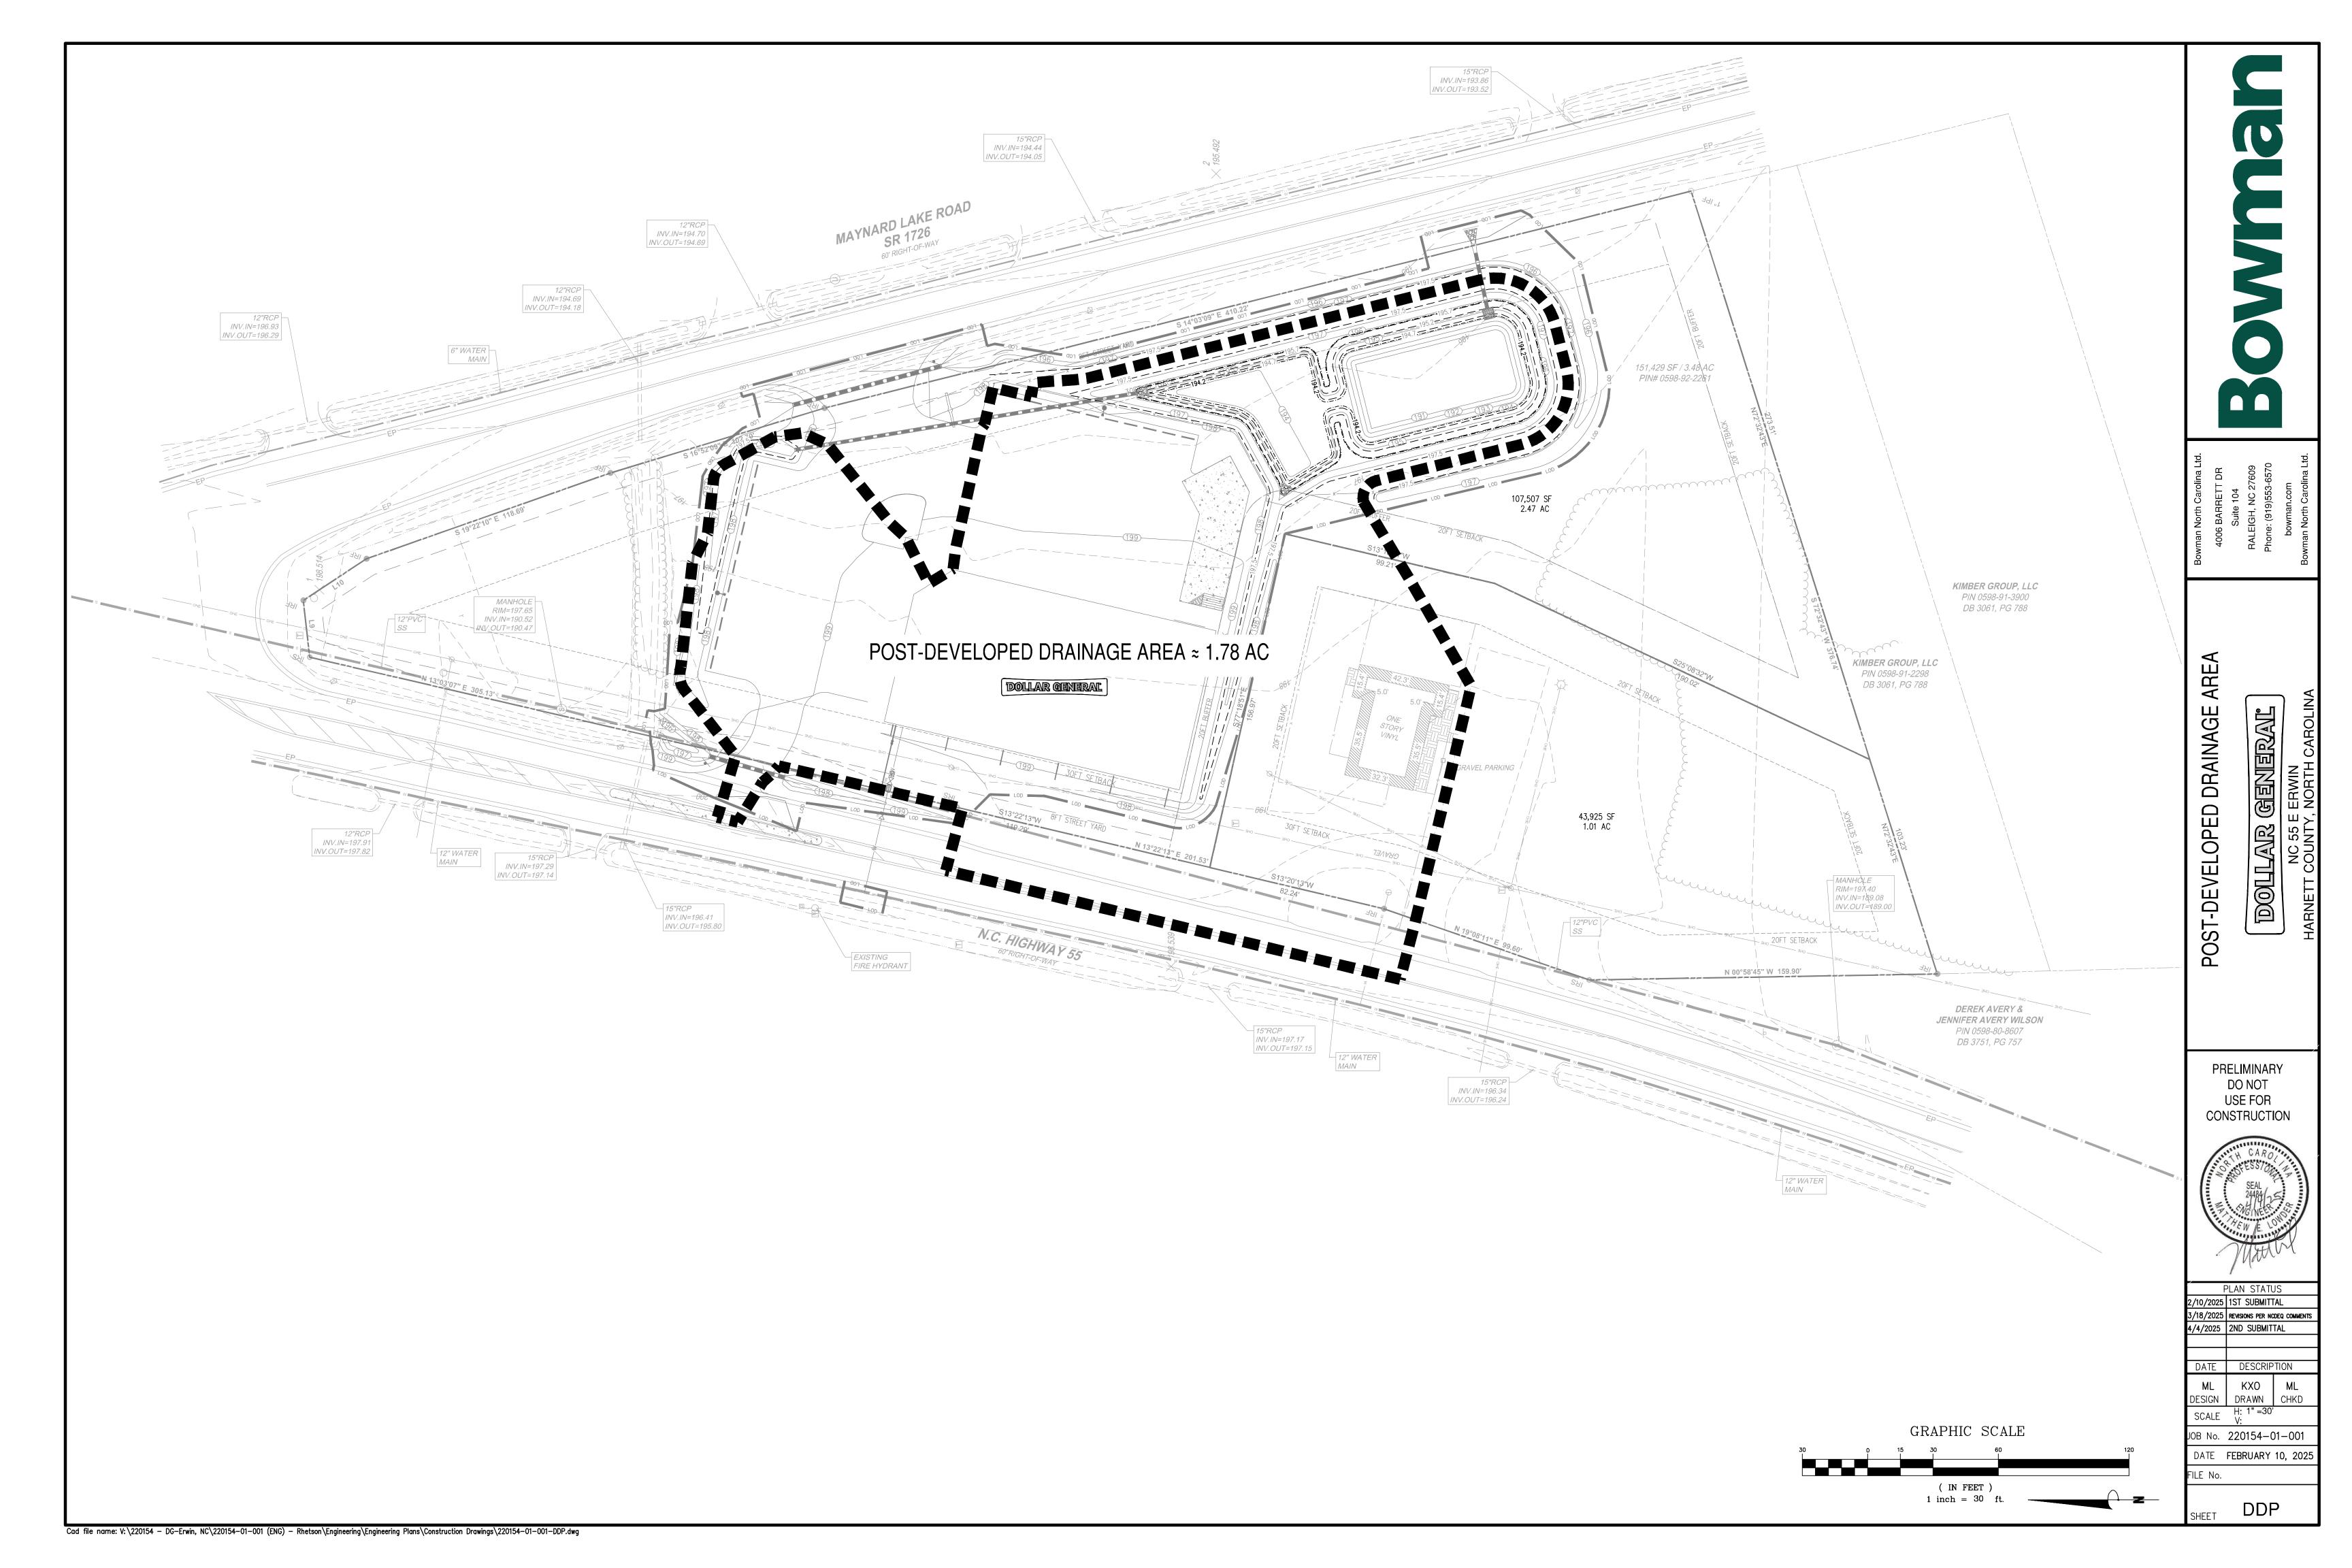

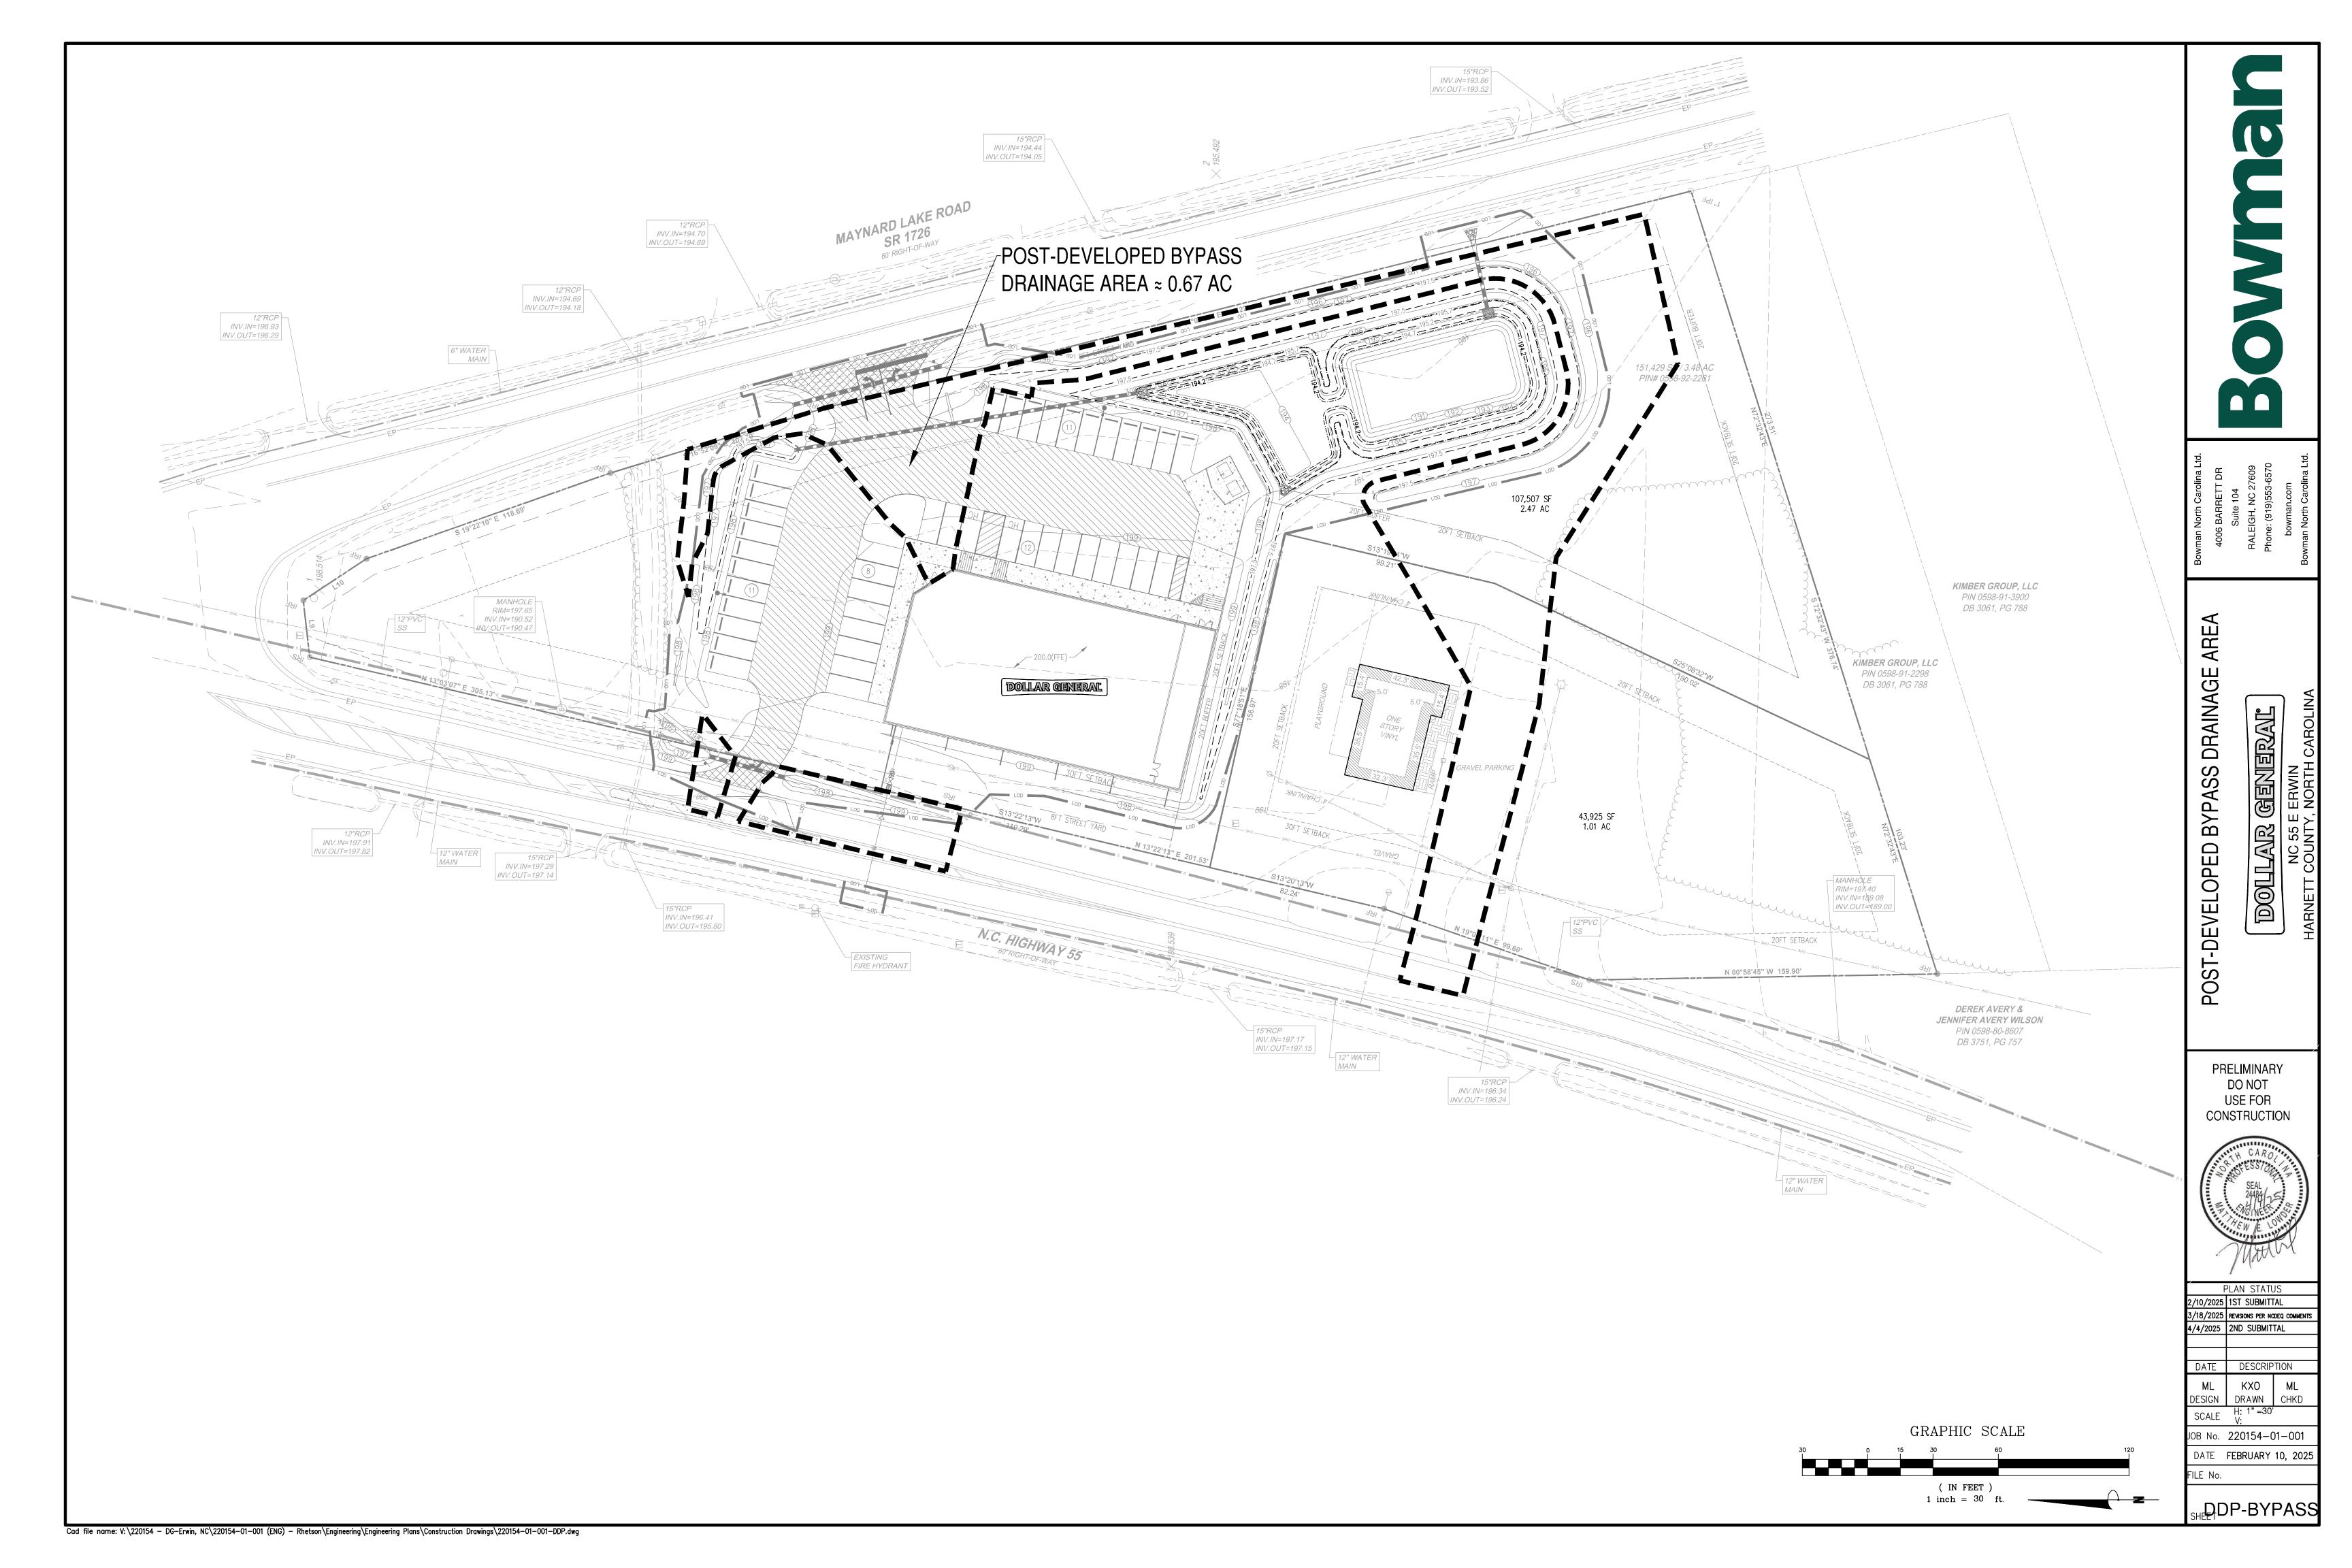

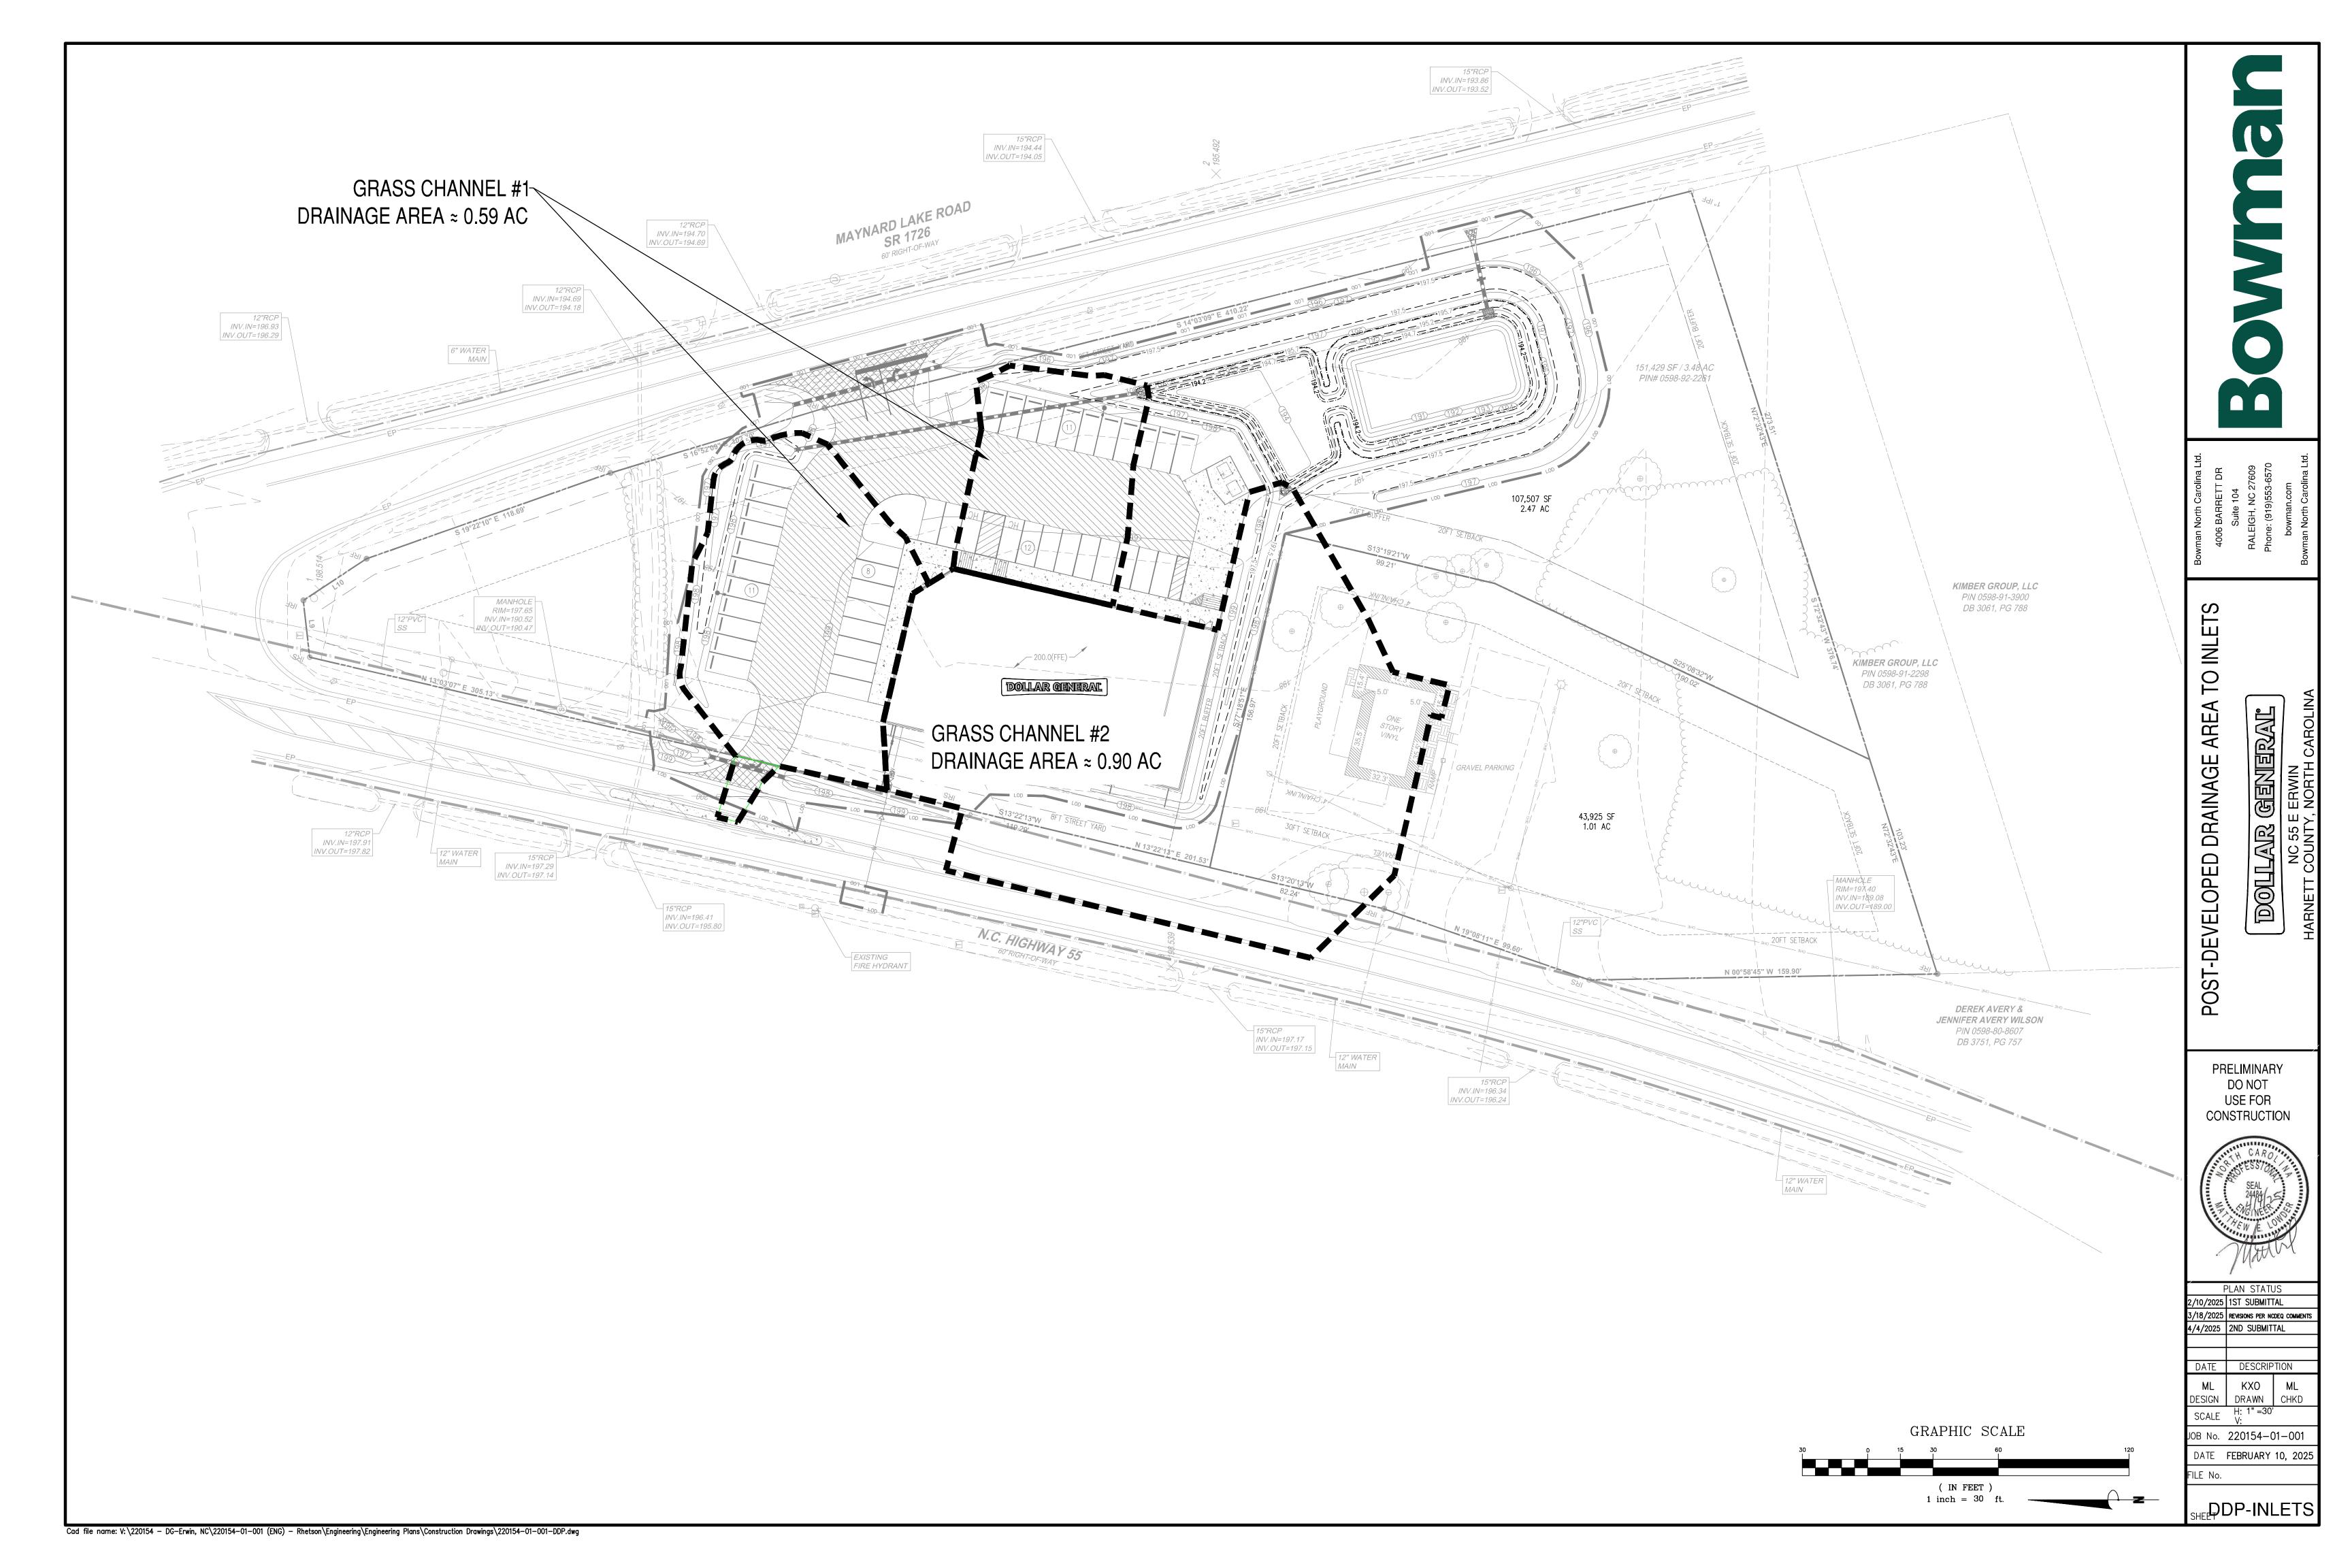

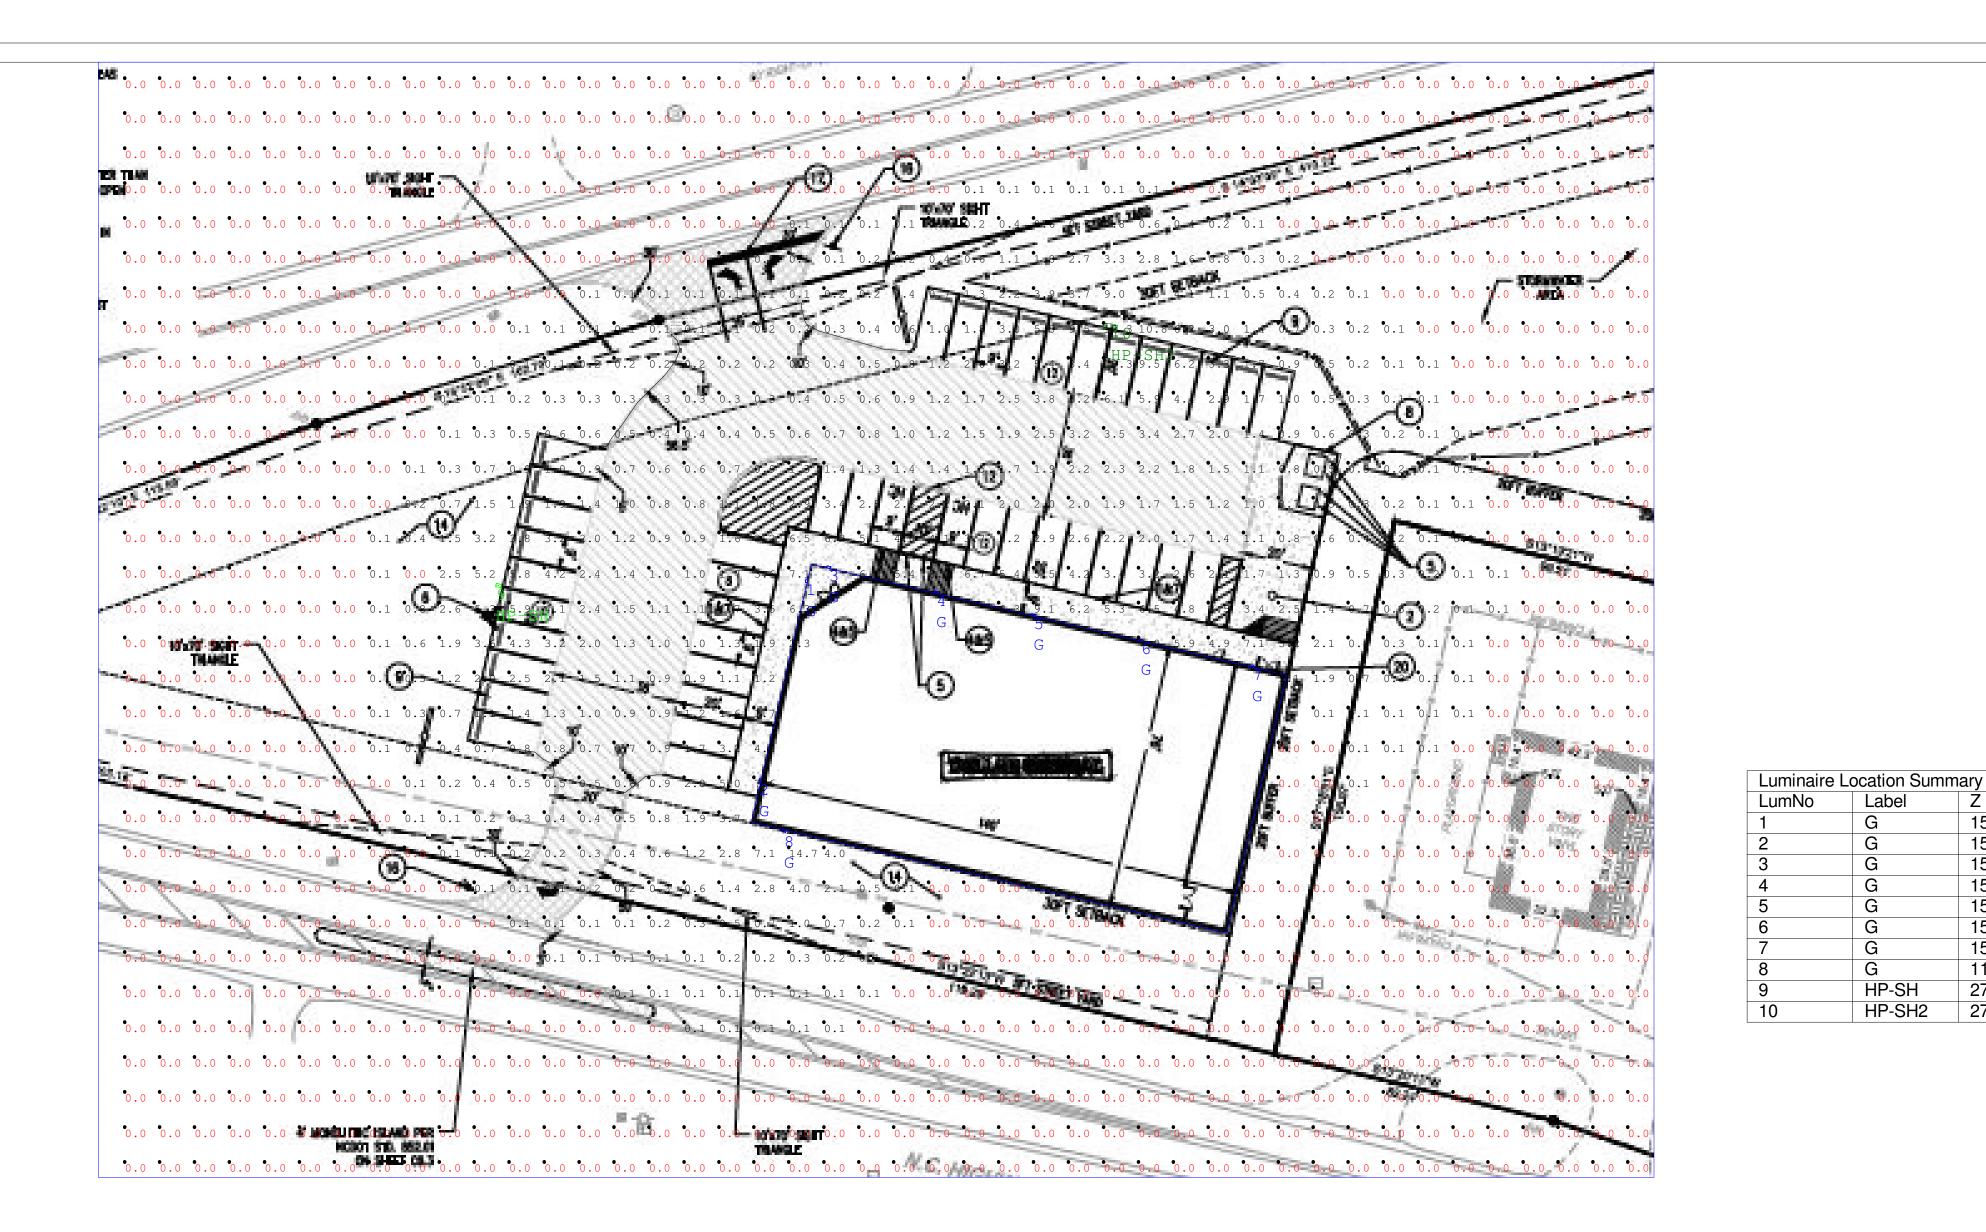

Total

Watts

294.978

337.925

147.489

Luminaire

Watts

147.489

42.2406

147.489

Luminaire

Lumens

16181

5696

16181

0.950

0.950

0.950


Calculation Summary


Parking Lot


CalcType


Illuminance

Illuminance

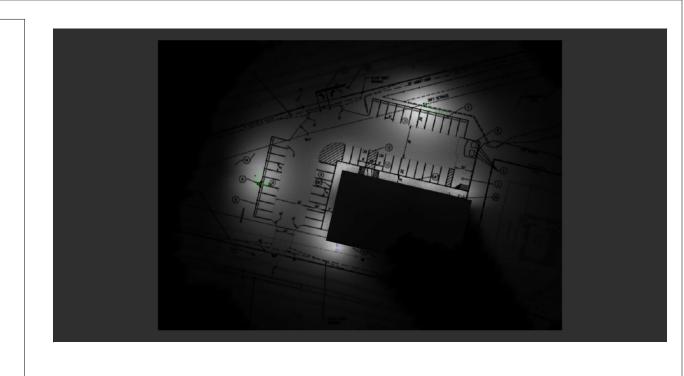

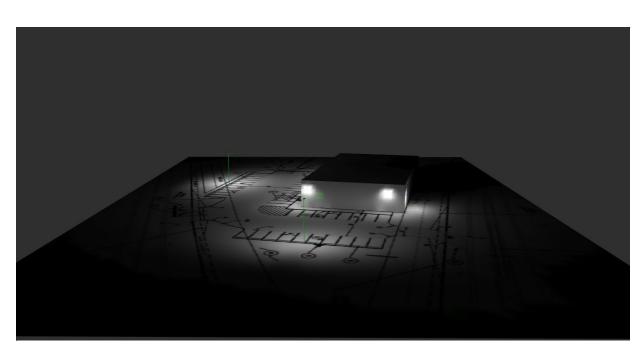

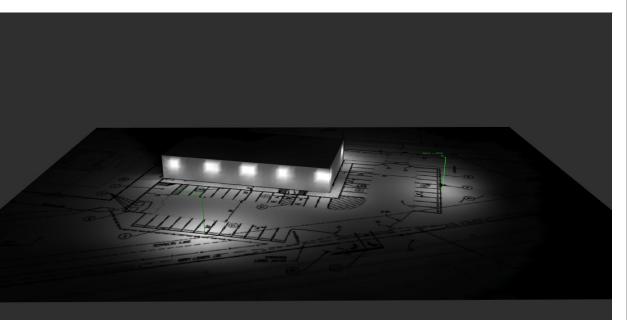

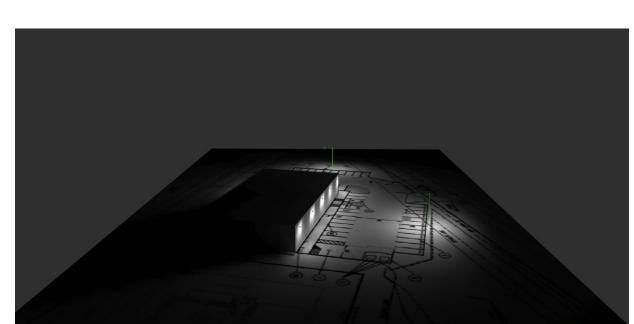



Notes:

Luminaire Schedule

HP-SH2

HP-SH

Symbol Qty

Calculations at Ground Level (10' x 10' Grid Spacing). Refer to luminaire location summary for mounting heights of each fixture. Pole mounted fixtures include a 2ft concrete base. Mounting heights indicated on luminaire location summary is a total A.F.G. height.

Description

Shield, 2-H NLES WP4054

NLES AL1212 Back

NLES AL1212 Back Shield

Arrangement


Twin

Single Single

General Notes:

Plan Notes:

Due to changing lighting ordinances it is the contractors resposibility to submit the site photometrics & luminaire specs to the local inspector before ordering to ensure this plan complies with local lighting ordinances. This lighting design is based on information supplied by others. Changes in electrical supply, area geometry & objects within the lighted area may produce illumination values different from the predicted results shown on this layout. This layout is based on .IES files that were lab tested or computer generated, actual results may vary.

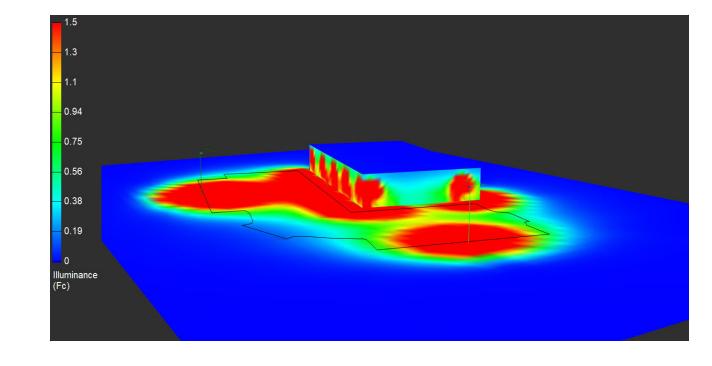

Avg 0.59

2.12

14.7

10.3

0.0

0.2

Label

HP-SH

Max/Min

N.A.


51.50

Avg/Min

10.60

HP-SH2 27

15.5

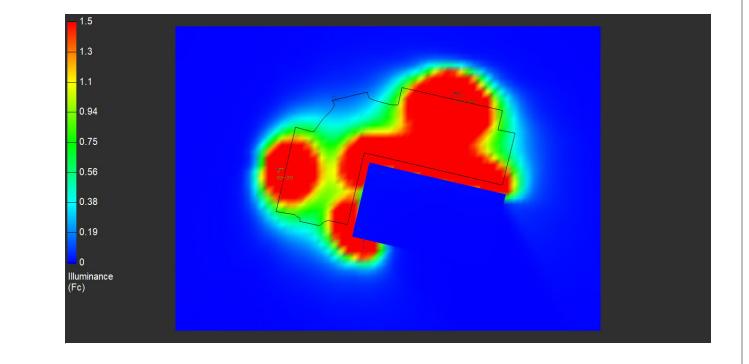

Page 1 of 1

General

Dollar

25444

S

Erwin