
Harnett County Department of Public Health

Improvement Permit A building permit cannot be issued with only an Improvement Permit

A building permit came	PROPERTY LOCATION: 50 Pine Oak (SR 2612)
ISSUED TO: Clayton Homes	SUBDIVISION SWEET BYICK LOT # 9
	Site Improvements required prior to Construction Authorization Issuance:
NEW REPAIR EXPANSION	the improvements required prior to construction Motiforization issuance.
Type of Structure: 28'x68' DWMH	
Proposed Wastewater System Type: 25% reduction	
Projected Daily Flow: 360 GPD	
number of bearons.	max
Basement Yes No	
Pump Required: Yes No May be required based on final lo	
Type of Water Supply: Community Public Well Distan	ce from wellfeet Permit valid for: 🔀 Five years
Permit conditions:	No expiration
Authorized State Agent:: Mah WEHT	Date: 05-13-22 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other	permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This
site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement	Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	
Constr	uction Authorization
	uired for Building Permit)
	.1958. and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.	
Olerton Herrore	FO Ding Oak (SD 2612)
ISSUED TO: Clayton Homes	PROPERTY LOCATION: 50 Pine Oak (SR 2612)
201 201 211 111	30001131011
Facility Type: 28'x68' DWMH	Expansion Repair
Basement? Yes No Basement Fixtures? Yes	⊠ No
Type of Wastewater System** 25% reduction	(Initial) Wastewater Flow: 360 GPD
(See note below, if applicable)	, ,
25% reduction	(Repair)
	each trench 90feet Trench Spacing: 9 Feet on Center
	e installed on contour at a Soil Cover: 6inches
Maximum Trench	Depth of: 18-24 inches (Maximum soil cover shall not exceed
(Trench bottoms	shall be level to +/-1/4" 36" above the trench bottom)
in all directions)	
Pump Requirements:ft. TDH vsGPM	inches below pipe
Tump Requirements.	Aggregate Depth: inches above pipe
Conditions:	
WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A	NY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD ARE	
The state of the s	the time specified on the application I account the specifications of this parmit
**If applicable: 1 understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.	
	Date:
Owner/Legal Representative Signature:	Date:
This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the laws and Bules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH	
Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.	
	5
Authorized State Agent: North MREHS	Date: <u>05-13-22</u>
Const	truction Authorization Expiration Date: 05-13-27

Harnett County Department of Public Health Site Sketch

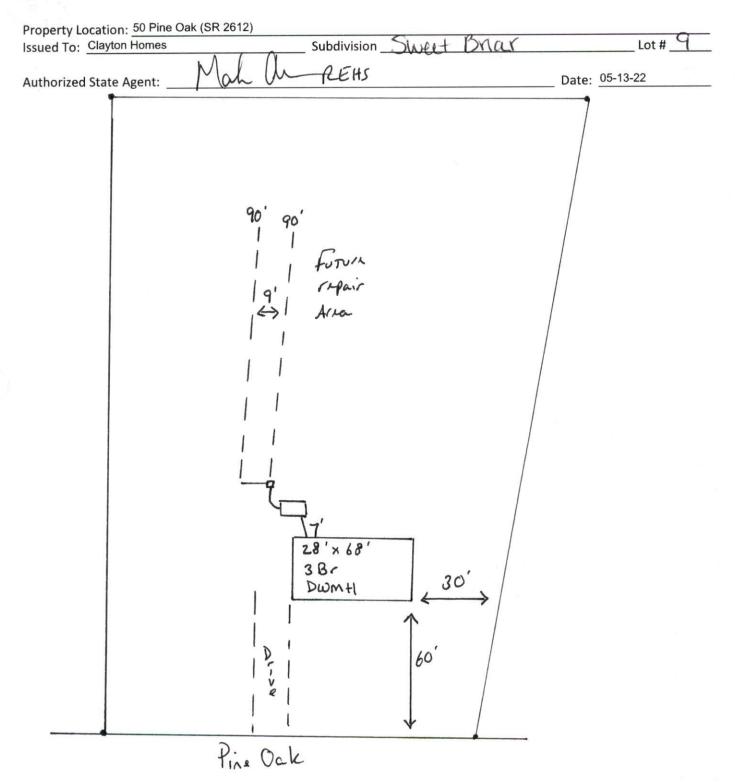

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.