
Harnett County Department of Public Health

Improvement Permit

A	building permit cannot be issued with only an Improvement	(Permit
	PROPERTY LOCATION: 872 Thon	nas Farm Rd (SR1281)
ISSUED TO: Travis Poe	SUBDIVISION	L0T #
NEW REPAIR EXPANSION Type of Structure: 16' x 76' SWMH	N Site Improvements re Must 927	quired prior to Construction Authorization Issuance:
Proposed Wastewater System Type: 25% reduction	on '	
Projected Daily Flow: 360 GPD	ACCUIATE	y Stated OFF, Then call
Number of bedrooms: 3 Number of Occup	pants: b max	FOI SYSTEM LAYOUT
Basement (Yes No		or Tyliam Cargoti
Pump Required: ☐Yes ☐ No ☒ May be requ	ired based on final location and elevations of facilities	Permit valid for: 🛛 Five years
Type of Water Supply: Community Public	Well Distance from well	The years No expiration
Permit conditions: (A. Will &	Well Distance from well feet by Issued AFTER GT Cles	Wie I Jy J Tom I Ho expiration
Can be laid ou	7.	
all M	RETU Date: 05-09-22	CCC ATTACHED CITE CVETCH
Authorized State Agent::		SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guara	ntees the issuance of other permits. The permit holder is responsible for o	hecking with appropriate governing bodies in meeting their requirements. This nership of the site. This permit is subject to compliance with the provisions of
		meratory of the site. This permit is applied to composite with the provinces of
the Laws and Rules for Sewage Treatment and Disposal and to condition	is or this permit.	
	Construction Authorization	
	(Required for Building Permit)	
The construction and installation resourcements of Rules 1950 1952		es into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.	and the state of t	
ISSUED TO: Travis Poe	PROPERTY LOCATION: 872	Thomas Farm Rd (SR1281)
	SUBDIVISION	LOT #
Facility Type: 16' x 76' SWMH	New ☐ Expansion ☐ Repair	
	ctures? Yes No	(Initial) Wastewater Flow: 360 GPD
,	duction	(Initial) Wastewater Flow.
(See note below, if applicable (1)	259	
Tump To	25% reduction (Repair)	
Installation Requirements/Conditions	Number of trenches/	
Septic Tank Size 1000 gallons	Exact length of each trench 225 feet	Trench Spacing: 9 Feet on Center
Pump Tank Sizegallons	Trenches shall be installed on contour at a	Soil Cover: 6 inches
romp tank sizeganons	Maximum Trench Depth of: 18-24 inches	
		36" above the trench bottom)
	(Trench bottoms shall be level to +/-1/4"	30 above the trench bottom
	in all directions)	
Pump Requirements: ft. TDH vs	GPM	inches below pipe
		Aggregate Depth: inches above pipe
Conditions: Driveway To be	moved TO LEFT Side of SU	IMH inches total
When Wind From Thomas	From Rd.	
VOREA VILWE TITE TAO ME	Moved to left side of sur form Rd.	20110 1011
WATER LINES (INCLUDING IRRIGATION) MUST	BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OF	KEPAIK AKEA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR		
		and I assess the encrifications of this assemit
**If applicable: I understand the system type specifie	ed is different from the type specified on the application	on. I accept the specifications of this permit.
Owner/Legal Representative Signature:		Date:
	plat, or the intended use changes. The Construction Authorization shall no	ot be transferred when there is a change in ownership of the site. This
	of the Laws and Rules for Sewage Treatment and Disposal and to the con	
Authorized State Agent: Mal M	-REH	6-14-22
Authorized State Agent: Mat VV	Construction Authorization Expiration	1 111 77
· ·	Construction Authorization Expiration	Date: 6-14-61

Harnett County Department of Public Health Site Sketch

Property Lo	ocation: 872 Th	homas Farm Rd (SR1281)		
Issued To:		Subdivision	Lot #	
Authorized State Agent: Mah		Mah de REHS Dat	Date:	

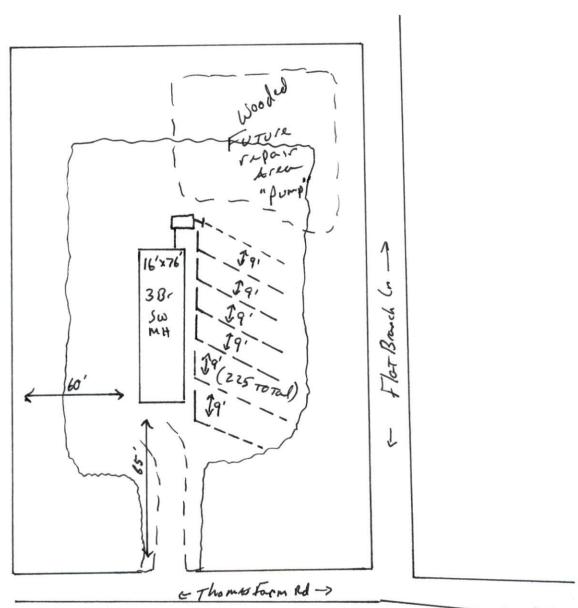

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.