


## R94LSe (VA2535WD)

Type of Appliance	Temperature controlled, continuous flow, gas hot water system
Rinnai Model Number	REU-VA2535WD
Operation	Forced combustion
Minimum/Maximum Gas Rate (Input)	15,000 - 199,000 BTU/h (Natural Gas and Propane)
Electrical	Appliance: AC 120 Volts - 60 Hz Controller: DC 12 Volts
Electrical Consumption	Normal 55 watts Standby 2.0 watts Anti-frost protection 100 watts
Ignition System	Direct electronic ignition
Hot Water Capacity	0.6 to 9.4 GPM (35° F rise)
Temperature	98° - 140° F (98° - 185° F available with the MCC-91 controller for commercial and hydronic applications)
Temperature (without remote)	120° F (factory default)
Approved Gas Types	Natural or Propane (ensure unit matches gas type)
Installation	Outdoor only
Energy Factor	Natural Gas: 0.82 Propane: 0.82
Thermal Efficiency	Natural Gas: 83% Propane: 83%
Service Connections	Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT Hot water outlet: 3/4 inch MNPT
Water Flow Control	Water flow sensor, electronic water control and by-pass control
Minimum/Maximum Water Supply Pressure	20 - 150 PSI (50 PSI or above is recommended for maximum flow)

**FLOW TABLE**

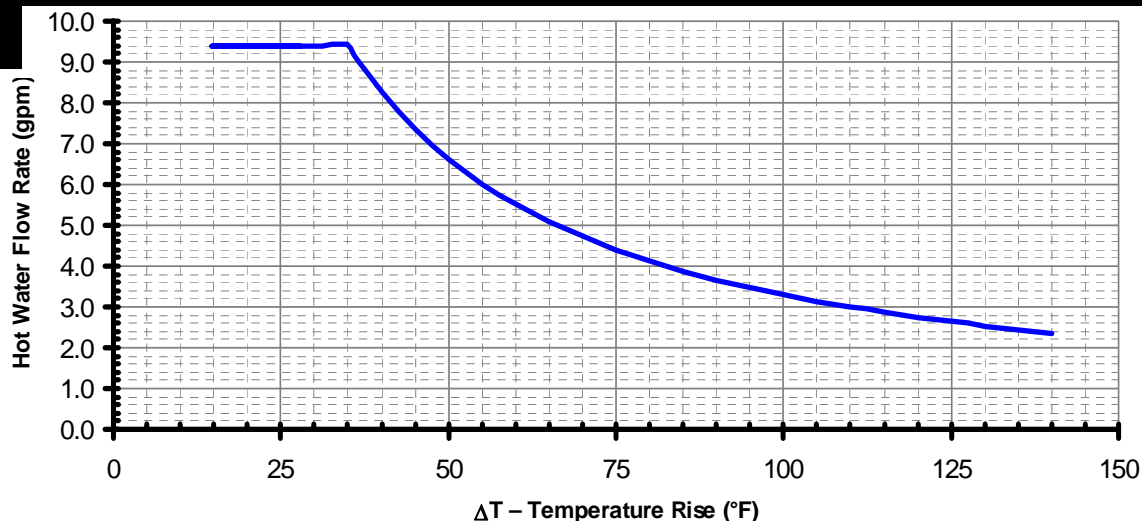

### Water Temperature Control

#### Controller

Simulation feed forward and feedback

MC-91-1US (included)	98° - 140° F
Deluxe controller: MC-100V-1US (optional)	
Bathroom controller: BC-100V-1US (optional)	
Wireless controller: MC-502RC-1US-MS (optional)	98° - 185° F
MCC-91-1US (for commercial applications)	

#### Controller Cable

Non-polarized two-core cable, minimum 22 AWG

#### Safety Devices

- Flame failure - Flame Rod
- Boiling protection
- Combustion fan rpm check
- Over current - glass fuse (3 amp)
- Remaining flame (OHS)
- Thermal fuse
- Automatic frost protection

#### Clearances from Combustibles

- Top of heater - 12 inches
- Front (Panel) - 24 inches
- Front (Exhaust) - 24 inches
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- Sides of heater - 6 inches

#### Clearances from Non-combustibles

\* 24 inches required for serviceability

- Top of heater - 2 inches
- Front (Panel) - 0 inches \*
- Front (Exhaust) - 24 inches
- Back of heater - 0 inches
- Bottom of heater - 2 inches
- Sides of heater - 1/8 inch

#### Min. / Max. Gas Supply Pressure

Natural Gas: min 5" W.C. max 10.5" W.C.  
Propane Gas: min 8" W.C. max 13.5" W.C.

#### Manifold Gas Pressure (inches W.C.)

Natural Gas: high fire 3.3" W.C. low fire 0.52" W.C.  
Propane Gas: high fire 5.0" W.C. low fire 0.92" W.C.

#### NOx



Meets California and Texas NOx Emission Rules

#### Warranty

Heat exchanger: 12 years\* for residential and 5 years\* for commercial and hydronic applications; (10 years\* if used with the Rinnai Hydronic Air Handler); all other parts 5 years\*; labor 1 year; (\* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater)

*Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.*

### DIMENSIONS

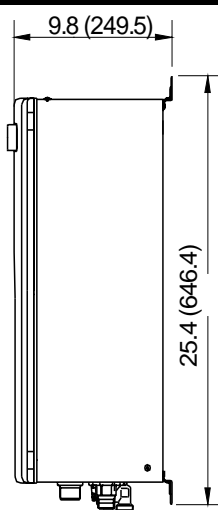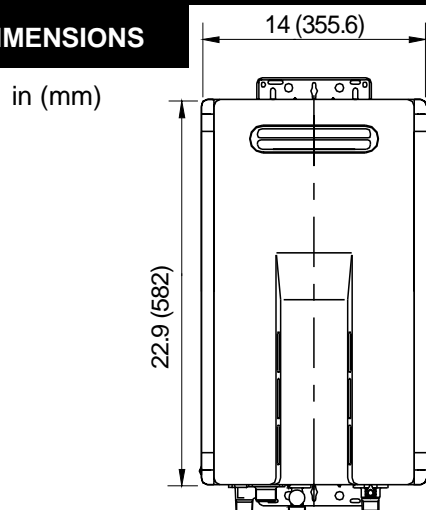

**WEIGHT: 46 LBS (21 KG)**

