

RJB, P.E., P.A.

C-0269

ROBERT J. BRACKEN
ENGINEER + SURVEYOR

3768 Carbonton Road • Sanford, North Carolina 27330
(919) 774-6074 • bjbracken@windstream.net

August 8, 2019

Harnett Co. Inspections
P.O. Box 65
Lillington, NC 27546

REF: Double wide Mobile home
Over height Inspection
Maria Jimenez, Owner's Rep.
20 Geoffrey Cir.
Broadway, NC 27505

Dear Sir/Madam,


I made an onsite inspection of the above referenced Double wide M/H on August 16, 2019. The purpose of the visit was to inspect the reported "over height" foundation setup for the mobile home.

The home was anchored with the approved Minute Man Model LLBS Longitudinal and Lateral Bracing FlexTube System. The flex tubes were anchored to 24x24 inch steel plates placed under the 16x16 inch piers. With reference to the specifications provided by Minute Man Anchors, Inc.; the amount of and the placement of the Minute Man Bracing Systems complies with the requirements of the State of North Carolina Regulations For Manufactured Homes 2004 ed.

The mobile home is approved "as is" and no additional anchors are required.

If you have any questions call 919-774-6074.

Sincerely,

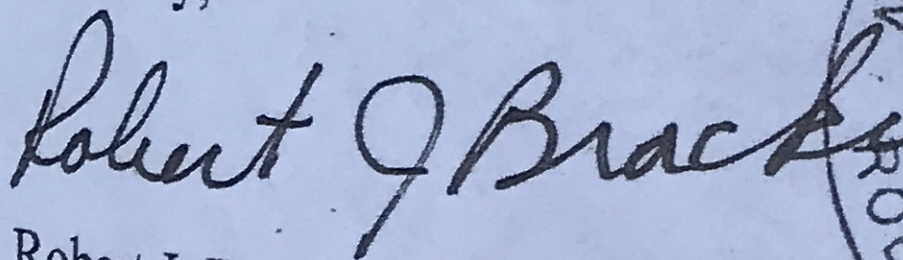

Robert J. Bracken, PE

