


CUSTOMER NAME: JOEL HUANTE

PLEASE SEE HOUSECALL PHOTO FOR JOB DETAILS.

GRIPER TOTAL: N/A
PIER TOTAL: N/A

BAND SILL: 39' 2" x 10
JOIST SIZE/TOTAL: 2" x 10

INSULATION TOTAL: N/A

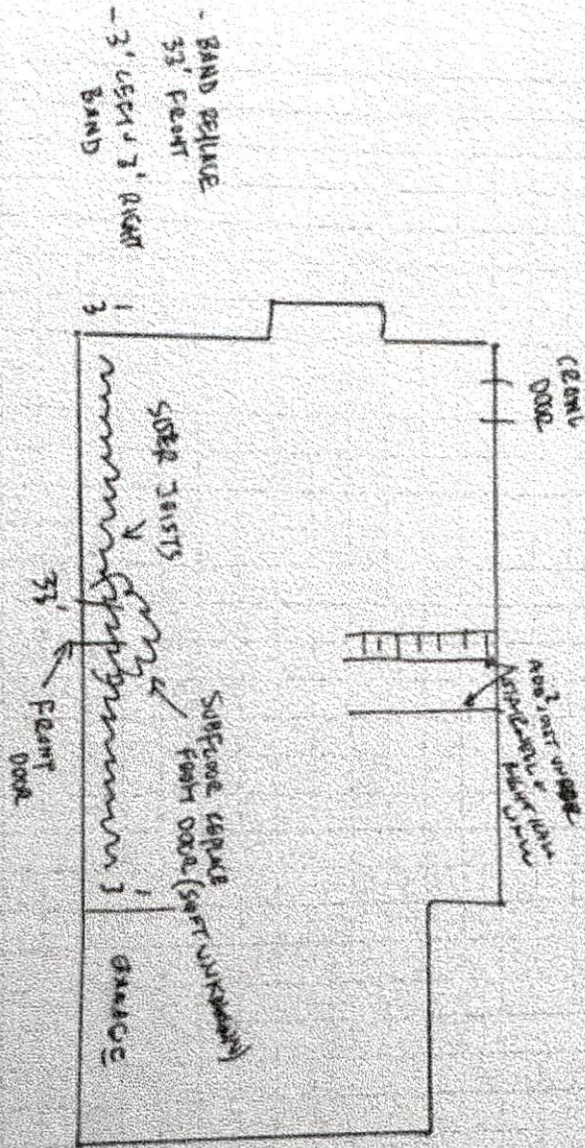

Scope of Work: \$8,621.00

Wood replacement - Remove and replace band - A Falcone-Certified Wood Replacement crew will remove and replace entire front wall band using pressure-treated lumber. Includes all new full length joist sisters for the front of house.

Add Supports - Joist sister - Add two full length pressure treated joists, one under the rear right hallway wall and one under the right side of stairwell.

Wood replacement - Replace subfloor - Remove and replace subfloor. This price encompasses replacing subfloor along the entire front wall, 2 feet back, from above. Floor finishes are to be removed before work starts by homeowner.