



Restore. Protect. Stabilize.

Prepared by: johnm@regionalwaterproofing.com
Regional Foundations Solutions
www.regionalwaterproofing.com
TF (800) 536-6260
F (919) 269-6788
Prepared on: 9-6-19

Prepared for: James Garris
jmgarris317@gmail.com
P (910) 984-6540
Job location:
260 Arbor Crest Ln
Lillington, NC 27546-7190

Project Summary

My Crawl Space

Table with 2 columns: Description and Amount. Rows include Total Investment (\$12,368.50), Same Day Savings (\$1,236.85), Total Contract Price (\$11,131.65), Deposit Required - 20% (\$2,226.33), Deposit Paid (\$0.00), and Amount Due Upon Installation (\$11,131.65).

Customer Consent

Any alteration from the above specifications and corresponding price adjustment (if necessary) will be made only at the Customer's request or approval. Completing the work in this Proposal at the time scheduled is contingent upon accidents or delays beyond our control. This Proposal is based primarily on the Customer's description of the problem. Engineering services are used as required by companies such as SFA Engineering and StoneWall Engineering. This Proposal may be withdrawn if not accepted by the Customer within 20 days.


Authorized Signature [Handwritten Signature] Date 9/6/19

Acceptance of Contract: I am/we are aware of and agree to the contents of this Proposal, the attached Job Detail sheet(s), and the attached Limited Warranty, (together, the "Contract"). I am/we are aware of and agree to the 60 day window that Regional has to remedy any service issues that are covered under the attached Limited Warranty. I will have bio-hazards cleaned and remediated that Regional may discover in the affected work area. This includes plumbing/sewage leaks, and any other hazards at my cost. I will provide documentation from a restoration company. You are authorized to do the work as specified in the Contract. However, field adjustments may be made if deemed vital by project Foreman or Production Manager. I/we will make the payment to crew the day project is completed.

Customer Signature [Handwritten Signature] Date 6 SEPT. 2019

Customer to have financing in place one week prior to installation date.
Customer understands after three days all deposits are final.
Initial _____
Initial _____

Job Details

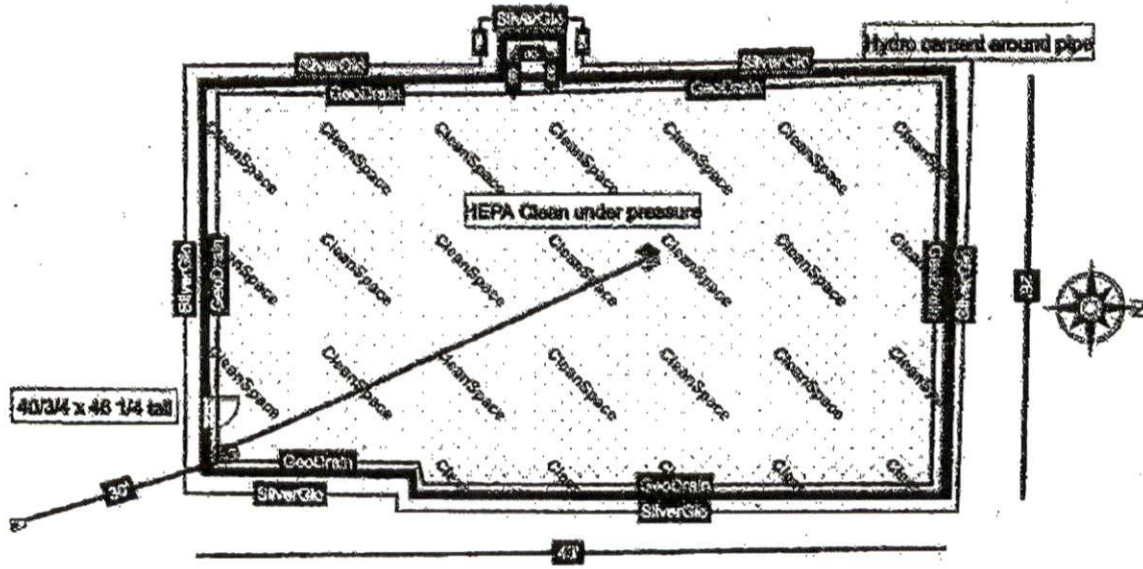

Type of Wall	Block
Existing Wall Finish	Plain
Existing Floor Finish	Dirt
Sub-Floor System	Full Perimeter System
Regional Foundations Solutions PO Box 917 Zebulon NC 27597	Job Location 260 Arbor Crest Ln Lillington NC 27546-7190
	Page 2/6 9-6-19

Job Details (Continued)

Specifications

Install SmartSump pump system with liner, cast iron pump, Clean Pump Stand, airtight lid with airtight floor drain and WaterWatch alarm system. Install LawnScape outlet at end of discharge line. Install GeoDrain to address groundwater seepage. Install 2 electric circuits with GFI protection. Install CleanSpace crawl space encapsulation system in area shown on drawing. Identify for customers obstacles such as low ductwork to be addressed for installation crew. Install SaniDry Sedona to keep humidity low. Install EverLast Door. Install SilverGlo as shown on drawing.

Contractor Will

- 1.) Remove and haul away any landscaping in the work area. Not responsible for replacement.
- 2.) Permit Project.
- 3.) Contact utility locator service

Customer Will

- 1.) Remove and replace any landscaping that is in the work area.
- 2.) Move items at least 10 feet away from the work area.
- 3.) Mark any private lines that may be hidden underground, and assumes all liability if damage should occur to such lines.
- 4.) Make payment of remaining balance to foreman of crew the same day installation is complete.

Additional Notes

All recommendations are based on customers descriptions of the problem. While inspection tools such as hygrometers and laser levels are used, no deconstruction or original house plans are available to review for the recommendation. Some unforeseen factors may impact project, despite best inspectors best efforts.

Product List

My Crawl Space

SmartSump	1
LawnScape Outlet	1
GeoDrain, Drainage	138 ft
Two GFI Electric Circuits, Electric	1
CleanSpace	1100 sqft
SaniDry Sedona	1
EverLast Door	1
SilverGlo	1100 sqft

Harnett, org