


637 Red Hill Church Rd, Dunn

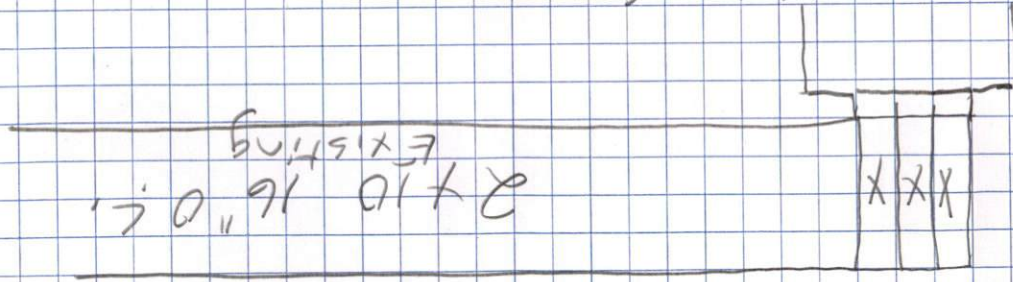

Job Scope

- * replace rot damaged girder +/- 21'
- * sister +/- 21' section of joist

NOTE: The 21' section of damaged joist will need to be cut back 16" from piers to allow new girder to be installed. The new sistered joist will be spanning 14' from existing out side rch joist beam to new girder and attached to sides of damaged joist by 10d nails and timberlock lags.