# U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 96/30/2026

# **ELEVATION CERTIFICATE**

## IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE				
A1. Building Owner's Name: Sherry Stewart	Policy Number:				
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 121 Stewart Farm Lane	Company NAIC Number:				
City: Spring Lake State: NC ZIP Code: 28390					
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Number:  Tax PIN: 0533-59-6285.000					
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential					
A5. Latitude/Longitude: Lat. 35°13'51.661"N Long. 78°52'51.753"W Horiz. Datum: ☐ NAD 1927 ☒ NAD 1983 ☐ WGS 84					
A6. Attach at least two and when possible four clear color photographs (one for each side) of the b	uilding (see Form pages 7 and 8).				
A7. Building Diagram Number:7					
A8. For a building with a crawlspace or enclosure(s):					
a) Square footage of crawlspace or enclosure(s): 1687 sq. ft.					
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	Yes □ No □ N/A				
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings:0 Engineered flood openings:14					
d) Total net open area of non-engineered flood openings in A8.c:0 sq. in.					
e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instruction	ons): 3500 sq. ft.				
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): N/A sq. ft.					
A9. For a building with an attached garage:					
a) Square footage of attached garage: N/A sq. ft.					
b) Is there at least one permanent flood opening on two different sides of the attached garage	? ☐ Yes ☐ No ☒ N/A				
<ul> <li>c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adj.</li> <li>Non-engineered flood openings:N/A Engineered flood openings:N/A</li> </ul>	acent grade:				
d) Total net open area of non-engineered flood openings in A9.c:N/A sq. in.					
e) Total rated area of engineered flood openings in A9.c (attach documentation – see Instructi	ons):N/A sq. ft.				
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): N/A sq. ft.					
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFO	RMATION				
B1.a. NFIP Community Name: Harnett County B1.b. NFIP Com	nmunity Identification Number: 370328				
B2. County Name: Harnett B3. State: NC B4. Map/Panel No.:	3720053300/0533 B5. Suffix: K				
B6. FIRM Index Date: 07/19/2022 B7. FIRM Panel Effective/Revised Date: 01/05/20	007				
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use	Base Flood Depth): 125.1'				
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9:  ☐ FIS ☐ FIRM ☐ Community Determined ☐ Other:					
B11. Indicate elevation datum used for BFE in Item B9: ☐ NGVD 1929 ☒ NAVD 1988 ☐ Othe	r/Source:				
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)?					
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No				

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE				
121 Stewart Farm Lane	Policy Number:				
City: Spring Lake State: NC ZIP Code: 28390	Company NAIC Number:				
SECTION C - BUILDING ELEVATION INFORMATION (SURVE	Y REQUIRED)				
C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete.					
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO, A99. Complete Items C2.a–h below according to the Building Diagram specified in Item A7. In Puerto Rico only, enter meters.  Benchmark Utilized: NC RTN (Real-Time Network)  Vertical Datum: NAVD 88					
Indicate elevation datum used for the elevations in items a) through h) below.  ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other:					
Datum used for building elevations must be the same as that used for the BFE. Conversion factor If Yes, describe the source of the conversion factor in the Section D Comments area.	used? Yes No Check the measurement used:				
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	125.4  feet  meters				
b) Top of the next higher floor (see Instructions):	132.1				
c) Bottom of the lowest horizontal structural member (see Instructions):	N/A  feet  meters				
d) Attached garage (top of slab):	N/A  feet  meters				
<ul> <li>e) Lowest elevation of Machinery and Equipment (M&amp;E) servicing the building (describe type of M&amp;E and location in Section D Comments area):</li> </ul>	131.9 ⊠ feet ☐ meters				
f) Lowest Adjacent Grade (LAG) next to building: Natural X Finished	124.5 X feet meters				
g) Highest Adjacent Grade (HAG) next to building: Natural X Finished	126.1 ⊠ feet □ meters				
h) Finished LAG at lowest elevation of attached deck or stairs, including structural support:	123.1 🛛 feet 🗌 meters				
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CER	RTIFICATION				
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by state law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.					
Were latitude and longitude in Section A provided by a licensed land surveyor? ☐ Yes ☐ No					
Check here if attachments and describe in the Comments area.					
Certifier's Name: Regan Driggers License Number: L-4525	11111111111111111111111111111111111111				
Certifier's Name: Regan Driggers  License Number: L-4525  Title: Professional Land Surveyor  Company Name: Driggers Land Surveying  Address: 1523 Proctorville Church Rd  State: NC ZIR Code: 28340					
Company Name: Driggers Land Surveying					
Address: 1523 Proctorville Church Rd	SEAL L-4525				
City: Fairmont State: NC ZIP Code: 28340					
Telephone: (910) 740-0502 Ext.: Email: regandriggers@gmail.com	DRIGGERIA				
Signature: Date: 09/02/2025	Place Seal Here				
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.					
Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): Equipment in C2.e) is a heat pump located on the rear of the dwelling. Engineered flood vents were manufactured by Freedom Flood Vent. The model number of the vents is FFV-1608-B. Each vent covers 250 square feet. Flood vent certification is attached. There are 2 flood vents in storage attached to right rear of dwelling. Storage area is 52 square feet.					

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 121 Stewart Farm Lane	FOR INSURANCE COMPANY USE					
City: Spring Lake State: NC ZIP Code: 28390	Policy Number:					
	Company NAIC Number:					
	SECTION E – BUILDING MEASUREMENT INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO, ZONE AR/AO, AND ZONE A (WITHOUT BFE)					
For Zones AO, AR/AO, and A (without BFE), complete Items E1–E5. For Items E1–E4, use natural grade, if available. If the Certificate is intended to support a Letter of Map Change request, complete Sections A, B, and C. Check the measurement used. In Puerto Rico only, enter meters.						
Building measurements are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete.						
E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the measurement is above or below the natural HAG and the LAG.	appropriate boxes to show whether the					
a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	s 🔲 above or 🔲 below the HAG.					
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:	s 🔲 above or 🔲 below the LAG.					
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and next higher floor (C2.b in applicable	/or 9 (see pages 1–2 of Instructions), the					
Building Diagram) of the building is:	s 🔲 above or 🔲 below the HAG.					
E3. Attached garage (top of slab) is:	s 🔲 above or 🔲 below the HAG.					
E4. Top of platform of machinery and/or equipment servicing the building is:	s 🔲 above or 🔲 below the HAG.					
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance?  Yes No Unknown The local official must certify this information in Section G.						
SECTION F - PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESE	NTATIVE) CERTIFICATION					
The property owner or owner's authorized representative who completes Sections A, B, and E for sign here. The statements in Sections A, B, and E are correct to the best of my knowledge	Zone A (without BFE) or Zone AO must					
Check here if attachments and describe in the Comments area.						
Property Owner or Owner's Authorized Representative Name:						
Address:						
City: State:	ZIP Code:					
Telephone: Ext.: Email:						
Signature: Date:						
Comments:						

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 121 Stewart Farm Lane	D.: FOR INSURANCE COMPANY USE
City: Spring Lake State: NC ZIP Code: 28390	Policy Number:
only. Spring Lance Claus. The Code. 20000.	Company NAIC Number:
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR COM	MMUNITY OFFICIAL COMPLETION)
The local official who is authorized by law or ordinance to administer the community's flood Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and	
G1. The information in Section C was taken from other documentation that has bee engineer, or architect who is authorized by state law to certify elevation information elevation data in the Comments area below.)	
G2.a. A local official completed Section E for a building located in Zone A (without a E5 is completed for a building located in Zone AO.	BFE), Zone AO, or Zone AR/AO, or when item
G2.b.   A local official completed Section H for insurance purposes.	
G3.	ons to the information in Sections A, B, E and H.
G4.	management purposes.
G5. Permit Number: G6. Date Permit Issued:	
G7. Date Certificate of Compliance/Occupancy Issued:	
G8. This permit has been issued for: $\square$ New Construction $\square$ Substantial Improvem	ent
G9.a. Elevation of as-built lowest floor (including basement) of the building:	] feet
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	feet meters Datum:
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	feet meters Datum:
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	feet meters Datum:
G11. Variance issued? Yes No If yes, attach documentation and describe in	
The local official who provides information in Section G must sign here. I have completed to correct to the best of my knowledge. If applicable, I have also provided specific corrections	he information in Section G and certify that it is
Local Official's Name: Title:	
NFIP Community Name:	
Telephone: Ext.: Email:	
Address:	
City: Sta	ate: ZIP Code:
Signature: Date:	
Comments (including type of equipment and location, per C2.e; description of any attachm Sections A, B, D, E, or H):	ents; and corrections to specific information in

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE				
121 Stewart Farm Lane	Policy Number:				
City: Spring Lake State: NC ZIP Code: 28390	Company NAIC Number:				
SECTION H – BUILDING'S FIRST FLOOR HEIGHT INFORMATION F (SURVEY NOT REQUIRED) (FOR INSURANCE PURPOSES					
The property owner, owner's authorized representative, or local floodplain management official may to determine the building's first floor height for insurance purposes. Sections A, B, and I must also be nearest tenth of a foot (nearest tenth of a meter in Puerto Rico). Reference the Foundation Type Instructions) and the appropriate Building Diagrams (at the end of Section I Instructions) to determine the surface of the su	e completed. Enter heights to the Diagrams (at the end of Section H				
H1. Provide the height of the top of the floor (as indicated in Foundation Type Diagrams) above the	Lowest Adjacent Grade (LAG):				
a) For Building Diagrams 1A, 1B, 3, and 5–8. Top of bottom floor (include above-grade floors only for buildings with crawlspaces or enclosure floors) is:	meters above the LAG				
b) For Building Diagrams 2A, 2B, 4, and 6–9. Top of next higher floor (i.e., the floor above basement, crawlspace, or enclosure floor) is:	meters above the LAG				
H2. Is all Machinery and Equipment servicing the building (as listed in Item H2 instructions) elevated H2 arrow (shown in the Foundation Type Diagrams at end of Section H instructions) for the approximation Type    Yes   No					
SECTION I - PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESENT	TATIVE) CERTIFICATION				
The property owner or owner's authorized representative who completes Sections A, B, and H must sign here. <i>The statements in Sections A, B, and H are correct to the best of my knowledge</i> . <b>Note:</b> If the local floodplain management official completed Section H, they should indicate in Item G2.b and sign Section G.					
Check here if attachments are provided (including required photos) and describe each attachme	nt in the Comments area.				
Property Owner or Owner's Authorized Representative Name: Regan Driggers					
Address: 1523 Proctorville Church Rd					
City: Fairmont State: N	C ZIP Code: 28340				
Telephone: (910) 740-0502 Ext.: Email: regandriggers@gmail.com	-				
Signature: Date: 09/02/2025	_				
Comments: Photos of front, right, rear and flood vent views are attached.					
Photos of front, right, real and flood vent views are attached.					

# IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:			FOR INSURANCE COMPANY USE	
121 Stewart Farm Lane				Policy Number:
City: Spring Lake	_ State: _	NC	ZIP Code: <u>28390</u>	Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: Front View

Clear Photo One



Photo Two

Photo Two Caption: Right View

Clear Photo Two

# IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

**Continuation Page** 

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:			FOR INSURANCE COMPANY USE	
121 Stewart Farm Lane				Policy Number:
City: Spring Lake	State:	NC	ZIP Code: 28390	
	_		<del>-</del>	Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: Rear View

Clear Photo Three



Photo Four

Photo Four Caption: Flood Vent

Clear Photo Four



# **ICC-ES Evaluation Report**

#### **ESR-4332**

Reissued March 2024

This report also contains:

- CBC Supplement

Subject to renewal March 2026

- FBC Supplement

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

**DIVISION: 08 00 00—** 

**OPENINGS** 

Section: 08 95 43— Vents / Foundation Flood Vents REPORT HOLDER:
SMART PRODUCT
INNOVATIONS. INC.

**EVALUATION SUBJECT:** 

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608



# 1.0 EVALUATION SCOPE

## Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 <u>International Residential Code<sup>®</sup> (IRC)</u>

## **Properties evaluated:**

- Physical operation
- Water flow
- Weathering

## **2.0 USES**

The model FFV–1608 Freedom Flood Vent<sup>®</sup> is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

## 3.0 DESCRIPTION

#### 3.1 General:

The model FFV-1608 Freedom Flood Vent® is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent® door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

## 3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent® FVs must be installed in accordance with Section 4.0 below. See <u>Table 1</u> for vent size and maximum allowable area coverage for a single vent.

# 4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent<sup>®</sup> is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom

Flood Vent® must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m2) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

## 5.0 CONDITIONS OF USE:

The Freedom Flood Vent® described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The model FFV-1608 Freedom Flood Vent® unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- 5.2 The model FFV-1608 Freedom Flood Vent<sup>®</sup> unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.
- 5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.
- 5.4 FFV-1608 Freedom Flood Vent® is manufactured in Gastonia. North Carolina under a quality control program with inspections by ICC-ES.

## 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).

## 7.0 IDENTIFICATION

- 7.1 The Freedom Flood Vent® model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332).
- **7.2** The report holder's contact information is the following:

**SMART PRODUCT INNOVATIONS, INC.** 19 MANTUA ROAD **MOUNT ROYAL, NEW JERSEY 08061** (800) 507-1527 www.freedomfloodvent.com

info@freedomfloodvent.com

# TABLE 1—FREEDOM FLOOD VENT®

MODEL NAME	L NAME MODEL NUMBER MODEL SIZE		COVERAGE (sq. ft.)
Freedom Flood Vent® FFV-1608		15 <sup>3</sup> / <sub>4</sub> " X 8 <sup>1</sup> / <sub>16</sub> "	250

For SI: 1 inch = 25.4 mm

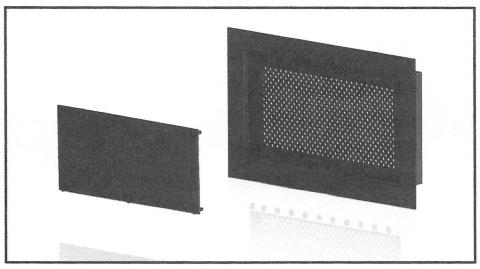


FIGURE 1—MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH COVER REMOVED

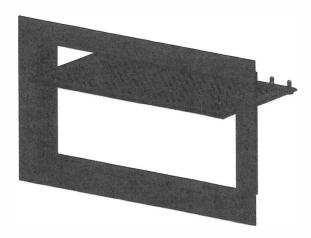


FIGURE 2—MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH FLOOD DOOR PIVOTED OPEN



# **ICC-ES Evaluation Report**

# ESR-4332 CBC and CRC Supplement

Reissued March 2024

This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

**EVALUATION SUBJECT:** 

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

# 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

#### Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

#### 2.0 CONCLUSIONS

#### 2.1 CBC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

#### 2.2 CRC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2024.





# **ICC-ES Evaluation Report**

# **ESR-4332 FBC Supplement**

Reissued March 2024

This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

**SMART PRODUCT INNOVATIONS, INC.** 

**EVALUATION SUBJECT:** 

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

## Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the *Florida Building Code—Building* and the *Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* and the *Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-4332 for the 2018 *International Building Code*® (IBC) meet the requirements of *Florida Building Code—Building* and the *Florida Building Code—Residential*, as applicable.

Use of the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued March 2024.

