

OPERATIONS PERMIT


Name: (owner) Lambert Homes Inc New Installation Septic Tank
 Property Location: SR# 1412 Repairs Nitrification Line
 Subdivision Briarwood Lot # 43
 TAX ID# _____ Quadrant # _____
 Contractor: Clint Adams Registration # _____
 Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 50+ ft.

Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other _____
 Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons
 Subsurface Drainage Field No. of ditches 2 exact length of each ditch 150 ft. width of ditches 3 ft. depth of ditches 18-24 in.
 French Drain: _____ Linear feet

Date: 1-3-97
 Inspected by: Thomas J. Boye R.S.
 Environmental Health Specialist

PERMIT NO. 10550

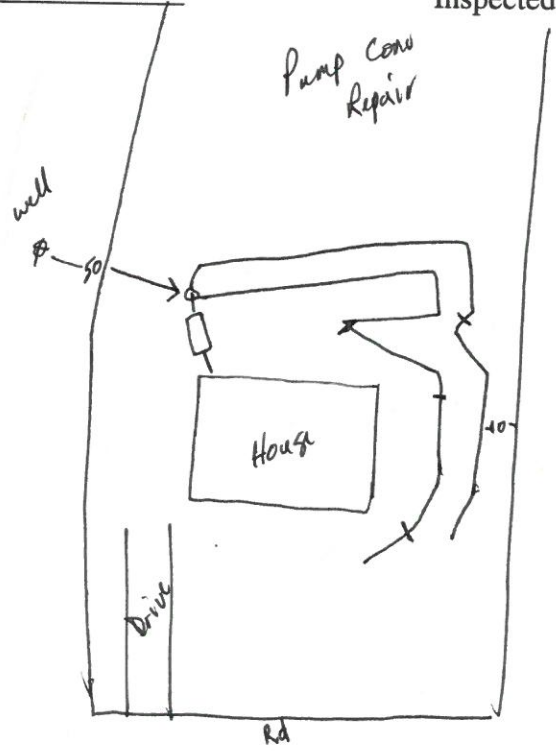

IMPROVEMENT PERMIT

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department".

Name: (owner) Lambert Homes Inc New Installation Septic Tank
Property Location: SR# 1412 Repairs Nitrification Line

Subdivision Briarwood Lot # 43

Tax ID# _____ Quadrant # _____

Number of Bedrooms Proposed: 3 Lot Size: .847 acres

Basement with Plumbing: Garage:
Water Supply: Well Public Community

Distance From Well: 50' ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other _____

Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons

Subsurface Drainage Field No. of ditches 2 exact length of each ditch 150 ft. width of ditches 3 ft. depth of ditches 18-22 in.

French Drain required: - Linear feet


This permit is subject to revocation if site plans or intended use change.

Date: 10-10-96

Signed: James C Mandant

Environmental Health Specialist
*Maintain all setbacks
*HOME had to be backed up 10'-15' to accommodate the drain field
*Plumbing has to be stubbed out High, set TANK High and bring backfill in, NOT soil off of this lot.
*Follow contours as best as possible, There will be stepdowns, but follow contours as well as possible to maintain drain.

Pump Gov Repair



1412 ← Bentwillow DR