

Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Rebecca & Billy Jackson PROPERTY LOCATION: 219 MORGAN FARM DR. (US 401 N.)
 NEW REPAIR EXPANSION **RELOCATION** SUBDIVISION: Morgan Farm LOT # 10
 Type of Structure: Existing 4-bedroom SFD Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: 25% Reduction Sys.
 Projected Daily Flow: 480 GPD
 Number of bedrooms: 4 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well NA feet Permit valid for: Five years
 Permit conditions: No expiration

Authorized State Agent: [Signature] Date: 05/18/2020 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Rebecca & Billy Jackson PROPERTY LOCATION: 219 Morgan Farm Dr. (US 401 N.)
 Facility Type: Ext. 4 BR SFD New Expansion Repair **RELOCATION**
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 480 GPD
 (See note below, if applicable 25% REDUCTION SFS. (Repair))

Installation Requirements/Conditions

Septic Tank Size <u>EXT</u> gallons	Number of trenches <u>1</u>	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size _____ gallons	Exact length of each trench <u>100</u> feet	Soil Cover: <u>6</u> inches
	Trenches shall be installed on contour at a	(Maximum soil cover shall not exceed
	Maximum Trench Depth of: <u>18</u> inches	36" above the trench bottom)
	(Trench bottoms shall be level to +/- 1/4"	
	in all directions)	
Pump Requirements: _____ ft. TDH vs. _____ GPM		<u>NA</u> inches below pipe
		Aggregate Depth: <u>NA</u> inches above pipe
Conditions: <u>relocation of upper line to accommodate pool</u>		<u>NA</u> inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 05/18/2020
ANDREW WAIN Construction Authorization Expiration Date: 05/18/2025

Application # BLES2004-0030


Harnett County Department of Public Health Site Sketch

Property Location: 219 Morgan Farm Dr. (US 401 N.)
Issued To: Billy Jackson Subdivision: Morgan Farm Lot # 10

Authorized State Agent: [Signature] Date: 05/18/2020
ANDREW COLLIN

NOTE:

* DISCHARGE FROM POOL SHALL NOT BE DRAINED ONTO SEPTIC FOR REPAIR AREA AND SHALL NOT BE PIPED THRU SEPTIC AREA [DISCHARGE TO RIGHT AND DOWN WITHIN 10 FT OF PROPERTY LINE TO REAR POL.]

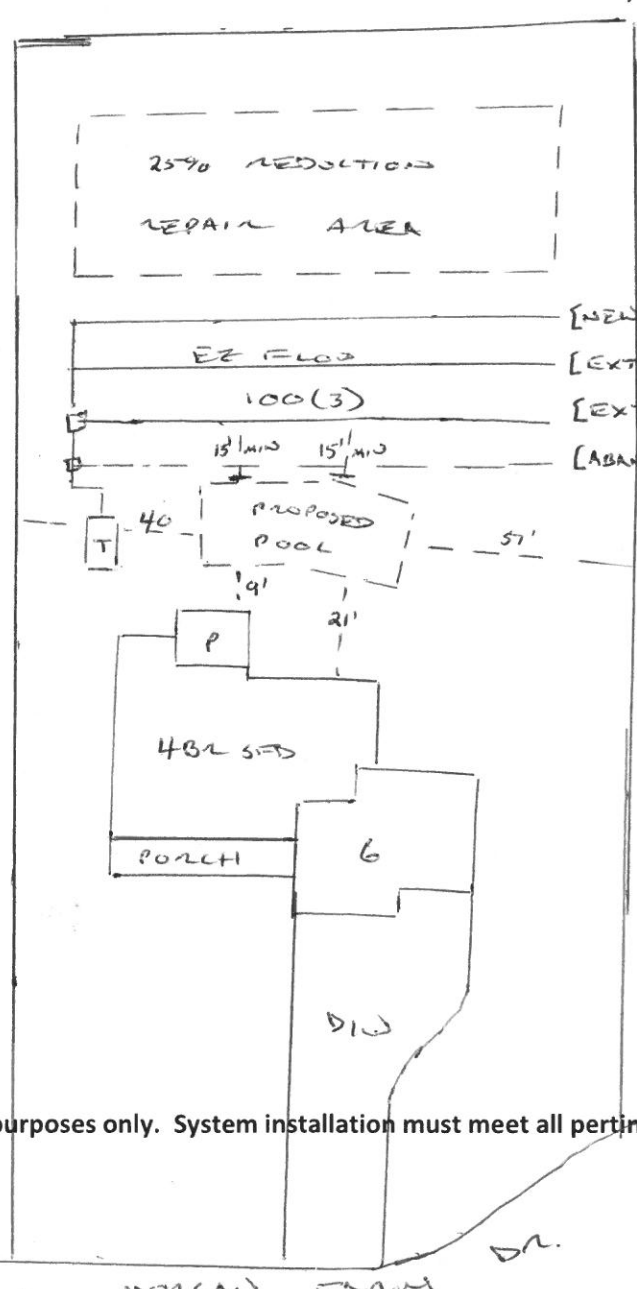

* RELOCATION OF UPPER LINE TO ACCOMMODATE PROPOSED POOL
* PROPOSED POOL SHALL BE CORRECTLY MARKED ON SITE PRIOR TO INSTALL [15' MIN SETBACK]
* EXT SYS. MARKED ON SITE W/ BLUE & WHITE FLAGS
* ADDITIONAL LINE MAY BE RELOCATED IF REQUIRED
* GRAVITY TO D-BOX EQUAL DISTRIBUTION AND 25% REDUCTION PRODUCT REQUIRED

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.