

Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Brian Rose PROPERTY LOCATION: 311251 Peach Farm RD
 NEW REPAIR EXPANSION SUBDIVISION _____ LOT # 4
 Type of Structure: DWMA 28X56 Site Improvements required prior to Construction Authorization Issuance: _____
 Proposed Wastewater System Type: 25% RSD
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 4 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: James E. Markham JR 2034+5 Date: 3-22-21 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization (Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Brian Rose PROPERTY LOCATION: 311251 Peach Farm RD
 SUBDIVISION _____ LOT # 4
 Facility Type: DWMA 28X56 New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% RSD/curved system (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable
25% RSD/curved system (Repair)
Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Number of trenches 3
 Pump Tank Size _____ gallons Exact length of each trench 80 feet Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 22-5/8 inches (Maximum soil cover shall not exceed
 (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)
 in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 6 inches below pipe
2 inches above pipe
12 inches total
 Conditions: _____

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Markham JR 2034+5 Date: 3-22-21
 Construction Authorization Expiration Date: 3-22-24

Application # BLLS 2008-0057


Harnett County Department of Public Health Site Sketch

Property Location: SR 1251 Peach Farm Rd

Issued To: BRIAN ROSE Subdivision _____ Lot # 4

Authorized State Agent: James E. Markham ^{PH 1251B} Date: 3-22-21

D-BOX TO INDIVIDUAL LINES REQUIRED. IF I LINC SYSTEM IS USED,
FRENCH DRAIN
WILL BE REQUIRED.

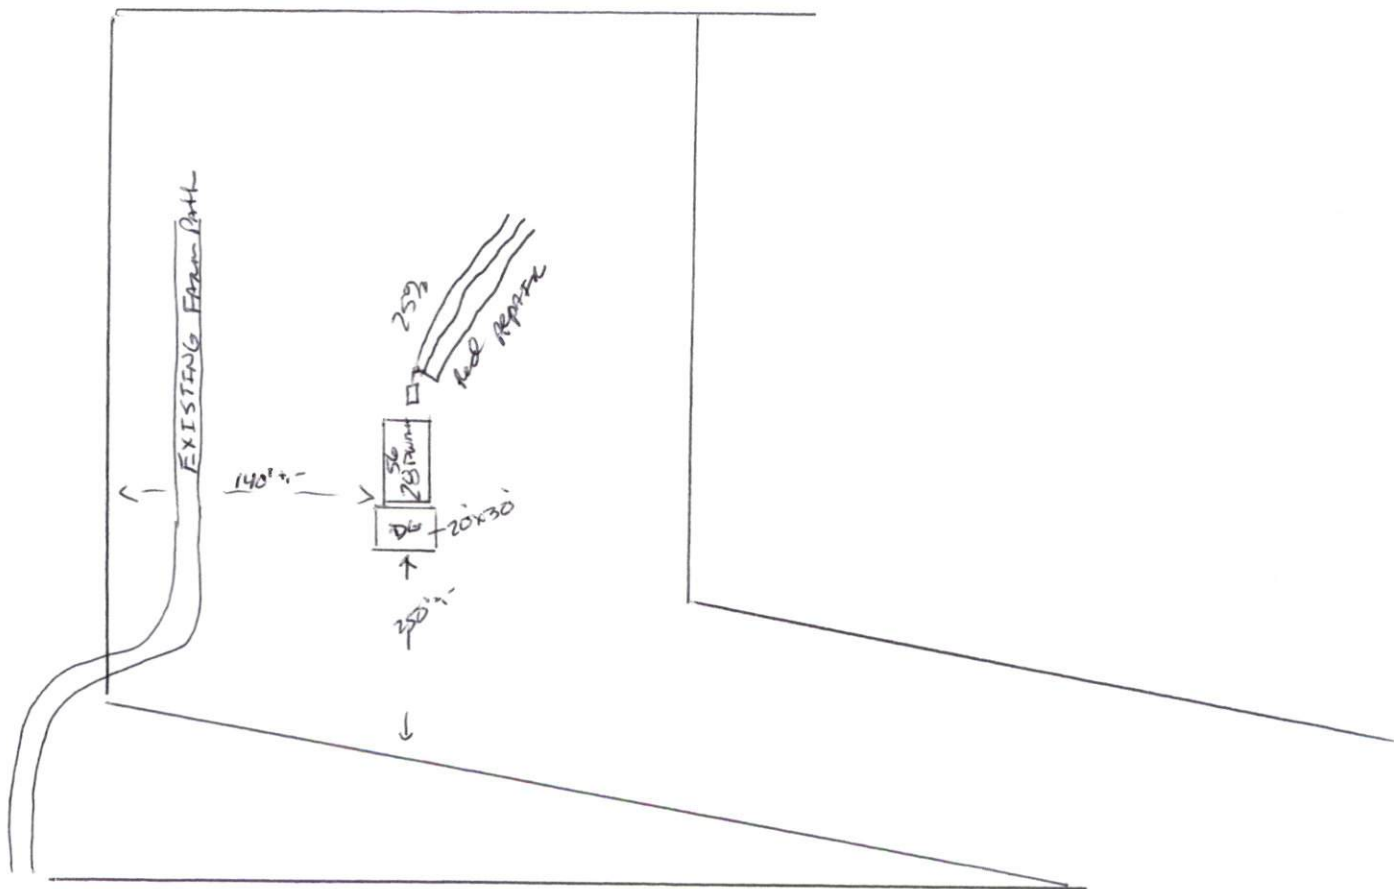

SR 1251 Peach Farm Rd

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.