

# Harnett County Department of Public Health

## Improvement Permit

20 Ridgewood Dr

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Jennifer Angueta PROPERTY LOCATION:  Hwy 24/27  
 NEW  REPAIR  EXPANSION  SUBDIVISION: Highlands @ SHERWOOD Forest LOT # 76  
 Type of Structure: DWMT Site Improvements required prior to Construction Authorization Issuance:  
 Proposed Wastewater System Type: 25% REDUCTION  
 Projected Daily Flow: 600 GPD  
 Number of bedrooms: 5 Number of Occupants: 10 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well \_\_\_\_\_ feet Permit valid for:  Five years  
 Permit conditions: \_\_\_\_\_  No expiration

Authorized State Agent: James E. Marshall Date: 10-13-20 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

20 Ridgewood Dr

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958 and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Jennifer Angueta PROPERTY LOCATION: Hwy 24/27  
 Facility Type: DWMT  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* 25% REDUCTION (Initial) Wastewater Flow: 600 GPD  
 (See note below, if applicable)   
25%/50% REDUCTION (Repair)  
 Installation Requirements/Conditions  
 Septic Tank Size 1250 gallons Number of trenches 4 or 5  
 Pump Tank Size 1250 gallons Exact length of each trench 100 or 80 feet  
 Trenches shall be installed on contour at a Trench Spacing: 9 Feet on Center  
 Maximum Trench Depth of: 24 inches Soil Cover: 6 inches  
 (Trench bottoms shall be level to +/-1/4" (Maximum soil cover shall not exceed 36" above the trench bottom)  
 in all directions)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM Aggregate Depth: 6 inches below pipe  
 \_\_\_\_\_ inches above pipe  
 \_\_\_\_\_ inches total

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Marshall Date: 10-13-20  
 Construction Authorization Expiration Date: 10-13-25


Application # BRES 2009-  
0072

Harnett County Department of Public Health  
Site Sketch

Property Location: Hwy 24127

Issued To: Jennifer Arqueta Subdivision Highlands @ Sherwood Forest Lot # 76

Authorized State Agent: James C. Marshall Date: 10-13-20

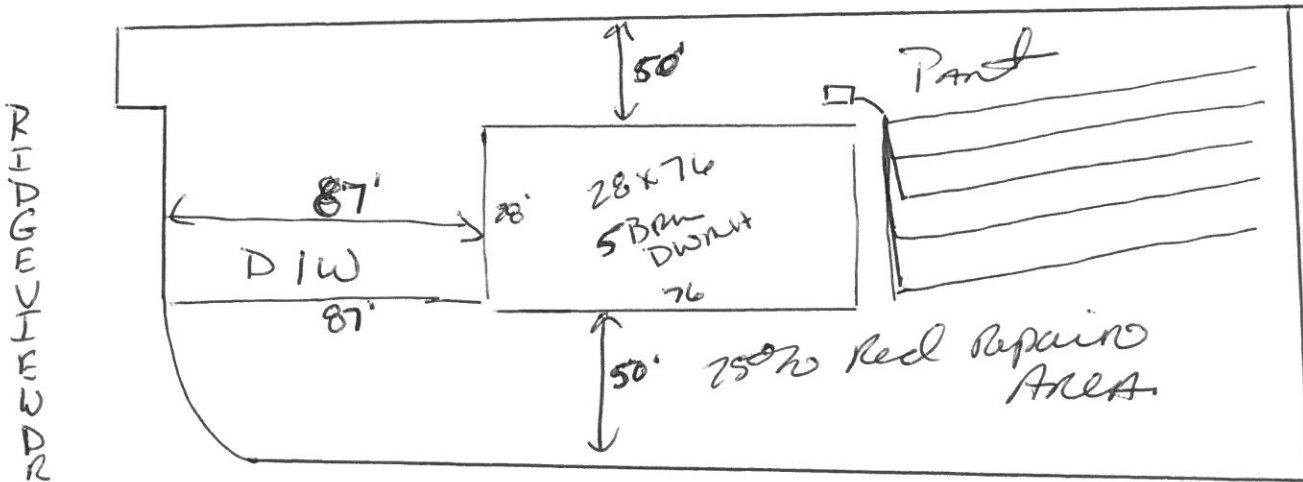

Hwy 24127

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.