

Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Donnie & Becky Hamilton PROPERTY LOCATION: 687 Hog Haven Ln. - Old Hamilton Rd. (SF
 SUBDIVISION: Heaven LOT # _____

NEW REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance: _____

Type of Structure: 58x32 modular, 3 beds 2 baths

Proposed Wastewater System Type: Low Profile Chamber

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well 50+ feet Permit valid for: Five years No expiration

Permit conditions: _____

Authorized State Agent: [Signature] Date: 07/09/2021 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Donnie & Becky Hamilton PROPERTY LOCATION: 687 Hog Haven Ln. - Old Hamilton Rd. (
 SUBDIVISION: Heaven LOT # _____

Facility Type: 58x32 modular, 3 beds 2 New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** Low Profile Chamber (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable) Low Profile Chamber (Repair)

Installation Requirements/Conditions	Number of trenches <u>4</u>	
Septic Tank Size <u>1000</u> gallons	Exact length of each trench <u>100</u> feet	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size _____ gallons	Trenches shall be installed on contour at a Maximum Trench Depth of: <u>8</u> inches (Trench bottoms shall be level to +/-1/4" in all directions)	Soil Cover: <u>6 (import)</u> inches (Maximum soil cover shall not exceed 36" above the trench bottom)
Pump Requirements: _____ ft. TDH vs. _____ GPM		Aggregate Depth: <u>NA</u> inches below pipe <u>NA</u> inches above pipe <u>NA</u> inches total

Conditions: _____

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH


Authorized State Agent: [Signature] Date: 07/09/2021
Andrew Corbin Construction Authorization Expiration Date: 07/09/2026

Harnett County Department of Public Health Site Sketch

Property Location: ^{Heaven} 687 Hog Haven Ln. - Old Hamilton Rd. (SR 1776)
Issued To: Donnie & Becky Hamilton Subdivision _____ Lot # _____

Authorized State Agent: _____ Date: 07/09/2021

- * PRELIMINARY SOIL PROPOSAL PROVIDED BY HAL OWENS & ASSOCIATES, INC (LSS)
- ↳ HOUSE SHIFTED TO BRING CLOSER TO PROVISIONALLY SUITABLE SOILS
- ↳ HOUSE OVERHEAD TRANSMISSION LINE
- * GRAVITY TO D-BOX EQUAL DISTRIBUTION
- * GINT IMPORTED SOIL COVER REQUIRED
- * TANK WILL SIT ABOVE ORIGINAL GRADE [NEED COVER]
- * STD. FLAGGED ONSITE
- * ULTRA SHALLOW SYSTEM!
- ↳ LOW PROFILE CHAMBER

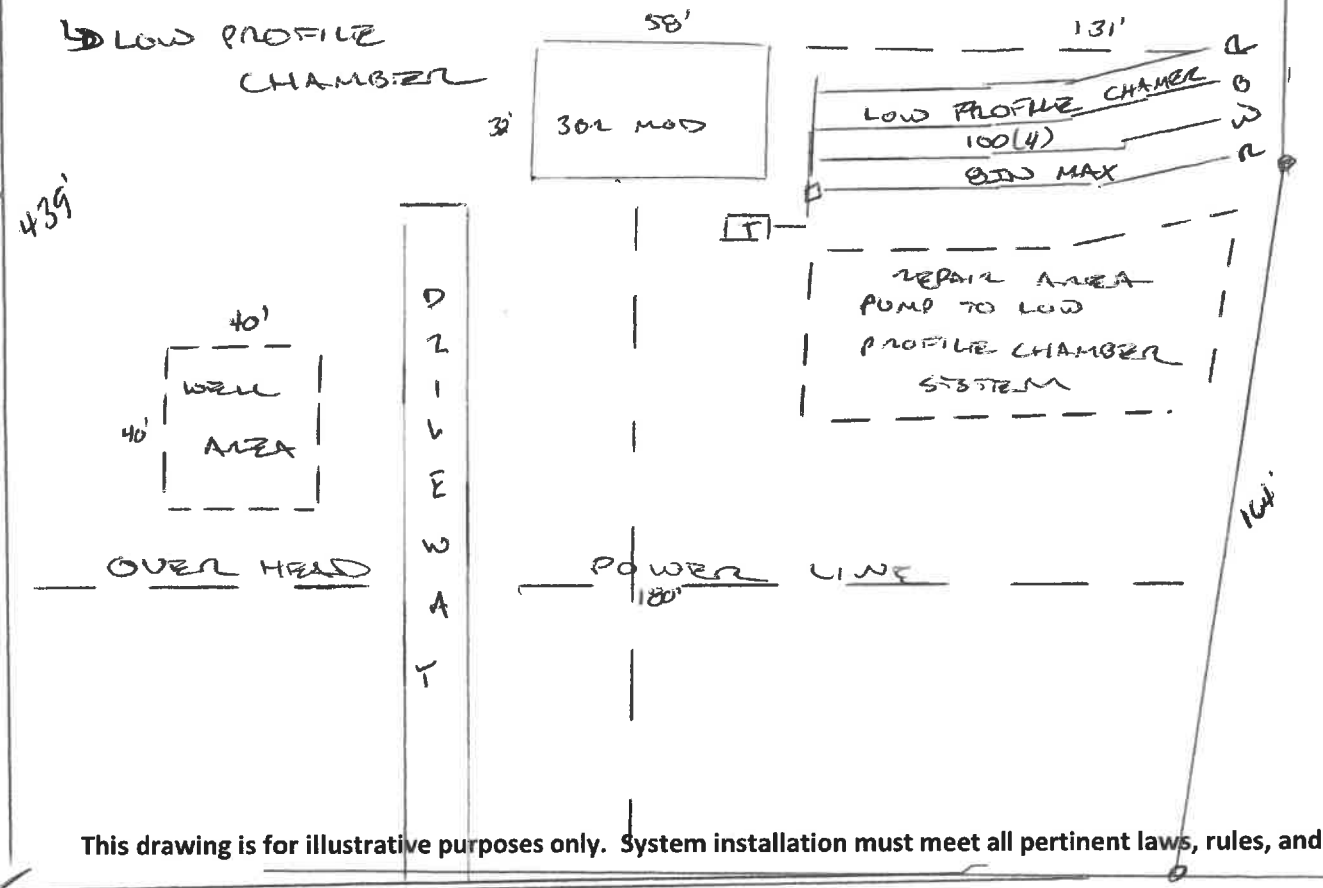

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.

HOG HAVEN LANE