


Section AV105 Barrier Requirements


ALL GATES SHALL COMPLY w/

Section AV105.2


8. Access gates shall comply with the requirements of Section AV105.2, Items 1 through 7, and shall be equipped to accommodate a locking device. Pedestrian access gates shall open outward away from the pool and shall be self-closing and have a self-latching device. Gates other than pedestrian access gates shall have a self-latching device. The release mechanism of the self-latching device will be located at **54 inches** from the bottom of the gate.

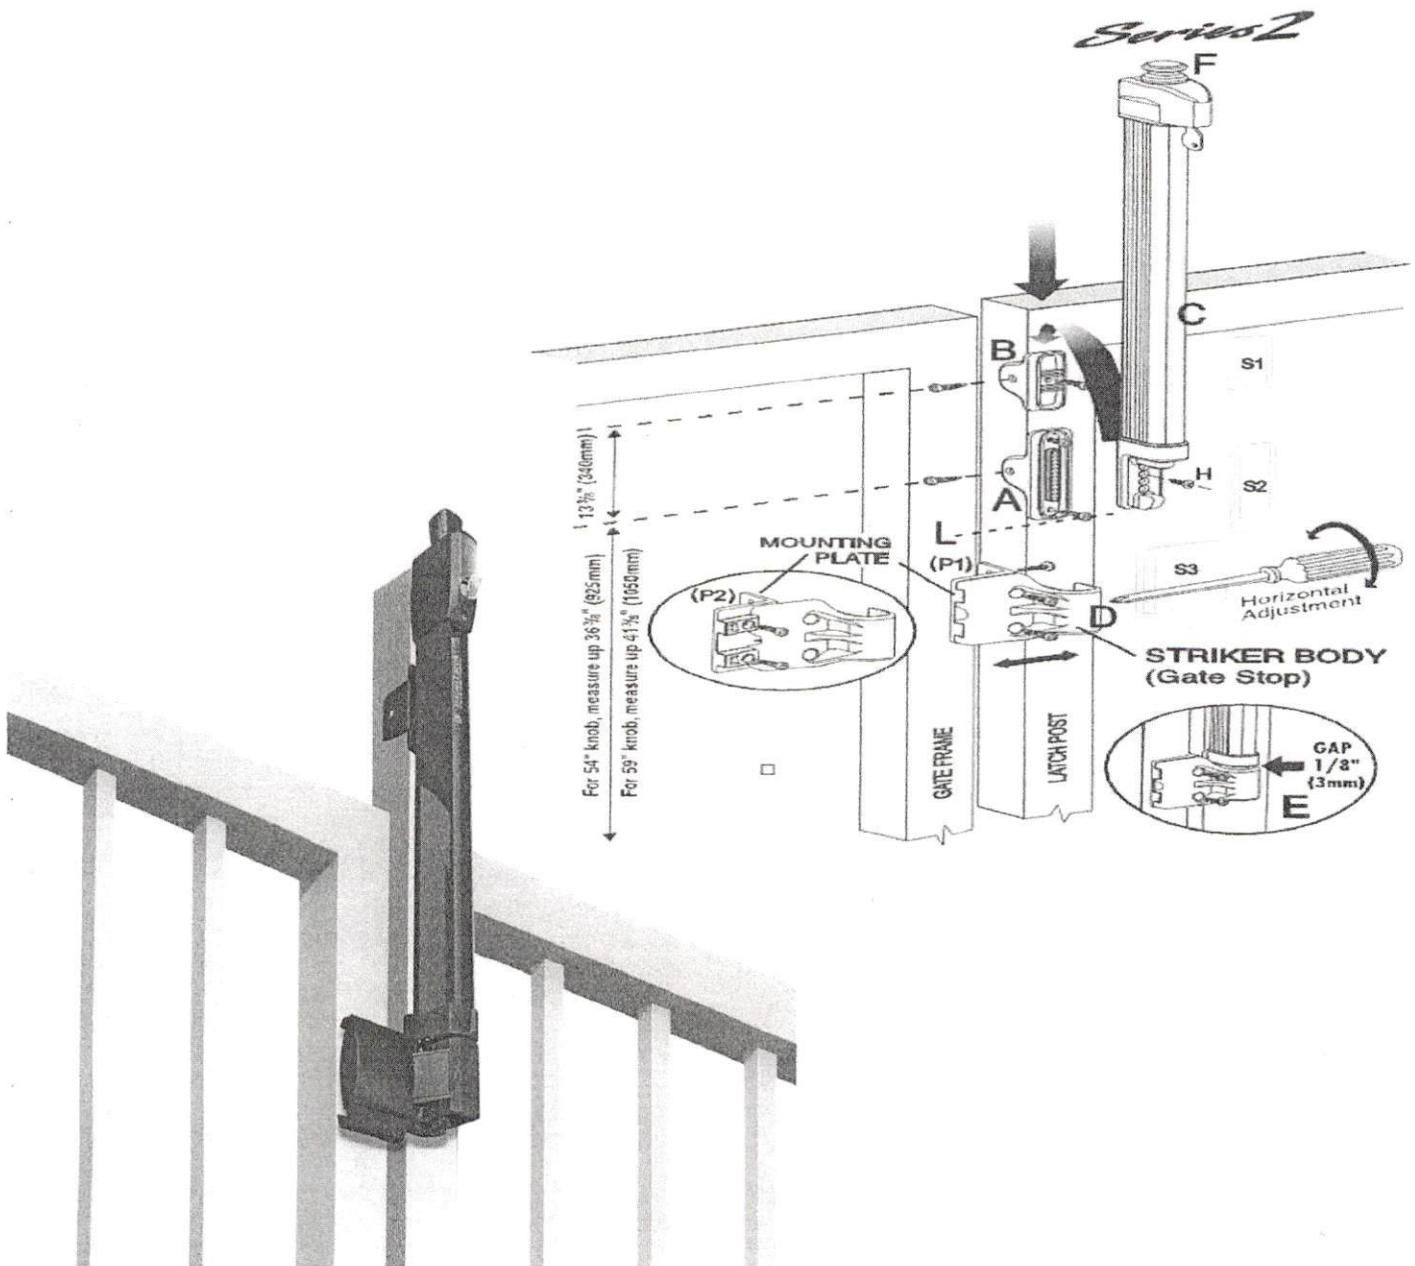

(see NC State Residential Code Appendix G for a complete list of requirements)

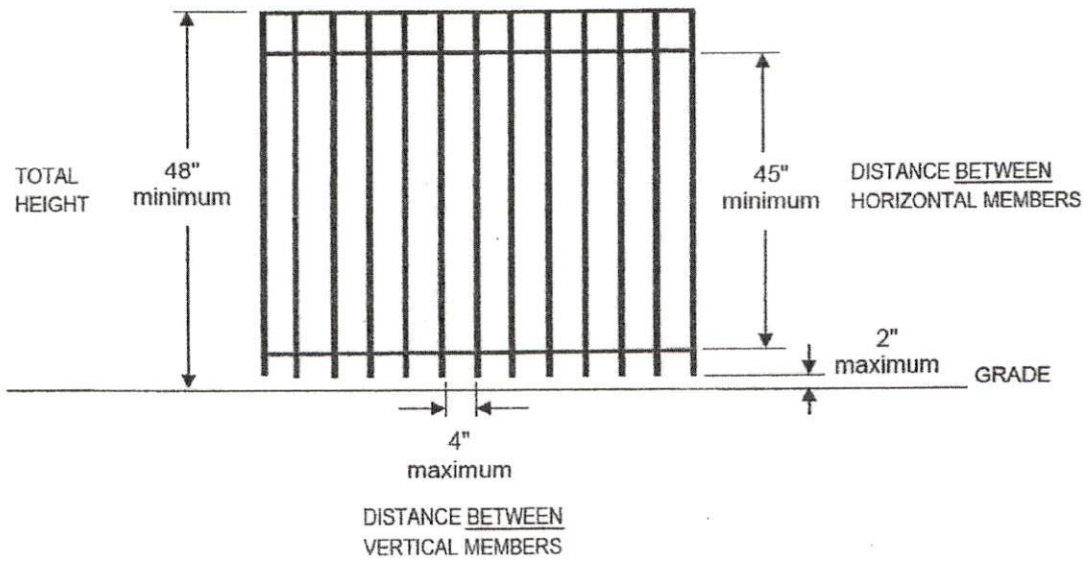

METAL FENCE
(aluminum or wrought iron)

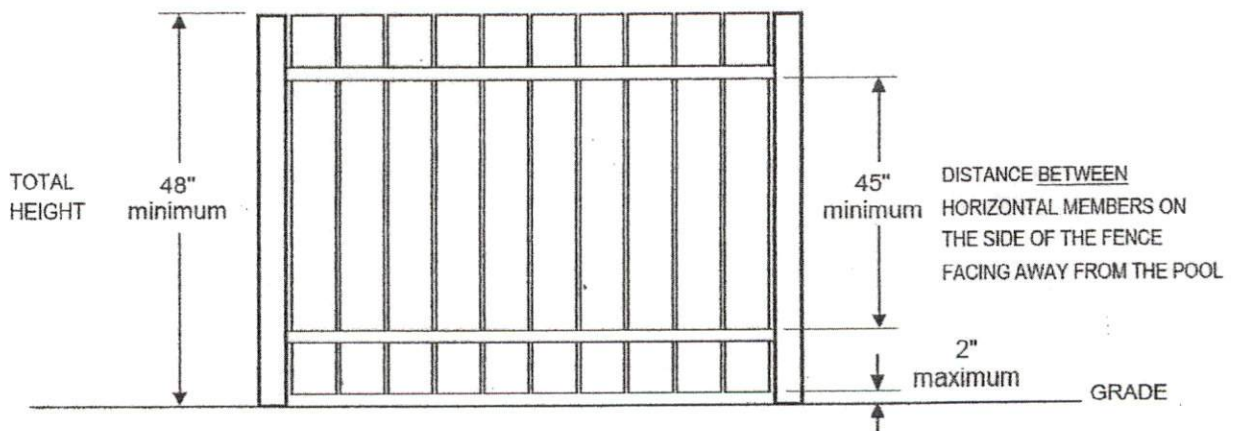

WOOD FENCE

Section AV105 Barrier Requirements

Section AV105.2

9. Where a wall of a *dwelling* serves as part of the barrier, one of the following conditions shall be met:
- 9.2 Doors with direct access to the pool through that wall shall be equipped with an alarm that produces an audible warning when the door and/or its screen, if present, are opened. The alarm shall be listed and *labeled* in accordance with UL 2017. The deactivation switch(es) shall be located at least 54 inches above the threshold of the door.

****NOTE:** *Doors with pool access will alarmed with the following approved device and will activate within 7 seconds, will be audible for 30 seconds and can be heard throughout the house*

