


NOTES


PRE-ENGINEERED SHED BY NC CARPORTS & GARAGES OF PILOT MOUNTAIN, NC
CONSTRUCTION DESIGN BY MOORE AND ASSOCIATES ENGINEERING AND CONSULTING, INC.
CONCRETE FOUNDATION AND PAD DESIGN PER MOORE ENGINEERING DWG. NO. SK-3
DETAIL 2B (1' X 1' MIN. FOOTER WITH #4 REBAR). CONCRETE MIX TO BE
4000 PSI WITH FIBER REINFORCEMENT. NON-STRUCTURAL BUILDING FLOOR PAD
TO BE 5" THICK WITH FIBER REINFORCEMENT.

PRE-ENGINEERED A/G POOL BY MARTIN POOLS & SPAS
CONSTRUCTION DESIGN BY OTHERS

REV-1 NOTES

POOL LOCATION MOVED TO 18" OFF EXISTING DECK AND 8' FURTHER FROM NORTHERN
PROPERTY LINE TOWARDS PROPOSED SHED. SEPTIC REDUCTION REPAIR AREA
RE-CONFIGURED TO ALLOW 15' OFFSET FROM PROPOSED A/G SWIMMING POOL AS
SHOWN ON THIS PLAN PER SITE MEETING WITH ANDREW CURRIN, R.E.H.S. ON 5/25/21.

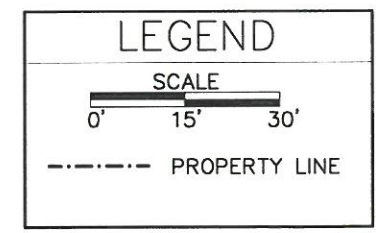

| | |
|--|---------------------|
| TITLE: PROPOSED SITE PLAN DAVIS GORDON LEE & DAVIS LISA PROPERTY HARNETT COUNTY PIN: 0587-98-3576.000 | |
| PROJECT: A/G POOL AND SHED CONSTRUCTION 90 PUMP STATION ROAD ERWIN, NC 28339 | |
| CLIENT: DAVIS GORDON LEE & DAVIS LISA 90 PUMP STATION ROAD ERWIN, NC 28339 | |
| SCALE: 1"=30' | DWN.BY: HN |
| DATE: 5/26/21 | DWG.#: SHEET 1-rev1 |
|  HENRY NEMARGUT ENGINEERING SERVICES 2211 CHESTNUT STREET WILMINGTON, NORTH CAROLINA 28405 (910) 762-5475 | |