

Harnett County Department of Public Health Improvement Permit

1080 OLD STAGE

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: BRIAN TEW PROPERTY LOCATION: SL 1769 OLD STAGE RD (S)
 SUBDIVISION _____ LOT # _____
 NEW REPAIR EXPANSION
 Type of Structure: MOD 28x56
 Proposed Wastewater System Type: Pump to AT GRADE 50% RED
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 50' feet
 Permit conditions: _____ Permit valid for: Five years No expiration

Authorized State Agent: [Signature] Date: 12-7-21 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958 and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: BRIAN TEW PROPERTY LOCATION: SL 1769 OLD STAGE RD (S)
 SUBDIVISION _____ LOT # _____
 Facility Type: MOD 28x56 New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** AT GRADE 50% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable
50% REDUCTION SYSTEM (Repair)
 Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Number of trenches 3
 Pump Tank Size 1000 gallons Exact length of each trench 75 feet Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 12" inches (Maximum soil cover shall not exceed
 (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)
 in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 6 inches below pipe
2 inches above pipe
 Conditions: Contractor to meet onsite prior to install
Ensure setbacks - Fill material - Tank placement
12 inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 12-7-21
 Construction Authorization Expiration Date: 12-7-26

Application # BURS 2105-0088

Harnett County Department of Public Health Site Sketch


1080 OLD STAGE

Property Location: SILVER OLD STAGE RD S

Issued To: Brian Tew Subdivision _____ Lot # _____

Authorized State Agent: James C. Manhart ^{IBHS} Date: 12-7-21

* Contractor to meet onsite prior to install

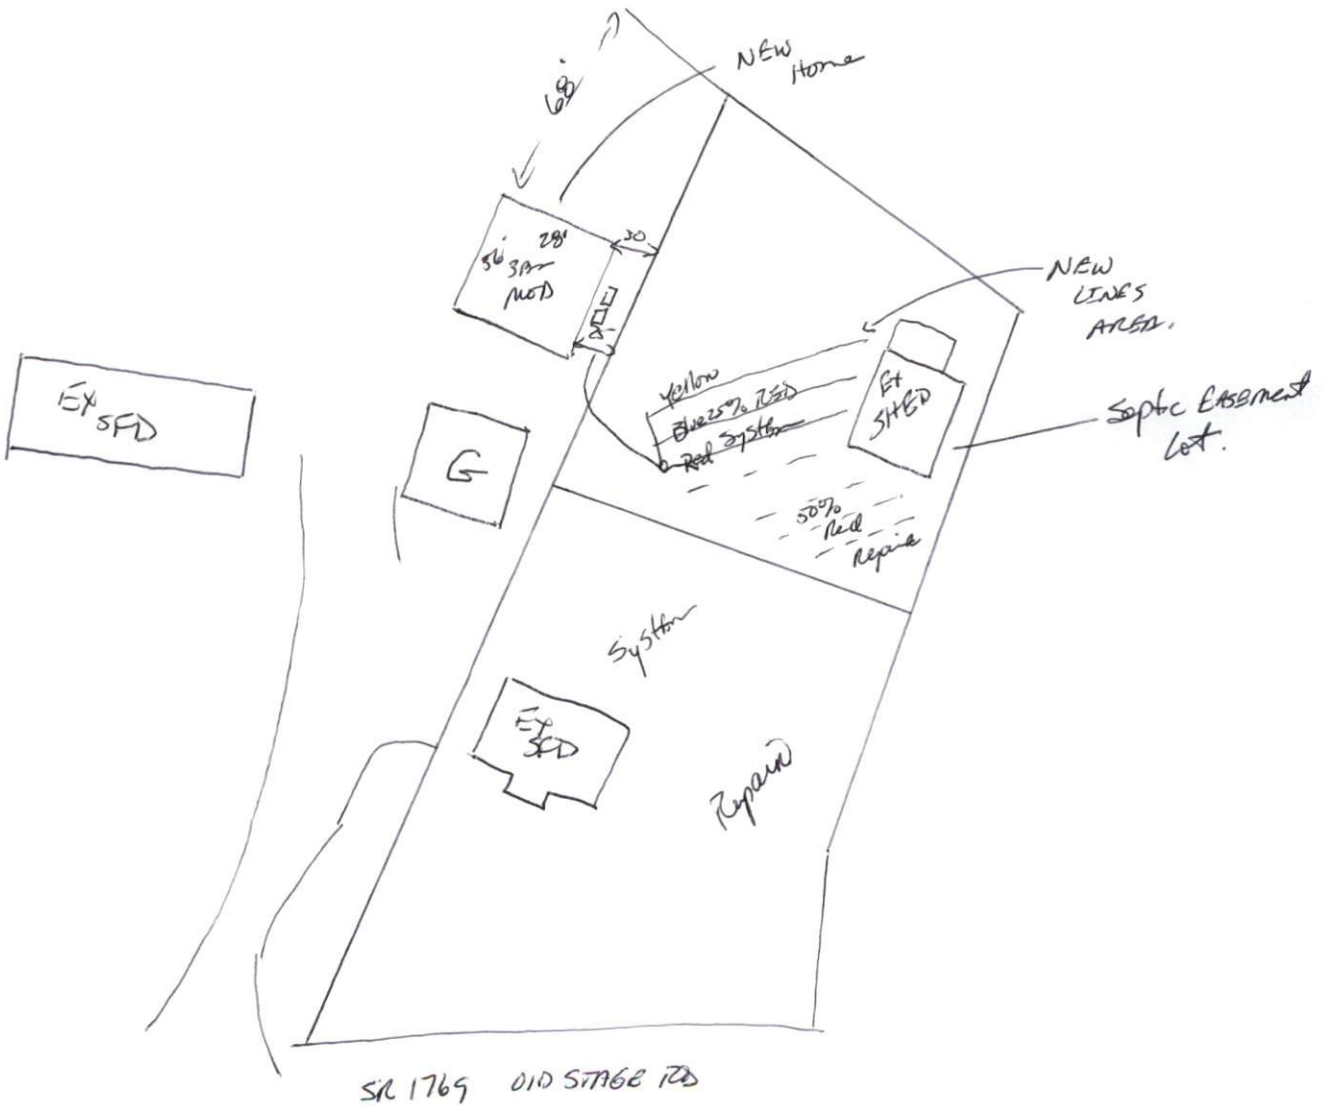

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.