




## Continuous Insulation for Exposed Use

### TSX-8500

This superior insulation product has glass fiber reinforced aluminum foil facers. The exposed side has a heavy 12mil aluminum reflective surface and is designed to provide an attractive interior finish without the need for a thermal barrier - up to 4.5" on walls or 12" on ceilings.

#### COMPLIANCES

- ASTM C1289 Type I, Class 1 or 2
- DrJ 1309-03
- Class A Flame Spread
- NFPA 285
- Miami Dade County
- City of LA
- IBC, IRC, IECC, ASHRAE 90.1
- ICC-ES ESR-1864
- UL Fire Rated Assemblies
- Exposure Rated
- Water-Resistive Barrier (WRB)
- Air Barrier Material
- CA Insulation Directory

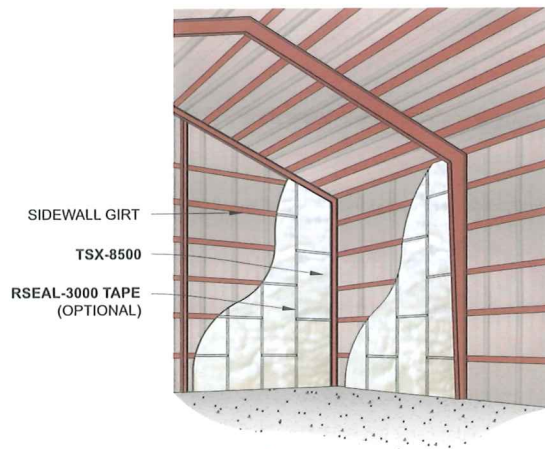

### TSX-8510

Just like TSX-8500, this product is designed for use without a thermal barrier (up to 4.5" on walls or 12" on ceilings) to provide an attractive interior finish. The difference is that the exposed side of TSX-8510 has a heavy 12mil white aluminum surface.

#### COMPLIANCES

- ASTM C1289 Type I, Class 1 or 2
- DrJ 1309-03
- Class A Flame Spread
- Miami Dade County
- City of LA
- IBC, IRC, IECC, ASHRAE 90.1
- ICC-ES ESR-1864
- UL Fire Rated Assemblies
- Exposure Rated
- Air Barrier Material
- CA Insulation Directory



## Thermal Properties / R-Values<sup>1</sup>

Product	Nominal Thickness (Foam Only)										
	0.5"	0.75"	1.00"	1.50"	1.55"	2.00"	2.50"	3.00"	3.50"	4.00"	4.50"
Thermasheath®-3	3.2	5.0	6.0	9.6	10.0	13.1	16.7	20.3	23.9	27.4	31.0
TSX-8500	3.2	5.0	6.0	9.6	10.0	13.1	16.7	20.3	23.9	27.4	31.0
TSX-8510	3.2	5.0	6.0	9.6	10.0	13.1	16.7	20.3	23.9	27.4	31.0
ECOMAXci™	---	---	6.5	10.0	---	13.1	16.7	20.3	---	---	---
ECOBASEci™ - 5/8" FRTP <sup>2</sup>	---	5.2	6.7	9.7	---	12.8	16.0	19.2	22.4	25.7	29.0
ECOBASEci™ - 3/4" FRTP <sup>2</sup>	---	5.4	6.9	9.9	---	13.0	16.2	19.4	22.6	25.9	29.2

<sup>1</sup>Thermal values are determined by using ASTM C518 test method at 75°F mean temperature on material conditioned according to PIMA Technical Bulletin No. 101.

<sup>2</sup>R-value includes nailing panel

Visit [www.rmax.com](http://www.rmax.com) for a complete list of thicknesses and packaging information.