

Victory Chandra
Slater® Plastic Boxes
Switch & Outlet Boxes
 With Captive Mounting Nails on Each End

Pass & Seymour


 **legrand**

Slater® Plastic Boxes


Catalog Number	Cu. In. Vol.	Description	Dimensions (inches)			Wire Fill (AWG)	Qty. Per Carton
			L	W	D		
Switch & Outlet Boxes with Threaded Mounting Holes							
P1-18-R	18.0	Single gang. 2 Quick/Entries® each end.	3¾	2¼	2 ²³ / ₃₂	9 No. 14 8 No. 12 7 No. 10	100
P1-18-RN	18.0	Single gang. Reverse angled captive mounting nail. 2 Quick/Entries each end. Used for manufactured housing.	3¾	2¼	2 ²³ / ₃₂	9 No. 14 8 No. 12 7 No. 10	100
NEW P1-22-C	22.0	Single gang. With "claw" – a temporary hold feature.	3¾	2¼	4	11 No. 14 10 No. 12 9 No. 10	100
NEW PH1-22-R	22.0	Single gang. Horizontal. Captive mounting nail each side.	3¾	2¼	3 ³ / ₈	11 No. 14 10 No. 12 9 No. 10	100
P2-35-RAC	35.0	Two gang. 4 Auto/Clamps® each end.	3 ³¹ / ₃₂	3 ³¹ / ₃₂	3 ³ / ₈	17 No. 14 15 No. 12 14 No. 10	100
P2-35-RACMH	35.0	Two gang. 4 Auto/Clamps each end. 3" depth for manufactured housing walls.	3 ³¹ / ₃₂	3 ³¹ / ₃₂	3	17 No. 14 15 No. 12 14 No. 10	100
P3-54-RACMH	54.0	Three gang. 6 Auto/Clamps each end. 3 ¹ / ₁₆ " depth for manufactured housing walls.	3 ¹³ / ₁₆	5 ¹⁵ / ₁₆	3 ¹ / ₁₆	27 No. 14 24 No. 12 21 No. 10	50
Deep Switch & Outlet Boxes with Threaded Mounting Holes							
P1-22-R	22.5	Single gang deep. 2 Quick/Entries each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	3%	11 No. 14 10 No. 12 9 No. 10	100
P1-22-RN	22.5	Single gang deep. Reverse angled captive mounting nail. 2 Quick/Entries each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	3%	11 No. 14 10 No. 12 9 No. 10	100
NEW P1-22-N	22.5	Single gang deep. Vertical bracket mount.	3¾	2¼	3%	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.


UL Classified for 2 Hour Fire Resistance.




P1-18-R




P1-18-RN




P1-22-R




P1-22-RN




P1-22-N




PH1-22-R




P1-22-C



P2-35-RAC



P2-35-RACMH




P3-54-RACMH

All devices listed on this page conform to NEMA OS2.

Switch & Outlet Boxes



9351-N

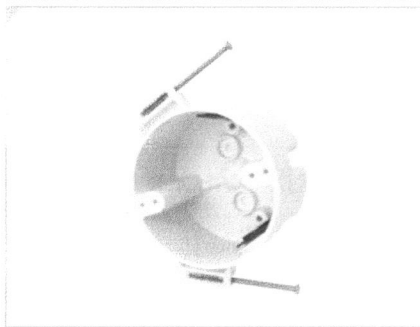

VIDEO

Product Description

4" dia. round fixture support box for use with nonmetallic sheathed cable

Brand: fiberglassBOX™
Catalog #: 9351-N

Carton Quantity: 48
Carton Weight: 25 lb.

Width: 4 in.
Depth: 2-7/16 in.
Volume: 22.5 cu. in.
Type of Installation: New Work
Round Ceiling Box

UPC: 085339104759
UNSPSC: 39121316
Country of Origin: United States of America

FEATURES

Machine tapped fixture holes, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Speed "K" Clamps bulk packed

STANDARDS

ANSI / UL 514C: File No. E30594



APPLICATION

New work residential construction 2 HR fire resistive walls and ceilings (50 lbs. fixture support)

FIRE CLASSIFICATION

Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)
Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 3 inches

Fire Resistance Classification in Floor-Ceiling Assemblies 2-Hours or Less

Distance between boxes in adjacent cavities may be reduced to 5 1/2 inches
Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)

COLOR

Beige/tan

ADDITIONAL MATERIALS

Carbon steel fasteners

MATERIAL

Fiberglass reinforced polyester BMC

Polyvinyl chloride clamps

MOUNTING


Nail-on with fetter ring nails

SUPPORT RATING

50 lbs fixture support



2300-N

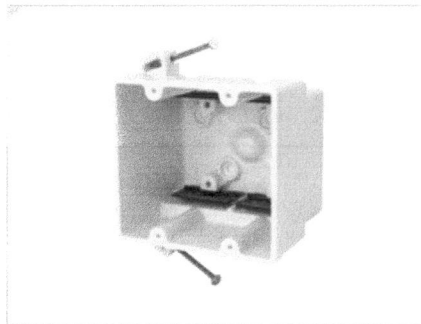

VIDEO

Product Description

Two gang electrical box for use with nonmetallic sheathed cable

Brand: fiberglassBOX™
Catalog #: 2300-N

Height: 3-3/4 in.
Width: 4 in.
Depth: 3 in.
Volume: 32.5 cu. in.
Type of Installation: New Work
Wall Box
Number of Gangs: 2

Carton Quantity: 48
Carton Weight: 28 lb.

UPC: 085339121251
UNSPSC: 39121308
Country of Origin: United States of America

FEATURES

Machine tapped device holes, offset gauge marks, leveling ribs, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Speed "K" Clamps bulk packed

APPLICATION

New work residential construction 2 HR fire resistive walls

STANDARDS

ANSI / UL 514C: File No. E30594



FIRE CLASSIFICATION

Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)
Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 3 inches
Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)

COLOR

Beige/tan

MATERIAL

Fiberglass reinforced polyester BMC

MOUNTING

Angled mid nails


ADDITIONAL MATERIALS

Carbon steel fasteners

Polyvinyl chloride clamps



3300-N

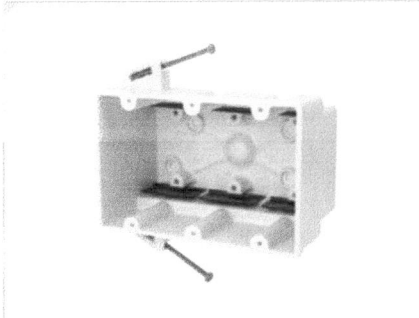

VIDEO

Product Description

Three gang electrical box for use with nonmetallic sheathed cable

Brand: fiberglassBOX™
Catalog #: 3300-N

Height: 3-3/4 in.
Width: 5-11/16 in.
Depth: 3 in.
Volume: 46 cu. in.
Type of Installation: New Work
Wall Box
Number of Gangs: 3

Carton Quantity: 20
Carton Weight: 15 lb.

UPC: 085339141754
UNSPSC: 39121308
Country of Origin: United States of America

FEATURES

Machine tapped device holes, offset gauge marks, leveling ribs, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Speed "K" Clamps bulk packed

APPLICATION

New work residential construction 2 HR fire resistive walls

STANDARDS

ANSI / UL 514C: File No. E30594



FIRE CLASSIFICATION

Fire Test of Building Construction Materials

ANSI / UL 263: File No. CEYY.R9379 (Category / File No.)

Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less

Shall be separated by a horizontal distance of not less than 3 inches

Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)

COLOR

Beige/tan

MATERIAL

Fiberglass reinforced polyester BMC

MOUNTING

Angled mid nails

ADDITIONAL MATERIALS

Carbon steel fasteners

Polyvinyl chloride clamps