

Owner: _____ Applicant: James Patterson
Address: Yukridge Summit Rd Date Evaluated: 10/04/2017
Proposed Facility: _____ Design Flow (.1949): 300 GPD
Location of Site: 302 DWH Property Recorded: yes
Water Supply: ☒ Public ☐ Individual ☐ Well
Evaluation Method: ☐ Auger Boring ☐ Pit ☐ Cu
Type of Wastewater: ☒ Sewage ☐ Industrial Process

☐ Mixed

Description	Initial System	Repair System	Other Factors (.1946):
Available Space (.1945)			Site Classification (.1948):
System Type(s)	25% red	25% yd	Evaluated By:
Site LTAR	0.4	0.4	Others Present:

Provisionally suitable
Andrew Curran, REHS

COMMENTS: _____

LANDSCAPE POSITIONS	GROUP	TEXTURES	.1955 LTAR	CONSISTENCE MOIST	WET
R-RIDGE	I	S-SAND	1.2 - 0.8	VFR-VERY FRIABLE	NS-NON-STICKY
S-SHOULDER SLOPE		LS-LOAMY SAND		FR-FRIABLE	SS-SLIGHTLY STICKY
L-LINEAR SLOPE	II	SL-SANDY LOAM	0.8 - 0.6	FI-FIRM	S-STICKY
FS-FOOT SLOPE		L-LOAM		VFI-VERY FIRM	VS-VERY STICKY
N-NOSE SLOPE	III	SI-SILT	0.6 - 0.3	EFI-EXTREMELY FIRM	NP-NON-PLASTIC
H-HEAD SLOPE		SIL-SILT LOAM			SP-SLIGHTLY STICKY
CC-CONCLAVE SLOPE		CL-CLAY LOAM			P-PLASTIC
CV-CONVEX SLOPE		SCL-SANDY CLAY LOAM			VP-VERY PLASTIC
T-TERRACE	IV	SIC-SILTY CLAY	0.4 - 0.1		
FP-FLOOD PLAN		C-CLAY			
		SC-SANDY CLAY			


STRUCTURE

SG-SINGLE GRAIN
M-MASSIVE
CR-CRUMB
GR-GRANULAR
SBK-SUBANGULAR BLOCKY
ABK-ANGULAR BLOCKY
PL-PLATY
PR-PRISMATIC

MINERALOGY

SLIGHTLY EXPANSIVE

EXPANSIVE

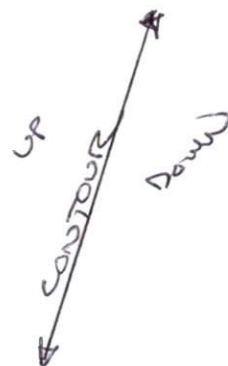

*EXT DRIVE
GOES 100 FT
6/14 SFD

TO RIDGE DRAIN
ROAD

Show profile locations and other site features (dimensions, references or benchmark, and North)

