

HARNETT COUNTY HEALTH DEPARTMENT

HTE 05-5-11540

IMPROVEMENT PERMIT

21871

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Murray & Cornelle J Griggs New Installation Septic Tank
Property Location: SR# Hwy 42 Repairs Nitrification Line

Subdivision DEXIE TATUM Lot # 3

Tax ID # _____ Quadrant # _____

Number of Bedrooms Proposed: 3 Lot Size: 2.93 acre

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 50' ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other _____

Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons


Subsurface Drainage Field No. of ditches 4 exact length of each ditch 100 ft. width of ditches 3 ft. depth of ditches 18" deep

French Drain Required: - Linear feet

This permit is subject to revocation if site plans or intended use change.

Date: 4-7-05

Signed: James E. Manhart
Environmental Health Specialist

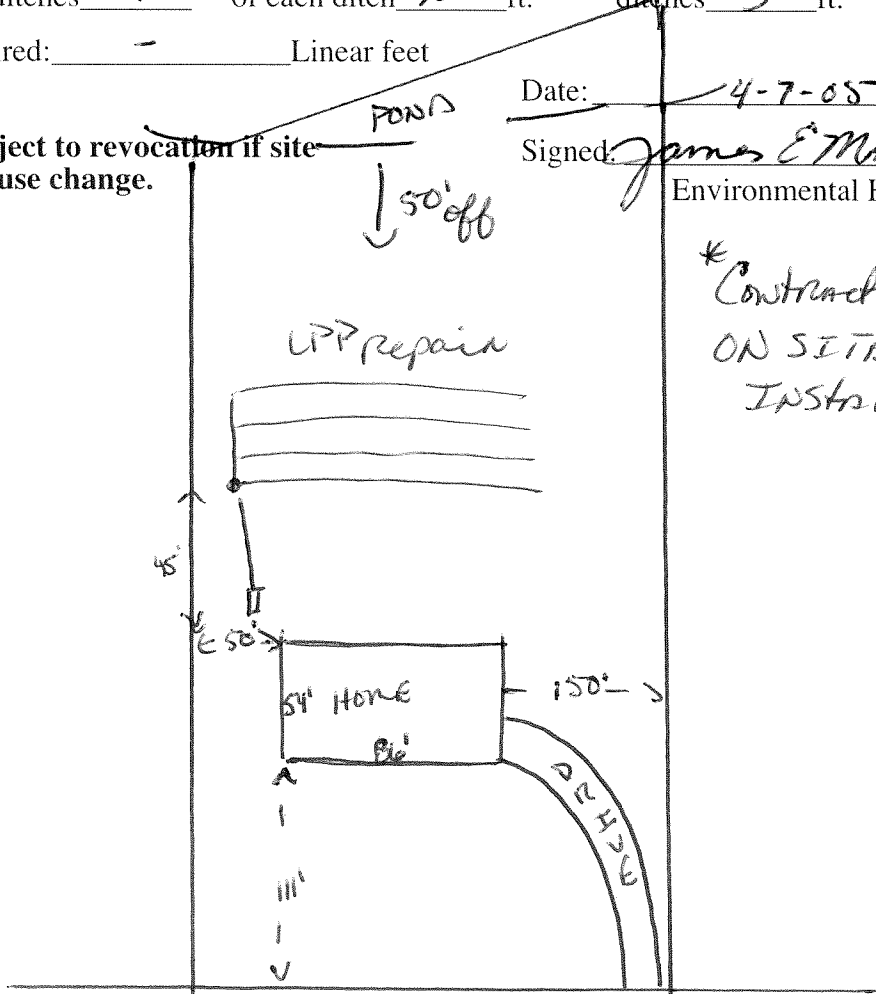

* Contractor to MEET ON SITE PRIOR to Installation.

Hwy 42

#05-5-11540

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 21871. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

Name Murray + Camille Griggs Telephone # 919-557-3114

Address 150 Sherman Road FV. N.C. 27526

Property Location SR# 42 Road Name 42

Subdivision DEXIE TOWN Lot # 3 # Bedrooms Proposed 3 Lot Size 2.93

TYPE OF SYSTEM

New Installation Repair Septic Tank Nitrification Lines

Conventional Other _____

Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: _____ Ft.

Septic Tank 1000 gal Pump Chamber _____ gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 2 # of lines per field 4 Length of lines 100 Ft.

Width of ditches 3 ft. Depth of ditches 18 inches

French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

James E. Marshall
Signature of Authorized Agent for Harnett County

4-7-05
Date