

# Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Frederick + Courtney Carroll PROPERTY LOCATION: 51827 Skeet Range RD  
 SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_  
 NEW  REPAIR  EXPANSION   
 Type of Structure: MODULAR 31x74' Site Improvements required prior to Construction Authorization Issuance: \_\_\_\_\_  
 Proposed Wastewater System Type: 25% REDUCTION  
 Projected Daily Flow: 480 GPD  
 Number of bedrooms: 4 Number of Occupants: 8 max  
 Basement  Yes  No maybe  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well \_\_\_\_\_ feet Permit valid for:  Five years  
 No expiration  
 Permit conditions: \_\_\_\_\_

Authorized State Agent: James E. Manhart <sup>REHS</sup> Date: 11-14-22 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Frederick + Courtney Carroll PROPERTY LOCATION: 51827 Skeet Range RD  
 SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_  
 Facility Type: MODULAR 31x74'  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No maybe  
 Type of Wastewater System\*\* 25% REDUCTION (Initial) Wastewater Flow: 480 GPD  
 (See note below, if applicable  50% REDUCTION (Repair)  
 Installation Requirements/Conditions:  
 Septic Tank Size 1200 gallons Number of trenches 3  
 Pump Tank Size 1200 gallons Exact length of each trench 100 feet Trench Spacing: 7 Feet on Center  
 Trenches shall be installed on contour at a Soil Cover: 6 inches  
 Maximum Trench Depth of: 20 inches (Maximum soil cover shall not exceed 36" above the trench bottom)  
 (Trench bottoms shall be level to +/- 1/4" in all directions)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM Aggregate Depth: 6 inches below pipe  
2 inches above pipe  
12 inches total  
 Conditions: \_\_\_\_\_

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Manhart <sup>REHS</sup> Date: 11-14-22  
 Construction Authorization Expiration Date: 11-14-27

Application # BRES 2206-0059


### Harnett County Department of Public Health Site Sketch

Property Location: SR 1827 Skeet Range RD

Issued To: Fredrick + Courtney Carroll Subdivision \_\_\_\_\_ Lot # \_\_\_\_\_

Authorized State Agent: James E. Manhart III IREMS Date: 11-14-22

- \* STAY 50' minimum off ponds
- \* Home Placement HAS BEEN Benched  
STAY off CUT > 2' - 25' upper slope  
15' SIDE slope
- \* TANK placement CAN vary  
50' off pond IS minimum

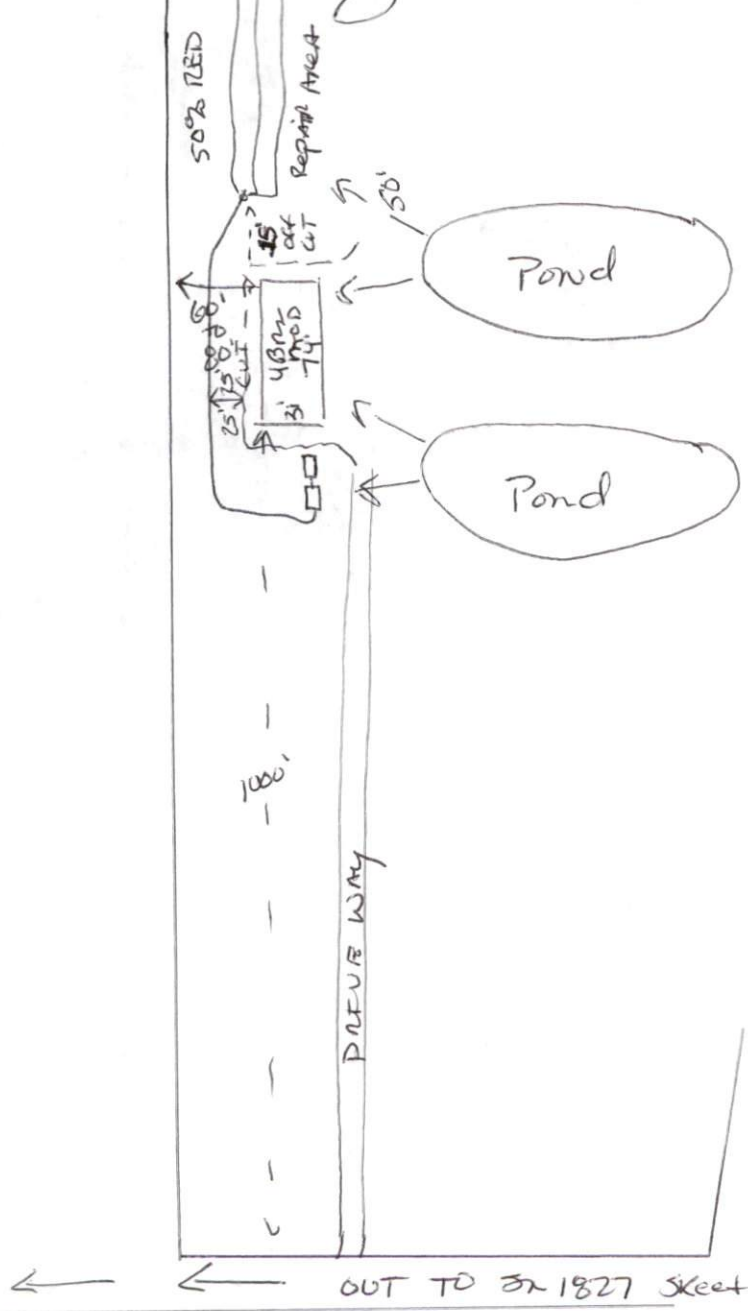

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.