

## GENERAL REQUIREMENTS

REFER TO SUBSEQUENT PLAN AND DETAIL NOTES FOR VARIATIONS AND REQUIREMENTS SPECIFIC TO REFERENCED PROJECT.

NOTES ON DRAWINGS TAKE PRECEDENCE OVER GENERAL STRUCTURAL NOTES.

## DESIGN CRITERIA

BUILDING CODE CONFORMANCE (MEETS OR EXCEEDS REQUIREMENTS):

2015 INTERNATIONAL BUILDING CODE (IBC)  
 2015 INTERNATIONAL RESIDENTIAL CODE (IRC)  
 2018 NORTH CAROLINA BUILDING CODE (NCBC)  
 2018 NORTH CAROLINA RESIDENTIAL CODE (NCRC)

### DEAD LOADS:

ROOF DEAD LOAD 15 PSF  
 FLOOR DEAD LOAD 15 PSF  
 WOOD WALL DEAD LOAD 12 PSF  
 INTERIOR WOOD WALL DEAD LOAD 9 PSF  
 BRICK WALL DEAD LOAD 78 PSF  
 CONCRETE DEAD LOAD 150 PSF

### LIVE LOADS:

ROOF LIVE LOAD 20 PSF  
 FLOOR LIVE LOAD (RESIDENTIAL) 40 PSF

## FSI PUSH PIERS

### MATERIALS:

BRACKET PLATES – ASTM A36  
 (MIN YIELD STRESS,  $F_y = 36$  KSI / MIN TENSILE STRESS,  $F_u = 58$  KSI)  
 PIER TUBES – ASTM A500 GRADE B OR C  
 (MIN YIELD STRESS,  $F_y = 50$  KSI / MIN TENSILE STRESS,  $F_u = 55$  KSI)  
 EXTERNAL SLEEVE – ASTM A500 GRADE B  
 (MIN YIELD STRESS,  $F_y = 50$  KSI / MIN TENSILE STRESS,  $F_u = 62$  KSI)  
 PIER CAP – ASTM A529 GRADE 50  
 (MIN YIELD STRESS,  $F_y = 50$  KSI / MIN TENSILE STRESS,  $F_u = 65$  KSI)  
 COIL ROD – ASTM A193 GRADE B7  
 (MIN YIELD STRESS,  $F_y = 105$  KSI / MIN TENSILE STRESS,  $F_u = 125$  KSI)  
 STEEL ANGLE SHAPES – ASTM A36  
 (MIN YIELD STRESS,  $F_y = 36$  KSI / MIN TENSILE STRESS,  $F_u = 58$  KSI)

### WELDING NOTES:

CONFORM TO AWS D1.1. WELDERS SHALL BE CERTIFIED IN ACCORDANCE WITH AWS REQUIREMENTS. USE E70 ELECTRODES OF TYPE REQUIRED FOR MATERIALS TO BE WELDED.

### CORROSION PROTECTION:

SACRIFICIAL DESIGN THICKNESS – CAPACITIES INCLUDE A SCHEDULED LOSS IN STEEL THICKNESS DUE TO CORROSION FOR BLACK, UNCOATED STEEL. ANCHORS ARE DESIGNED FOR 50-YEAR SCHEDULED SACRIFICIAL THICKNESS LOSS IN ACCORDANCE WITH ICC-ES AC358.

### INSTALLATION:

SYSTEM TO BE INSTALLED PER MANUFACTURERS RECOMMENDATIONS. MINIMUM INSTALLATION PRESSURE IS TO BE DETERMINED BY THE FOLLOWING EQUATION:

PUSH PIER INSTALLATION PRESSURE (PSI):  $[DESIGN\ LOAD] \times 2 / [AREA\ OF\ HYDRAULIC\ RAM]$ .

MINIMUM INSTALLATION DEPTH IS 10'-0" ± UNO.

NOTIFY ENGINEER IF MINIMUM INSTALLATION CONDITIONS CANNOT BE ACHIEVED.

## FSI PUSH PIERS

### EXISTING UTILITY LINES:


CONTRACTOR TO REPAIR UTILITY LINES THAT MAY BE DAMAGED DURING INSTALLATION.

### PUSH PIER SPLICING:

PILES ARE TO BE GRAVITY SPLICED WITH FITTING COUPLERS. BUILDING WEIGHT WILL ENSURE JOINTS DO NOT SEPARATE.

## TESTING & INSPECTION

SPECIAL INSPECTION & TESTING PER REVIEWING JURISDICTION.



EXPIRES: 12/31/22  
 DATE SIGNED: 10/24/22



**BENNETT RESIDENCE**  
**UNDERPINNING & FLOOR SUPPORT**  
 4105 RED HILL CHURCH RD  
 COATS, NC 27521

FSI SMARTJACK SYSTEM INFO				
PART	DESCRIPTION	COMMENTS	MIN YIELD STRESS, $F_y$	MIN TENSILE STRESS, $F_u$
SJQ350T	ASTM A500 GRADE C HD GALV, PER ASTM 123, HSS 3 1/2x3 1/2x0.095"x'L' SQUARE TUBE		50 KSI	62 KSI
SJQ125ATR	ASTM A108 GRADE 1018 1 1/4"Øx0'-10"L THREADED ROD W/ WELDED HEAVY HEX NUT		54 KSI	64 KSI
SJQ350BP-A	ASTM A36 $\mathbb{R}$ 5/16x12x1'-0" ASTM A36 BENT $\mathbb{R}$ 0.120"	CRUSHED STONE FTG CONDITION PER PLAN	36 KSI 36 KSI	58 KSI 58 KSI
SJQ350TP-A	ASTM A36 $\mathbb{R}$ 3/8x4 1/2x0'-4 1/2" ASTM A53 GRADE B 1 3/4"Øx1/4"x1 3/8"L CONFINING RING	WOOD BEAM CONDITION	36 KSI 35 KSI	58 KSI 60 KSI
SJQ350TI	ASTM A36 BENT $\mathbb{R}$ 0.120" ASTM A572 GRADE 50 $\mathbb{R}$ 3/4x3.63x0'-3.63" W/ 1 1/4"Ø THREAD TAP		36 KSI 50 KSI	58 KSI 65 KSI
SJ288T	ASTM A500 GRADE C 2 7/8"Øx0.165x'L' TRIPLE-COATED IN-LINE GALVANIZED TUBE		50 KSI	55 KSI
S4x7.7	ASTM A992 STEEL S SHAPE BEAM (L=120" & 144" - FIELD CUT TO LENGTH)	STEEL BEAM CONDITION	50 KSI	65 KSI
SJ288TBBS4	ASTM A36 $\mathbb{R}$ 3/8x4 1/2x0'-5" BOTT BEAM SPLICE BRACKET (AT BEAM SPLICE LOCATIONS)		36 KSI	58 KSI
SJTBTS4	ASTM A36 $\mathbb{R}$ 3/8x4 1/2x0'-5" TOP BEAM SPLICE BRACKET W/ (4) 1/2"Øx5 1/2" BOLTS W/ NUTS (ASTM A307 MIN) & THREADED ROD W/ NUTS ASTM A53 GRADE B 1 1/2"Øx1/4x1.36"L CONFINING RING (AT BEAM SPLICE & END LOCATIONS)	STEEL BEAM CONDITION	36 KSI 36 KSI 36 KSI MIN	58 KSI 60 KSI 60 KSI MIN
SJAFTG	AISI/AA 356.0-T6 $\mathbb{R}$ 0.850x12x1'-0" CAST ALUMINUM BASE	CRUSHED STONE FTG CONDITION PER PLAN		30 KSI
SJ100ATR	ASTM A108 1"ØxREQ'D THREADED ROD WELDED HEAVY HEX NUT		54 KSI	64 KSI
SJ288TI	ASTM A108 3"Øx1" TAPERED THREADED ROD INSERT			64 KSI

### NOTE:

INSTALL PER MFR RECOMMENDATIONS


GENERAL NOTES

REVISIONS

△	10-24-2022

PROJECT NO:  
RBC22-212  
 DESIGNED BY:  
MEK  
 DRAWN BY:  
MEK  
 CHECKED BY:  
JLD  
 DATE:  
07.15.2022


SHEET NO:  
**S1.1**



EXPIRES: 12/31/22  
DATE SIGNED: 10/24/22



**BENNETT RESIDENCE**  
**UNDERPINNING & FLOOR SUPPORT**  
4105 RED HILL CHURCH RD  
COATS, NC 27521

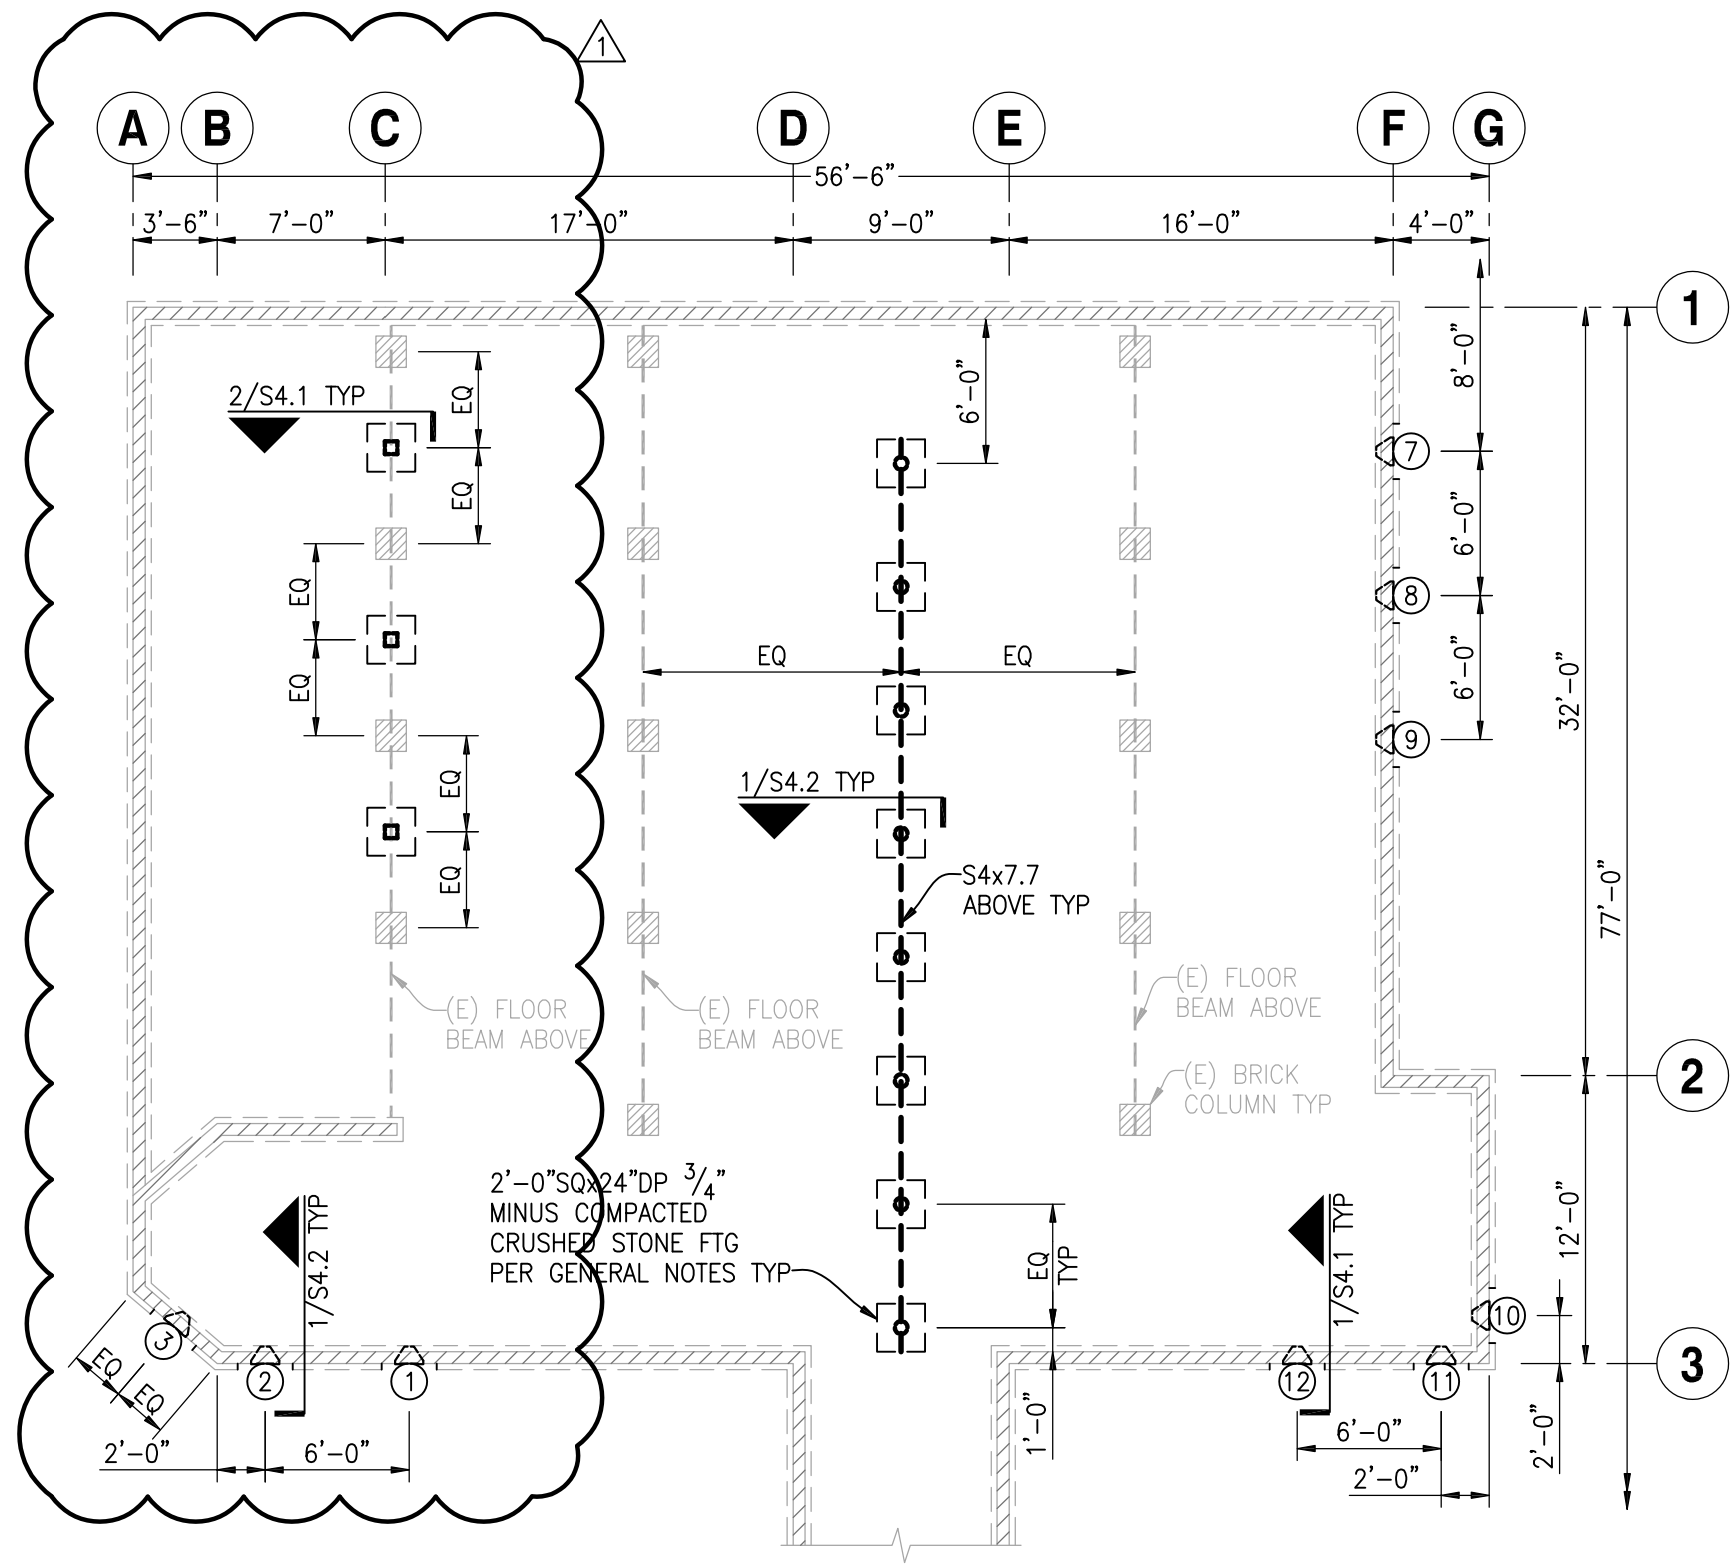

**(E) FOUNDATION/(N) PIER/SMARTJACK LAYOUT PLAN**

SCALE: 1/8" = 1'-0"

**(E) FOUNDATION/(N) PIER/SMARTJACK LAYOUT PLAN NOTES:**

- REFERENCE S1.1 FOR GENERAL REQUIREMENTS
- CONTRACTOR TO NOTIFY ENGINEER OF RECORD OF DISCREPANCIES BETWEEN FIELD CONDITIONS & THOSE SHOWN IN THESE DOCUMENTS PRIOR TO WORK TYP
- INDICATES (E) BRICK STEMWALL ON (E) CONC FOOTING (CONTRACTOR TO VERIFY 7"Wx2'-6"H (E) BRICK STEMWALL AND 1'-4"Wx10"DP (E) CONC FOOTING MIN TYP (NOTIFY ENGINEER OF RECORD IF FIELD CONDITIONS DIFFER IN THE AREA OF WORK))
- SECTION CUT - DETAIL NUMBER/SHEET NUMBER X/SX.X
- INDICATES LOCATION OF FSI 288 PUSH PIER W/ FSI FS288BL FOUNDATION BRACKET ((9) TOTAL)  
**PUSH PIER INSTALLATION NOTES:**
  - MAX LOAD TO ANCHOR = 9,100 LBS
  - 2.875"Ø PIPE PILE W/ 0.165" THICK WALL
  - 3.5"Øx48" LONG PIPE SLEEVE W/ 0.216" WALL
  - MINIMUM 10'-0" INSTALLATION DEPTH
  - MINIMUM 2000 PSI INSTALLATION PRESSURE
  - MINIMUM 1/4" FOUNDATION LIFT DURING INSTALLATION
- PIER SPACING SHALL BE AS INDICATED ON PLAN TYP UNO
- CONTRACTOR TO NOTIFY ENGINEER OF RECORD IF (E) FOUNDATION CRACK IS PRESENT IN THE SPAN BETWEEN FOUNDATION BRACKETS
- INDICATES LOCATION OF FSI SJ288 SMARTJACK ((8) TOTAL)  
MAX LOAD TO SMARTJACK = 3,936 LBS
- INDICATES LOCATION OF FSI SJQ350 SMARTJACK ((3) TOTAL)  
MAX LOAD TO SMARTJACK = 5,376 LBS
- REPLACE "IN-KIND" ALL (E) WOOD MEMBERS (JOISTS, PURLINS, SUBPURLINS, SHEATHING, STUDS, WALL PLATES) WHICH SHOW SIGNS OF DRY ROT OR STRUCTURAL DAMAGE
- ALL WOOD EXPOSED TO CONCRETE, WEATHER, OR WITHIN 6" OF FINISH GRADE SHALL BE PRESSURE-TREATED
- ALL MULTI-LAM BUILT-UP BEAMS TO HAVE (3) ROWS OF 16d NAILS AT 12" OC EACH 1 1/2" LAM
- CONTRACTOR IS RESPONSIBLE FOR ALL TEMPORARY SHORING
- FILL ALL VISIBLE CRACKS IN THE FOUNDATION WALL WITH HYDRAULIC CEMENT OR EPOXY
- ALL CONSTRUCTION MATERIALS IN THESE DOCUMENTS ARE (N) UNO

(E) FDN/(N) PUSH PIER/SMARTJACK LAYOUT PLAN

REVISIONS	
	10-24-2022

PROJECT NO: RBC22-212  
DESIGNED BY: MEK  
DRAWN BY: MEK  
CHECKED BY: JLD  
DATE: 07.15.2022


SHEET NO:  
**S2.1**



EXPIRES: 12/31/22  
DATE SIGNED: 10/24/22



**BENNETT RESIDENCE**  
**UNDERPINNING & FLOOR SUPPORT**  
4105 RED HILL CHURCH RD  
COATS, NC 27521

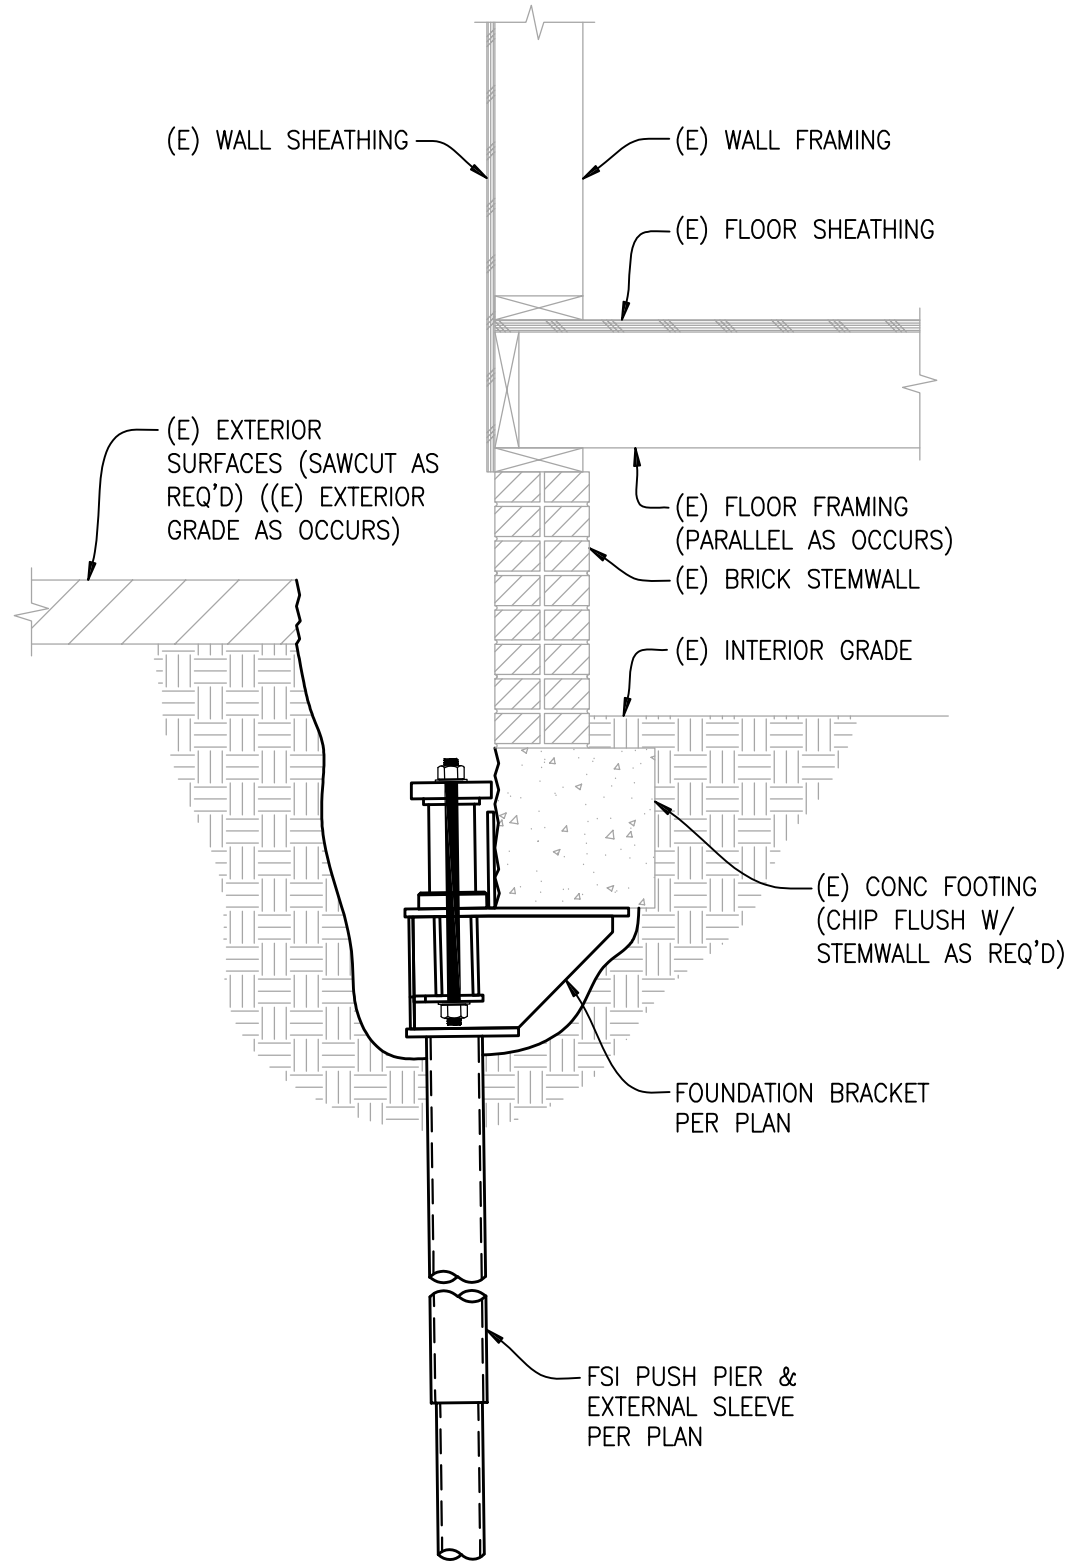


**NOTE:**  
REF PLAN FOR LAYOUT & INSTALLATION REQ'S

**(N) PUSH PIER TO (E) FOUNDATION DETAIL**

SCALE: 1"=1'-0"

1

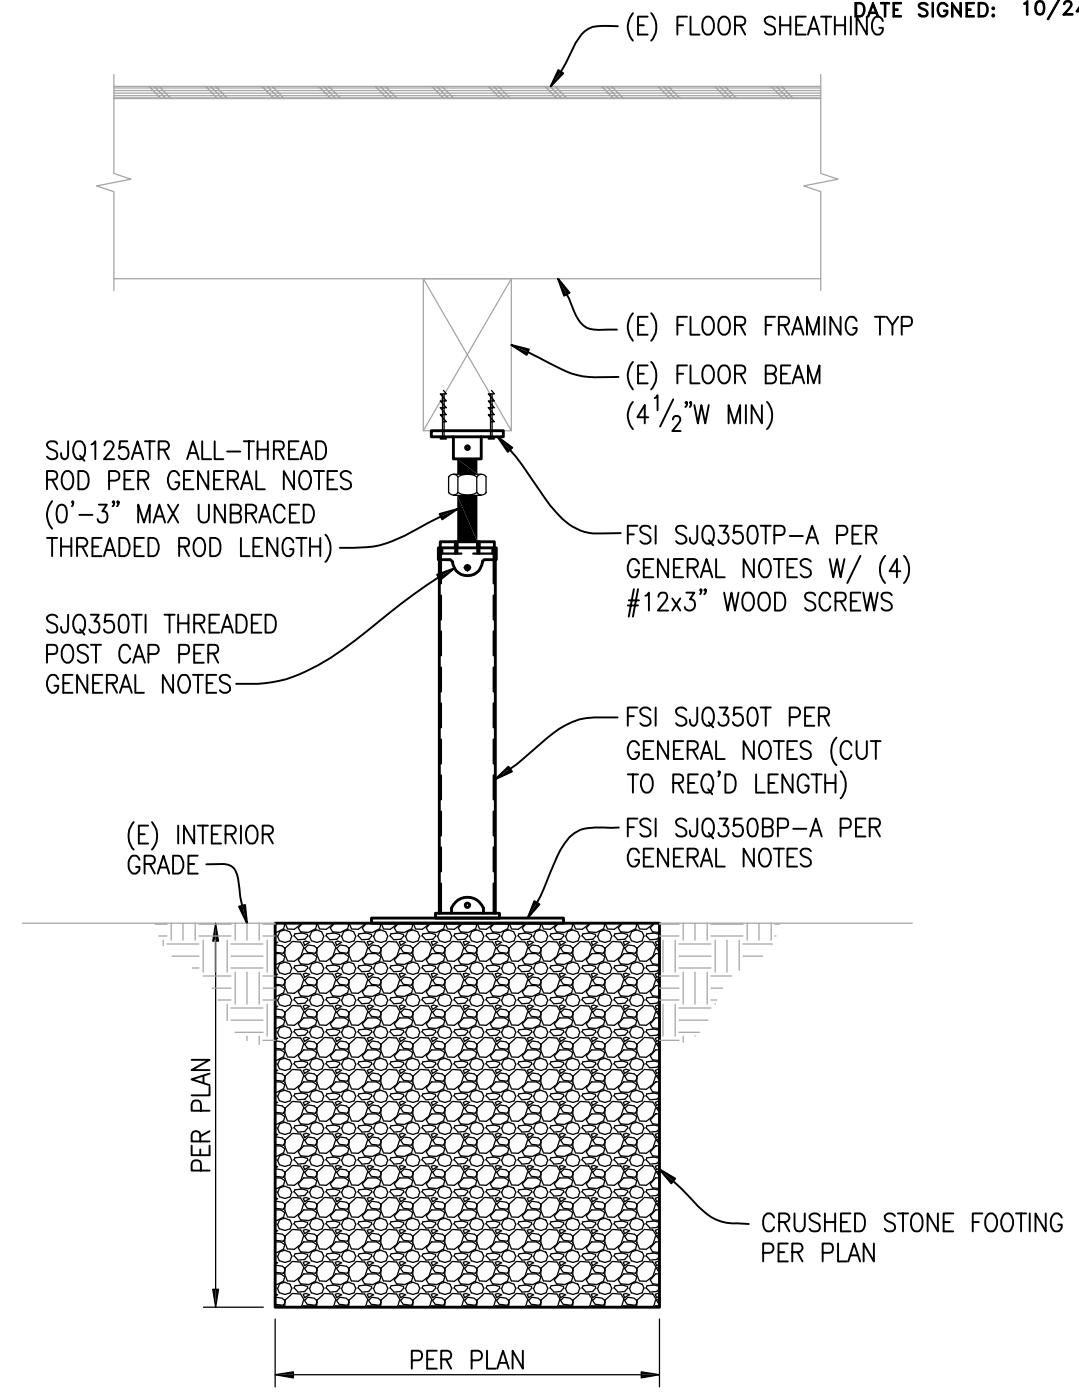

- NOTES:**
- REF PLAN FOR LAYOUT & INSTALLATION REQ'S
  - INSTALL PER MFR RECOMMENDATIONS

**FSI SMARTJACK IN CRAWLSPACE**

SCALE: 1"=1'-0"


2

DETAILS

REVISIONS	
△	10-24-2022

PROJECT NO:  
RBC22-212  
DESIGNED BY:  
MEK  
DRAWN BY:  
MEK  
CHECKED BY:  
JLD  
DATE:  
07.15.2022

SHEET NO:  
**S4.1**

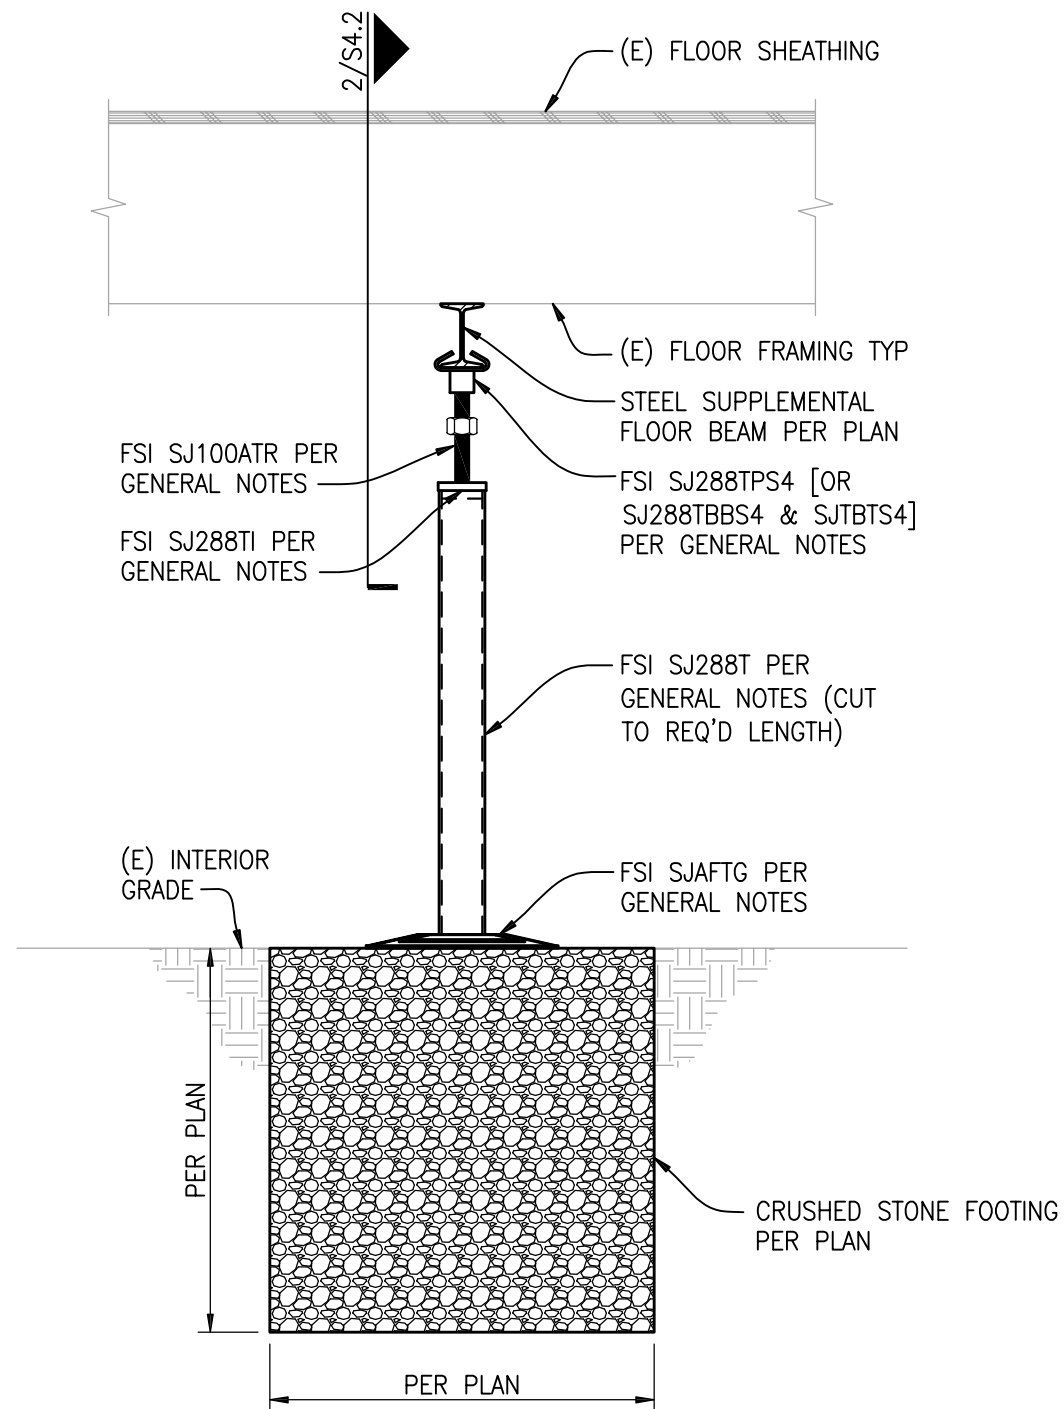



**NOTES:**

1. REF PLAN FOR LAYOUT & INSTALLATION REQ'S
2. INSTALL PER MFR RECOMMENDATIONS

**FSJ SMARTJACK IN CRAWLSPACE**

SCALE: 1"=1'-0"

1

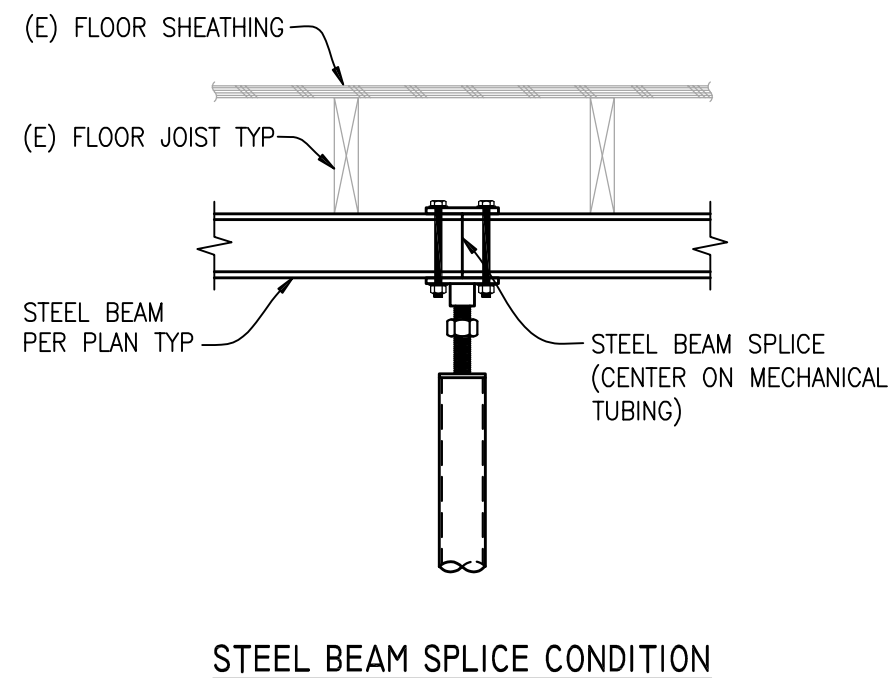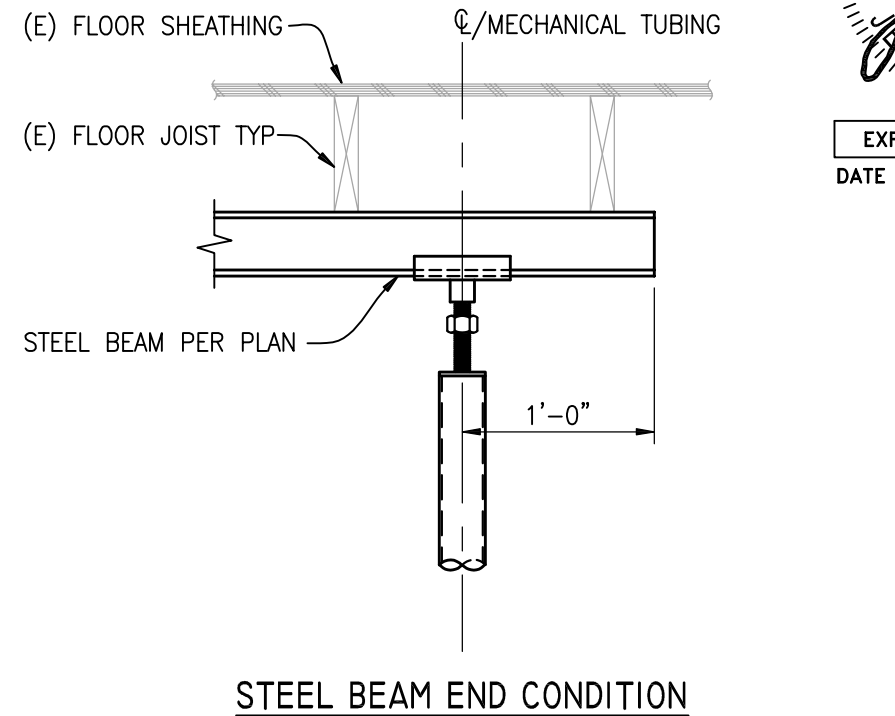


**NOTE:**

REF 1/S4.1 FOR CALLOUTS IN COMMON

**(N) SMARTJACK W/ SUPPLEMENTAL BEAM**

SCALE: 1"=1'-0"

2



EXPIRES: 12/31/22  
DATE SIGNED: 10/24/22



SFA Design Group, LLC  
STRUCTURAL | GEOTECHNICAL | SPECIAL INSPECTIONS  
Portland, OR | Livermore, CA | Seattle, WA  
p: (503) 641-8311 www.sfadg.com

**BENNETT RESIDENCE**  
**UNDERPINNING & FLOOR SUPPORT**  
4105 RED HILL CHURCH RD  
COATS, NC 27521

DETAILS	
---------	--

REVISIONS	
△	10-24-2022

PROJECT NO:  
RBC22-212  
DESIGNED BY:  
MEK  
DRAWN BY:  
MEK  
CHECKED BY:  
JLD  
DATE:  
07.15.2022

SHEET NO:  
**S4.2**