

Tyn-Co Concrete

2310 Taylors Chapel Rd
Dunn, NC 28334 US
910.308.9971
tyncoconcrete@gmail.com



Estimate

ADDRESS
Tony Godwin
181 Armstrong St.
Dunn, NC

ESTIMATE 2230
DATE 09/01/2022
EXPIRATION DATE 10/01/2022

DATE	DESCRIPTION	QTY	RATE	AMOUNT
	Lump Sum			
	Labor, equipment and materials to form, place and finish a 20'x28' monolithic building slab. The main slab to be 4" thick and have 12"x12" footers with (2) #4 rebar continuous around the perimeter, 6oz poly for a vapor barrier, fiber in the concrete to meet building code and sawed joints. Concrete truck to be able to be pulled right up to where the pad is poured.	1	4,875.00	4,875.00
	Lump Sum			
	Labor & equipment for onsite grading to cut some existing dirt and move it around for the building slab pad.	1	350.00	350.00


Tyn-Co Concrete is not responsible for any damage done to the existing underground utilities during our execution of work. The existing utilities need to be located with paint or flagging prior to our arrival to complete the listed scope of work. If no locates have been completed, we will proceed at the customer / property owner / general contractors risk. We are not responsible for any form of testing, corner layouts or surveying. There will be a 3% fee added to final invoice if a credit or debit card is used for final payment. However, you may do an ACH draft from your bank account for no charge. If paying with a check, please make checks payable to Tyn-Co Concrete. Thank you for the opportunity to quote your project.

TOTAL

\$5,225.00

Accepted By

Accepted Date

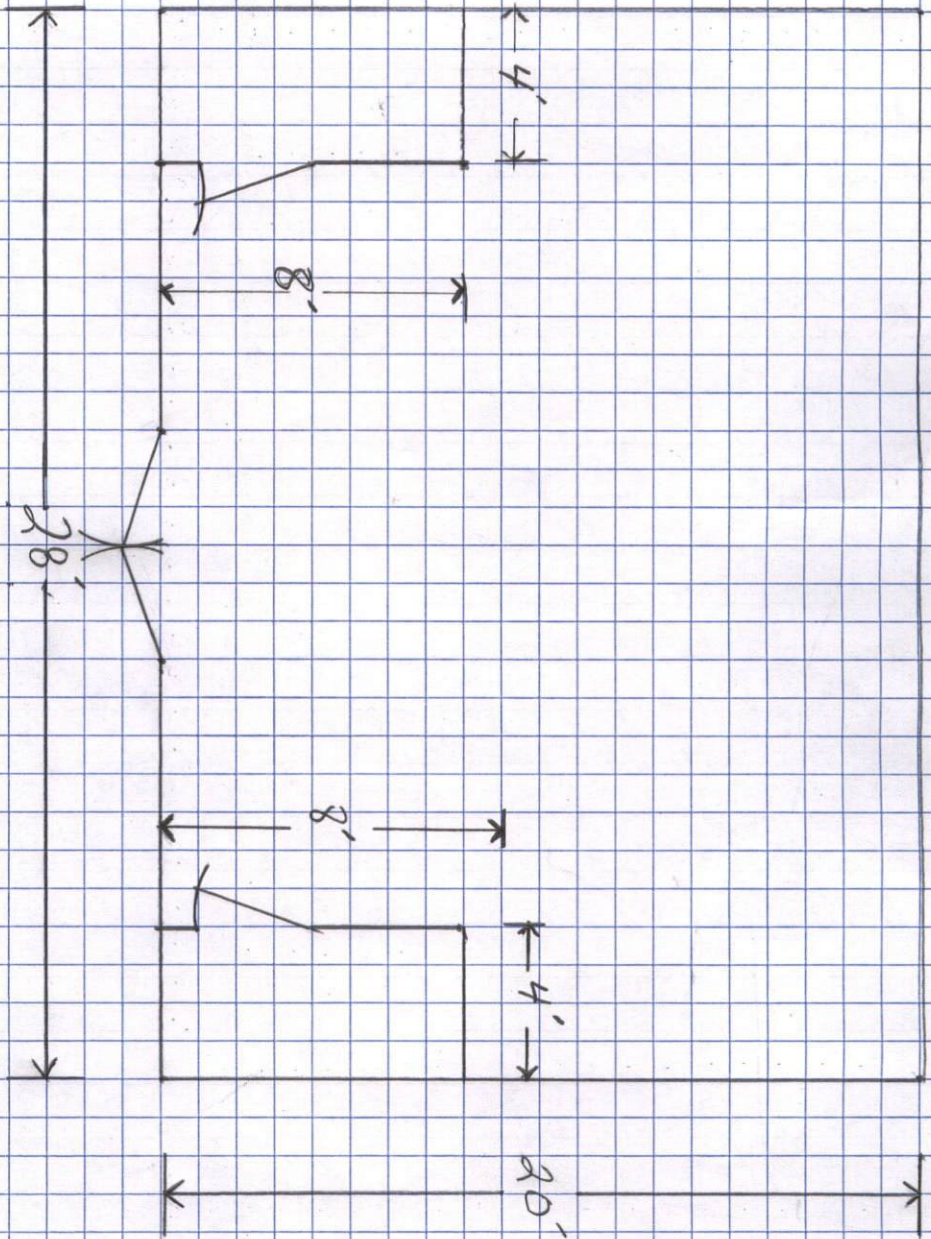

2 x 4 x 10 STUCCO
16" O.C.
Manufactured Trusses