

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Clayton Homes PROPERTY LOCATION: 51560 Festus RD
 NEW REPAIR EXPANSION SUBDIVISION _____ LOT # 8
 Type of Structure: DWMT Site Improvements required prior to Construction Authorization Issuance: _____
 Proposed Wastewater System Type: 25% REDUCTION
 Projected Daily Flow: 3600 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: James E. Marshall III RCHS Date: 10-21-22 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Clayton Homes PROPERTY LOCATION: 51560 Festus RD
 SUBDIVISION _____ LOT # 8
 Facility Type: DWMT New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 3600 GPD
 (See note below, if applicable 50% REDUCTION (Repair))
 Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Number of trenches 2
 Pump Tank Size _____ gallons Exact length of each trench 120 feet Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 (Trench bottoms shall be level to +/- 1/4" in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM 6 inches below pipe
 Aggregate Depth: 2 inches above pipe
 Conditions: SOLE PIPE TO CROSS DRAIN TO BE DUG WITH 10x12 SMALLER BUCKET _____ inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH


Authorized State Agent: James E. Marshall III RCHS Date: 10-21-22
 Construction Authorization Expiration Date: 10-21-27

Application # BRES 2210-0007

Harnett County Department of Public Health Site Sketch

Property Location: 541500 Festus RD
Issued To: Clayton Homes Subdivision _____ Lot # 8
Authorized State Agent: James E. Manhart ²²¹⁰⁰⁰⁰³ Date: 10-21-22

* SOLID PIPE TO CROSS DRIVE OR DRAIN IS REQUIRED.
DO NOT DIG CONTAINERS WITH 3' WIDE BUCKET - NEED SMALL 1' BUCKET
TO INSTALL SOLID PIPE THROUGH DRIVE OR DRAIN

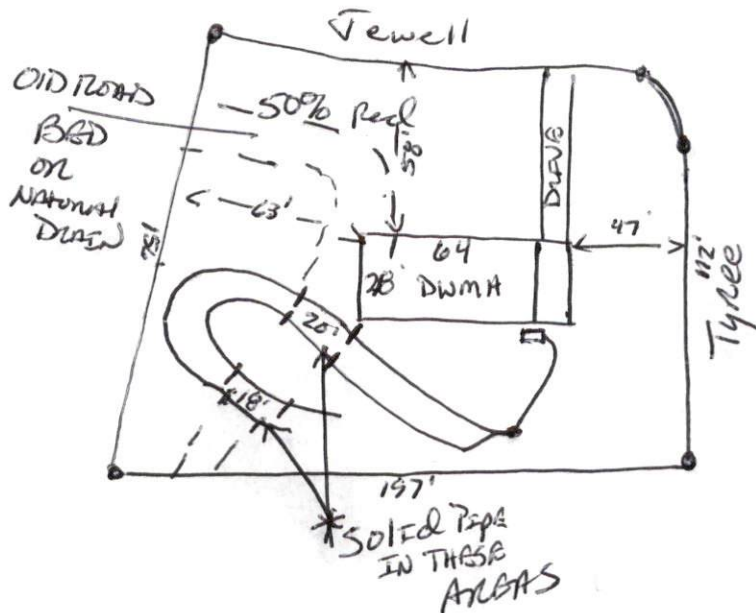

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.