HTE# 10-5-2379)

Harnett County Department of Public Health

25916

Improvement Permit


PROPERTY TOTAL	TION: PONOEROSA RO
NEW 🔀 REPAIR □, EXPANSION □	Site Improvements required prior to Construction Authorization Issuance:
Type of Structure: 5FD (LIH'X51')	site improvements required prior to construction Authorization issuance:
Proposed Wastewater System Type: CONVENTIONAL	
Projected Daily Flow: 360 GPD	
Number of bedrooms: 3 Number of Occupants: 6 max	
Basement □Yes 🔀 No	
Pump Required: Yes No May be required based on final location and elevan	tions of facilities
Type of Water Supply: La Community 🔼 Public 🔲 Well Distance from well 🛝	OO feet Permit valid for: Five years
Permit conditions:	─────────────────────────────────────
11.11	- To copridition
And the state of t	4-4-
Authorized State Agent: The issuance of this page that the Health December 1997.	3 / 8/10 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees be issuance of other permits. The permit site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be all the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	holder is fesponsible for checking with appropriate governing bodies in meeting their requirements. This fected by a change in ownership of the site. This permit is subject to compliance with the provisions of
<u>Construction Aut</u>	<u>horization</u>
(Required for Buildin	g Permit)
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958. and .1959 are with the attached system layout.	incorporated by references into this permit and shall be met. Systems shall be installed in accordance
ISSUED TO: CUMBERZAND HOMES INC PROPERTY	INCATION: POLICEROS DO
Facility Type: SFO (44751) New Expansion	
Basement? Yes No Basement Fixtures? Yes No	on 🗆 Repair
Tons of West of Co.	2/2
(See note below, if applicable [])	(Initial) Wastewater Flow: <u>360</u> GPD
, (
1 / 11 / 15 / 15 / 15 / 15 / 15 / 15 /	(Repair)
Installation Requirements/Conditions Number of trenches	
Septic Tank Size VOOO gallons Exact length of each trench	-2
	feet Trench Spacing: Feet on Center
Pump Tank Size gallons Trenches shall be installed on con	1 8
rump Tank Size gallons	tour at a Soil Cover: Y2-18 inches
Maximum Trench Depth of: ユン	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions)	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions)	tour at a Soil Cover: 12-18 inches -30 inches (Maximum soil cover shall not exceed +/-1/4" 36" above the trench bottom)
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vs GPM Conditions: MATER LINE MUST BE 10 FROM SEPTIC S	tour at a Soil Cover: \(\frac{12-18}{30}\) inches \(\frac{130}{36}\) inches \(\frac{130}{36}\) inches \(\frac{130}{36}\) above the trench bottom\) Aggregate Depth: \(\frac{6}{2}\) inches above pipe \(\frac{13}{12}\) inches total \(\frac{130}{20}\) inches total
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vs GPM Conditions: MATER LINE MUST BE 10 FROM SEPTIC S	tour at a Soil Cover: \(\frac{12-18}{30}\) inches \(\frac{130}{36}\) inches \(\frac{130}{36}\) inches \(\frac{130}{36}\) above the trench bottom\) Aggregate Depth: \(\frac{6}{2}\) inches above pipe \(\frac{13}{12}\) inches total \(\frac{130}{20}\) inches total
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vs GPM Conditions: MATER LINE MUST BE 10 FROM SERTIC SO UTILITIES MAY ENCORCH ON INITIAL CR R **If applicable: I understand the system type specified is different from the type specified	tour at a Soil Cover: \(\frac{12-18}{30}\) inches \(\frac{130}{36}\) inches \(\frac{130}{36}\) inches \(\frac{130}{36}\) above the trench bottom\) Aggregate Depth: \(\frac{6}{2}\) inches above pipe \(\frac{13}{12}\) inches total \(\frac{130}{20}\) inches total
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM Conditions: MAKER LINE MUST BE 10 From SEPTIC S UTILITIES MAY ENCOPACH ON INITIAL CR R **If applicable: / understand the system type specified is different from the type specified Dwner/Legal Representative Signature:	tour at a Soil Cover: \(\frac{12-18}{30}\) inches (Maximum soil cover shall not exceed +/-1/4" 36" above the trench bottom) Aggregate Depth: \(\frac{6}{2}\) inches above pipe inches above pipe inches total epone. \(\frac{12}{12}\) inches total epone. \(\frac{12}{12}\) on the application. I accept the specifications of this permit.
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM Conditions: Water Line Must Be 10 From Septic Se	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed +/-1/4" 36" above the trench bottom) Aggregate Depth:
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM Conditions: Water Line Must Be 10 From Septic Se	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed +/-1/4" 36" above the trench bottom) Aggregate Depth:
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements: ft. TDH vs. GPM Conditions: WATER LINE MUST BE 10 From SEPTIC	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed +/-1/4" 36" above the trench bottom) Aggregate Depth:
Maximum Trench Depth of: 22 (Trench bottoms shall be level to in all directions) Pump Requirements:ft. TDH vsGPM Conditions:ft. TDH vsGPM Conditions:ft. TDH vsGPM Conditions:ft. TDH vs GPM Conditions:ft. TDH vs GPM Conditions:ft. TDH vs GPM Conditions:ft. TDH vs GPM Conditions:	tour at a Soil Cover: Y2-18 inches -30 inches (Maximum soil cover shall not exceed +/-1/4" 36" above the trench bottom) Aggregate Depth:

HTE# 10 ~5~2579 1

Permit # 25916

Harnett County Department of Public Health Site Sketch

	PROPERTY LOCATON: PONDEROSA RD	
ISSUED TO: CUMBERLAND HOMES	SUBDIVISION CAROLINA SEASONS	LOT # 98
Authorized State Agent:	DEHS (DLIVER TOLKSDORF) Date: 3/8/10	
	vale. J J	

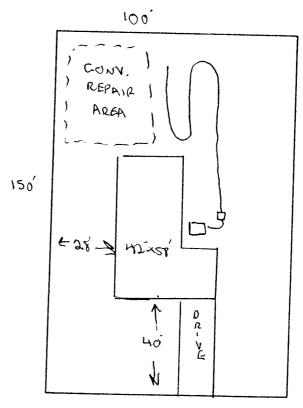

PONDEROSA TRAIL