26009

HTE#10-5-23834

## Harnett County Department of Public nealth

**Improvement Permit** 

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: NC27W ISSUED TO: CUMBERZAND HOMES INC SUBDIVISION MIRE BRANCH LOT # 58 NEW X REPAIR ☐ EXPANSION ☐ Type of Structure: SFD (48×40) Site Improvements required prior to Construction Authorization Issuance: Proposed Wastewater System Type: 25% REDUCTION SYSTEM Projected Daily Flow: 360 GPD Number of bedrooms: 3 Number of Occupants: S max Basement Yes No Pump Required: ☐Yes ☐ No May be required based on final location and elevations of facilities Type of Water Supply: 

Community Public 


Well Distance from well 100 feet Permit valid for: Five years Permit conditions: ☐ No expiration Authorized State Agent:: SEE ATTACHED SITE SKETCH The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958. and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: CUMBERZAND HOMES INC PROPERTY LOCATION: NC2TW SUBDIVISION MIRE BRANCH Facility Type: SED (18/240) New Expansion Repair Basement? ☐ Yes 🗑 No Basement Fixtures? ☐ Yes Type of Wastewater System\*\*

DSY REDUCTION SYSTEM

(Initial) Wastewater Flow: 360 (See note below, if applicable ) 25% REDUCTION SYSTEM (Repair) Installation Requirements/Conditions Number of trenches Exact length of each trench 225 feet Trench Spacing: Septic Tank Size LOGO gallons Pump Tank Size gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: ft. TDH vs. inches below pipe Aggregate Depth: \_\_\_\_\_\_ inches above pipe Conditions: WATER LINE MUST BE 10 FROM SERTIC SYSTEM. NO UTILITIES MAY ENCROPORT ON INTOL OR REPAIR AREA. \*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. Authorized State Agent: Construction Authorization Expiration Date: 4

## Harnett County Department of Public Health Site Sketch

PROPERTY LOCATON: NC27W	
ISSUED TO: CUMBERLAND HOMES INC SUBDIVISION MIRE BRANCH	LOT # 58
Authorized State Agent: Date: 4710	

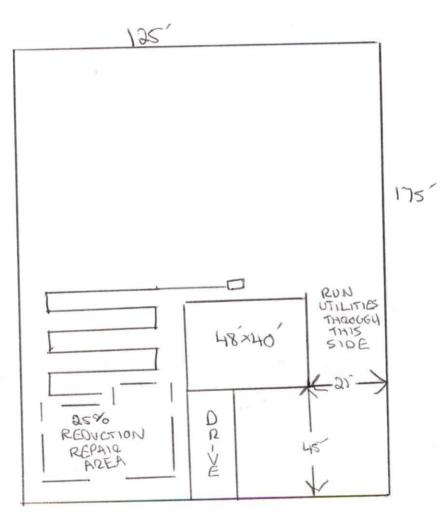

SUNRIOGE DOZ