


74 Cross Link Drive
 3 Bedroom Septic Proposal for New Pool
 Breault - Harnett County

*Not a Survey
 Sketched from public records

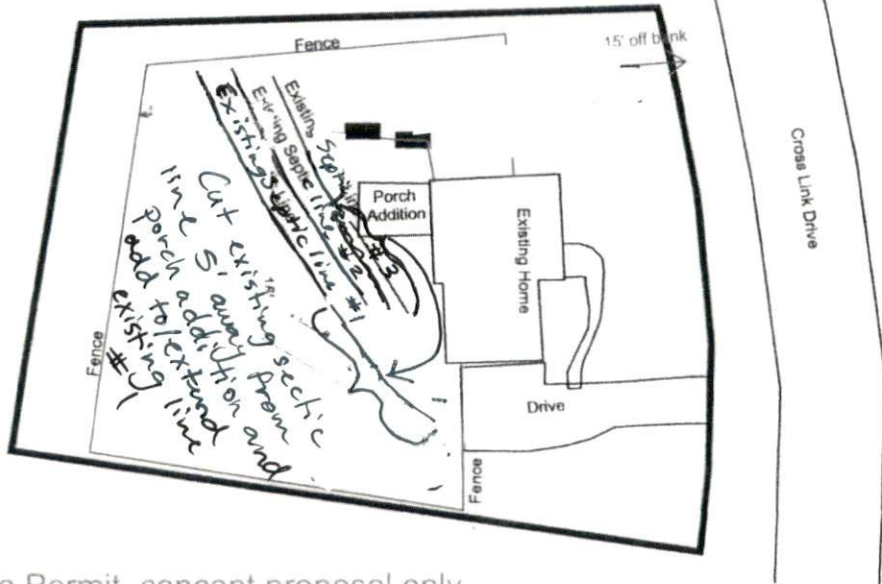

*Not a Permit, concept proposal only
 Local Health Department to review for any future permits.

*Abandon existing gravity system
 *Install new pressure manifold 3-bedroom septic system
 **1000 Gallon Septic and Pump Tank
 Tank and trenches to be located minimum of 10' from any property line and minimum of 5' from any building foundation, and 15' from water's edge of proposed pool.
 *Do Not Cut, Fill, or Alter Drainfield or Repair Area
 *Comply with all setbacks

Abandon existing system
 New System: Pressure manifold
 Lines: 1-4 (270')
 0.35 LTAR
 30" Max Trench Bottom
 Accepted Status System
 Repair: Pressure Manifold
 Lines: 5-7 (175')
 0.35 LTAR
 24" Max Trench Bottom
 T&J Panel Block - 50% reduction system

Adams
 Soil Consulting
 919-414-6761
 Job #1601

