

Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: LISA GAINNEY PROPERTY LOCATION: 21413 Rollins Rd
 SUBDIVISION: The Reserve LOT # 21
 NEW REPAIR EXPANSION Relocation
 Type of Structure: En SFD + Det Garage Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: 25% REDUCTION
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: [Signature] Date: _____ SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization (Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: LISA GAINNEY PROPERTY LOCATION: 21413 Rollins Rd
 SUBDIVISION: THE RESERVE LOT # 21
 Facility Type: En SFD + Det Gar New Expansion Repair Relocation
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% Red (Hammer) (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable 50% RSD (Repair))

Installation Requirements/Conditions

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>2</u>	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size _____ gallons	Exact length of each trench <u>45</u> feet	Soil Cover: <u>6</u> inches
	Trenches shall be installed on contour at a	(Maximum soil cover shall not exceed
	Maximum Trench Depth of: <u>24</u> inches	36" above the trench bottom)
	(Trench bottoms shall be level to +/- 1/4" in all directions)	
Pump Requirements: _____ ft. TDH vs. _____ GPM		Aggregate Depth: <u>6</u> inches below pipe
		<u>2</u> inches above pipe
Conditions: <u>Beginning of En Septic to be found and what is removed has to be replaced at end of existing system</u>		<u>12</u> inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 1-18-23
 Construction Authorization Expiration Date: 1-18-28

Application # BRES 2212-0032

Harnett County Department of Public Health Site Sketch

Property Location: SA 1413 ROLLINS RD


Issued To: LISA GAENEY Subdivision THE RESERVE Lot # 21

Authorized State Agent: James E. Manlove 726115 Date: 1-18-23

*NEEDS
NEW TANK
AND Roughly
90° of
DRAINLINE
ADDED

*Whatever
WAS
LOST
ADD
TO END
OF
EXISTING
DRAINLINES

*5'-1"
ANY
FOUNDATION

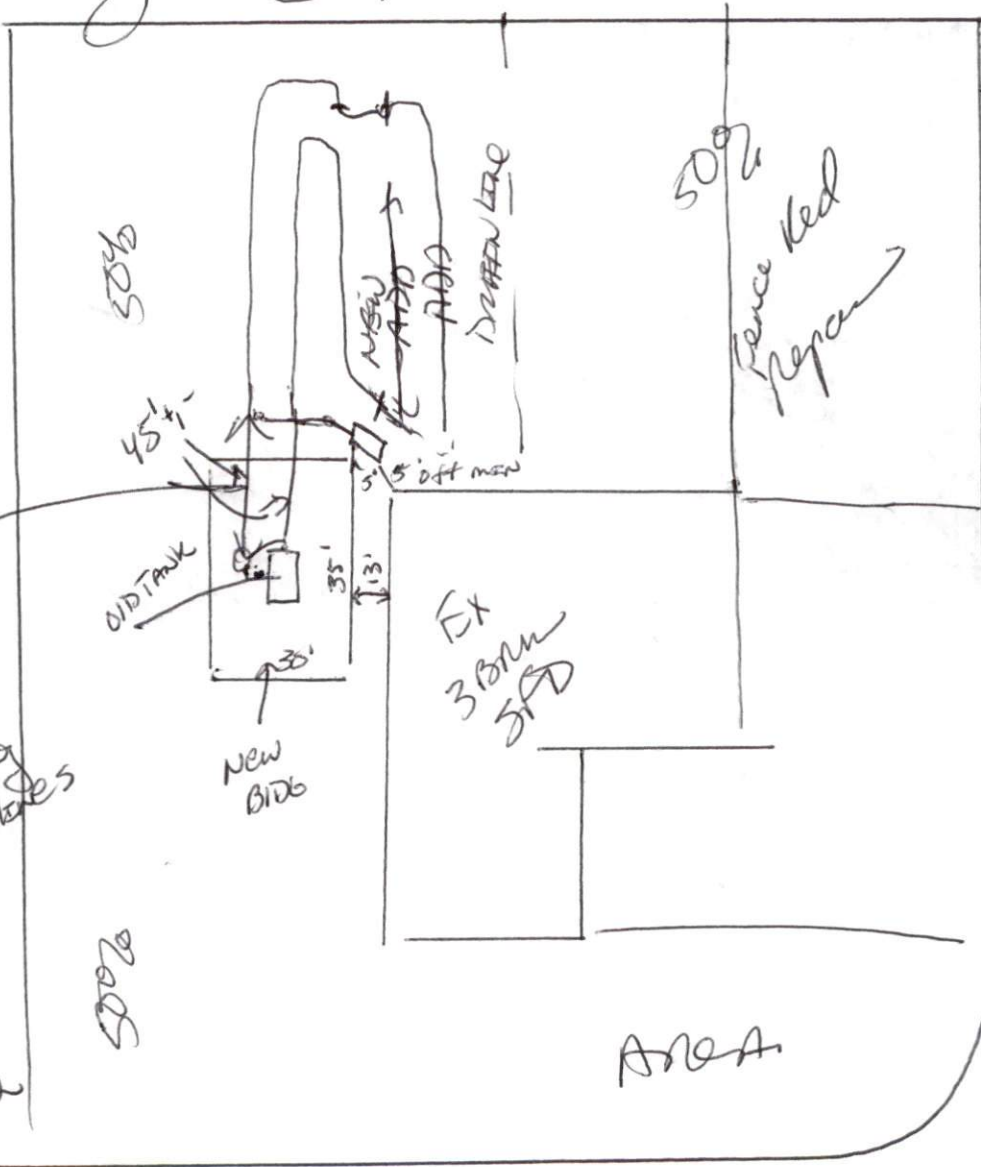

Trophy Ridge.

Reserve DR

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.