HTE# 11-5-25846

Harnett County Department of Public Health

Improvement Permit

26386


A building permit can						
region to Allahan Canada and a	PROPERTY LOCATIO		ocs !		107 # > > 0	
ISSUED TO: WYNN CONSTRUCTION				LIDGE	LOT # <u>\\Q</u>	
NEW REPAIR EXPANSION		Site Improvem	ients requ	uired prior to Construction Author	orization Issuance:	
Type of Structure: SFD (LB ~L18)						
Proposed Wastewater System Type: Conventional	_					
Projected Daily Flow: 490 GPD	-					
Number of bedrooms: Number of Occupants:	_max					
Basement □Yes X No	-					
Pump Required: □Yes ➤ No □ May be required based on final le					. .	
Type of Water Supply: Community Public Well Distant	ce from well <u>10</u>	<u> </u>	eet	Permit valid for:	Five years	
Permit conditions:					☐ No expiration	
- Left in						
		1 . 1 .				
Authorized State Agent::		19/1)			TTACHED SITE SKETCH	
The issuance of this permit by the Health Department in no way guarantees the issuance of other site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement						
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.			5* *		as comprised that the provisions of	
Constr	uction Autl	horizatio	n			
			<u> </u>			
· ·	uired for Buildin					
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, with the attached system layout.	.1958. and .1959 are	incorporated by r	references i	nto this permit and shall be met. System	ms shall be installed in accordance	
ISSUED TO: WYNN CONSTRUCTION						
	SUBDIVISION	IROT	7 <u>5025</u>	RIDGE	LOT # <u>/パン</u>	
Facility Type: SFO (43'×48') New	□ Expansion	n 🗆	Repair			
	∑ _U No '		•			
Type of Wastewater System** Convertional	ブ			(Initial) Wastewater Flow	: 480 GPD	
••				(iiidai) wastewater riow	div	
(See note below, if applicable □)		/n ' \				
CONVESTIONAL		(Repair)				
<u>Installation Requirements/Conditions</u> Number of trenc				9		
Septic Tank Size 1000 gallons Exact length of	each trench <u>5</u>	<u> </u>	feet	Trench Spacing:	Feet on Center	
	e installed on con			Soil Cover: 12	inches	
Maximum Trench	Depth of: 	4	inches	(Maximum soil cover shall	not exceed	
	shall be level to			36" above the trench be		
in all directions)		, ,, .		so above the trenen be	,,	
,				4	Sandras Balancastas	
Pump Requirements:ft. TDH vs GPM				-	inches below pipe	
				Aggregate Depth:	inches above pipe	
Conditions:					inches total	
WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A	NY PART OF SE	PTIC SYSTEI	M OR R	EPAIR AREA.		
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA						
INO OTILITIES ALLOWED IN INITIAL OR RELAIN DIVAIN TIELD ARE	n.					
** f applicable: understand the system type specified is different from	the type specified	on the app	olication.	I accept the specifications of	f this permit.	
				_		
Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use	TI C		1 11 4 1	Date:		
Construction Authorization is subject to compliance with the provisions of the Laws and Rules for	sewage treatment and	visposal and to t	ine conditio	ons of this permit. SE	E ATTACHED SITE SKETCH	
Supplied the supplied that the supplied to the	_			1 -1		
Authorized State Agent: Date: 1911						
	ruction Authoriz	ation Evnir	ation D	ato: Wall		

HTE#	11-	5-25846	
------	-----	---------	--

Permit # 26386

Harnett County Department of Public Health Site Sketch

	PROPERTY LOCATON: Docs RD	
ISSUED TO: WYNN CONSTRUCTION	SUBDIVISION TROTIERS RIDGE	LOT # 112
	,	
Authorized State Agent:	REAS (OLIVER TOLKS DOP) Date: 1/19/11	

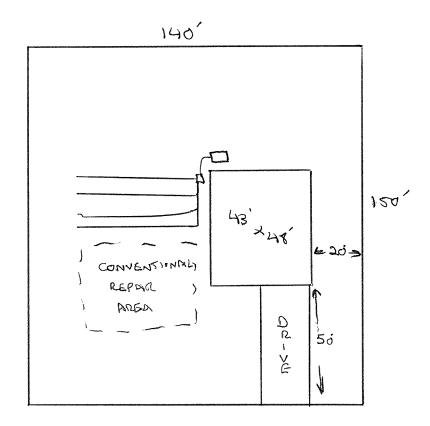

KENKUCKY DERBY LN