
HTE# 12-5-28629 Harnett County Department of Public Health	
	26979
Improvement Permit	20777
A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: STOCK-YARD RD	
ISSUED TO: JIMMY BYRD SUBDIVISION STOCKYARD R.D. EST	LOT # 56
NEW REPAIR C -EXPANSION Site Improvements required prior to Construction Authori	ization Issuance:
Proposed Wastewater System Type: Pume To 25% REDUCTION	
Projected Daily Flow: 360 GPD	
Number of bedrooms: Number of Occupants: max	
Basement ☐Yes 📉 No Pump Required: Zer ☐ No ☐ May be required based on final location and elevations of facilities	
Pump Required: XYes INO May be required based on final location and elevations of facilities Type of Water Supply: I Community Rublic I Well Distance from well NCO feet Permit valid for:	Five years
Permit conditions:	No expiration
Authorized State Agent::	ACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in	meeting their requirements. This
site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	compliance with the provisions of
Construction Authorization	
(Required for Building Permit)	
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958. and .1959 are incorporated by references into this permit and shall be met. Systems	shall be installed in accordance
with the attached system layout.	
ISSUED TO: JIMMY BYRD PROPERTY LOCATION: STOCKYARD RO	
Facility Type: <u>SFD (50'240)</u> X New Expansion Repair	LOT # <u>56</u>
Basement? I Yes X No Basement Fixtures? I Yes X No Type of Wastewater System** Pume To 25% REDUCTION (MANATEE DISCIPLINITIAL) Wastewater Flow:	360 gpd
(See note below, if applicable [])	
Rump To 25% REOVERION (Repair)	
Installation Requirements/Conditions Number of trenches	
Septic Tank Size 1000 gallons Exact length of each trench $\overline{15}$ feet Trench Spacing: $\frac{1}{1000}$	Feet on Center
Pump Tank Size $\bot O O O$ gallons Trenches shall be installed on contour at a Soil Cover: $G - 16$ in Maximum Trench Depth of: $18 - 28$ inches (Maximum soil cover shall n	nches
(Trench bottoms shall be level to $+/-1/4$ " 36" above the trench bottom	
in all directions)	sin)
	inches below pipe
Pump Requirements:ft. TDH vs GPM Aggregate Depth: Conditions: MANATCE SPECS 4 '2 SCHOVALVES', J'PRESSURG HEAD' 2"SCH 40 PRE	inches above pipe
Conditions: MANATEE DAECS 4 250140 VALVES' & PRESSURE HEAD. 2"SCH HOPIEL	inches total
WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.	
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.	
**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of the	his permit.
Owner/Legal Representative Signature: Date: _	mountin of the side This
	ATTACHED SITE SKETCH
Authorized State Agent: JUII RENS Date: _4]4] J2	
Authorized State Agent: Date:	

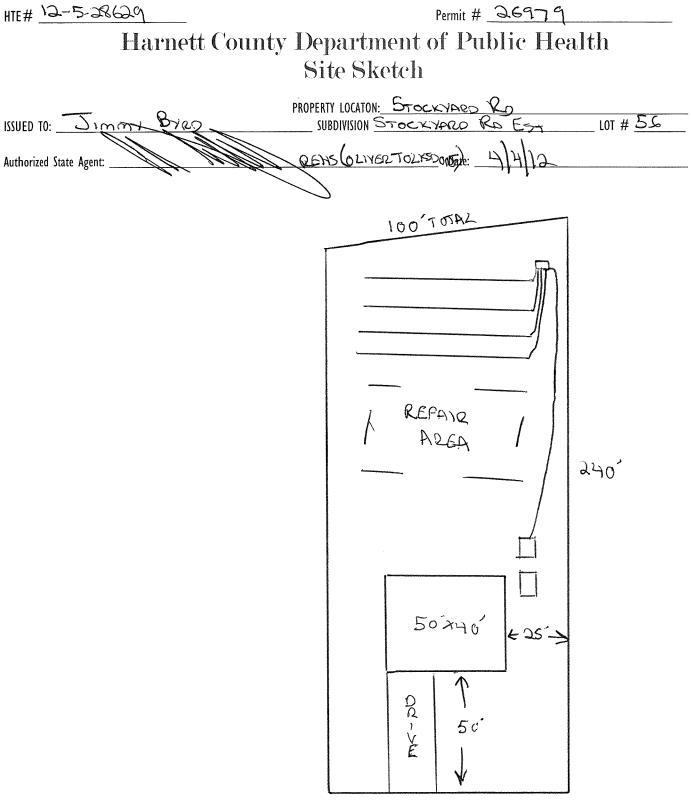

RAY BYRD RO