



Prepared by:
Page Brockman
page@regionalwaterproofing.com
Regional Foundation & Crawlspace Repair
www.regionalwaterproofing.com
TF 919-851-4500
F (919) 269-6788
License# 100348

Prepared for:
Denise DeDeaux
djd622@gmail.com
P (910) 670-5754

Job location:
116 Highmeadow Dr
Cameron, NC 28326

Prepared on:
6-17-23

Project Summary

Table with 2 columns: Item, Amount. Rows include My Crawl Space (\$13,809.52), Lift and Level (\$1,619.20), Seal Joints (\$2,280.20), Repair Cracks (\$657.90), Seal Surface (\$3,020.00), Lift Settled Foundation (\$2,535.00), Custom Solution (\$-2,315.80), Total Investment (\$21,606.02), Total Contract Price (\$21,606.02), Deposit Required - 20% (\$4,321.20), Deposit Paid (\$0.00), Amount Due Upon Installation (\$21,606.02).

Customer Consent

Any alteration from the above specifications and corresponding price adjustment (if necessary) will be made only at the Customer's request or approval. Completing the work in this Proposal at the time scheduled is contingent upon accidents or delays beyond our control. This Proposal is based primarily on the Customer's description of the problem. Engineering services are used as required by companies such as SFA Engineering and other local Structural Engineering firms. This Proposal may be withdrawn if not accepted by the Customer within 20 days.

Authorized Signature: Page Brockman, Date: 6/17/2023


Acceptance of Contract— I am/we are aware of and agree to the contents of this Proposal, the attached Job Detail sheet(s), and the attached Limited Warranty, (together, the "Contract"). I am/ we are aware of and agree to the 60 day window that Regional has to remedy any service issues that are covered under the attached Limited Warranty. I will have bio-hazards cleaned and remediated that Regional may discover in the affected work area. This includes plumbing/sewage leaks, and any other hazards at my cost. I will provide documentation from a restoration company. You are authorized to do the work as specified in the Contract. However, field adjustments may be made if deemed vital by project Foreman or Production Manager. I/WE WILL MAKE THE PAYMENT TO CREW THE DAY PROJECT IS COMPLETED. MULTI-PHASE PROJECTS WILL BE INVOICED AND MUST BE PAID AT COMPLETION OF EACH PHASE.

Customer Signature: DENISE DEDEAUX, Date: 6/19/2023

Customer to have financing in place two weeks before start of project.

Customer understands after three days all deposits are final.

Job Details

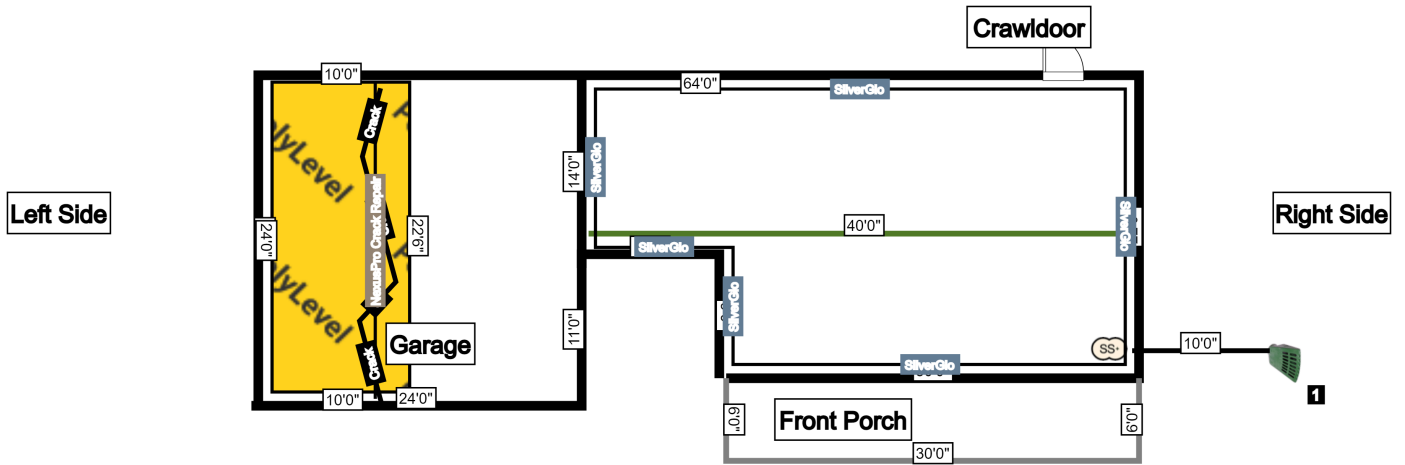

Type of Wall Block
Existing Wall Finish Plain
Existing Floor Finish Dirt
Sub-Floor System Partial Perimeter System
Regional Foundation & Crawlspace Repair
 721 E. Gannon Ave Zebulon NC 27597
Job Location
 116 Highmeadow Dr Cameron NC 28326



Job Details (Continued)

Specifications

1) Install PolyLEVEL as indicated on job drawing. 2) Caulk concrete cracks as noted on job drawing. Caulking may need to be re-applied in the future. 3) Clean up and prepare crack as needed and apply NexusPro joint sealant. 4) Regional to clean concrete surface and apply SealantPro to seal concrete as indicated on proposal. We do not guarantee removal of existing concrete stains. 5) Inject Polyurethane and 7ft and 3ft depths. Injection points should span 4-5ft max. No lifting is attempted but soil densification is attempted. 6) Install 1/3 hp cast iron pump in TripleSafe liner with clean pump stand. 7) Extend exterior discharge line as indicated on proposal. 8) Install a lawnscap outlet at the end of the discharge line. 9) Install Geo Drain as indicated on the drawing. 10) Install an Everlast door, crawl space door. 11) Install SilverGlo high performance graphite insulation as indicated on job drawing. 12) Install SuperSeal as shown. 13) Remove and dispose of existing insulation. 14) Two Dedicated Electrical Circuits and outlets with GFI protection 15) Lumberkote to be sprayed on wood framing in crawlspace. If pre-existing fungi is present on wood, there may be residual visibility of the fungi. This will not represent a warranty or performance issue. Lumberkote will have to dry for one hour minimum before the wood can be re-insulated or other work performed in direct contact. 16) Install Aprilaire e100 as shown. 17) Install 1.5 inch pvc plumbing from sump pump to location of the discharge line. 18) Obtain Engineering letter of approval for installed work. 19) Obtain proper building permit. 20) 21)

Contractor Will

- 1.) Permit Project.
- 2.) Remove and replace excavated soils. Customer is responsible for final landscaping (pavers, plants, re-seeding, mulch, retaining walls, etc)
- 3.) Attempt to lift the foundation, floors, or concrete. but is not responsible for cosmetic damage that may result. (Achieving lift is not guaranteed)
- 4.) Contact utility locator service

Customer Will

- 1.) Move items at least 10 feet away from the work area.
- 2.) Mark any private lines that may be hidden underground, and assumes all liability if damage should occur to such lines.
- 3.) Make payment of remaining balance to foreman of crew the same day installation is complete.

Additional Notes

All recommendations are based on customers descriptions of the problem. While inspection tools such as hygrometers and laser levels are used, no deconstruction or original house plans are available to review for the recommendation. Some unforeseen factors may impact project, despite best inspectors best efforts.

Product List

My Crawl Space

SuperSump Plus	1
Exterior Discharge Line	10 Linear Foot
Lawnscap Outlet	1
Geo Drain	60 Linear Foot
Everlast Door	1
SilverGlo	240 sqft
SuperSeal, Encapsulation	720
Insulation - Remove , Prevent Mold, Rot and Odors	720 Square Foot
Electrical 2 Circuits, Electric	1
Lumberkote, Framing Sealant	720 square foot
E100 Crawlspace Air System, Dehumidification	1
Interior PVC Discharge Extension	15 Linear Foot

Lift and Level

Product List (Continued)

PolyLEVEL	92 lbs
Seal Joints	
NexusPro Joint Sealant	260 ft
Repair Cracks	
NexusPro Crack Repair	30 ft
Seal Surface	
SealantPro	1000 sqft
Lift Settled Foundation	
Deep Injection Polyurethane , Deep Injection	3
Custom Solution	
Engineer Letter of Completion, Engineer Letter	1
Permit Fee	1
Fuel Surcharge, Surcharge	1
Same Day Savings	1

Lift and Level - Areas

Area Title	LxWxD	Lbs	Location	Notes
Garage Lifting (Garage Floor)	24x12x1	92	Garage	

Seal Joints - Areas

Area Title	LnFt	Location	Notes
Pool Deck	260	Pool	

Repair Cracks - Areas

Area Title	LnFt	Location	Notes
Garage	20	Garage	
Pool Deck	10	Pool	

Seal Surface - Areas

Area Title	SqFt	Location	Notes
Pool Deck	1000	Pool	