HTE# 13-5-30620

Authorized State Agent:

## Harnett County Department of Public nealth

27286

Improvement Permit A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: MARKS RO ISSUED TO: HOWARD BUILDERS LLC SUBDIVISION ASHEFORD Site Improvements required prior to Construction Authorization Issuance: Type of Structure: SFO (54'×52) Proposed Wastewater System Type: Pume To 25%, REDUCTION Projected Daily Flow: 480 Number of bedrooms: Number of Occupants: 8 max Pump Required: Tes ☐ May be required based on final location and elevations of facilities Type of Water Supply: 

Community Public Well Distance from well 100 feet Five years Permit valid for: Permit conditions: ■ No expiration REHS Authorized State Agent:: SEE ATTACHED SITE SKETCH The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: HOWARD BUILDERS LLC PROPERTY LOCATION: MARRIS RO SUBDIVISION ASHEFORED Facility Type: SFO (54755)

New | Expansion | Repair

Basement? | Yes | No Basement Fixtures? | Yes | No

Type of Wastewater System\*\* | Pume Tu 25° Lo REDUCTION SysTEM (Initial) Wastewater Flow: 480 (See note below, if applicable Pume To 25% REDUCTION (Repair)

Number of trenches 3 Installation Requirements/Conditions Septic Tank Size 1000 gallons Exact length of each trench 115 Pump Tank Size \_\_\_ LOOO gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 18-24 inches (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: \_\_\_\_\_\_ft. TDH vs. GPM \_\_ inches below pipe Aggregate Depth: \_\_\_\_\_\_ inches above pipe Conditions: inches total WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. \*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Construction Authorization Expiration Date:


## Harnett County Department of Public Health Site Sketch


Authorized State Agent:

PROPERTY LOCATON: MARKS RD

SUBDIVISION ASHERORD

LOT # 45

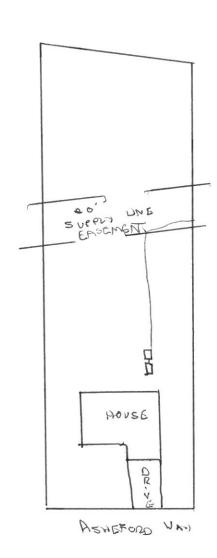

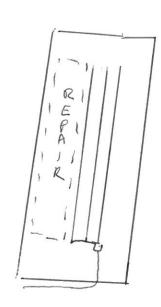

FOR EREGMENT LOCATION